

**SRM VALLIAMMAI ENGINEERING COLLEGE**

**DEPARTMENT OF ELECTRONICS AND COMMUNICATION ENGINEERING**

**PROFESSIONAL READINESS FOR INNOVATION, EMPLOYABILITY AND  
ENTREPRENEURSHIP**

**SMART SOLUTIONS FOR RAILWAYS USING IOT**

**NALAIYA THIRAN PROJECT REPORT 2022**

***Submitted by***

**SOWMIYA.P**

**SIVANANTHAM.P**

**SASIKALA.A**

**RESHMAJA.K.RAMESH**

**Team ID: PNT2022TMID21839**

# **Project Report**

## **1. INTRODUCTION**

1.1 Project Overview

1.2 Purpose

## **2. LITERATURE SURVEY**

2.1 Existing problem

2.2 References

2.3 Problem Statement Definition

## **3. IDEATION & PROPOSED SOLUTION**

3.1 Empathy Map Canvas

3.2 Ideation & Brainstorming

3.3 Proposed Solution

3.4 Problem Solution fit

## **4. REQUIREMENT ANALYSIS**

4.1 Functional requirement

4.2 Non-Functional requirements

## **5. PROJECT DESIGN**

5.1 Data Flow Diagrams

5.2 Solution & Technical Architecture

5.3 User Stories

## **6. PROJECT PLANNING & SCHEDULING**

6.1 Sprint Planning & Estimation

6.2 Sprint Delivery Schedule

6.3 Reports from JIRA

7. **CODING & SOLUTIONING** (Explain the features added in the project along with code)

7.1 Feature 1

7.2 Feature 2

7.3 Database Schema (if Applicable)

## **8. TESTING**

8.1 Test Cases

8.2 User Acceptance Testing

## **9. RESULTS**

9.1 Performance Metrics

## **10. ADVANTAGES & DISADVANTAGES**

## **11. CONCLUSION**

## **12. FUTURE SCOPE**

## **13. APPENDIX Source Code**

GitHub Link

**1.1 PROJECT OVERVIEW**

**SMART SOLUTIONS FOR RAILWAYS** is to manage Indian Railways is the largest railway network in Asia and additionally world's second largest network operated underneath a single management. Due to its large size it is difficult to monitor the cracks in tracks manually. This paper deals with this problem and detects cracks in tracks with the help of ultrasonic sensor attached to moving assembly with help of stepper motor. Ultrasonic sensor allows the device to moves back and forth across the track and if there is any fault, it gives information to the cloud server through which railway department is informed on time about cracks and many lives can be saved. This is the application of IoT, due to this it is cost effective system. This effective methodology of continuous observation and assessment of rail tracks might facilitate to stop accidents. This methodology endlessly monitors the rail stress, evaluate the results and provide the rail break alerts such as potential buckling conditions, bending of rails and wheel impact load detection to the concerned authorities.

**1.2 PURPOSE**

Internet is basically system of interconnected computers through network. But now its use is changing with changing world and it is not just confined to emails or web browsing. Today's internet also deals with embedded sensors and has led to development of smart homes, smart rural area, e-health care's etc. and this introduced the concept of IoT . Internet of Things refers to interconnection or communication between two or more devices without humanto-

human and human-to-computer interaction. Connected devices are equipped with sensors or actuators perceive their surroundings. IOT has four major components which include sensing the device, accessing the device, processing the information of the device, and provides application and services. In addition to this it also provides security and privacy of data . Automation has affected every aspect of our daily lives. More improvements are being introduced in almost all fields to reduce human effort and save time. Thinking of the same is trying to introduce automation in the field of track testing. Railroad track is an integral part of any company's asset base, since it provides them with the necessary business functionality. Problems that occur due to problems in railroads need to be overcome. The latest method used by the Indian railroad is the tracking of the train track which requires a lot of manpower and is time-consuming

## **2.LITERATURE SURVEY**

### **2.1 EXISTING SYSTEM**

In the Existing train tracks are manually researched. LED (Light Emitting Diode) and LDR (Light Dependent Resister) sensors cannot be implemented on the block of the tracks ]. The input image processing is a clamorous system with high cost and does not give the exact result. The Automated Visual Test Method is a complicated method as the video color inspection is implemented to examine the cracks in rail track which does not give accurate result in bad weather. This traditional system delays transfer of information. Srivastava et al., (2017) proposed a moving gadget to detect the cracks with the help of an array of IR sensors to

identify the actual position of the cracks as well as notify to nearest railway station . Mishra et al., (2019) developed a system to track the cracks with the help of Arduino mega power using solar energy and laser. A GSM along with a GPS module was implemented to get the actual location of the faulty tracks to inform the authorities using SMS via a link to find actual location on Google Maps. Rizvi Aliza Raza presented a prototype in that is capable of capturing photos of the track and compare it with the old database and sends a message to the authorities regarding the crack detected. The detailed analysis of traditional railway track fault detection techniques is explained in table

## **2.2 REFERENCES**

1. D. Hesse, “Rail Inspection Using Ultrasonic Surface Waves” Thesis, Imperial College of London, 2007.
2. Md. Reya Shad Azim<sup>1</sup> , Khizir Mahmud<sup>2</sup> and C. K. Das. Automatic railway track switching system, International Journal of Advanced Technology, Volume 54, 2014.
3. S. Somalraju, V. Murali, G. saha and V. Vaidehi, “Title-robust railway crack detection scheme using LED (Light Emitting Diode) - LDR (Light Dependent Resistor) assembly IEEE 2012.
4. S. Srivastava, R. P. Chourasia, P. Sharma, S. I. Abbas, N. K. Singh, “Railway Track Crack detection vehicle”, IARJSET, Vol. 4, pp. 145-148, Issued in 2, Feb 2017.
5. U. Mishra, V. Gupta, S. M. Ahzam and S. M. Tripathi, “Google Map Based Railway Track Fault Detection Over the Internet”, International Journal of Applied Engineering Research, Vol. 14, pp. 20-23, Number 2, 2019.
6. R. A. Raza, K. P. Rauf, A. Shafeeq, “Crack detection in Railway track using Image processing”, IJARIT, Vol. 3, pp. 489-496, Issue 4, 2017.
7. N. Bhargav, A. Gupta, M. Khirwar, S. Yadav, and V. Sahu, “Automatic Fault


Detection of Railway Track System Based on PLC (ADOR TAST)”, International Journal of Recent Research Aspects, Vol. 3, pp. 91-94, 2016

## **2.3 PROBLEM STATEMENT DEFINITION**

Among the various modes of transport, railways is one of the biggest modes of transport in the world. Though there are competitive threats from airlines, luxury buses, public transports, and personalized transports the problem statement is to answer the question “What are the problems faced by the passengers while travelling by train at station and on board”

### 3. IDEATION AND PROPOSED SOLUTION

#### 3.1 EMPATHY MAP CANVAS

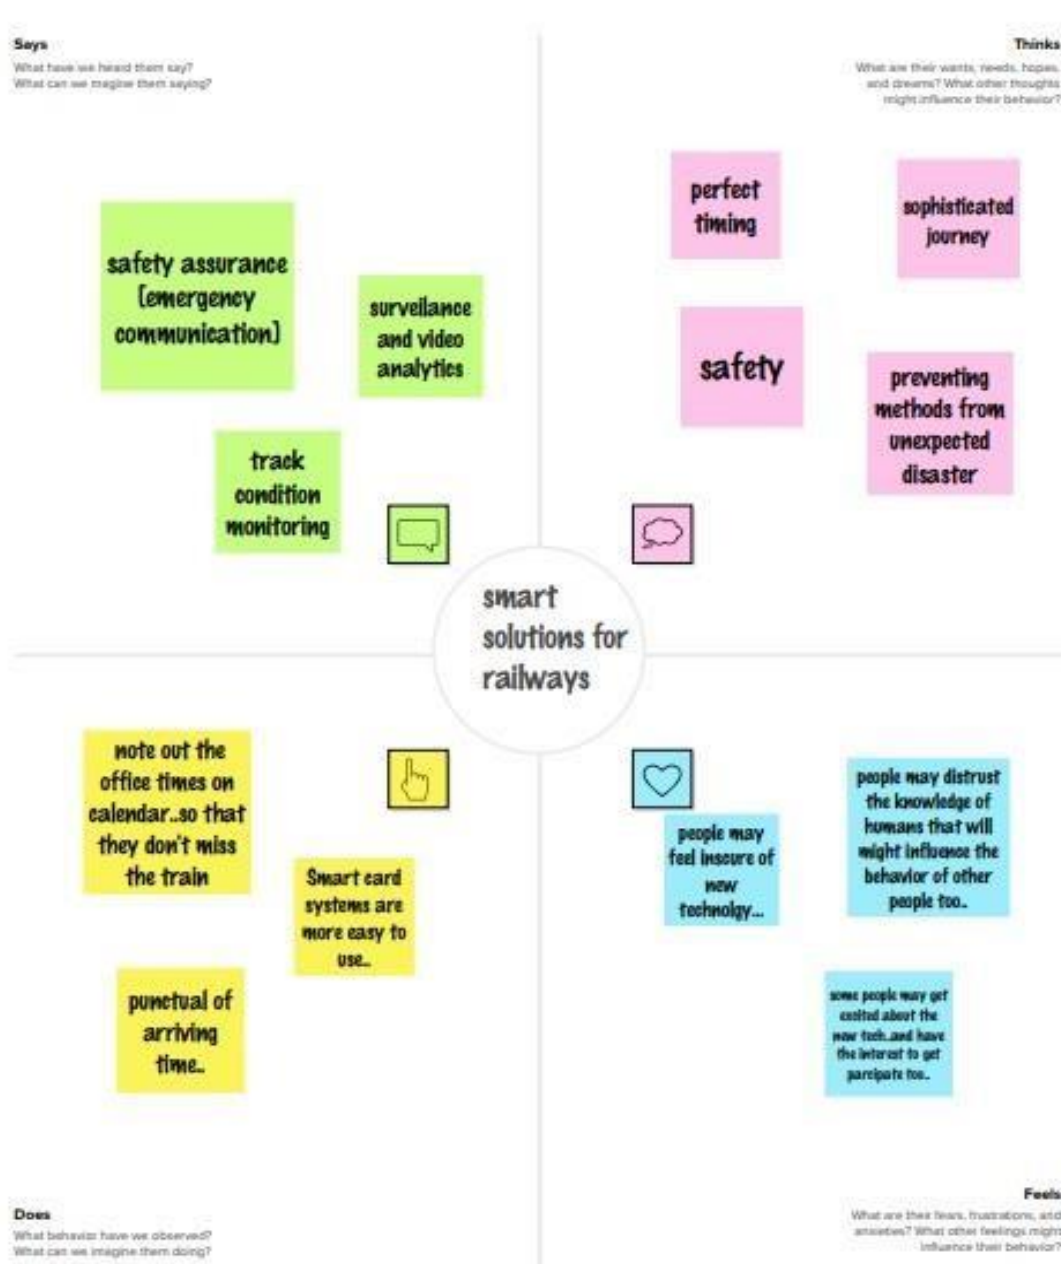

## 3.2 IDEATION & BRAINSTORMING

2

### Brainstorm

Write down any ideas that come to mind that address your problem statement.

⌚ 10 minutes

#### TIP



You can select a sticky note and hit the pencil [switch to sketch] icon to start drawing!

#### VIJI

|                        |  |  |
|------------------------|--|--|
| Poor lighting facility | ELECTRONIC RECTIFIER CUM REGULATOR   | Fast and reliable switching devices.           |
|                        | Auto setting of voltage, load current, Battery current, over voltage, over current | Moulded Hall sensors for setting current limit |
|                        |  |  |

#### PANDISELVI

|                               |   |  |
|-------------------------------|---|--|
| Late arrival of train         | low punctuality due to public apitations, adverse weather conditions. | low punctuality due to track, signal, mechanical |
| Rationalization of Time Table | monitoring at Divisional, Zonal and Railway Board levels              |  |
|                               |   |  |

#### KEERTHIKA

|                                  |                     |                                     |
|----------------------------------|---------------------|-------------------------------------|
| Poor sanitary conditions         | Mechanised Cleaning | smart sanitation- Automate cleaning |
| privatization or increased costs |                     |                                     |
|                                  |                     |                                     |

#### BUVANESHWARI

|                         |   |   |
|-------------------------|---|---|
| safety and security     | track structure- Prestressed Concrete Sleeper (PSC) | Network Layer Security- signaling equipment, surveillance |
| security control center |   |   |
|                         |   |   |

#### PRIYA

|   |                      |                  |
|---|----------------------|------------------|
| smart booking                                       | Integrated ticketing | Mobile Ticketing |
| Smart Card is used to purchase tickets through ATVM |                      |                  |
|   |                      |                  |




4

## Prioritize

Your team should all be on the same page about what's important moving forward. Place your ideas on this grid to determine which ideas are important and which are feasible.

🕒 20 minutes

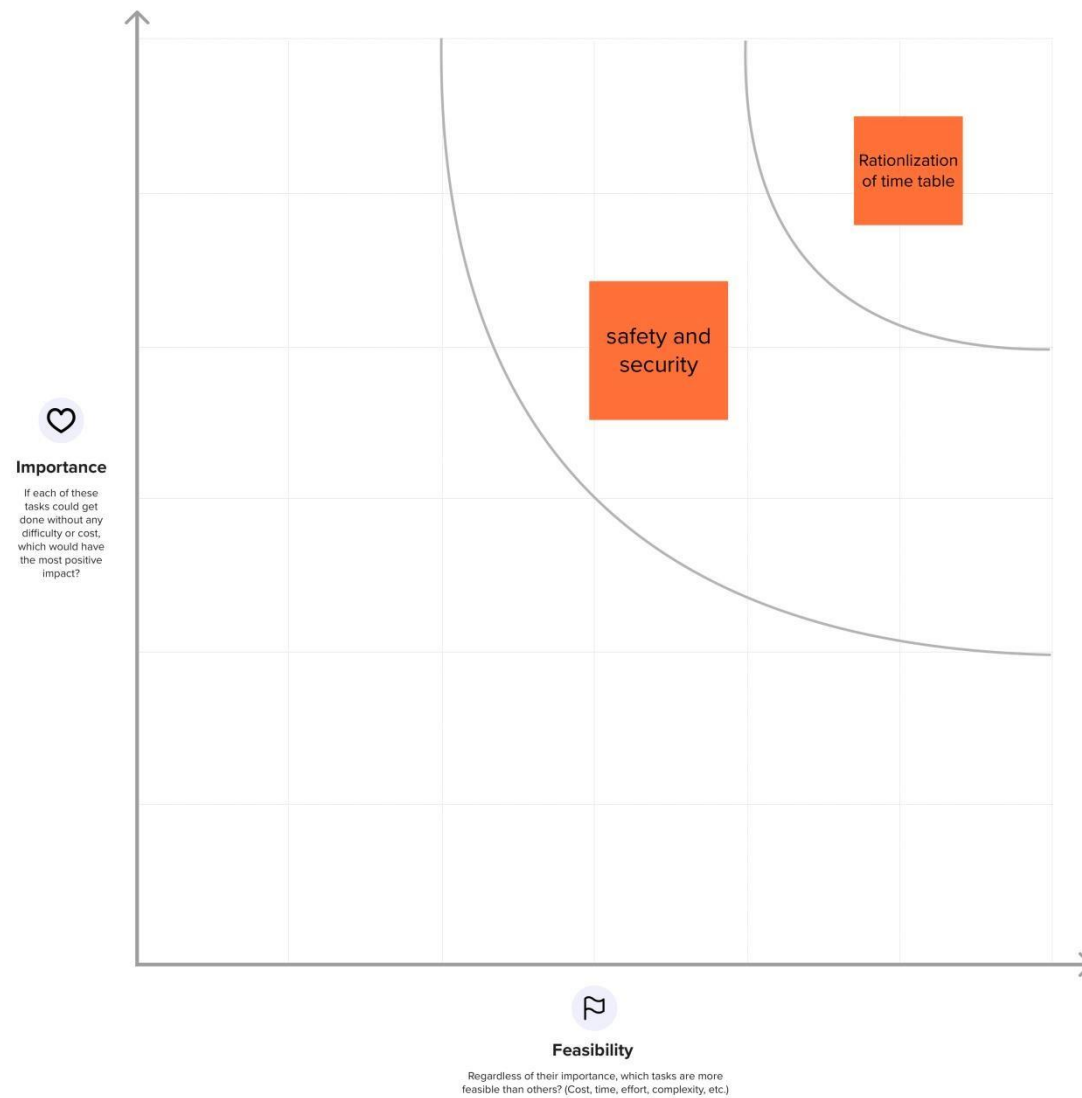

### 3.3 PROPOSED SOLUTION

| S.NO     | PARAMETERS                                  | DESCRIPTIONS   |
|----------|---|--|
| <u>1</u> | Problem Statement<br>(Problem to be solved) | In order to satisfy the passengers, the Railways provides various services to its passengers But, the passengers can face some problems.   |
| 2        | Idea / Solution description                 | The idea is to minimize the ticket booking problems among the passengers by providing Online mode of booking rather than papers. . In queues in front of the ticket counters in railway stations have been drastically increased over the time.  |
| 3        | Novelty / Uniqueness                        | Online mode of booking is most common and so ease of access to everyone that makes more efficient uniqueness of utilizing the technique. People can book their ticket through online and they get a QR code through SMS  |
| 4        | Social Impact / Customer Satisfaction       | Customers for sure they get satisfied as they are in the fast roaming world this technique makes more easier for travelling passengers. A web page is designed in which the user can book tickets and will be provided with the QR code, which will be shown to the ticket collector and by scanning the QR code the ticket collector will get the passenger details |

|   |                                   |  |
|---|-----------------------------------|--|
| 5 | Business Model<br>(Revenue Model) | A web page is designed in which the user can book tickets and will be provided with the QR code, which will be shown to the ticket collector and by scanning the QR code the ticket collector will get the passenger details. The booking details of the user will be stored in the database, which can be retrieved any time          |
| 6 | Scalability of the<br>Solution    | The scalability of this solution is most feasible among the passengers who are willing to travel. No need of taking printout Counter ticket has to be handled with care, but SMS on mobile is enough. No need to taking out wallet and showing your ticket to TTR just tell your name to TTR that you are a passenger with valid proof |

### 3.4 PROBLEM SOLUTION FIT

Project Title: Smart Solutions For Railways

Project Design Phase-I - Solution Fit Template

Team ID: PNT2022TMID48423

|                                    |   |  |  |                                    |
|------------------------------------|---|--|--|------------------------------------|
| <b>Define CS, fit into CC</b>      | <b>1. CUSTOMER SEGMENT(S)</b><br>Passenger<br>Ticket collector  | <b>6. CUSTOMER CONSTRAINTS</b><br>Reducing the paper work of customer  | <b>5. AVAILABLE SOLUTIONS</b><br>A web page is designed in which the user can book tickets and will be provided with the QR code, which will be shown to the ticket collector and by scanning the  | <b>Explore AS, differentiate</b>   |
|                                    | <b>2. JOBS-TO-BE-DONE / PROBLEMS</b><br>In their busy schedule as fast roaming world public in need of online booking process. In queues in front of the ticket counters in railway stations have been drastically increased over the time.                                     | <b>9. PROBLEM ROOT CAUSE</b><br>The main reason for the problem but has occurred due to lack of technology earlier. Since the passengers find it difficult to book the ticket and track the location of train.   | <b>7. BEHAVIOUR</b><br>By listening to the customer we can provide genuine empathy for the problem regarded  |                                    |
| <b>Identify strong TR &amp; EM</b> | <b>3. TRIGGERS</b><br>Save paper and workload   | <b>10. YOUR SOLUTION</b><br>A web page is designed in which the user can book tickets and will be provided with the QR code, which will be shown to the ticket collector and by scanning the QR code the ticket collector will get the passenger details. The booking details of the user will be stored in the database, which can be retrieved any time. | <b>8. CHANNELS of BEHAVIOUR</b><br><b>8.1 ONLINE</b><br>People can book their ticket through online and they get a QR code through SMS<br><br><b>8.2 OFFLINE</b><br>In web application passenger details are stored and the ticket collector can view their details at any time. | <b>Identify strong TR &amp; EM</b> |
|                                    | <b>4. EMOTIONS: BEFORE / AFTER</b><br>No need of taking pintout<br>Counter ticket has to be handled with care, but SMS on mobile is enough.<br>No need to taking out wallet and showing your ticket to TTR just tell your name to TTR that you are a passenger with valid proof |  |  |                                    |

## 4. REQUIREMENT ANALYSIS

### 4.1. FUNCTIONAL REQUIREMENTS


| FR No. | Functional Requirement (Epic) | Sub Requirement (Story / Sub-Task)   |
|--------|-------------------------------|--|
| FR-1   | Unique accounts               | <ul style="list-style-type: none"><li>• Every online booking needs to be associated with an account</li><li>• One account cannot be associated with multiple users</li></ul>   |
| FR-2   | Booking options               | <ul style="list-style-type: none"><li>□ Search results should enable users to find the most recent and relevant booking options</li></ul>                                      |
| FR-3   | Mandatory fields              | <ul style="list-style-type: none"><li>□ System should only allow users to move to payment only when mandatory fields such as date, time, location has been mentioned</li></ul> |
| FR-4   | Synchronization               | <ul style="list-style-type: none"><li>□ System should consider timezone synchronisation when accepting bookings from different timezones</li></ul>                             |
| FR-5   | Authentication                | <ul style="list-style-type: none"><li>□ Booking confirmation should be sent to user to the specified contact details</li></ul>   |

## 4.2. NON-FUNCTIONAL REQUIREMENTS



| <b>FR No.</b> | <b>Non-Functional Requirement</b> | <b>Description</b>   |
|---------------|-----------------------------------|--|
| NFR-1         | <b>Usability</b>                  | <input type="checkbox"/> Search results should populate within acceptable time limits  |
| NFR-2         | <b>Security</b>                   | <input type="checkbox"/> System should visually confirm as well as send booking confirmation to the user's contact               |
| NFR-3         | <b>Reliability</b>                | <input type="checkbox"/> System should accept payments via different payment methods, like PayPal, wallets, cards, vouchers, etc |
| NFR-4         | <b>Performance</b>                | <input type="checkbox"/> Search results should populate within acceptable time limits  |
| NFR-5         | <b>Availability</b>               | <input type="checkbox"/> User should be helped appropriately to fill in the mandatory fields, incase of invalid input            |
| NFR-6         | <b>Scalability</b>                | <input type="checkbox"/> Use of captcha and encryption to avoid bots from booking tickets  |

## 5. PROJECT DESIGN

### 5.1 DATA FLOW DIAGRAMS

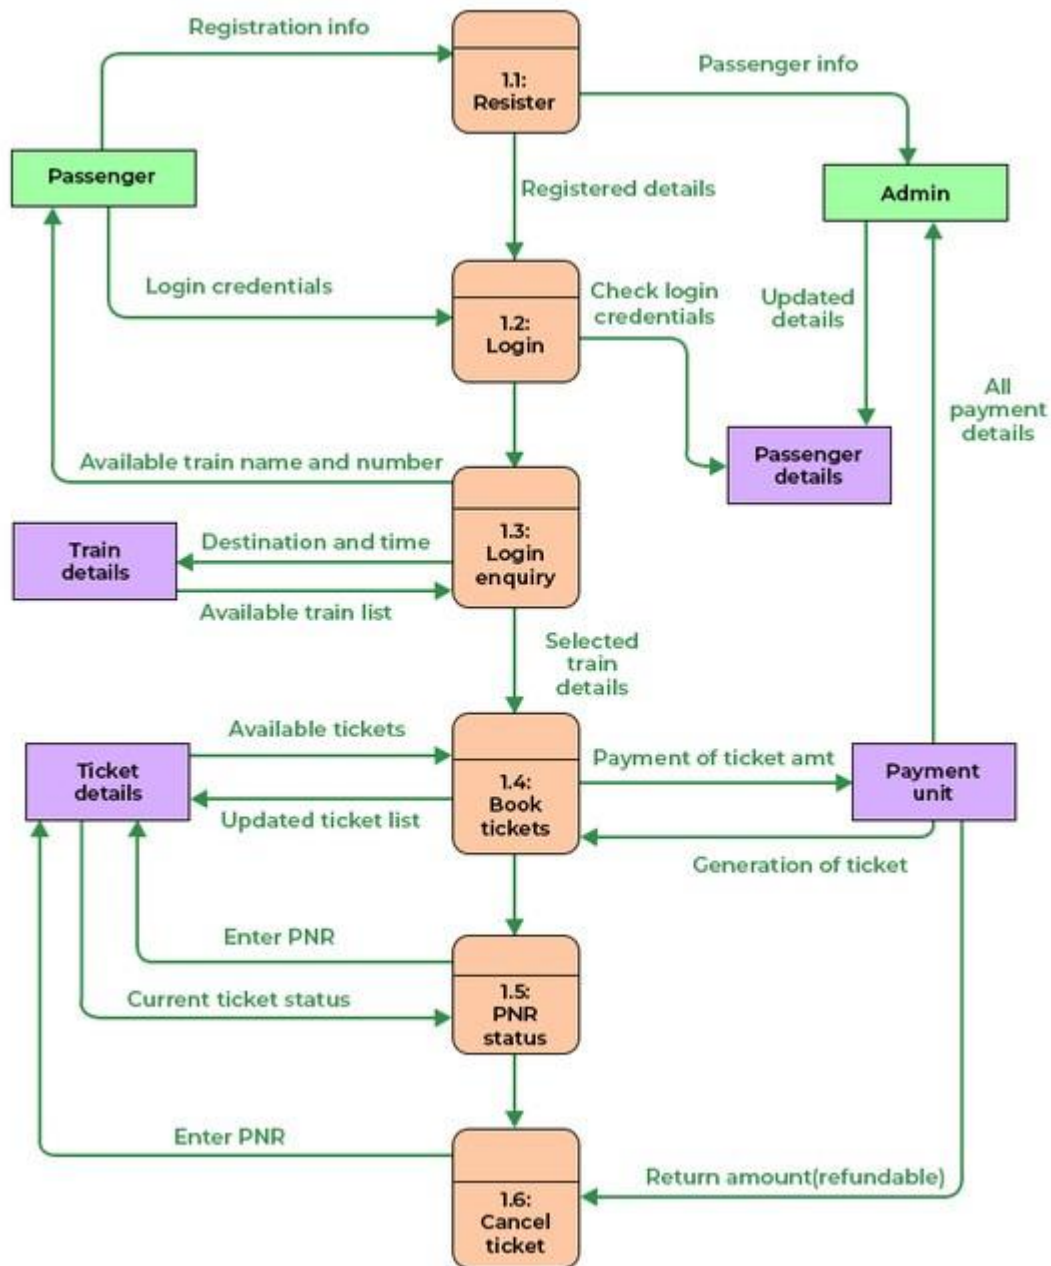

## 5.2 SOLUTION & TECHNICAL ARCHITECTURE

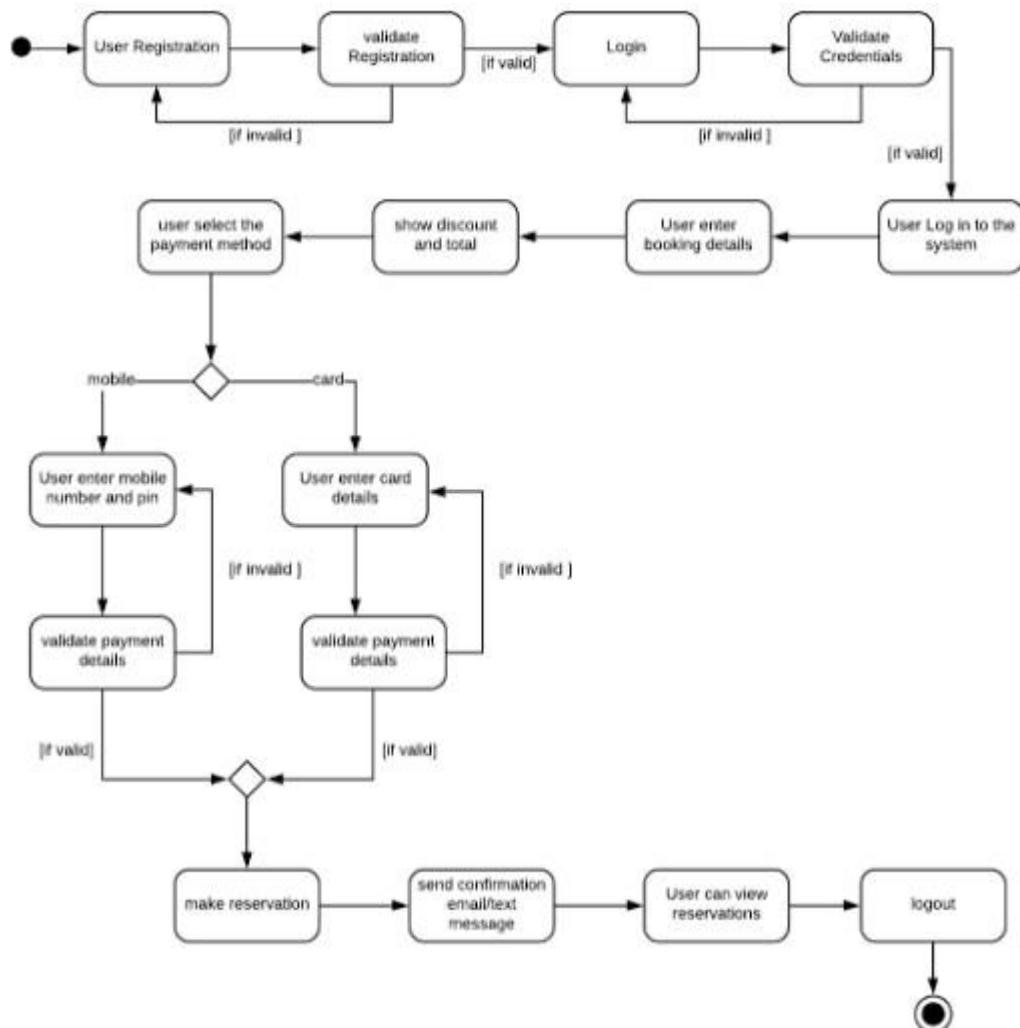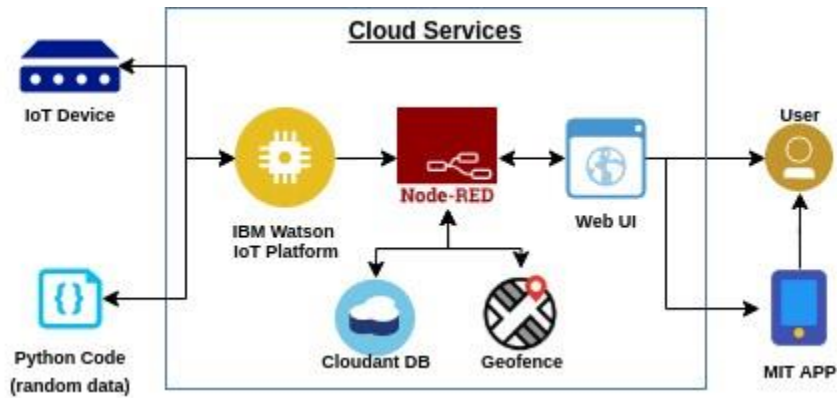



## 5.3 USER STORIES

| User Type                           | Functional Requirement (Epic) | User Story Number | User Story / Task  | Acceptance criteria  | Priority | Release  |
|-------------------------------------|-------------------------------|-------------------|--|--|----------|----------|
| Customer<br>(Mobile user, Web user) | Registration                  | USN-1             | As a user, I can register through the form by Filling in my details  | I can register and create my account / dashboard   | High     | Sprint-1 |
|                                     |                               | USN-2             | As a user, I can register through phone numbers, Gmail, Facebook or other social sites   | I can register & create my dashboard with Facebook login or other social sites   | High     | Sprint-2 |
|                                     | Conformation                  | USN-3             | As a user, I will receive confirmation through email or OTP once registration is successful  | I can receive confirmation email & click confirm.  | High     | Sprint-1 |
|                                     | Authentication/Login          | USN-4             | As a user, I can login via login id and password or through OTP received on register phone number                                      | I can login and access my account/dashboard  | High     | Sprint-1 |
|                                     | Display Train details         | USN-5             | As a user, I can enter the start and destination to get the list of trains available connecting the above                              | I can view the train details (name & number), corresponding routes it passes through based on the start and destination entered. | High     | Sprint-1 |
|                                     | Booking                       | USN-6             | As a use, I can provide the basic details such as a name, age, gender etc...   | I will view, modify or confirm the details enter.  | High     | Sprint-1 |
|                                     |                               | USN-7             | As a user, I can choose the class, seat/berth. If a preferred seat/berth isn't available I can be allocated based on the availability. | I will view, modify or confirm the seat/class berth selected   | High     | Sprint-1 |
|                                     | Payment                       | USN-8             | As a user, I can choose to pay through credit Card/debit card/UPI.   | I can view the payment Options available and select my desirable choice To proceed with the payment                              | High     | Sprint-1 |

|                         |                               | USN-9             | As a user, I will be redirected to the selected Payment gateway and upon successful  | I can pay through the payment portal and confirm the booking if any changes need to                    | High     | Sprint-1 |
|-------------------------|-------------------------------|-------------------|--|--|----------|----------|
| User Type               | Functional Requirement (Epic) | User Story Number | User Story / Task  | Acceptance criteria  | Priority | Release  |
|                         |                               |                   | completion of payment I'll be redirected to the booking website.   | be done I can move back to the initial payment page  |          |          |
|                         | Ticket generation             | USN-10            | As a user, I can download the generated e-ticket for my journey along with the QR code which is used for authentication during my journey. | I can show the generated QR code so that authentication can be done quickly.                           | High     | Sprint-1 |
|                         | Ticket status                 | USN-11            | As a user, I can see the status of my ticket Whether it's confirmed/waiting/RAC.   | I can confidentially get the Information and arrange alternate transport if the ticket isn't Confirmed | High     | Sprint-1 |
|                         | Reminders notification        | USN-12            | As a user, I get reminders about my journey A day before my actual journey.  | I can make sure that I don't miss the journey because of the constant notifications.                   | Medium   | Sprint-2 |
|                         |                               | USN-13            | As a user, I can track the train using GPS and can get information such as ETA, Current stop and delay.                                    | I can track the train and get to know about the delays pian accordingly                                | Medium   | Sprint-2 |
|                         | Ticket cancellation           | USN-14            | As a user, I can cancel my tickets if there's any Change of plan   | I can cancel the ticket and get a refund based on how close the date is to the journey.                | High     | Sprint-1 |
|                         | Raise queries                 | USN-15            | As a user, I can raise queries through the query box or via mail.  | I can view my pervious queries.  | Low      | Sprint-2 |
| Customer care Executive | Answer the queries            | USN-16            | As a user, I will answer the questions/doubts Raised by the customers.   | I can view the queries and make it once resolved   | Medium   | Sprint-2 |
| Administrator           | Feed details                  | USN-17            | As a user, I will feed information about the   | I can view and ensure the corrections of the information fed.  | High     | Sprint-1 |

|  |  |  |  |  |  |  |
|--|--|--|--|--|--|--|
|  |  |  | trains delays and add<br>extra seats if a new<br>compartment is added. |  |  |  |
|--|--|--|--|--|--|--|

## 6. PROJECT PLANNING AND SCHEDULING

### 6.1. SPRINT PLANNING& ESTIMATION





| Sprint   | Functional Requirement (Epic) | User Story Number | User Story / Task   | Story Points | Priority | Team Members   |
|----------|-------------------------------|-------------------|---|--------------|----------|--|
| Sprint-1 | Registration                  | USN-1             | As a user, I can register through the form by Filling in my details   | 2            | High     | Sowmiya . P, Sivanantham . P, Sasikala .A, Reshmaja.K.Ramesh |
| Sprint-1 |                               | USN-2             | As a user, I can register through phone numbers, Gmail, Facebook or other social sites  | 1            | High     | Sowmiya . P, Sivanantham . P, Sasikala .A, Reshmaja.K.Ramesh |
| Sprint-1 | Conformation                  | USN-3             | As a user, I will receive confirmation through email or OTP once registration is successful   | 2            | Low      | Sowmiya . P, Sivanantham . P, Sasikala .A, Reshmaja.K.Ramesh |
| Sprint-1 | login                         | USN-4             | As a user, I can login via login id and password or through OTP received on register phone number                                     | 2            | Medium   | Sowmiya . P, Sivanantham . P, Sasikala .A, Reshmaja.K.Ramesh |
| Sprint-1 | Display Train details         | USN-5             | As a user, I can enter the start and destination to get the list of trains available connecting the above                             | 1            | High     | Sowmiya . P, Sivanantham . P, Sasikala .A, Reshmaja.K.Ramesh |
| Sprint-2 | Booking                       | USN-6             | As a use, I can provide the basic details such as a name, age, gender etc...  | 2            | High     | Sowmiya . P, Sivanantham . P, Sasikala .A, Reshmaja.K.Ramesh |
| Sprint-2 |                               | USN-7             | As a user, I can choose the class, seat/berth. If a preferred seat/berth isn't available I can be allocated based on the availability | 1            | Low      | Sowmiya . P, Sivanantham . P, Sasikala .A, Reshmaja.K.Ramesh |
| Sprint-2 | Payment                       | USN-8             | As a user, I can choose to pay through credit Card/debit card/UPI.  | 1            | High     | Sowmiya . P, Sivanantham . P, Sasikala .A, Reshmaja.K.Ramesh |





| Sprint   | Functional Requirement (Epic) | User Story Number | User Story / Task   | Story Points | Priority | Sowmiya . P, Sivanantham . P, Sasikala .A, Reshmaja.K.Ramesh |
|----------|-------------------------------|-------------------|---|--------------|----------|--|
| Sprint-2 |                               | USN-9             | As a user, I will be redirected to the selected   | 2            | High     | Sowmiya . P, Sivanantham . P, Sasikala .A, Reshmaja.K.Ramesh |
| Sprint-3 | Ticket generation             | USN-10            | As a user, I can download the generated e- ticket for my journey along with the QR code which is used for authentication during my journey. | 1            | High     | Sowmiya . P, Sivanantham . P, Sasikala .A, Reshmaja.K.Ramesh |
| Sprint-3 | Ticket status                 | USN-11            | As a user, I can see the status of my ticket  | 2            | High     | Sowmiya . P, Sivanantham . P, Sasikala .A, Reshmaja.K.Ramesh |
|          |                               |                   | Whether it's confirmed/waiting/RAC.   |              |          |  |
| Sprint-3 | Reminders notification        | USN-12            | As a user, I get reminders about my journey A day before my actual journey.   | 1            | High     | Sowmiya . P, Sivanantham . P, Sasikala .A, Reshmaja.K.Ramesh |
| Sprint-3 | Ticket cancellation           | USN-13            | As a user, I can track the train using GPS and can get information such as ETA, Current stop and delay                                      | 2            | High     | Sowmiya . P, Sivanantham . P, Sasikala .A, Reshmaja.K.Ramesh |
| Sprint-4 |                               | USN-14            | As a user, I can cancel my tickets if there's any Change of plan  | 1            | High     | Sowmiya . P, Sivanantham . P, Sasikala .A, Reshmaja.K.Ramesh |
| Sprint-4 | Raise queries                 | USN-15            | As a user, I can raise queries through the query box or via mail.   | 2            | Medium   | Sowmiya . P, Sivanantham . P, Sasikala .A, Reshmaja.K.Ramesh |
| Sprint-4 | Answer the queries            | USN-16            | As a user, I will answer the questions/doubts Raised by the customers.  | 2            | High     | Sowmiya . P, Sivanantham . P, Sasikala .A, Reshmaja.K.Ramesh |
| Sprint-4 | Feed details                  | USN-17            | As a user, I will feed information about the trains delays and add extra seats if a new compartment is added.                               | 1            | High     | Sowmiya . P, Sivanantham . P, Sasikala .A, Reshmaja.K.Ramesh |

## 6.2. SPRINT DELIVERY SCHEDULE

| Sprint   | Total Story Points | Duration | Sprint Start Date | Sprint End Date (Planned) | Story Points Completed (as on Planned End Date) | Sprint Release Date (Actual) |
|----------|--------------------|----------|-------------------|---------------------------|---|------------------------------|
| Sprint-1 | 20                 | 6 Days   | 24 Oct 2022       | 29 Oct 2022               | 20  | 29 Oct 2022                  |
| Sprint-2 | 20                 | 6 Days   | 31 Oct 2022       | 05 Nov 2022               | 20  | 5 Nov 2022                   |
| Sprint   | Total Story Points | Duration | Sprint Start Date | Sprint End Date (Planned) | Story Points Completed (as on Planned End Date) | Sprint Release Date (Actual) |
| Sprint-3 | 20                 | 6 Days   | 07 Nov 2022       | 12 Nov 2022               | 20  | 12 Nov 2022                  |
| Sprint-4 | 20                 | 6 Days   | 14 Nov 2022       | 19 Nov 2022               | 20  | 19 Nov2022                   |

## 6.3. REPORTS FROM JIRA

|                         | NOV  |
|-------------------------|--|
|                         | 31 1 2 3 4 5   |
| Sprints                 | SSFR Sprint 2  |
| >  SSFR-23 registration |  |
| >  SSFR-24 booking      |  |
| >  SSFR-25 payment      |  |
| >  SSFR-26 redirect     |  |

|                               | NOV  |
|-------------------------------|--|
|                               | 13 14 15 16 17 18 19   |
| Sprints                       | SSFR Sprint 4  |
| >  SSFR-23 registration       |  |
| >  SSFR-24 booking            |  |
| >  SSFR-25 payment            |  |
| >  SSFR-26 redirect           |  |
| >  SSFR-27 ticket generation\ |  |
| >  SSFR-28 status             |  |
| >  SSFR-29 notification       |  |
| >  SSFR-30 tracking location  |  |
| >  SSFR-31 cancellation       |  |
| >  SSFR-32 raise queries      |  |
| >  SSFR-33 ans queries        |  |
| >  SSFR-34 feed details       |  |

## 7. CODING AND SOLUTIONING

### 7.1. FEATURE 1 ○

- IOT device
- IBM Watson platform
- Node red
- Cloudbant DB
- Web UI
- Geofence □ MIT App
- Python code

### 7.2. FEATURE 2

- Registration
- Login
- Verification
- Ticket Booking
- Payment
- Ticket Cancellation
- Adding Queries

```
labl_0 = Label(base, text="Registration form",width=20,font=("bold",  
20))
```



```
labl_0.place(x=90,y=53)
```

```
lb1= Label(base, text="Enter Name", width=10, font=('arial',12))  
lb1.place(x=20, y=120) en1= Entry(base)  
en1.place(x=200, y=120)
```

```
lb3= Label(base, text="Enter Email", width=10, font=('arial',12))  
lb3.place(x=19, y=160) en3= Entry(base)  
en3.place(x=200, y=160)
```

```
lb4= Label(base, text="Contact Number", width=13,font=('arial',12))  
lb4.place(x=19, y=200) en4= Entry(base)  
en4.place(x=200, y=200)
```

```
lb5= Label(base, text="Select Gender", width=15, font=('arial',12))  
lb5.place(x=5, y=240)  
var = IntVar()
```

```
Radiobutton(base, text="Male", padx=5,variable=var,  
value=1).place(x=180, y=240)
```

```
Radiobutton(base, text="Female", padx =10,variable=var,  
value=2).place(x=240,y=240)
```

```
Radiobutton(base, text="others", padx=15, variable=var,  
value=3).place(x=310,y=240)
```

```
list_of_cntry = ("United States", "India", "Nepal", "Germany") cv  
= StringVar() drplist= OptionMenu(base, cv, *list_of_cntry)  
drplist.config(width=15) cv.set("United States") lb2= Label(base,
```

```
text="Select Country", width=13,font=('arial',12))
lb2.place(x=14,y=280)
drplist.place(x=200, y=275)
```

```
lb6= Label(base, text="Enter Password", width=13,font=('arial',12))
lb6.place(x=19, y=320)  en6= Entry(base, show='*')
en6.place(x=200, y=320)
```

```
lb7= Label(base, text="Re-Enter Password",
width=15,font=('arial',12))
lb7.place(x=21, y=360)  en7
=Entry(base, show='*')
en7.place(x=200, y=360)
```

```
Button(base, text="Register", width=10).place(x=200,y=400)
base.mainloop()
```

```
def generateOTP() :
```

```
    # Declare a digits variable
    # which stores all digits
    digits = "0123456789"
    OTP = ""
```

```
    # length of password can be changed
    # by changing value in range    for i
    in range(4) :
```

```

    OTP += digits[math.floor(random.random() * 10)]

    return OTP

# Driver code if __name__ ==
"__main__" :

    print("OTP of 4 digits:", generateOTP())

digits="0123456789" OTP=""
for i in range(6):
    OTP+=digits[math.floor(random.random()*10)]
otp = OTP + " is your OTP" msg= otp s =
smtplib.SMTP('smtp.gmail.com', 587)
s.starttls()
s.login("Your Gmail Account", "You app password") emailid
= input("Enter your email: ")
s.sendmail('&&&&&&&&&&',emailid,msg)
a = input("Enter Your OTP >>: ") if a ==
OTP:
    print("Verified") else:
    print("Please Check your OTP again") roo

```

## 8. TESTING

### 8.1.TEST CASES

| Test case ID | Feature Type | Component             | Test Scenario  | Pre-Requisite | Steps To Execute  | Test Data  | Expected Result   | Actual Result       | Status | Comments | TC for Automation | BUG ID | Executed By  |
|--------------|--------------|-----------------------|--|---------------|---|--|---|---------------------|--------|----------|-------------------|--------|--------------|
| 1            | Functional   | Registration          | Registration through the form by Filling in my details               |               | 1.Click on register<br>2.Fill the registration form<br>3.click Register   |  | Registration form to be filled is to be displayed   | Working as expected | Pass   |          |                   |        | keerthika    |
| 2            | UI           | Generating OTP        | Generating the otp for further process                               |               | 1.Generating of OTP number  |  | user can register through phone numbers, Gmail, Facebook or other social sites and to get otonumber | Working as expected | pass   |          |                   |        | Pandiselvi   |
| 3            | Functional   | OTP verification      | Verify user otp using mail   |               | 1.Enter gmail id and enter password<br>2.click submit   | Username: abc@gmail.com<br>password: Testing123                | OTP verified is to be displayed   | Working as expected | pass   |          |                   |        | Buvaneshwari |
| 4            | Functional   | Login page            | Verify user is able to log into application with Invalid credentials |               | 1.Enter into log in page<br>2.Click on My Account dropdown button<br>3.Enter Invalid username/email in Email text box<br>4.Enter valid password in password text box<br>5.Click on login button | Username: abc@gmail.com<br>password: Testing123                | Application should show 'Incorrect email or password' validation message.                           | Working as expected | pass   |          |                   |        | viji         |
| 5            | Functional   | Display Train details | The user can view about the available train details                  |               | 1.As a user, I can enter the start and destination to get the list of trains available connecting the above   | Username: abc@gmail.com<br>password: Testing123678686786876876 | A user can view about the available trains to enter start and destination details                   | Working as expected | fail   |          |                   |        | priya        |

| Feature Type | Component     | Test Scenario   | Pre-Requisite | Steps To Execute   | Test Data | Expected Result   | Actual Result       | Status | Comments | TC for Automation(Y/N) | BUG ID | Executed By  |
|--------------|---------------|---|---------------|--|-----------|---|---------------------|--------|----------|------------------------|--------|--------------|
| Functional   | Booking       | user can provide the basic details such as a name, age, gender etc  |               | 1.Enter method of reservation<br>2.Enter name,age,gender<br>3.Enter how many tickets wants to be booked<br>4.Also enter the number member's details like name,age,gender |           | Tickets booked to be displayed  | Working as expected | Pass   |          |                        |        | Buvaneshwari |
| UI           | Booking seats | User can choose the class, seat/berth. If a preferred seat/berth isn't available I can be allocated based on the availability |               | 1.known to which the seats are available   |           | known to which the seats are available  | Working as expected | pass   |          |                        |        | Viji         |
| Functional   | Payment       | user, I can choose to pay through credit Card/debit card/UPI.   |               | 1.user can choose payment method<br>2.pay using tht method   |           | payment for the booked tickets to be done using payment method through either the following methods credit Card/debit card/UPI. | Working as expected | pass   |          |                        |        | keerthika    |
| Functional   | Redirection   | user can be redirected to the selected  |               | 1.After payment the use will be redirected to the previous   |           | After payment the use will be redirected to the previous page   | Working as expected | pass   |          |                        |        | priya        |

| Test case ID | Feature Type | Component             | Test Scenario  | Pre-Requisite | Steps To Execute   | Test Data | Expected Result                           | Actual Result       | Status | Comments | TC for Autom | BUG ID | Executed By  |
|--------------|--------------|-----------------------|--|---------------|--|-----------|---|---------------------|--------|----------|--------------|--------|--------------|
| 10           | Functional   | Ticket generation     | a user can download the generated e ticket for my journey along with the QR code which is used for authentication during my journey. |               | 1.Enter method of reservation<br>2.Enter name, age, gender<br>3.Enter how many tickets wants to be booked<br>4.Also enter the number member's details like name, age, gender |           | Tickets booked to be displayed            | Working as expected | Pass   |          |              |        | pandiselvi   |
| 11           | UI           | Ticket status         | a user can see the status of my ticket whether it's confirmed/waiting/RAC  |               | 1.known to the status of the tickets booked  |           | known to the status of the tickets booked | Working as expected | pass   |          |              |        | Viji         |
| 12           | Functional   | Reminder notification | a user, I get reminders about my journey A day before my actual journey  |               | 1.user can get reminder notification   |           | user can get reminder notification        | Working as expected | pass   |          |              |        | buvaneshwari |
| 13           | Functional   | GPS tracking          | user can track the train using GPS and can get information such as ETA, Current stop and delay                                       |               | 1.tracking train for getting information   |           | tracking process through GPS              | Working as expected | pass   |          |              |        | keerthi      |

| Test case ID | Feature Type | Component           | Test Scenario   | Pre-Requisite | Steps To Execute                | Test Data | Expected Result                | Actual Result       | Status | Comments | TC for Automation/Y | BUG ID | Executed By   |
|--------------|--------------|---------------------|---|---------------|---------------------------------|-----------|--------------------------------|---------------------|--------|----------|---------------------|--------|---------------|
| 14           | Functional   | Ticket cancellation | user can cancel my tickets there's any Change of plan   |               | 1.tickets to be cancelled       |           | Tickets booked to be cancelled | Working as expected | Pass   |          |                     |        | priya         |
| 15           | UI           | Raise queries       | user can raise queries through the query box or via   |               | 1.raise the queries             |           | raise the queries              | Working as expected | pass   |          |                     |        | pandiselvi    |
| 16           | Functional   | Answer the queries  | user will answer the questions/doubts Raised by the customers.  |               | 1.answer the queries            |           | answer the queries             | Working as expected | pass   |          |                     |        | bhuvaneshwari |
| 17           | Functional   | Feed details        | a user will feed information about the trains delays and add extra seats if a new compartment is added. |               | 1.information feeding on trains |           | information feeding on trains  | Working as expected | pass   |          |                     |        | keerthika     |

## 9. RESULTS

### 9.1.PERFORMANCE METRICS



## ADVANTAGES &DISADVANTAGES

### 10.ADVANTAGES &DISADVANTAGES

#### 10.1.ADVANTAGES

- Openness – compatibility between different system modules, potentially from different vendors;
- Orchestration – ability to manage large numbers of devices, with full visibility over them;
  - Dynamic scaling – ability to scale the system according to the application needs, through resource virtualization and cloud operation;

- Automation – ability to automate parts of the system monitoring application, leading to better performance and lower operation costs.

## **10.2.DISADVANTAGES**

- Approaches to flexible, effective, efficient, and low-cost data collection for both railway vehicles and infrastructure monitoring, using regular trains;
- Data processing, reduction, and analysis in local controllers, and subsequent sending of that data to the cloud, for further processing;
- Online data processing systems, for real-time monitoring, using emerging communication technologies;
- Integrated, interoperable, and scalable solutions for railway systems preventive maintenance.

# CONCLUSION

## 11.CONCLUSION

Accidents occurring in Railway transportation system cost a large number of lives. So this system helps us to prevent accidents and giving information about faults or cracks in advance to railway authorities. So that they can fix them and accidents cases becomes less. This project is cost effective. By using more techniques they can be modified and developed according to their applications. By this system many lives can be saved by avoiding accidents. The idea can be implemented in large scale in the long run to facilitate better safety standards for rail tracks and provide effective testing infrastructure for achieving better results in the future.



## **12.FUTURE SCOPE**

In future CCTV systems with IP based camera can be used for monitoring the visual videos captured from the track. It will also increase security for both passengers and railways. GPS can also be used to detect exact location of track fault area, IP cameras can also be used to show fault with the help of video. Locations on Google maps with the help of sensors can be used to detect in which area track is broken

## **APPENDIX**

### **13.APPENDIX**

#### **13.1.SOURCE PROGRAM**

```
import math, random
import os
import smtplib
import sqlite3
import requests
from bs4 import BeautifulSoup
from django.contrib.auth.base_user import AbstractBaseUser
from django.db import models
import logging
import pandas as pd
import pyttsx3
from plyer import notification
import time
import
numpy as np
import
matplotlib.pyplot as plt
from PIL
```

```

import Image, ImageDraw
pickle import load,dump
import smtplib, ssl
from email.mime.text import MIMEText
from email.mime.multipart import MIMEMultipart
import email

from email import encoders
from email.mime.base import MIMEBase

import attr
from flask import Blueprint, flash, redirect, request,
url_for from flask.views import MethodView
from flask_babelplus import gettext as _
from flask_login import current_user, login_required
from pluggy import HookimplMarker

from tkinter import*
base = Tk() base.geometry("500x500")
base.title("registration form")

labl_0 = Label(base, text="Registration form",width=20,font=("bold",
20))
labl_0.place(x=90,y=53)

lb1= Label(base, text="Enter Name", width=10, font=("arial",12))
lb1.place(x=20, y=120) en1= Entry(base)
en1.place(x=200, y=120)

lb3= Label(base, text="Enter Email", width=10, font=("arial",12))
lb3.place(x=19, y=160) en3= Entry(base)

```

**en3.place(x=200, y=160)**

**lb4= Label(base, text="Contact Number", width=13,font=("arial",12))**

**lb4.place(x=19, y=200) en4= Entry(base)**

**en4.place(x=200, y=200)**

**lb5= Label(base, text="Select Gender", width=15, font=("arial",12))**

**lb5.place(x=5, y=240) var = IntVar()**

**Radiobutton(base, text="Male", padx=5,variable=var,  
value=1).place(x=180, y=240)**

**Radiobutton(base, text="Female", padx =10,variable=var,  
value=2).place(x=240,y=240)**

**Radiobutton(base, text="others", padx=15, variable=var,  
value=3).place(x=310,y=240)**

**list\_of\_centry = ("United States", "India", "Nepal", "Germany") cv  
= StringVar() drplist= OptionMenu(base, cv, \*list\_of\_centry)**

**drplist.config(width=15) cv.set("United States") lb2= Label(base,  
text="Select Country", width=13,font=("arial",12))**

**lb2.place(x=14,y=280)**

**drplist.place(x=200, y=275)**

**lb6= Label(base, text="Enter Password", width=13,font=("arial",12))**

**lb6.place(x=19, y=320) en6= Entry(base, show='\*')**

**en6.place(x=200, y=320)**

**lb7= Label(base, text="Re-Enter Password",  
width=15,font=("arial",12))**

**lb7.place(x=21, y=360) en7**

**=Entry(base, show='\*')**

**en7.place(x=200, y=360)**

```
Button(base, text="Register", width=10).place(x=200,y=400)  
base.mainloop()
```

```
def generateOTP() :
```

```
    # Declare a digits variable  
# which stores all digits  
digits = "0123456789"  
    OTP = ""
```

```
    # length of password can be changed  
# by changing value in range    for i  
in range(4) :  
        OTP += digits[math.floor(random.random() * 10)]
```

```
    return OTP
```

```
# Driver code if __name__ ==  
"__main__" :
```

```
    print("OTP of 4 digits:", generateOTP())
```

```
digits="0123456789" OTP=""
```

```
for i in range(6):
```

```
    OTP+=digits[math.floor(random.random()*10)]  
otp = OTP + " is your OTP" msg= otp s =  
smtplib.SMTP('smtp.gmail.com', 587)  
s.starttls()
```

```
s.login("Your Gmail Account", "You app password") emailid  
= input("Enter your email: ")
```

```

s.sendmail('&&&&&&&&&&',emailid,msg) a
= input("Enter Your OTP >>: ")
if a == OTP:
    print("Verified") else:
    print("Please Check your OTP again") root
= Tk() root.title("Python: Simple Login
Application") width = 400 height = 280
screen_width = root.winfo_screenwidth()
screen_height = root.winfo_screenheight() x =
(screen_width/2) - (width/2)
y = (screen_height/2) - (height/2) root.geometry('%dx%d+%d+%d'
% (width, height, x, y)) root.resizable(0, 0)
USERNAME = StringVar()
PASSWORD = StringVar()
Top = Frame(root, bd=2, relief=RIDGE)
Top.pack(side=TOP, fill=X)
Form = Frame(root, height=200) Form.pack(side=TOP,
pady=20)
lbl_title = Label(Top, text = "Python: Simple Login Application",
font=('arial', 15)) lbl_title.pack(fill=X) lbl_username =
Label(Form, text = "Username:", font=('arial', 14), bd=15)
lbl_username.grid(row=0, sticky='e') lbl_password =
Label(Form, text = "Password:", font=('arial', 14), bd=15)
lbl_password.grid(row=1, sticky='e') lbl_text = Label(Form)
lbl_text.grid(row=2, columnspan=2) username = Entry(Form,
textvariable=USERNAME, font=(14)) username.grid(row=0,
column=1) password = Entry(Form, textvariable=PASSWORD,
show="*", font=(14)) password.grid(row=1, column=1) def
Database():
    global conn, cursor    conn = sqlite3.connect("pythontut.db")
cursor = conn.cursor()    cursor.execute("CREATE TABLE IF

```

```

NOT EXISTS `member` (mem_id INTEGER NOT NULL
PRIMARY KEY
AUTOINCREMENT, username TEXT, password TEXT)")
cursor.execute("SELECT * FROM `member` WHERE `username` =
'admin' AND `password` = 'admin'")
if cursor.fetchone() is None:
    cursor.execute("INSERT INTO `member` (username, password)
VALUES('admin', 'admin')")    conn.commit()
def
Login(event=None):    Database()    if USERNAME.get()
== "" or PASSWORD.get() == "":
    lbl_text.config(text="Please complete the required field!", fg="red")
else:
    cursor.execute("SELECT * FROM `member` WHERE `username`
= ? AND `password` = ?", (USERNAME.get(), PASSWORD.get()))
if cursor.fetchone() is not None:
    HomeWindow()
    USERNAME.set("")
    PASSWORD.set("")
    lbl_text.config(text="")    else:
        lbl_text.config(text="Invalid username or password", fg="red")
        USERNAME.set("")
        PASSWORD.set("")
    cursor.close()
conn.close()
btn_login = Button(Form, text="Login", width=45, command=Login)
btn_login.grid(pady=25, row=3, columnspan=2)
btn_login.bind('<Return>', Login)

def HomeWindow():
    global Home
    root.withdraw()

```

```

    Home = Toplevel()
    Home.title("Python: Simple Login Application")
    width = 600    height = 500    screen_width =
    root.winfo_screenwidth()    screen_height =
    root.winfo_screenheight()    x = (screen_width/2) -
    (width/2)    y = (screen_height/2) - (height/2)
    root.resizable(0, 0)
    Home.geometry("%dx%d+%d+%d" % (width, height, x, y))
    lbl_home = Label(Home, text="Successfully Login!", font=('times new
roman', 20)).pack()    btn_back = Button(Home, text='Back',
command=Back).pack(pady=20, fill=X)

```

```

def Back():

```

```

    Home.destroy()
    root.deiconify()
def
getdata(url):    r =
requests.get(url)
return r.text

```

```

# input by geek

```

```

from_Station_code = "GAYA"
from_Station_name = "GAYA"

```

```

To_station_code = "PNBE"

```

```

To_station_name = "PATNA"

```

```

# url

```

```

url = "https://www.railatri.in/booking/trains-between-
stations?from_code="+from_Station_code+"&from_name="+from_Stat
ion_name+"+JN+&journey_date="+Wed&src=tbs&to_code=" + \
    To_station_code+"&to_name="+To_station_name + \
    "+JN+&user_id=-

```

**1603228437&user\_token=355740&utm\_source=dwebsearch\_tbs\_search\_trains"**

```
# pass the url
# into getdata function htmldata =
getdata(url) soup = BeautifulSoup(htmldata,
'html.parser')

# find the Html tag
# with find()
# and convert into string
data_str = "" for item in soup.find_all("div", class_="col-xs-12
TrainSearchSection"):
    data_str = data_str + item.get_text() result
= data_str.split("\n")

print("Train between "+from_Station_name+" and "+To_station_name)
print("")

# Display the result
for item in result:
if item != "":
print(item)
print("\n\nTicket Booking System\n")
restart = ('Y')
while restart !=
('N','NO','n','no'):
    print("1.Check PNR status")    print("2.Ticket
Reservation")
        option = int(input("\nEnter your option : "))
```



```

        if option == 1:
            print("Your PNR status is t3")
            exit(0)

        elif option == 2:
            people = int(input("\nEnter no. of Ticket you
want :
"))
            name_l = []    age_l = []
            sex_l = []    for p in
range(people):           name =
str(input("\nName : "))
            name_l.append(name)
                        age = int(input("\nAge : "))           age_l.append(age)
                        sex = str(input("\nMale or Female : "))
                        sex_l.append(sex)

            restart = str(input("\nDid you forgot someone? y/n:
"))    if restart in ('y','YES','yes','Yes'):
                restart = ('Y')    else :
                    x = 0
                    print("\nTotal Ticket : ",people)           for p in
range(1,people+1):       print("Ticket : ",p)
                        print("Name : ", name_l[x])           print("Age :
", age_l[x])
                            print("Sex : ",sex_l[x])           x
+= 1

```

## 7.2. FEATURE 2

```
class User(AbstractBaseUser):
    """
    User model.
    """

    USERNAME_FIELD = "email"

    REQUIRED_FIELDS = ["first_name", "last_name"]

    email = models.EmailField(verbose_name="E-mail",
                               unique=True
    )

    first_name = models.CharField(verbose_name="First name",
                                   max_length=30
    )

    last_name = models.CharField(verbose_name="Last name",
                                  max_length=40
```

```

    )

    city = models.CharField(
verbose_name="City",      max_length=40
    )

    stripe_id = models.CharField(
verbose_name="Stripe ID",
        unique=True,
max_length=50,      blank=True,
        null=True
    )

objects = UserManager()

@property   def
get_full_name(self):
    return f"{self.first_name} {self.last_name}"

class Meta:
    verbose_name = "User"
    verbose_name_plural = "Users"

class Profile(models.Model):
    """
    User's profile.
    """

    phone_number = models.CharField(
verbose_name="Phone number",

```

```

        max_length=15
    )

    date_of_birth = models.DateField(
        verbose_name="Date of birth"
    )

    postal_code = models.CharField(
        verbose_name="Postal code",
        max_length=10,
        blank=True
    )

    address = models.CharField(
        verbose_name="Address",
        max_length=255,
        blank=True
    )

    class Meta:
        abstract = True

class UserProfile(Profile):
    """
    User's profile model.
    """

    user = models.OneToOneField(
        to=User,
        on_delete=models.CASCADE, related_name="profile",

```

```

    )

    group = models.CharField(
verbose_name="Group type",
choices=GroupTypeChoices.choices(),
max_length=20,
default=GroupTypeChoices.EMPLOYEE.name,
    )

    def __str__(self):
        return self.user.email

    class Meta:

# user 1 - employer
user1, _ = User.objects.get_or_create(
email="foo@bar.com",
first_name="Employer",  last_name="Testowy",
    city="Białystok",
)

user1.set_unusable_password()

group_name = "employer"

_profile1, _ = UserProfile.objects.get_or_create(
user=user1,  date_of_birth=datetime.now() -
timedelta(days=6600),
group=GroupTypeChoices(group_name).name,
    address="Myśliwska 14",  postal_code="15-
569",  phone_number="+48100200300",

```

)

**# user2 - employee**

**user2, \_ = User.objects.get\_or\_create()**

**email="bar@foo.com",**

**first\_name="Employee", last\_name="Testowy",**

**city="Białystok",**

)

**user2.set\_unusable\_password()**

**group\_name = "employee"**

**\_profile2, \_ = UserProfile.objects.get\_or\_create()**

**user=user2, date\_of\_birth=datetime.now() -**

**timedelta(days=7600),**

**group=GroupTypeChoices(group\_name).name,**

**address="Myśliwska 14", postal\_code="15-569",**

**phone\_number="+48200300400",**

)

**response\_customer = stripe.Customer.create()**

**email=user.email, description=f"EMPLOYER - {user.get\_full\_name}",**  
**name=user.get\_full\_name,**

**phone=user.profile.phone\_number,**

)

**user1.stripe\_id = response\_customer.stripe\_id user1.save()**

**mcc\_code, url = "1520", "https://www.softserveinc.com/"**

```

response_ca = stripe.Account.create()    type="custom",
country="PL",    email=user2.email,
default_currency="pln",    business_type="individual",
settings={"payouts": {"schedule": {"interval": "manual", }}},
requested_capabilities=["card_payments", "transfers", ],
business_profile={"mcc": mcc_code, "url": url},    individual={
    "first_name": user2.first_name,
    "last_name": user2.last_name,
    "email": user2.email,
    "dob": {
        "day": user2.profile.date_of_birth.day,
        "month": user2.profile.date_of_birth.month,
        "year": user2.profile.date_of_birth.year,
    },
    "phone": user2.profile.phone_number,
    "address": {
        "city": user2.city,
        "postal_code": user2.profile.postal_code,
        "country": "PL",
        "line1": user2.profile.address,
    },
},
)

```

```

user2.stripe_id = response_ca.stripe_id user2.save()

```

```

tos_acceptance = {"date": int(time.time()), "ip": user_ip},

```

```

stripe.Account.modify(user2.stripe_id, tos_acceptance=tos_acceptance)

```

```
passport_front = stripe.File.create(
purpose="identity_document",  file=_file,
# ContentFile object
    stripe_account=user2.stripe_id,
)
```

```
individual = {
    "verification": {
        "document": {"front": passport_front.get("id")},
        "additional_document": {"front": passport_front.get("id")},
    }
}
```

```
stripe.Account.modify(user2.stripe_id, individual=individual)
```

```
new_card_source = stripe.Customer.create_source(user1.stripe_id,
source=token)
```

```
stripe.SetupIntent.create(
payment_method_types=["card"],
customer=user1.stripe_id,  description="some
description",
    payment_method=new_card_source.id,
)
```

```
payment_method =
stripe.Customer.retrieve(user1.stripe_id).default_source
```

```
payment_intent = stripe.PaymentIntent.create(  amount=amount,
currency="pln",  payment_method_types=["card"],
```



```

capture_method="manual",    customer=user1.stripe_id, #
customer    payment_method=payment_method,
application_fee_amount=application_fee_amount,
transfer_data={"destination": user2.stripe_id}, # connect account
description=description,
    metadata=metadata,
)

```

```

payment_intent_confirm = stripe.PaymentIntent.confirm(
payment_intent.stripe_id, payment_method=payment_method
)

```

```

stripe.PaymentIntent.capture(
payment_intent.id, amount_to_capture=amount
)
stripe.Balance.retrieve(stripe_account=user2.stripe_id)

```

```

stripe.Charge.create(
amount=amount,    currency="pln",
source=user2.stripe_id,
    description=description
)

```

```

stripe.PaymentIntent.cancel(payment_intent.id)

```

```

    unique_together = ("user", "group")
@attr.s(frozen=True, cmp=False, hash=False, repr=True) class
UserSettings(MethodView):
    form = attr.ib(factory=settings_form_factory)
settings_update_handler = attr.ib(factory=settings_update_handler)

```

```

decorators = [login_required]

def get(self):
    return self.render()

def post(self):    if
self.form.validate_on_submit():
try:
    self.settings_update_handler.apply_changeset(
        current_user, self.form.as_change()
    )
    except StopValidation as e:
self.form.populate_errors(e.reasons)
    return self.render()
except PersistenceError:
    logger.exception("Error while updating user settings")
flash(_("Error while updating user settings"), "danger")    return
self.redirect()

    flash(_("Settings updated."), "success")
    return self.redirect()
return self.render()

def render(self):    return
render_template("user/general_settings.html",
form=self.form)

def redirect(self):
    return redirect(url_for("user.settings"))

```

```

@attr.s(frozen=True, hash=False, cmp=False, repr=True) class
ChangePassword(MethodView):
    form = attr.ib(factory=change_password_form_factory)
    password_update_handler = attr.ib(factory=password_update_handler)
    decorators = [login_required]

    def get(self):
        return self.render()

    def post(self):
        if self.form.validate_on_submit():
            try:
                self.password_update_handler.apply_changeset(
                    current_user, self.form.as_change()
                )
            except StopValidation as e:
                self.form.populate_errors(e.reasons)
                return self.render()
        except PersistenceError:
            logger.exception("Error while changing password")
            flash(_("Error while changing password"), "danger")
        return self.redirect()

        flash(_("Password updated."), "success")
        return self.redirect()
    return self.render()

    def render(self):
        return render_template("user/change_password.html",
            form=self.form)

```

```

def redirect(self):
    return redirect(url_for("user.change_password"))

@attr.s(frozen=True, cmp=False, hash=False, repr=True) class
ChangeEmail(MethodView):
    form = attr.ib(factory=change_email_form_factory)
    update_email_handler = attr.ib(factory=email_update_handler)
    decorators = [login_required]

    def get(self):
        return self.render()

    def post(self):
        if
self.form.validate_on_submit():
try:
    self.update_email_handler.apply_changeset(
current_user, self.form.as_change()
    )
    except StopValidation as e:
        self.form.populate_errors(e.reasons)
        return self.render()
except PersistenceError:
    logger.exception("Error while updating email")
flash(_("Error while updating email"), "danger")
self.redirect()

flash(_("Email address updated."), "success")
return self.redirect()
return self.render()

```

```

def render(self):
    return render_template("user/change_email.html", form=self.form)

def redirect(self):
    return redirect(url_for("user.change_email"))
def berth_type(s):

    if s>0 and s<73:
        if s % 8 == 1 or s % 8 == 4:
            print (s), "is lower berth"
        elif s % 8 == 2 or s % 8 == 5:
            print (s), "is middle berth"
        elif s % 8 == 3 or s % 8 == 6:
            print (s), "is upper berth"
        elif s % 8 == 7:
            print (s), "is side lower berth"
        else:
            print (s), "is side upper berth"
        else:
            print (s), "invalid seat number"

# Driver code s = 10 berth_type(s)    #
# fn call for berth type

s = 7 berth_type(s)    # fn call for
# berth type

s = 0 berth_type(s)    # fn call for berth type class
Ticket:  counter=0    def
__init__(self,passenger_name,source,destination):
    self.__passenger_name=passenger_name

```

```

        self.__source=source
self.__destination=destination
self.Counter=Ticket.counter
        Ticket.counter+=1
    def validate_source_destination(self):
        if (self.__source=="Delhi" and (self.__destination=="Pune" or
self.__destination=="Mumbai" or self.__destination=="Chennai"
or self.__destination=="Kolkata")):          return True          else:
            return False

    def generate_ticket(self ):
if True:

__ticket_id=self.__source[0]+self.__destination[0]+"0"+str(self.Counter)
print( "Ticket id will be:",__ticket_id)          else:
            return False    def
get_ticket_id(self):          return
self.ticket_id    def
get_passenger_name(self):
return self.__passenger_name
def get_source(self):
    if self.__source=="Delhi":
        return self.__source
else:
    print("you have written invalid soure option")
return None    def get_destination(self):          if
self.__destination=="Pune":
        return self.__destination          elif
self.__destination=="Mumbai":
        return self.__destination
    elif self.__destination=="Chennai": return
        self.__destination

```

```

        elif self.__destination=="Kolkata":
            return self.__destination

    else:
        return None

    # user define function
    # Scrape the data def
    getdata(url):
        r = requests.get(url)
        return r.text

# input by geek
train_name = "03391-rajgir-new-delhi-clone-special-rgd-to-ndls"

# url
url = "https://www.railatri.in/live-train-status/"+train_name

# pass the url # into getdata function
htmldata = getdata(url)
soup = BeautifulSoup(htmldata, 'html.parser')

# traverse the live status from
# this Html code data = [] for item in soup.find_all('script',
type="application/ld+json"):
    data.append(item.get_text())

# convert into dataframe
df = pd.read_json(data[2])

# display this column of #
dataframe

```

```
print(df["mainEntity"][0]['name'])  
print(df["mainEntity"][0]['acceptedAnswer']['text'])  
Speak method def Speak(self, audio):
```

```
# Calling the initial constructor
```

```
# of pyttsx3
```

```
engine = pyttsx3.init('sapi5')
```

```
# Calling the getter method
```

```
voices = engine.getProperty('voices')
```

```
# Calling the setter method
```

```
engine.setProperty('voice', voices[1].id)
```

```
engine.say(audio)
```

```
engine.runAndWait()
```

```
def
```

```
Take_break():
```

```
Speak("Do you want to start sir?")
```

```
question = input()
```

```
if "yes" in question:
```

```
Speak("Starting Sir")
```

```
if "no" in question:
```

```
Speak("We will automatically start after 5 Mins  
Sir.")
```



```

time.sleep(5*60)
Speak("Starting Sir")

# A notification we will held that
# Let's Start sir and with a message of
# will tell you to take a break after 45
# mins for 10 seconds
while(True):
    notification.notify(title="Let's Start sir",
        message="will tell you to take a break after 45
mins",
        timeout=10)

# For 45 min the will be no notification but
# after 45 min a notification will pop up.
time.sleep(0.5*60)

Speak("Please Take a break Sir")

notification.notify(title="Break Notification",
    message="Please do use your device after sometime
as you have"
    "been continuously using it for 45 mins and it will
affect your eyes",
    timeout=10)

# Driver's Code
if __name__ == '__main__':
    Take_break()

```

```

data_path = 'data.csv' data = pd.read_csv(data_path,
names=['LATITUDE', 'LONGITUDE'], sep=',') gps_data =
tuple(zip(data['LATITUDE'].values,
data['LONGITUDE'].values))

```

```

image = Image.open('map.png', 'r') # Load map image.

```

```

img_points = []
for d in gps_data:

```

```

    x1, y1 = scale_to_img(d, (image.size[0], image.size[1])) # Convert GPS
coordinates to image coordinates.    img_points.append((x1, y1)) draw =
ImageDraw.Draw(image) draw.line(img_points, fill=(255, 0, 0),
width=2) # Draw converted records to the map image.

```

```

image.save('resultMap.png') x_ticks = map(lambda x: round(x, 4),
np.linspace(lon1, lon2, num=7)) y_ticks = map(lambda x: round(x, 4),
np.linspace(lat1, lat2, num=8)) y_ticks = sorted(y_ticks, reverse=True) #
y ticks must be reversed due to conversion to image coordinates.

```

```

fig, axis1 = plt.subplots(figsize=(10, 10))
axis1.imshow(plt.imread('resultMap.png')) # Load the image to
matplotlib plot.

```

```

axis1.set_xlabel('Longitude')

```

```

axis1.set_ylabel('Latitude')

```

```

axis1.set_xticklabels(x_ticks)

```

```

axis1.set_yticklabels(y_ticks)

```

```

axis1.grid() plt.show()

```

```

class tickets:    def __init__(self):

```

```

self.no_ofac1stclass=0

```

```

self.totaf=0

```

```

self.no_ofac2ndclass=0

```

```

self.no_ofac3rdclass=0

```

```

self.no_ofsleeper=0

```

```

self.no_oftickets=0

```

```

self.name=""      self.age=""
self.resno=0
self.status=""    def
ret(self):
    return(self.resno)
def retname(self):
return(self.name)  def
display(self):
    f=0
    fin1=open("tickets.dat","rb")
if not fin1:
    print "ERROR"
else:
    print
    n=int(raw_input("ENTER PNR NUMBER : "))
print "\n\n"
    print ("FETCHING DATA ...".center(80))
time.sleep(1)
    print
    print('PLEASE WAIT...!!'.center(80))
time.sleep(1)      os.system('cls')
try:
    while True:
        tick=load(fin1)
if(n==tick.ret()):
    f=1
print "="*80      print("PNR
STATUS".center(80))
        print "="*80
        print
        print "PASSENGER'S NAME :",tick.name
print
        print "PASSENGER'S AGE :",tick.age
print

```

```

        print "PNR NO :",tick.resno
print
        print "STATUS :",tick.status
print
        print "NO OF SEATS BOOKED : ",tick.no_oftickets
print    except:        pass        fin1.close()
if(f==0):
    print
    print "WRONG PNR NUMBER..!!"
    print
def pending(self):
    self.status="WAITING LIST"
    print "PNR NUMBER :",self.resno
print    time.sleep(1.2)    print
"STATUS = ",self.status
    print
    print "NO OF SEATS BOOKED : ",self.no_oftickets
print    def confirmation (self):
        self.status="CONFIRMED"
        print "PNR NUMBER : ",self.resno
print    time.sleep(1.5)    print
"STATUS = ",self.status
        print    def
cancellation(self):
    z=0
    f=0
    fin=open("tickets.dat","rb")
fout=open("temp.dat","ab")
    print
    r= int(raw_input("ENTER PNR NUMBER : "))
try:        while(True):        tick=load(fin)
z=tick.ret() if(z!=r):

```

```

        dump(tick,fout)
elif(z==r):
        f=1
except:
pass
fin.close()
        fout.close()
        os.remove("tickets.dat")
os.rename("temp.dat","tickets.dat")
if (f==0):        print
        print "NO SUCH RESERVATION NUMBER FOUND"
print        time.sleep(2)        os.system('cls')        else:
print
        print "TICKET CANCELLED"
print"RS.600 REFUNDED...."    def
reservation(self):
        trainno=int(raw_input("ENTER THE TRAIN NO:"))
z=0
        f=0
        fin2=open("tr1details.dat")
        fin2.seek(0)        if
not fin2:        print
"ERROR"        else:
        try:
                while True:
                        tr=load(fin2)
z=tr.gettrainno()
n=tr.gettrainname()        if
(trainno==z):
                print
                print "TRAIN NAME IS : ",n
f=1                print                print "-"*80

```

```

no_ofac1st=tr.getno_ofac1stclass()
no_ofac2nd=tr.getno_ofac2ndclass()
no_ofac3rd=tr.getno_ofac3rdclass()
no_ofsleeper=tr.getno_ofsleeper()
if(f==1):
    fout1=open('tickets.dat',"ab")
print
    self.name=raw_input('ENTER THE PASSENGER'S
NAME ')
    print
    self.age=int(raw_input('PASSENGER'S AGE : '))
print
    print"\t\t SELECT A CLASS YOU WOULD LIKE TO
TRAVEL IN :- "
    print "1.AC FIRST CLASS"
print
    print "2.AC SECOND CLASS"
print
    print "3.AC THIRD CLASS"
print
    print "4.SLEEPER CLASS"
    print
    c=int(raw_input("\t\t\tENTER YOUR CHOICE = "))
os.system('cls')
    amt1=0
    if(c==1):
        self.no_oftickets=int(raw_input('ENTER NO_OF
FIRST CLASS AC SEATS TO BE BOOKED : '))
i=1
        while(i<=self.no_oftickets):
            self.totaf=self.totaf+1
amt1=1000*self.no_oftickets
            i=i+1
    print
    print "PROCESSING. .",

```

```

        time.sleep(0.5)
    print ".",
    time.sleep(0.3)
    print'.'
    time.sleep(2)
    os.system('cls')

        print "TOTAL AMOUNT TO BE PAID = ",amt1
    self.resno=int(random.randint(1000,2546))
        x=no_ofac1st-self.totaf
        print
    if(x>0):
        self.confirmation()
    dump(self,fout1)
        break
    else:
        self.pending()
        dump(tick,fout1)
        break
    elif(c==2):
        self.no_oftickets=int(raw_input("ENTER NO_OF
SECOND CLASS AC SEATS TO BE BOOKED : "))
    i=1

def menu():
    tr=train()
    tick=tickets()    print
    print "WELCOME TO PRAHIT AGENCY".center(80)
    while True:
        print          print "="*80
    print " \t\t\t\t RAILWAY"

```





```

        fout=open("tr1details.dat","ab")
tr.getinput()          dump(tr,fout)
fout.close()

        print"\n\n\n\n\n\n\n\n\n\n\n\n\t\t\tUPDATING TRAIN LIST
PLEASE WAIT ..",
        time.sleep(1)

print ("."),
time.sleep(0.5)
print ("."),
time.sleep(2)
os.system('cls')

        print "\n\n\n\n\n\n\n\n\n\n\n\n\n"
        x=raw_input("\t\t\tDO YOU WANT TO ADD ANY MORE
TRAINS DETAILS ? ")
        os.system('cls')
continue          elif(j<>r):
        print"\n\n\n\n\n\n"
        print "WRONG PASSWORD".center(80)
elif ch==2:
        fin=open("tr1details.dat",'rb')
if not fin:
        print "ERROR"
else:
        try:
while True:
        print"*"*80
print"\t\t\t\t\tTRAIN DETAILS"
        print"*"*80

print          tr=load(fin)
tr.output()

```

```

raw_input("PRESS ENTER TO VIEW NEXT TRAIN
DETAILS")
os.system('cls')
except EOFError:
    pass
elif ch==3:
    print'*80
    print "\t\t\tRESERVATION OF TICKETS"
    print'*80          print          tick.reservation()
elif ch==4:
    print"*80
    print"\t\t\tCANCELLATION OF TICKETS"
    print          print"*80          print
    tick.cancellation()          elif ch==5:
        print "*80
    print("PNR STATUS".center(80))
    print"*80
printclass tickets:    def
__init__(self):
self.no_ofac1stclass=0
self.totaf=0
self.no_ofac2ndclass=0
self.no_ofac3rdclass=0
self.no_ofsleeper=0
self.no_oftickets=0
self.name=""          self.age=""
        self.resno=0
self.status=""          def
ret(self):
        return(self.resno)
def retname(self):
return(self.name)    def
display(self):

```

```

    f=0
    fin1=open('tickets.dat','rb')
if not fin1:
    print "ERROR"
else:
    print
    n=int(raw_input('ENTER PNR NUMBER : '))
print "\n\n"          print ("FETCHING DATA . .
.'.center(80))          time.sleep(1)          print
    print('PLEASE WAIT...!!'.center(80))
    time.sleep(1)
os.system('cls')
try:
    while
True:
        tick=load(fin1)
if(n==tick.ret()):
    f=1
print "="*80          print("PNR
STATUS".center(80))
    print"="*80
print
    print "PASSENGER'S NAME :",tick.name
print
    print "PASSENGER'S AGE :",tick.age
print
    print "PNR NO :",tick.resno
print
    print "STATUS :",tick.status
print
    print "NO OF SEATS BOOKED : ",tick.no_oftickets
print
except:
    pass
    fin1.close()
if(f==0):
    print
    print "WRONG PNR NUMBER..!!"
print
    def pending(self):

```

```

        self.status="WAITING LIST"
        print "PNR NUMBER :",self.resno
print      time.sleep(1.2)      print
"STATUS = ",self.status      print
        print "NO OF SEATS BOOKED : ",self.no_oftickets
print    def confirmation (self):
        self.status="CONFIRMED"
        print "PNR NUMBER : ",self.resno
print
        time.sleep(1.5)      print
"STATUS = ",self.status
        print    def
cancellation(self):
        z=0
        f=0
        fin=open("tickets.dat","rb")
fout=open("temp.dat","ab")
        print
        r= int(raw_input("ENTER PNR NUMBER : "))
try:      while(True):      tick=load(fin)
z=tick.ret()      if(z!=r):
        dump(tick,fout)
elif(z==r):
        f=1
except:
pass
fin.close()
        fout.close()
        os.remove("tickets.dat")
os.rename("temp.dat","tickets.dat")
if (f==0):      print

```

```

        print "NO SUCH RESERVATION NUMBER FOUND"
print      time.sleep(2)      os.system('cls')
    else:
print
        print "TICKET CANCELLED"
print"RS.600 REFUNDED...."    def
reservation(self):
    trainno=int(raw_input("ENTER THE TRAIN NO:"))
z=0
    f=0
    fin2=open("tr1details.dat")
    fin2.seek(0)    if
not fin2:    print
"ERROR"    else:
try:    while
True:
        tr=load(fin2)
z=tr.gettrainno()
n=tr.gettrainname()    if
(trainno==z):
        print
        print "TRAIN NAME IS : ",n
f=1    print    print "-"*80
no_ofac1st=tr.getno_ofac1stclass()
no_ofac2nd=tr.getno_ofac2ndclass()
no_ofac3rd=tr.getno_ofac3rdclass()
no_ofsleeper=tr.getno_ofsleeper()
if(f==1):
        fout1=open("tickets.dat","ab")
        print
        self.name=raw_input("ENTER THE PASSENGER'S
NAME ")

```

```

        print
        self.age=int(raw_input("PASSENGER'S AGE : "))
print
        print"\t\t SELECT A CLASS YOU WOULD LIKE TO
TRAVEL IN :- "
        print "1.AC FIRST CLASS"
print
        print "2.AC SECOND CLASS"
print
        print "3.AC THIRD CLASS"
print
        print "4.SLEEPER CLASS"
print
        c=int(raw_input("\t\t ENTER YOUR CHOICE = "))
os.system('cls')          amt1=0          if(c==1):
        self.no_oftickets=int(raw_input("ENTER NO_OF
FIRST CLASS AC SEATS TO BE BOOKED : "))
i=1          while(i<=self.no_oftickets):
        self.totaf=self.totaf+1
amt1=1000*self.no_oftickets          i=i+1
        print
        print "PROCESSING. .",
        time.sleep(0.5)
        print ". ",
time.sleep(0.3)
print'. '          time.sleep(2)
os.system('cls')
        print "TOTAL AMOUNT TO BE PAID = ",amt1
self.resno=int(random.randint(1000,2546))
        x=no_ofac1st-self.totaf
        print
if(x>0):

```

```

                                self.confirmation()
dump(self,fout1)
                                break
else:
                                self.pending()
dump(tick,fout1)
                                break
elif(c==2):
                                self.no_oftickets=int(raw_input("ENTER NO_OF
SECOND CLASS AC SEATS TO BE BOOKED : "))
i=1

```

```

def menu():
    tr=train()
    tick=tickets()    print
    print "WELCOME TO PRAHIT AGENCY".center(80)
while True:
    print          print "="*80
print " \t\t\t RAILWAY"
    print
print "="*80
    print
    print "\t\t\t1. **UPDATE TRAIN DETAILS."
print
    print "\t\t\t2. TRAIN DETAILS. "
print
    print "\t\t\t3. RESERVATION OF TICKETS."
print
    print "\t\t\t4. CANCELLATION OF TICKETS. "
print

```

```

        print "\t\t5. DISPLAY PNR STATUS."
print
        print "\t\t6. QUIT."
        print "** - office use....."
        ch=int(raw_input("\t\tENTER YOUR CHOICE : "))
os.system('cls')          print
"\n\n\n\n\n\n\n\n\n\n\n\n\n\n\n\n\n\n\n\n\n\n\n\n\n\t\t\t\t\tLOADI
NG. .",
        time.sleep(1)
print ("."),
time.sleep(0.5)
print (".")
time.sleep(2)
os.system('cls')          if
ch==1:
j="*****"
r=raw_input("\n\n\n\n\n\n\n\n\n\n\n\n\n\n\n\n\n\n\n\n\n\n\n\n\n\t\t\t\t\tENT
ER THE
PASSWORD: ")
        os.system('cls')
if (j==r):                x='y'
while (x.lower()=='y'):
        fout=open("tr1details.dat","ab")
tr.getinput()             dump(tr,fout)
fout.close()
        print"\n\n\n\n\n\n\n\n\n\n\n\n\n\n\n\n\n\n\n\t\t\t\t\tUPDATING TRAIN LIST
PLEASE WAIT . .",
        time.sleep(1)
print ("."),
time.sleep(0.5)
print ("."),

```





```

Hi,
How are you?
Real Python has many great tutorials:
www.realpython.com"""
html = """\ <html>
    <body>
        <p>Hi,<br>
            How are you?<br>
                <a href="http://www.realpython.com">Real Python</a>
has many great tutorials.
    </p>
</body>
</html>
"""

```

```

# Turn these into plain/html MIMEText objects part1
= MIMEText(text, "plain")
part2 = MIMEText(html, "html")

```

```

# Add HTML/plain-text parts to MIMEMultipart message
# The email client will try to render the last part first
message.attach(part1) message.attach(part2)

```

```

# Create secure connection with server and send email context =
ssl.create_default_context() with
smtplib.SMTP_SSL('smtp.gmail.com', 465, context=context) as
server:
    server.login(sender_email, password)
server.sendmail(      sender_email, receiver_email,
message.as_string()
    )

```

```

subject = "An email with attachment from Python" body =
"This is an email with attachment sent from Python"
sender_email = "my@gmail.com" receiver_email =
"your@gmail.com" password = input("Type your
password and press enter:") # Create a multipart message
and set headers

message = MIMEMultipart() message["From"] = sender_email
message["To"] = receiver_email message["Subject"] = subject
message["Bcc"] = receiver_email # Recommended for mass
emails

# Add body to email
message.attach(MIMEText(body, "plain"))

filename = "document.pdf" # In same directory as script

# Open PDF file in binary mode with
open(filename, "rb") as attachment:
    # Add file as application/octet-stream
    # Email client can usually download this automatically as attachment
part = MIMEBase("application", "octet-stream")
part.set_payload(attachment.read())

# Encode file in ASCII characters to send by email
encoders.encode_base64(part)

# Add header as key/value pair to attachment part
part.add_header( "Content-Disposition",
    f'attachment; filename= {filename}',
)

```

```

# Add attachment to message and convert message to string
message.attach(part)
text = message.as_string()

# Log in to server using secure context and send email context =
ssl.create_default_context() with
smtplib.SMTP_SSL('smtp.gmail.com', 465, context=context) as
server:
    server.login(sender_email, password)
server.sendmail(sender_email, receiver_email, text)
api_key = "Your_API_key"

# base_url variable to store url
base_url = "https://api.railwayapi.com/v2/pnr-status/pnr/"

# Enter valid pnr_number
pnr_number = "6515483790"

# Stores complete url address
complete_url = base_url + pnr_number + "/apikey/" + api_key + "/"

# get method of requests module #
return response object
response_ob = requests.get(complete_url)

# json method of response object convert #
json format data into python format data
result = response_ob.json()

# now result contains list # of
nested dictionaries if

```

```
result["response_code"] == 200: #  
train name is extracting # from  
the result variable data  
train_name =  
result["train"]["name"]
```

```
# train number is extracting from # the result  
variable data
```

```
train_number = result["train"]["number"]
```

```
# from station name is extracting # from the  
result variable data
```

```
from_station = result["from_station"]["name"]
```

```
# to_station name is extracting from # the  
result variable data
```

```
to_station = result["to_station"]["name"]
```

```
# boarding point station name is # extracting from the result  
variable data boarding_point = result["boarding_point"]["name"]
```

```
# reservation upto station name is # extracting from  
the result variable data
```

```
reservation_upto =  
result["reservation_upto"]["name"]
```

```
# store the value or data of "pnr"
```

```
# key in pnr_num variable
```

```
pnr_num = result["pnr"] # store the  
value or data of "doj" key # in  
variable date_of_journey variable
```

```
date_of_journey = result["doj"]
```

```

# store the value or data of
# "total_passengers" key in variable
total_passengers = result["total_passengers"]

# store the value or data of "passengers" # key in
variable passengers_list
passengers_list = result["passengers"]

# store the value or data of      #
"chart_prepared" key in variable
chart_prepared = result["chart_prepared"]

# print following values
print(" train name : " + str(train_name)  + "\n train
number : " + str(train_number)
      + "\n from station : " + str(from_station)
      + "\n to station : " + str(to_station)
      + "\n boarding point : " + str(boarding_point)
      + "\n reservation upto : " + str(reservation_upto)
      + "\n pnr number : " + str(pnr_num)
      + "\n date of journey : " + str(date_of_journey)
+ "\n total no. of passengers: " + str(total_passengers)
      + "\n chart prepared : " + str(chart_prepared))

# looping through passenger list
for passenger in passengers_list:

# store the value or data # of "no"
key in variable passenger_num =
passenger["no"]

```

```

        # store the value or data of      # "current_status" key in
variable    current_status = passenger["current_status"]

        # store the value or data of      # "booking_status" key in
variable    booking_status = passenger["booking_status"]

        # print following values
        print(" passenger number : " + str(passenger_num)          + "\n
current status : " + str(current_status)
              + "\n booking_status : " + str(booking_status))
    else:
        print("Record Not Found")

```

## 13.2.GIT HUB LINK

**<https://github.com/IBM-EPBL/IBM-Project-28860-1660117540>**