


TEAM ID :PNT2022TMID10671

PROJECT NAME : AI-powered Nutrition Analyzer for Fitness Enthusiasts

Routing To The Html Page


Here, the declared constructor is used to route to the HTML page created earlier.

In the above example, the '/' URL is bound with the home.html function. Hence, when the home page of the webserver is opened in the browser, the HTML page is rendered. Whenever you enter the values from the HTML page the values can be retrieved using the POST Method.

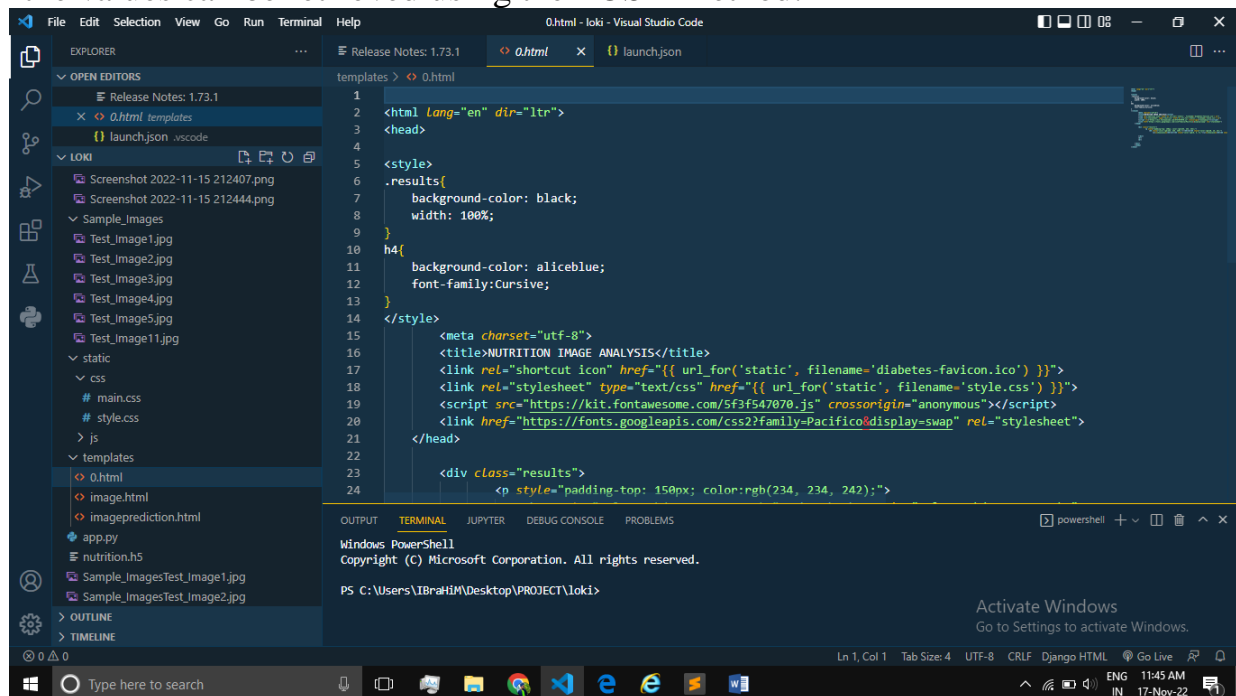

When “image is uploaded “on the UI, the launch function is executed

It will take the image request and we will be storing that image in our local system then we will convert the image into our required size and finally, we will be predicting the results with the help of our model which we trained and depending upon the class identified we will showcase the class name and its properties by rendering the respective html pages.

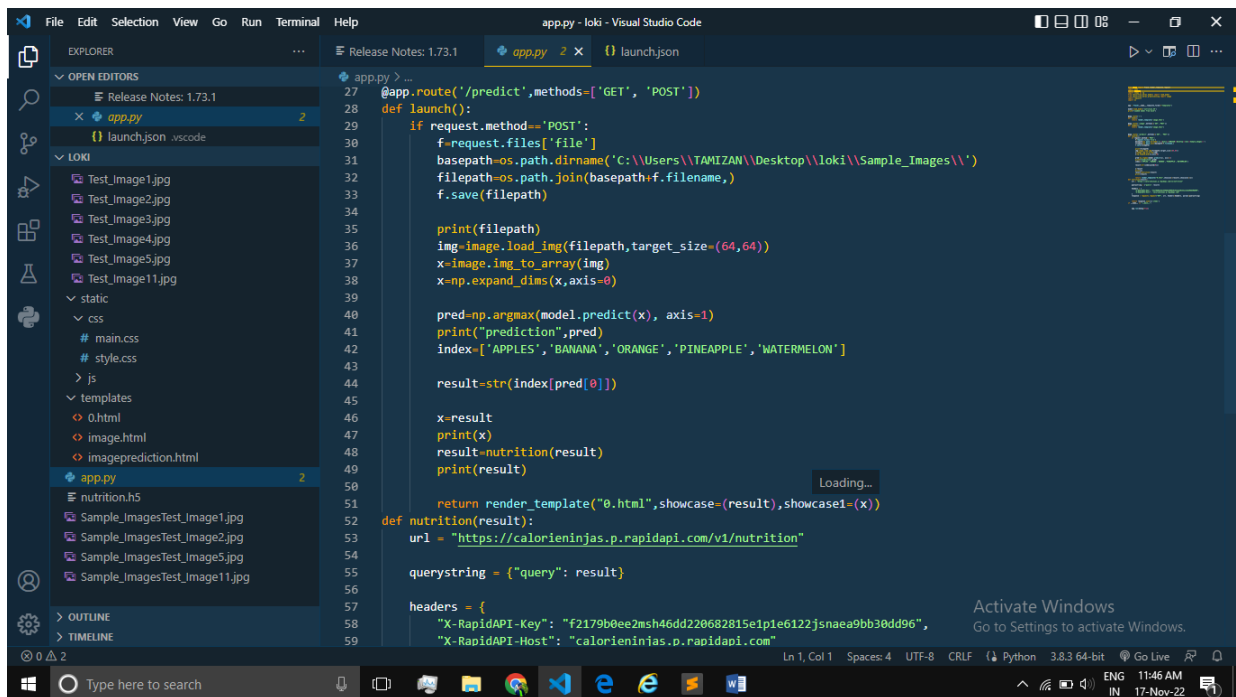


API Integration:

Here we will be using Rapid API


Using RapidAPI, developers can search and test the APIs, subscribe, and connect to the APIs

— all with a single account, single API key and single SDK. Engineering teams also use RapidAPI to share internal APIs and microservice documentation.

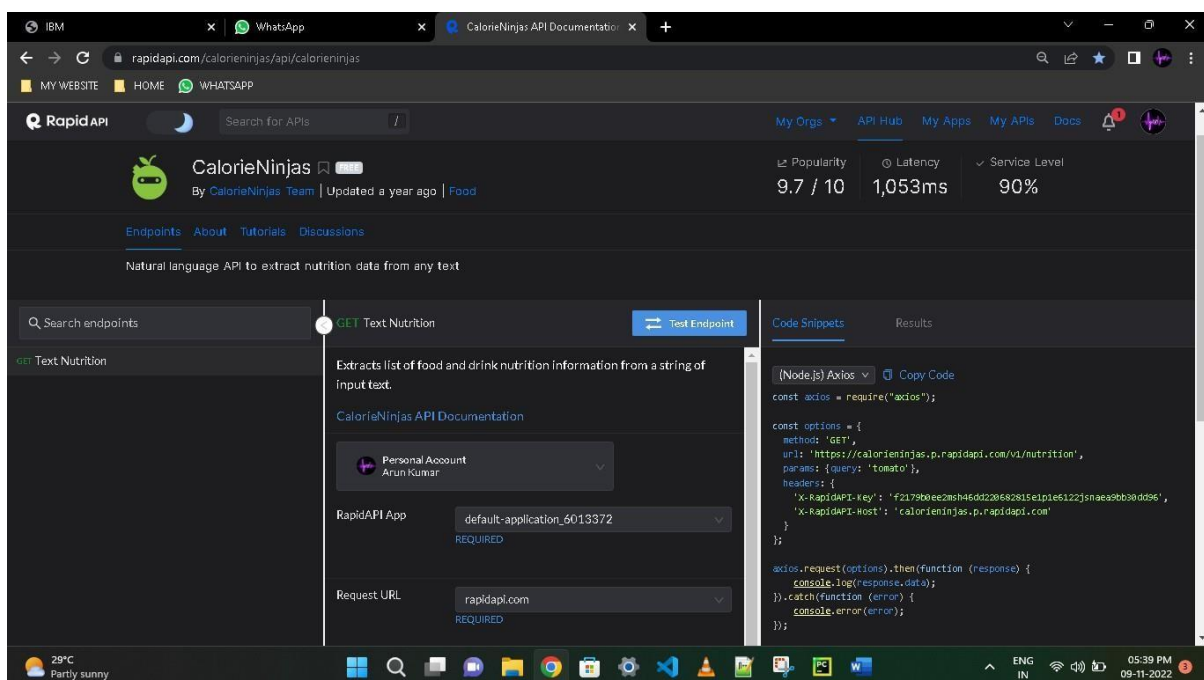

The link above will allow us to test the food item and will result the nutrition

NOTE: When we keep hitting the API the limit of it might expire. So making a smart use of it will be an efficient way.

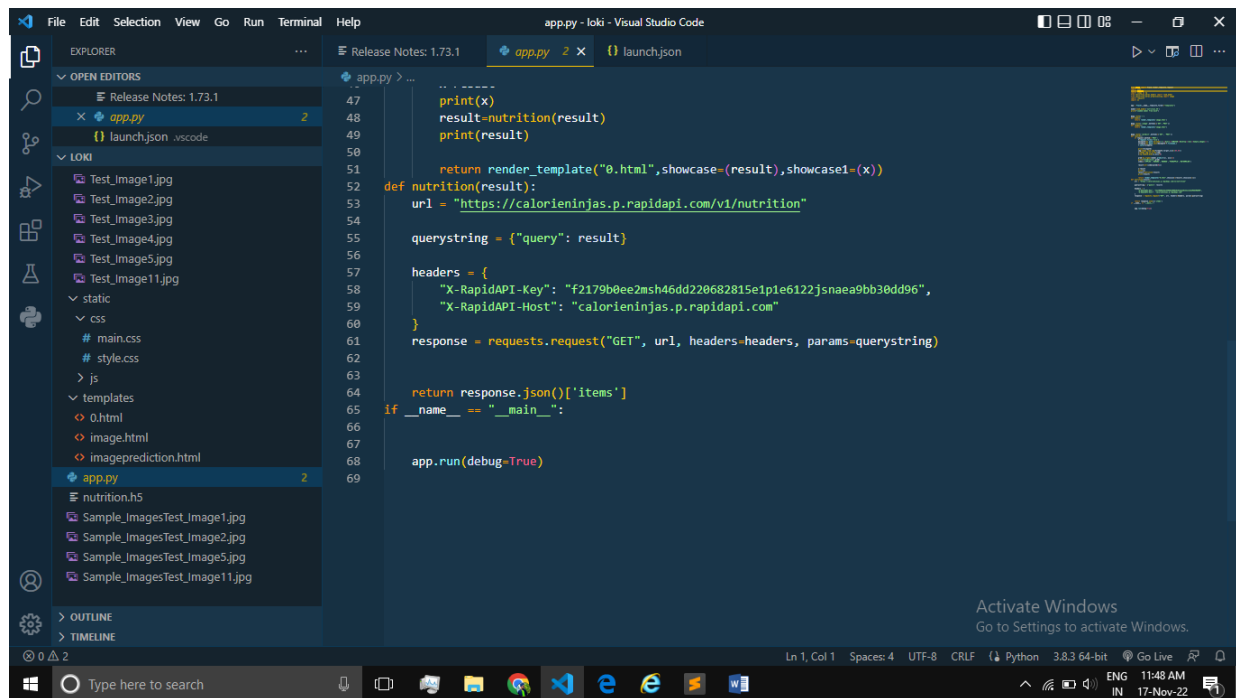

```
app.py - loki - Visual Studio Code
File Edit Selection View Go Run Terminal Help
Release Notes: 1.73.1
app.py 2 x launch.json
EXPLORER
OPEN EDITORS
Release Notes: 1.73.1
app.py 2
launch.json .vscode
LOKI
Test_Image1.jpg
Test_Image2.jpg
Test_Image3.jpg
Test_Image4.jpg
Test_Image5.jpg
Test_Image11.jpg
static
css
main.css
style.css
js
templates
0.html
image.html
imageprediction.html
app.py 2
nutrition.h5
Sample_ImagesTest_Image1.jpg
Sample_ImagesTest_Image2.jpg
Sample_ImagesTest_Image5.jpg
Sample_ImagesTest_Image11.jpg
OUTLINE
TIMELINE
0 2
Type here to search
Ln 1, Col 1 Spaces: 4 UTF-8 CRLF Python 3.8.3 64-bit Go Live
ENG IN 11:48 AM 17-Nov-22
```

Finally, Run the application

This is used to run the application in a localhost. The local host runs on port number 5000. (We can give different port numbers)