### **ASSIGNMENT-4**

REGISTER NUMBER	731219106004
TEAM ID	PNT2022TMID44437
PROJECT NAME	SMART FARMER-IOT
	ENABLED SMART FARMING APPLICATION

## **Question:**

Write code and connections in wokwi for the ultrasonic sensor.

Whenever the distance is less than 100 cms send an "alert" to the IBM Cloud and display in the device recent events.

Uplode document with wokwi share link and images of IBM cloud

#### Code:

```
#include <WiFi.h>
#include <PubSubClient.h>
void callback(char* subscribetopic, byte* payload, unsigned int
payloadLength);
//-----credentials of IBM Accounts-----
#define ORG "kotoq5"//IBM ORGANITION ID
#define DEVICE_TYPE "ESP32"//Device type mentioned in ibm watson
IOT Platform
#define DEVICE_ID "12345"//Device ID mentioned in ibm watson IOT
Platform
```

```
#define TOKEN "12345678"//Token
String data3;
char server[] = ORG ".messaging.internetofthings.ibmcloud.com";
char publishTopic[] = "iot-2/evt/Data/fmt/json";
char subscribetopic[] = "iot-2/cmd/test/fmt/String";
char authMethod[] = "use-token-auth"; char token[] = TOKEN;
char clientId[] = "d:"ORG ":"DEVICE_TYPE ":"DEVICE ID;
WiFiClient wifiClient;
PubSubClient client(server, 1883, callback, wifiClient);
const int trigPin = 5;
const int echoPin = 18;
#define SOUND SPEED 0.034
long duration;
float distance;
void setup() {
Serial.begin(115200);
pinMode(trigPin, OUTPUT);
pinMode(echoPin, INPUT);
wificonnect();
mqttconnect();
void loop()
digitalWrite(trigPin, LOW);
delayMicroseconds(2);
digitalWrite(trigPin, HIGH);
delayMicroseconds(10);
digitalWrite(trigPin, LOW);
duration = pulseIn(echoPin, HIGH);
distance = duration * SOUND SPEED/2;
Serial.print("Distance (cm): ");
Serial.println(distance);
if(distance<100)
Serial.println("ALERT!!");
delay(1000); Publish Data(distance);
delay(1000);
if (!client.loop()) {
mqttconnect();
delay(1000);
```


```
void PublishData(float dist) {
mqttconnect();
String payload = "{\"Distance\":";
payload += dist;
payload += ",\"ALERT!!\":""\"Distance less than 100cms\"";
payload += "}";
Serial.print("Sending payload: ");
Serial.println(payload);
if (client.publish(publishTopic, (char*) payload.c str())) {
Serial.println("Publish ok");
} else {
Serial.println("Publish failed");
void mqttconnect() {
if (!client.connected()) {
Serial.print("Reconnecting client to ");
Serial.println(server);
while (!!!client.connect(clientId, authMethod, token)) {
Serial.print(".");
delay(500);
} initManagedDevice();
Serial.println();
void wificonnect()
Serial.println(); Serial.print("Connecting to ");
WiFi.begin("Wokwi-GUEST", "", 6); while (WiFi.status()!=
WL CONNECTED) { delay(500);
Serial.print(".");
Serial.println(""); Serial.println("WiFi
connected"); Serial.println("IP address: ");
Serial.println(WiFi.localIP());
void initManagedDevice() {
if (client.subscribe(subscribetopic)) {
Serial.println((subscribetopic)); Serial.println("subscribe to
cmd OK");
} else {
Serial.println("subscribe to cmd FAILED");
```

```
void callback(char* subscribetopic, byte* payload, unsigned int
payloadLength)
Serial.print("callback invoked for topic: ");
Serial.println(subscribetopic);
for (int i = 0; i < payloadLength; i++) { //Serial.print((char)payload[i]);
data3 += (char)payload[i];
}
Serial.println("data: "+ data3);
data3="";
Diagram.json:
"version": 1,
"author": "sweetysharon",
"editor": "wokwi",
"parts": [
{ "type": "wokwi-esp32-devkit-v1", "id": "esp", "top": -4.67, "left":
-114.67, "attrs": {} },
{ "type": "wokwi-hc-sr04", "id": "ultrasonic1", "top": 15.96, "left": 89.17,
"attrs": {} }
],
"connections": [
["esp:TX0", "$serialMonitor:RX", "", []],
["esp:RX0", "$serialMonitor:TX", "", []],
"esp:VIN",
"ultrasonic1:VCC",
"red",
["h-37.16", "v-178.79", "h200", "v173.33", "h100.67"]
[ "esp:GND.1", "ultrasonic1:GND", "black", [ "h39.87", "v44.04",
"h170"]],
[ "esp:D5", "ultrasonic1:TRIG", "green", [ "h54.54", "v85.07",
"h130.67"]],
[ "esp:D18", "ultrasonic1:ECHO", "green", [ "h77.87", "v80.01",
"h110"]]
}
```

## **Wokwisimulation link:**

https://wokwi.com/projects/346959747844407892

# **Circuit Diagram:**

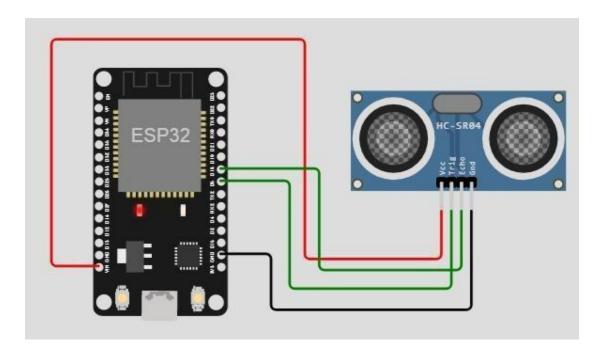


## **Output:**

# Wokwi output:

```
Connecting to ....
WiFi connected
IP address:
10.10.0.2
Reconnecting client to ytluse.messaging.internetofthings.ibmcloud.com
iot-2/cmd/test/fmt/String
subscribe to cmd OK

Distance (cm): 399.92
Distance (cm): 399.96
Distance (cm): 399.94
Distance (cm): 399.98
Distance (cm): 399.94
Distance (cm): 399.94
Distance (cm): 399.92
Distance (cm): 399.94
```

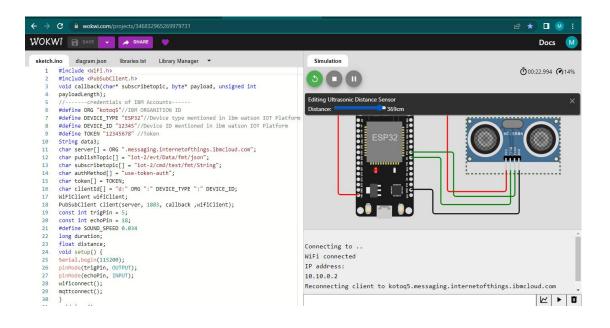

## IBM cloud output:

