




**MAHENDRA INSTITUTE OF TECHNOLOGY**

**(AUTONOMOUS)**

Mahendhirapuri, Mallasamudram, Namakkal- 637 503

**Office of the Controller of Examinations**



## **PROJECT REPORT**

### **A NOVEL METHOD FOR HANDWRITTEN DIGIT RECOGNITION SYSTEM**

Submitted by

VIDHYA S (611619205302)

MAYURI S (611619205025)

YAZHINI S (611619205059)

LAVANYA D (611619205022)

**TEAMID : PNT2022TMID17703**

## **TABLE OF CONTENTS**

### **1. INTRODUCTION**

1.1 PROJECT OVERVIEW

1.2 PURPOSE

### **2. LITERATURE SURVEY**

2.1 EXISTING PROBLEM

2.2 REFERENCES

2.3 PROBLEM STATEMENT DEFINITION

### **3. IDEATION AND PROPOSED SOLUTION**

3.1 EMPATHY MAP

3.2 IDEATION & BRAINSTORMING

3.3 PROPOSED SOLUTION

3.4 PROBLEM SOLUTION FIT

### **4. REQUIREMENT ANALYSIS**

4.1 FUNCTIONAL REQUIREMENTS

4.2 NON FUNCTIONAL REQUIREMENTS

### **5. PROJECT DESIGN**

5.1 DATA FLOW DIAGRAM

5.2 SOLUTION & TECHNICAL ARCHITECTURE

5.3 USER STORIES

### **6. PROJECT PLANNING AND SCHEDULING**

6.1 SPRINT PLANNING AND ESTIMATION

6.2 SPRINT DELIVERY SCHEDULE

6.3 REPORT FROM JIRA

## **7. CODING & SOLUTIONING**

7.1 FEATURE 1

7.2 FEATURE 2

## **8. TESTING**

8.1 USER ACCEPTANCE TESTING

## **9. RESULTS**

9.1 PERFORMANCE METRICS

## **10 ADVANTAGES & DISADVANTAGES**

## **11 CONCLUSION**

## **12 FUTURE SCOPE**

## **13 APPENDIX**

SOURCE CODE


GITHUB & PROJECT DEMO LINK

## INTRODUCTION

### 1.1 PROJECT OVERVIEW

Handwriting recognition is one of the compelling research works going on because every individual in this world has their own style of writing. It is the capability of the computer to identify and understand handwritten digits or characters automatically. Because of the progress in the field of science and technology, everything is being digitalized to reduce human effort. Hence, there comes a need for handwritten digit recognition in many real-time applications. MNIST data set is widely used for this recognition process and it has 70000 handwritten digits. We use Artificial neural networks to train these images and build a deep learning model. Web application is created where the user can upload an image of a handwritten digit. this image is analyzed by the model and the detected result is returned on to UI

#### Technical Architecture:

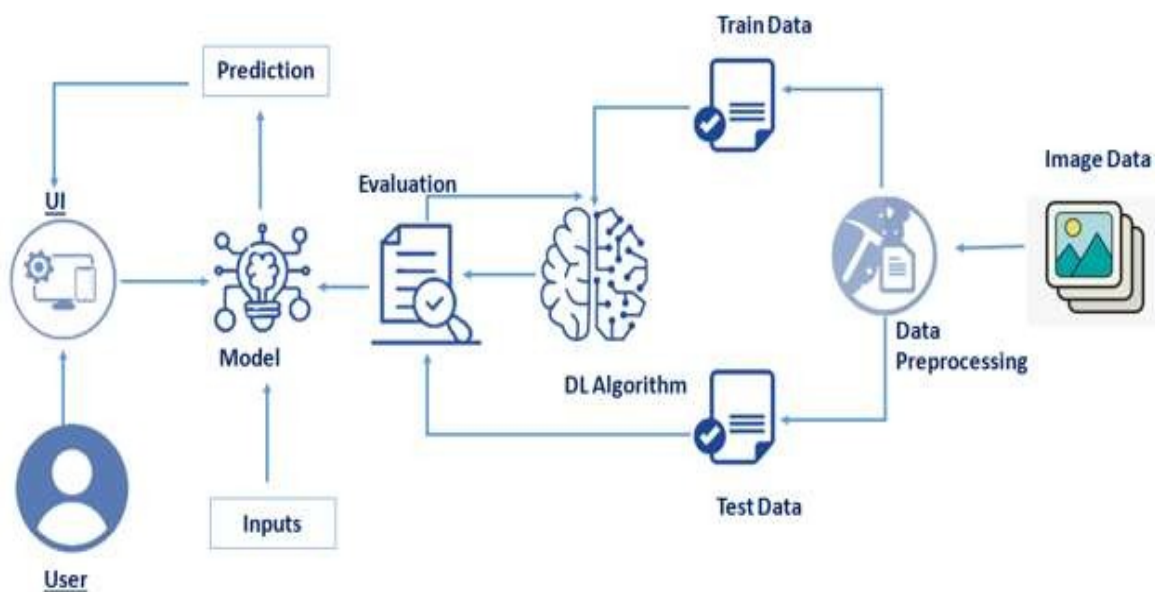

## **1.2 PURPOSE**

Handwritten digits are not perfect and can be made with many different flavors. The handwritten digit recognition is the solution to this problem which uses the image of a digit and recognizes the digit present in the image. Digit recognition systems are capable of recognizing the digits from different sources like emails, bank cheque, papers, images, etc. and in different real-world scenarios for online handwriting recognition on computer tablets or system, recognize number plates of vehicles, processing bank cheque amounts, numeric entries in forms filled up by hand (tax forms) and so on.

## **LITERATURE SURVEY**

### **2.1 EXISTING PROBLEM:**

The issue is that there's a wide range of handwriting – good and bad. This makes it tricky for programmers to provide enough examples of how every character might look. Sometimes, characters look very similar, making it hard for a computer to recognise accurately. The fundamental problem with handwritten digit recognition is that handwritten digits do not always have the same size, width, orientation, and margins since they vary from person to person. Additionally, there would be issues with identifying the numbers because of similarities between numerals like 1 and 7, 5 and 6, 3 and 8, 2 and 5, 2 and 7, etc. Finally, the individuality and variation of each individual's handwriting influence the structure and appearance of the digits.

### **2.2 REFERENCES:**

**R. Bajaj, L. Dey, S. Chaudhari et al**, employed three different kinds of features, namely, the density features, moment features and descriptive component features for classification of Devanagari Numerals. They proposed multi classifier connectionist architecture for increasing the recognition reliability and they obtained 89.6% accuracy for handwritten Devanagari numerals.

**Salvador España-Boquera et al**, in this paper hybrid Hidden Markov Model (HMM) model is proposed for recognizing unconstrained offline handwritten texts. In this, the structural part of the optical model has been modelled with Markov chains, and a Multilayer Perceptron is used to estimate the emission probabilities. In this paper, different techniques are applied to remove slope and slant from handwritten text and to normalize the size of text images with supervised learning methods. The key features of this recognition system were to develop a system having high accuracy in pre-processing and recognition, which are both based on ANNs.

**Yoshimasa Kimura** presented a work on how to select features for Character Recognition Using Genetic Algorithms. The author proposes a novel method of feature selection for character recognition using genetic algorithms (GA). The proposed method selects only the genes for which the recognition rate of training samples exceeds the predetermined threshold as a candidate of the parent gene and adopts a reduction ratio in the number of features used for recognition as the fitness value.

**Renata F. P. Neves** has proposed SVM based offline handwritten digit recognition. Authors claim that SVM outperforms the Multilayer perceptron classifier. Experiment is carried out on NIST SD19 standard dataset. Advantage of MLP is that it is able to segment non-linearly separable classes. However, MLP can easily fall into a region of local minimum, where the training will stop assuming it has achieved an optimal point in the error surface. Another hindrance is defining the best network architecture to solve the problem, considering the number of layers and the amount of perceptron in each hidden layer. Because of these disadvantages, a digit recognizer using the MLP structure may not produce the desired low error rate.

**M. Hanmandlu, O.V. Ramana Murthy** has presented in their study the recognition of handwritten Hindi and English numerals by representing them in the form of exponential membership functions which serve as a fuzzy model. The recognition is carried out by modifying the exponential membership functions fitted to the fuzzy sets. These fuzzy sets are derived from features consisting of normalized distances obtained using the Box approach. The membership function is modified by two structural parameters that are estimated by optimizing the entropy subject to the attainment of membership function to unity. The overall recognition rate is found to be 95% for Hindi numerals and 98.4% for English numerals.

**Ragha & Sasikumar** describes a system for Kannada characters. In this paper, the moment features are extracted from the Gabor wavelets of pre-processed images of 49 characters. The comparison of moments features of 4 directional images with original images are tested on Multi-Layer Perceptron with Back Propagation Neural

Network. The average performance of the system with these two features together is 92%.

**Aparna et al**, proposed a method to construct a handwritten Tamil character by executing a sequence of strokes. A structure or shape-based representation of a stroke was used in which a stroke was represented as a string of shape features. Using this string representation, an unknown stroke was identified by comparing it with a database of strokes using a flexible string-matching procedure.


## 2.3 PROBLEM STATEMENT DEFINITION:

The user is a postal mail sorting centre head who needs hand recognition system because the different handwritten ZIP code is confusing. So, a novel method for handwritten digit recognition system must be developed.


Who does the problem affect?	Postal office workers, courier office employees, bankers and elder people.
What are the boundaries of the problem?	Postal department, courier service and Banking sector
What is the issue?	Sometimes handwritten digits are confusing. so, the important details such as zip code, account number, figure of cash and checks may go wrong. By fixing this problem handwritten digits are recognized correctly. If we didn't solve this problem the mail sorting and transactions may gone wrong.
When does the issue occurs?	<ul style="list-style-type: none"><li>• When the banking sector has a failed transaction due to wrong entry of account number, cash.</li><li>• When postal and courier service are unable to recognize zip code or postal code for mail and courier sorting.</li><li>• When elder people are unable to understand the handwritten digits.</li></ul>
Where is the issue occurring?	<ul style="list-style-type: none"><li>• The issue occurs in the banking sector where more handwritten numbers are involved like figure of cash, account number and checks.</li><li>• The issue occurs in the postal sector where recognizing zip code or postal code is required for mail sorting.</li></ul>
Why is it important that we fix the problem?	<ul style="list-style-type: none"><li>• Postal department and courier services can easily find the digits written.</li><li>• Old people who will have eye sight issues with handwritten digits can recognize easily.</li></ul>

# IDEATION & PROPOSED SOLUTION

## 3.1 EMPATHY MAP CANVAS:

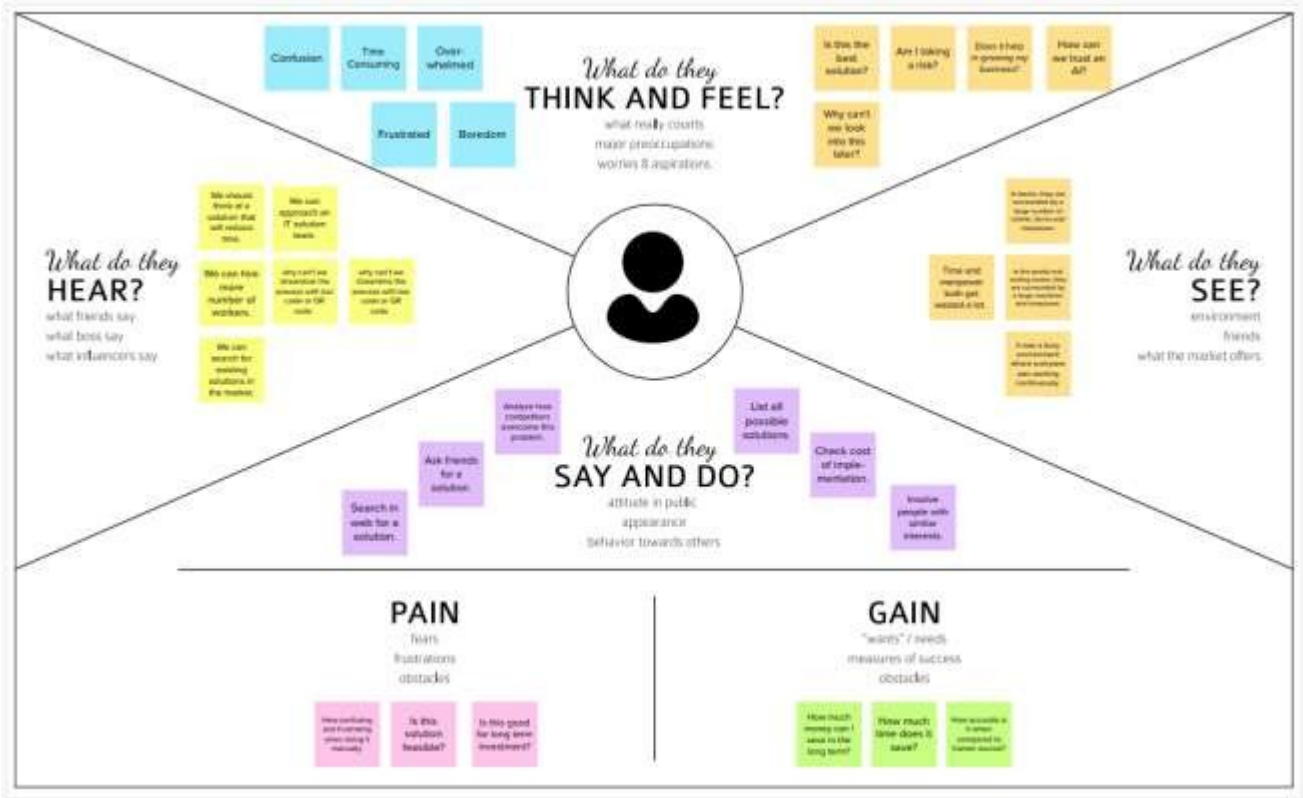

## 3.2 IDEATION & BRAINSTORMING:

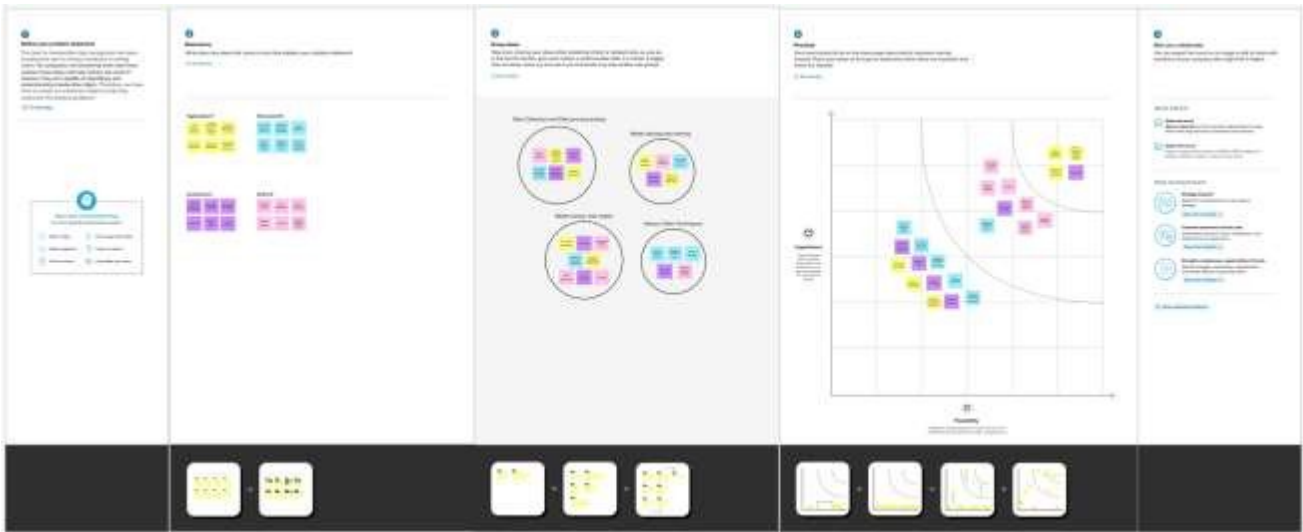



### 3.3 PROPOSED SOLUTION:

S.NO	PARAMETER	DESCRIPTION
1.	Problem Statement (Problem to be solved)	Handwritten digits do not always have same size, thickness and shape. So, the handwritten digits cannot be recognized correctly.
2.	Idea/Solution description	Handwritten digit recognition system is a way to overcome this problem in which the image of a digit is given as an input to recognize what digit is present in the image.
3.	Novelty/Uniqueness	This handwritten recognition system is meant for only digits, but other existed system is meant to recognize alphabets, expressions etc..
4.	Feasibility of Solution	With a model trained using diverse images , digits can be identified with great accuracy.
5.	Social Impact/Customer Satisfaction	<ul style="list-style-type: none"><li>• Postal department and courier services can easily find the digits written.</li><li>• Old people who have eye sight issues,like far-sightedness can use this system to recognize the handwritten digits correctly</li></ul>
6.	Business Model	This system can be converted into business model by providing services to Banking sector and Postal sector.
7.	Scalability of the Solution	If this model is able to classify different handwritten digits, then it can be used to classify different characters and different types of digits like Arabic numbers.

### 3.4 PROBLEM SOLUTION FIT:

Define CS, fit into CC	<b>1. CUSTOMER SEGMENT(S)</b> <span>CS</span> <p>The customers are the employees who find it difficult to read the numbers written in different handwriting. The customers majorly include bank staff and postal mail order staff.</p>	<b>6. CUSTOMER CONSTRAINTS</b> <span>CC</span> <p>Is such a product worth the cost or can we just learn by trial and error? Does the product really provide accurate results?</p>	<b>5. AVAILABLE SOLUTIONS</b> <span>AS</span> <p>The customers just ask their colleagues to recognize/ identify the digits written for them. There are no popularised software products offering solutions to such problems.</p>	Explore AS, differentiate
	<b>2. JOBS-TO-BE-DONE / PROBLEM</b> <span>J&amp;P</span> <p>The digits written in different handwriting style are difficult to identify and may lead to errors unfortunately.</p>	<b>9. PROBLEM ROOT CAUSE</b> <span>RC</span> <p>Everyone has their unique handwriting style and it becomes difficult for the customers to identify them in a fast paced environment. Any error would lead to loss of a bank customer's money or wrong delivery of goods in postal services.</p>	<b>7. BEHAVIOUR</b> <span>BE</span> <p>The customer finds the product or service which helps him/her in identifying the digit faster and accurately.</p>	
Identify strong TR & EM	<b>3. TRIGGERS</b> <span>TR</span> <p>Feeling that they are lacking in their ability to identify the digits makes them stressed and they slow down in their job.</p>	<b>10. YOUR SOLUTION</b> <span>SL</span> <p>The project model uses the Convolutional Neural Network which is trained using MNIST dataset and the model is deployed to efficiently recognize the digit in an image.</p>	<b>8. CHANNELS of BEHAVIOUR</b> <span>CH</span> <b>8.1 ONLINE</b> <p>The customer searches for a service being offered online.</p>	Identify strong TR & EM
	<b>4. EMOTIONS: BEFORE / AFTER</b> <span>EM</span> <p>The customers feel the pressure and take some time to figure out the digit. And afterwards they worry if they made the right choice for the digit in question.</p>		<b>8.2 OFFLINE</b> <p>The customer asks the support of his colleagues for clarification on the digits.</p>	

## REQUIREMENT ANALYSIS

### 4.1 FUNCTIONAL REQUIREMENTS:

FR No.	Functional Requirement (Epic)	Sub Requirement (Story / Sub-Task)
FR-1	Input correlation	Image Correlation is a technique used to recognize characters from images.
FR-2	Data Preparation	Collecting data and prepare it for training
FR-3	Feature extraction	Feature extraction is analysing the images and derive some characteristics from these images that identify each specific element
FR-4	Character classification	During the classification phase, the attributes of the data in the picture are compared to the classes in the database to determine which class the picture belongs to.

### 4.2 NON-FUNCTIONAL REQUIREMENTS:


FR No.	Non-Functional Requirement	Description
NFR-1	Usability	The software is very easy to use and reduces the learning work.To recognize the digits from bank cheque,papers,numeric entry in forms etc.
NFR-2	Security	The handwritten digit recognition can be used by banking sector where it can be used to maintain the security pin numbers, it can be also used for blind peoples by using sound output.
NFR-3	Reliability	This software will work reliably for low resolution images and not for graphical images.
NFR-4	Performance	Handwritten characters in the input image will be recognized with an accuracy of about 90% and more.
NFR-5	Availability	This system will retrieve the handwritten text regions only if the image contains written text in it.
NFR-6	Scalability	It contains thousands of handwritten digits that have been used in the development of programs .

## PROJECT DESIGN


### 5.1 DATA FLOW DIAGRAMS:

A Data Flow Diagram (DFD) is a traditional visual representation of the information flows within a system. A neat and clear DFD can depict the right amount of the system requirement graphically. It shows how data enters and leaves the system, what changes the information, and where data is stored.

Example:

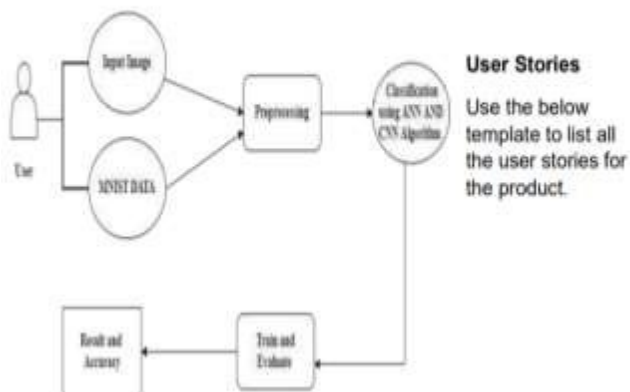


Example: DFD Level 0 (Industry Standard)

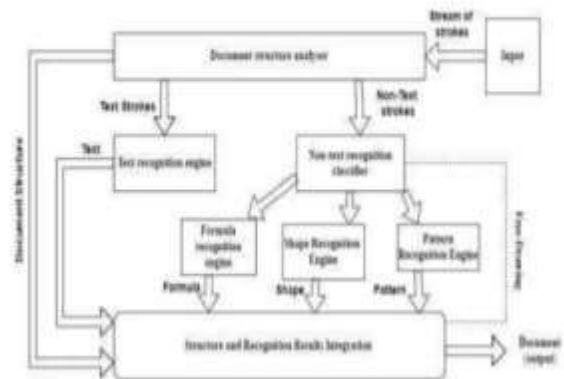



## 5.2 SOLUTION & TECHNICAL ARCHITECTURE:

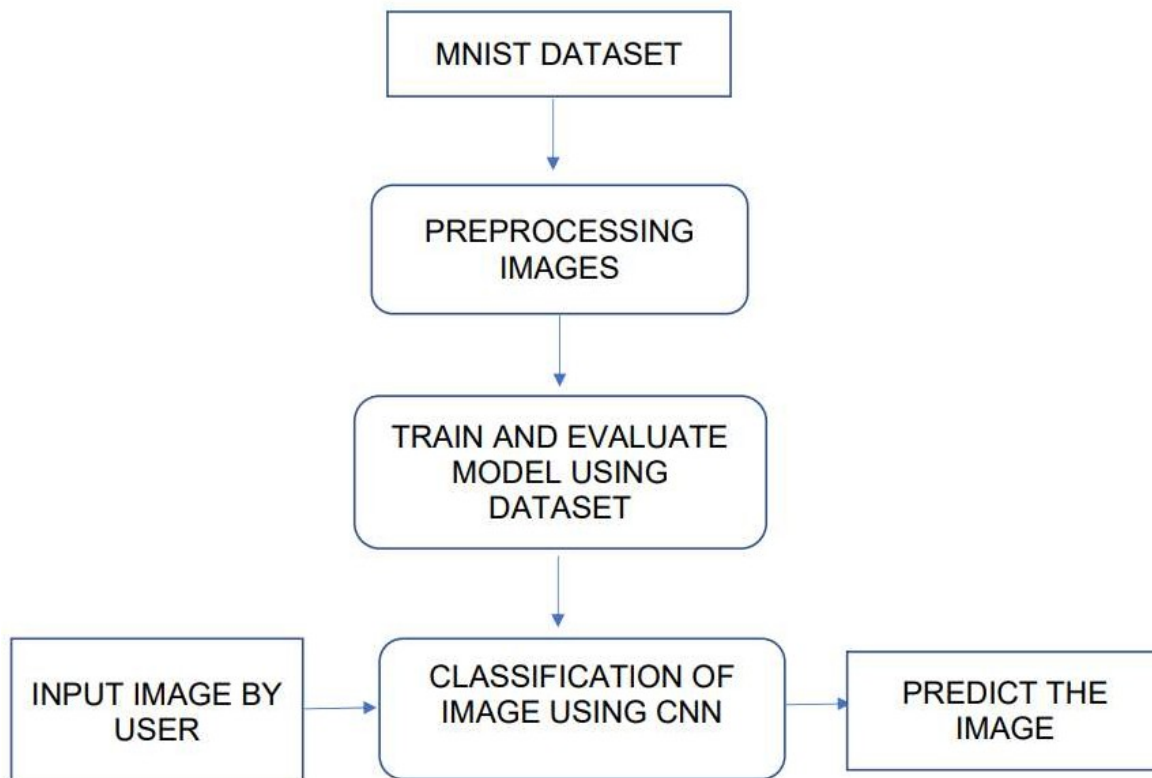

### DATASET:

The MNIST data collection, which contains 70000 handwritten digits, is frequently utilized for this recognition method. In order to train these photos and create a deep learning model, we use artificial neural networks. A web application is developed that allows users to upload pictures of handwritten numbers. The model examines this picture. The 60,000 training and 10,000 testing labeled handwritten digit images in the MNIST Handwritten Digit Recognition Dataset.




## APPROACH:

This project will be approached utilizing a convolutional neural network. (CNN)

- **The convolutional and max-pool layer:** The feature is extracted from the input image and got max pooled to reduce the dimensionality of the image without any changes in the extracted feature.

- **The dense layer:** The flattened output from the max-pool layer is fed to a feed-forward neural network and backpropagation applied to every iteration of training.

- **The output layer:** The nodes in this stratum are referred to as output units. It gives us access to the neural network's final prediction, which may be used to make final predictions.

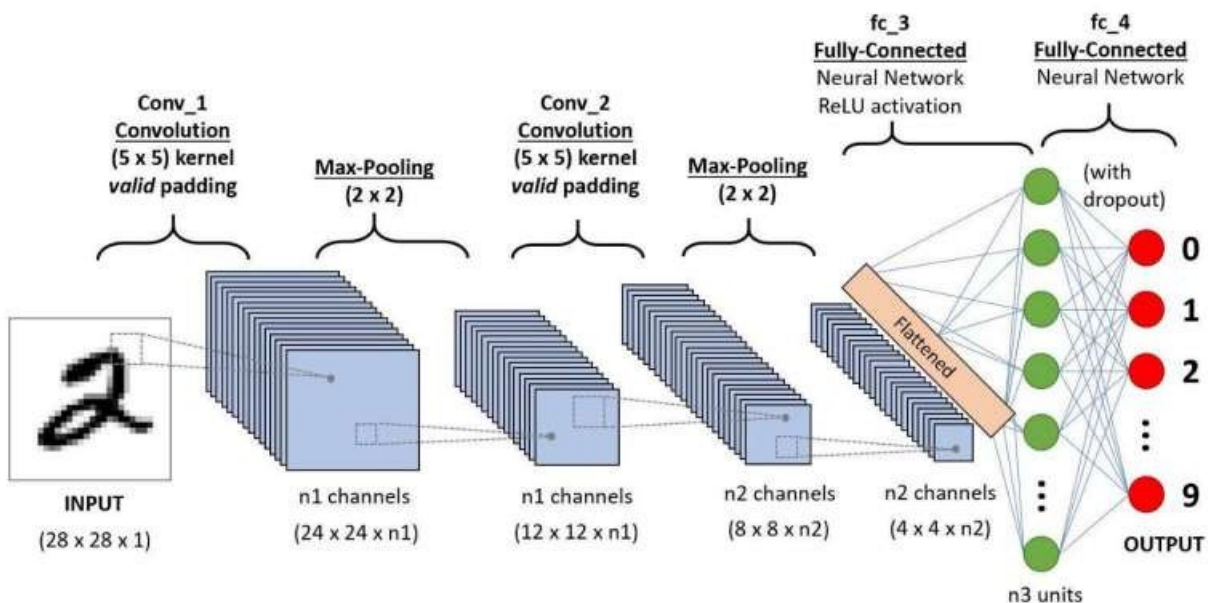

A neural network is a model of the brain's operations. It is made up of numerous layers with a variety of activations; these activations mimic the neurons in our brain. An attempt is made by a neural network to learn a set of parameters from a set of data that might aid in understanding the underlying relationships. Since neural networks are capable of adapting to changing input, the network can produce the best outcome without having to change the output criterion.

## METHODOLOGY:

A neural network with one hidden layer and 100 activation units has been put into practice (excluding bias units). The features (X) and labels (Y) were retrieved after the data was loaded from a mat file. To prevent overflow during computation, features are then scaled into a range of [0,1] by dividing by 255. 10,000 testing cases and 60,000 training examples make up the data. With the training data, feedforward is used to calculate the hypothesis, and backpropagation is then used to lower the error between the layers. To combat overfitting, the regularization parameter lambda is set to 0.1. To identify the model that fits the situation the optimizer runs for 70 times. **WORKING:** After receiving an input, neural networks change it using a number of hidden layers. Each group of neurons in a hidden layer is completely linked to every other neuron in the layer above it. One layer of neurons have perfect independence from one another. The “output layer” is the final layer to be fully connected. **CONVOLUTION**

**LAYER :** The foundational component of a CNN is the convolutional layer. The parameters of the layer are a set of learnable filters (or kernels) that cover the entire depth of the input volume but have a narrow receptive field. Each filter is convolved across the width and height of the input volume during the forward pass, computing the dot product between each filter entry and the input to create a two-dimensional activation map of the filter. As a result, the network picks up filters that turn on when it detects a certain kind of feature at a particular spatial location in the input.

**FEATURE EXTRACTION :** All neurons in a feature share the same weights .In this way all neurons detect the same feature at different positions in the input image. Reduce the number of free parameters.

**TENSOR FLOW :** An open-source machine learning library for both research and production is called TensorFlow. TensorFlow provides developers of all skill levels with APIs for desktop, mobile, web, and cloud applications. We can achieve text output and sound output by scanning the number digit and converting it to PNG format using the python3 command in the terminal.

## 5.3 USER STORIES:

User Type	Functional Requirement (Epic)	User Story Number	User Story / Task	Acceptance criteria	Priority	Release
Customer (Mobile user)	Home	USN-1	As a user, I can view the guide and awareness to use this application.	I can view the awareness to use this application and its limitations.	Low	Sprint-1
		USN-2	As a user, I'm allowed to view the guided video to use the interface of this application.	I can gain knowledge to use this application by a practical method.	Low	Sprint-1
		USN-3	As a user, I can read the instructions to use this application.	I can read instructions also to use it in a user-friendly method.	Low	Sprint-2
	Recognize	USN-4	As a user, In this prediction page I get to choose the image.	I can choose the image from our local system and predict the output.	High	Sprint-2
	Predict	USN-6	As a user, I'm Allowed to upload and choose the image to be uploaded	I can upload and choose the image from the system storage and also in any virtual storage.	Medium	Sprint-3
		USN-7	As a user, I will train and test the input to get the maximum accuracy of output.	I can able to train and test the application until it gets maximum accuracy of the result.	High	Sprint-4
		USN-8	As a user, I can access the MNIST data set	I can access the MNIST data set to produce the accurate result.	Medium	Sprint-3
Customer (Web user)	Home	USN-9	As a user, I can view the guide to use the web app.	I can view the awareness of this application and its limitations.	Low	Sprint-1

User Type	Functional Requirement (Epic)	User Story Number	User Story / Task	Acceptance criteria	Priority	Release
Customer (Mobile user)	Home	USN-1	As a user, I can view the guide and awareness to use this application.	I can view the awareness to use this application and its limitations.	Low	Sprint-1
		USN-2	As a user, I'm allowed to view the guided video to use the interface of this application.	I can gain knowledge to use this application by a practical method.	Low	Sprint-1
		USN-3	As a user, I can read the instructions to use this application.	I can read instructions also to use it in a user-friendly method.	Low	Sprint-2
	Recognize	USN-10	As a user, I can use the web application virtually anywhere.	I can use the application portably anywhere.	High	Sprint-1
		USN-11	As it is an open source, can use it cost freely.	I can use it without any payment to be paid for it to access.	Medium	Sprint-2
		USN-12	As it is a web application, it is installation free	I can use it without the installation of the application or any software.	Medium	Sprint-4
	Predict	USN-13	As a user, I'm Allowed to upload and choose the image to be uploaded	I can upload and choose the image from the system storage and also in any virtual storage.	Medium	Sprint-3



## PROJECT PLANNING & SCHEDULING

### 6.1 SPRINT PLANNING & ESTIMATION:

Sprint	Functional Requirement (Epic)	User Story Number	User Story / Task	Story Points	Priority	Team Members
Sprint-1	Data Collection	USN-1	As a user, I need to collect the data with different handwriting to train the model	6	High	Yughendaran P Dharanaesh M Janarthanan S Dinesh A
Sprint-1	Importing libraries	USN-2	As a user, I have to implement necessary libraries in python packages.	4	Low	Yughendaran P Dharanaesh M
Sprint-1	Data preprocessing	USN-3	As a user, I can load the dataset, handle the missing values, scale and split the data.	10	Medium	Janarthanan S Dinesh A
Sprint-2	Model building	USN-4	As a user, I will get an application with ML model which provides high accuracy of recognized handwritten digit.	5	High	Yughendaran P Dharanaesh M Janarthanan S Dinesh A

Sprint-2	Add the CNN layers	USN-5	Add input convolutional layer, max-pooling layer, flatten, hidden and output layers to the model.	5	High	Yughendaran P Dharanaesh M
Sprint-2	Compile the model	USN-6	As a user, compile the model for trained dataset.	2	Medium	Janarthanan S Dinesh A
Sprint-2	Train and test the model	USN-7	As a user, train and test the model for the dataset collected and data are validated.	4	High	Yughendaran P Dharanaesh M
Sprint-2	Save the model	USN-8	As a user, the compiled data are saved and integrated with an android application or web application.	2	Low	Janarthanan S Dinesh A
Sprint-3	Building UI application	USN-9	As a user upload the input image that contains handwritten digits.	10	Medium	Yughendaran P Dharanaesh M Janarthanan S Dinesh A
Sprint-3		USN-10	As a user, I can provide the fundamental details about the usage of application to customer.	5	Low	Yughendaran P Dharanaesh M
Sprint-3		USN-11	As a user, I can see the predicted or recognized digits in the application.	5	Medium	Janarthanan S Dinesh A
Sprint-4	Train the model on IBM	USN-12	As a user train the model in IBM cloud and integrate the results.	10	High	Yughendaran P Dharanaesh M

Sprint-4	Cloud Deployment	USN-13	As a user, I can access the web application and make the use of the product from anywhere.	10	High	Janarthanan S Dinesh A
----------	------------------	--------	--	----	------	---------------------------

## Project Tracker, Velocity & Burndown Chart:

Sprint	Total Story Points	Duration	Sprint Start Date	Sprint End Date (Planned)	Story Points Completed (as on Planned End Date)	Sprint Release Date (Actual)
Sprint-1	20	6 Days	24 Oct 2022	29 Oct 2022	20	31 Oct 2022
Sprint-2	20	6 Days	31 Oct 2022	05 Nov 2022	20	6 Nov 2022
Sprint-3	20	6 Days	07 Nov 2022	12 Nov 2022	20	13 Nov 2022
Sprint-4	20	6 Days	14 Nov 2022	19 Nov 2022	20	19 Nov 2022


### Velocity:

Imagine we have a 10-day sprint duration, and the velocity of the team is 20 (points per sprint). Let's calculate the team's average velocity (AV) per iteration unit (story points per day).

$$AV = \frac{\text{sprint duration}}{\text{velocity}} = \frac{20}{10} = 2$$

### Burndown Chart:

A burn down chart is a graphical representation of work left to do versus time. It is often used in agile software development methodologies such as Scrum. However, burn down charts can be applied to any project containing measurable progress over time.

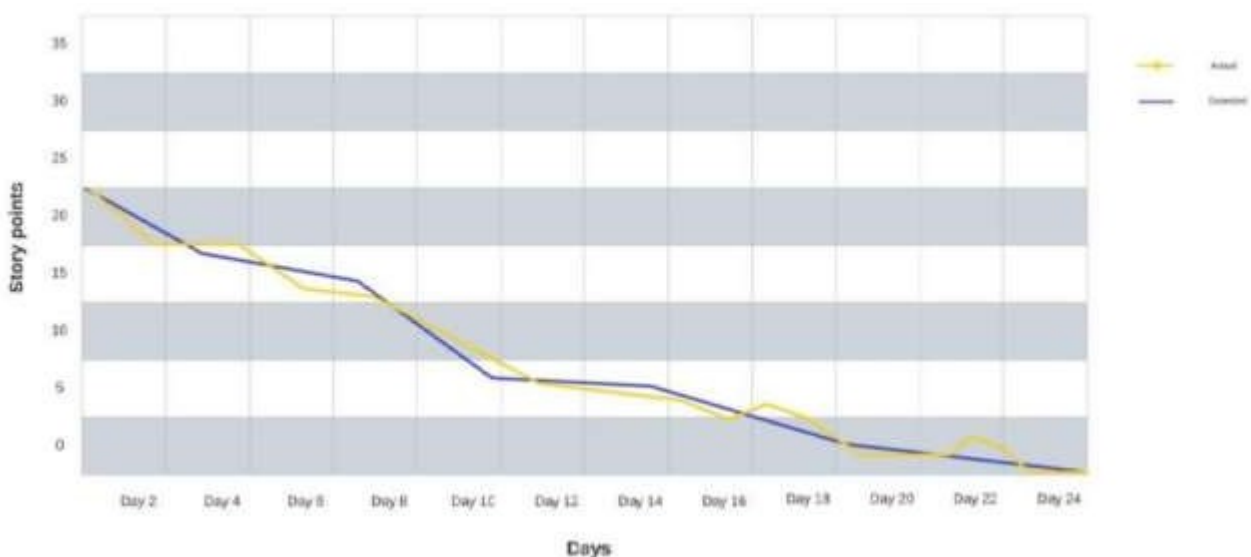

## 6.2 SPRINT DELIVERY SCHEDULE:

S.No.	Milestones	Activities	Timeline
1.	Literature Survey	Literature survey on the handwritten digit recognition system and information gathering.	10 September 2022
2.	Empathy Map	Prepared empathy map canvas to capture the user gains and pains.	10 September 2022
3.	Brainstorming and Ideation	Ideas are listed and top 3 ideas are prioritized based on the feasibility and importance.	17 September 2022
4.	Proposed Solution Document	Proposed solution document is prepared which includes Novelty, feasibility of idea, social impact, scalability of solution, etc.	24 September 2022
5.	Problem Solution Fit	Includes customer segments and customer constraints, the problem root cause and jobs to be done.	1 October 2022
6.	Solution Architecture	From data collection to digit recognition by the web application are represented in architectural diagram.	1 October 2022
7.	Customer Journey Map	Prepare Customer Journey maps to understand user interactions and	8 October 2022

		experiences with the application	
8.	Functional Requirement Document	Functional requirements and non functional requirements alike scalability and accuracy are described.	15 October 2022
9.	Data Flow Diagrams	Data flow diagram and user stories are prepared and four sprint phases are described.	15 October 2022
10.	Technology Architecture	Technical flow graphs are created and the functions of technical stacks are defined.	15 October 2022

## **CODING AND SOLUTIONING**

### **7.1 FEATURE 1:**

#### **\*Importing Required Libraries**

```
In [1]: import numpy as np
import pandas as pd
import random
import tensorflow as tf
import keras
from keras import layers
keras.backend.set_image_data_format('channels_last')
import matplotlib.pyplot as plt
from sklearn.model_selection import train_test_split
from sklearn.metrics import confusion_matrix
from keras.utils.np_utils import to_categorical

print(keras.__version__)
print(tf.__version__)

2.10.0
2.10.0
```

Here we are importing required libraries like numpy, pandas, tensorflow and keras


## Data Preprocessing:

### DATA PREPROCESSING

```
In [13]: X_train = X_train/255.0
X_test = X_test/255.0

X_train = X_train.values.reshape(-1, 28, 28, 1)
X_test = X_test.values.reshape(-1, 28, 28, 1)

fig, ax = plt.subplots(figsize=(2,2))
plt.imshow(X_train[random.randint(0,len(X_train))], cmap='Greys')
plt.show()
```



### TRAIN AND TEST SPLIT

```
In [14]: validation_size = 0.2
X_train, X_val, Y_train, Y_val = train_test_split(X_train, Y_train, test_size = validation_size)
```

### ONE HOT ENCODING

```
In [15]: Y_train = keras.utils.np_utils.to_categorical(Y_train, num_classes = 10)
Y_val = keras.utils.np_utils.to_categorical(Y_val, num_classes = 10)
```

## Model Building:

### MODEL BUILDING

```
In [75]: def Conv_Neural_Net():
model = keras.Sequential()
model.add(layers.Conv2D(32, kernel_size=(3,3), input_shape=(28,28,1)))
model.add(layers.BatchNormalization(name='bn_1'))
model.add(layers.Activation('relu', name='relu_1'))
model.add(layers.MaxPooling2D(pool_size=(2, 2)))
model.add(layers.Conv2D(64, kernel_size=(3,3)))
model.add(layers.MaxPooling2D(pool_size=(2, 2)))
model.add(layers.Flatten()) # Flattening the 2D arrays for fully connected layers
model.add(layers.Dense(128, activation=tf.nn.relu))
model.add(layers.Dropout(0.2))
model.add(layers.Dense(10,activation=tf.nn.softmax))
return model
```

```
In [76]: model = Conv_Neural_Net()
```

### COMPILING THE MODEL

```
In [77]: model.compile(optimizer='adam',
loss='categorical_crossentropy',
metrics=['accuracy'])
```

## 7.2 FEATURE 2:

### Training the Model:

#### TRAINING THE MODEL

```
In [125]: model.fit(X_train, Y_train, validation_data = (X_val, Y_val), epochs = 50)
```


```
Epoch 1/50  
1050/1050 [=====] - 22s 21ms/step - loss: 0.0086 - accuracy: 0.9974 - val_loss: 0.0939 - val_accuracy: 0.9882  
Epoch 2/50  
1050/1050 [=====] - 22s 21ms/step - loss: 0.0069 - accuracy: 0.9978 - val_loss: 0.0968 - val_accuracy: 0.9875  
Epoch 3/50  
1050/1050 [=====] - 22s 21ms/step - loss: 0.0056 - accuracy: 0.9985 - val_loss: 0.0934 - val_accuracy: 0.9874  
Epoch 4/50  
1050/1050 [=====] - 22s 21ms/step - loss: 0.0068 - accuracy: 0.9979 - val_loss: 0.0835 - val_accuracy: 0.9869  
Epoch 5/50  
1050/1050 [=====] - 22s 21ms/step - loss: 0.0055 - accuracy: 0.9982 - val_loss: 0.0982 - val_accuracy: 0.9885  
Epoch 6/50  
1050/1050 [=====] - 22s 21ms/step - loss: 0.0071 - accuracy: 0.9979 - val_loss: 0.1012 - val_accuracy: 0.9873  
Epoch 7/50
```

### Evaluating the Model and Predicting:

#### TESTING THE MODEL

```
In [126]: def predict(model, X, start, end):  
s = int(np.sqrt(end-start))  
fig, ax = plt.subplots(s, s, sharex=True, sharey=True, figsize=(15, 15))  
ax = ax.flatten()  
preds = model.predict(X[start:end])  
for i in range(end-start):  
y_pred = np.argmax(preds[i])  
img = X[start+i].reshape(28, 28)  
ax[i].imshow(img, cmap='Greys', interpolation='nearest')  
ax[i].set_title(f'p: {y_pred}')
```

```
In [127]: predict(model, X_test, 25, 50)
```

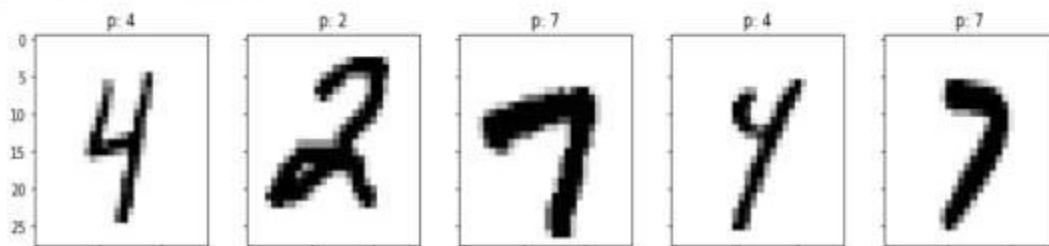



## Cloud Deployment:

```
hine-learning-client) (1.20.3)
```

```
In [132]: from ibm_watson_machine_learning import APIClient
wml_credentials={
    "url": "https://us-south.ml.cloud.ibm.com",
    "apikey": "8SQXhQX1HPhcxGU0qhEx-vm90X22Xd7-eY8HQ8pqUUV"
}
client=APIClient(wml_credentials)
```

```
In [133]: def guid_from_space_name(client,space_name):
space=client.spaces.get_details()
return (next(item for item in space['resources'] if item['entity']['name']==space_name)['metadata']['id'])
```

```
In [134]: space_uid=guid_from_space_name(client,'Digit Recognition')
print("Space UID = "+space_uid)

Space UID = 8fc978c9-a6d6-4320-9c43-790cb87d6d88
```

```
In [135]: client.set.default_space(space_uid)
```

```
Out[135]: 'SUCCESS'
```

```
In [136]: client.software_specifications.list()
```

NAME	ASSET_ID	TYPE
default_py3.6	0062b8c9-8b7d-44a0-a9b9-46c416adcbb9	base
kernel-spark3.2-scala2.12	020d69ce-7ac1-5e68-ac1a-31189867356a	base
pytorch-onnx_1.3-py3.7-edt	069ea134-3346-5748-b513-49178e15d288	base
scikit-learn_0.20-py3.6	09c5a1d0-9c1e-4473-a344-eb7b665ff687	base

```
147]: import os, types
import pandas as pd
from botocore.client import Config
import ibm_boto3

def __iter__(self): return 0

# @hidden_cell
# The following code accesses a file in your IBM Cloud Object Storage. It includes your credentials.
# You might want to remove those credentials before you share the notebook.
cos_client = ibm_boto3.client(service_name='s3',
    ibm_api_key_id='g8zhqVmspbZtmQORKL532n4PK6TmWg1emZLZ5COKpB',
    ibm_auth_endpoint="https://iam.cloud.ibm.com/oidc/token",
    config=Config(signature_version='oauth'),
    endpoint_url='https://s3.private.us.cloud-object-storage.appdomain.cloud')

bucket = 'novelmethodforhandwrittendigitrec-donotdelete-pr-sb2ogtldrhegen'
object_key = '3.PNG'

streaming_body_3 = cos_client.get_object(Bucket=bucket, Key=object_key)['Body']

# Your data file was loaded into a botocore.response.StreamingBody object.
# Please read the documentation of ibm_boto3 and pandas to learn more about the possibilities to load the data.
# ibm_boto3 documentation: https://ibm.github.io/ibm-cos-sdk-python/
# pandas documentation: http://pandas.pydata.org/
```

```
148]: img = Image.open(streaming_body_3).convert("L")
img = img.resize( (28,28) )
```

```
.48]: img = Image.open(streaming_body_3).convert("L")
img = img.resize( (28,28) )
```

```
.49]: img
```

```
.49]: 
```

```
.50]: im2arr = np.array(img) #converting to image
im2arr = im2arr.reshape(1, 28, 28, 1)
```

```
pred = model.predict(im2arr)
print(np.argmax(pred))
```

```
3
```

## TESTING

### 8.1 USER ACCEPTANCE TESTING:

Date	03 November 2022
Team ID	PNT2022TMID35418
Project Name	Project – A novel method for handwritten digit recognition
Maximum Marks	4 Marks

#### 1. Purpose of Document

The purpose of this document is to briefly explain the test coverage and open issues of the **A novel method for handwritten digit recognition** project at the time of the release to User Acceptance Testing (UAT).

#### 2. Defect Analysis

This report shows the number of resolved or closed bugs at each severity level, and how they were resolved

Resolution	Severity 1	Severity 2	Severity 3	Severity 4	Subtotal
By Design	13	4	2	5	24
Duplicate	1	0	0	2	3
External	2	3	1	1	7
Fixed	4	6	4	10	24
Not Reproduced	1	1	1	1	4
Skipped	1	2	0	1	4
Won't Fix	0	5	2	4	11
Totals	22	21	10	24	77



### 3. Test Case Analysis

This report shows the number of test cases that have passed, failed, and untested

Section	Total Cases	Not Tested	Fail	Pass
Print Engine	7	0	0	7
Security	2	0	0	2
Performance	3	0	0	3
Exception Reporting	9	0	0	9



## RESULTS

### 9.1 PERFORMANCE METRICS:

Date	10 November 2022
Team ID	PNT2022TMID35418
Project Name	Project – A novel method for handwritten digit recognition
Maximum Marks	10 Marks

### Model Performance Testing:

Project team shall fill the following information in model performance testing template.

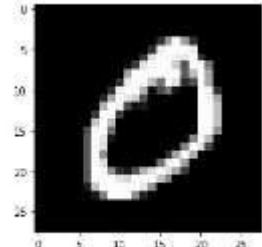S.No.	Parameter	Values	Screenshot
1.	Model Summary	Loss: 0.0181 Val_loss:0.1560	 <p>Prediction</p> <p>Final Output: 0</p>
2.	Accuracy	Training Accuracy - 97.87 Validation Accuracy -95.48	

## ADVANTAGES AND DISADVANTAGES

## **ADVANTAGES:**

- Reduces manual work
- Backups
- More accurate than average human
- Capable of handling a lot of data
- Can be used anywhere from any device

## **DISADVANTAGES:**

- Cannot handle complex data
- Low retention
- All the data must be in digital format
- Requires a high performance server for faster predictions
- Prone to occasional errors

## **CONCLUSION**

This project demonstrated a web application that uses machine learning to recognise handwritten numbers. Flask, HTML, CSS, JavaScript, and a few other technologies were used to create this project. The model predicts the handwritten digit using a CNN network. During testing, the model achieved a 99.61% recognition rate. The proposed project is scalable and can easily handle a huge number of users. Since it is a web application, it is compatible with any device that can run a browser. This project is extremely useful in real-world scenarios such as recognizing number plates of vehicles, processing bank cheque amounts, numeric entries in forms filled up by hand (tax forms) and so on. There is so much room for improvement, which can be implemented in subsequent versions.

## FUTURE SCOPE

This project is far from complete and there is a lot of room for improvement. Some of the improvements that can be made to this project are as follows:

- Add support to detect from digits multiple images and save the results
- Add support to detect multiple digits
- Improve model to detect digits from complex images
- Add support to different languages to help users from all over the world This project has endless potential and can always be enhanced to become better. Implementing this concept in the real world will benefit several industries and reduce the workload on many workers, enhancing overall work efficiency.

## APPENDIX

### SOURCE CODE:

#### Importing Required Libraries

```
In [1]: import numpy as np
        from numpy import array
        import matplotlib.pyplot as plt
        import tensorflow as tf
        import pandas as pd
        from keras.datasets import mnist
        from keras.preprocessing import image
```

#### Loading Data

```
In [2]: (X_train, y_train), (X_test, y_test) = mnist.load_data()

        print("Training Images:", len(X_train))
        print("Testing Images:", len(X_test))
        print("Shape:", X_train[0].shape)

        Training Images: 60000
        Testing Images: 10000
        Shape: (28, 28)
```

#### Data Preprocessing

```
In [3]: import random
        import matplotlib.pyplot as plt
        random_image = random.choice(X_train)
        plt.imshow(random_image, cmap="gray")

Out[3]: <matplotlib.image.AxesImage at 0x28c3e3f2c10>
```

```
In [4]: X_train = X_train.reshape(X_train.shape[0], 28, 28, 1)
X_test = X_test.reshape(X_test.shape[0], 28, 28, 1)
X_train.shape

X_train = X_train / 255.
X_test = X_test / 255.

X_train = X_train.astype(np.float32)
X_test = X_test.astype(np.float32)

input_shape = X_train[0].shape
```

## Building a Model

```
In [5]: # Importing the required keras modules containing model and layers
from tensorflow.keras.models import Sequential
from tensorflow.keras.layers import Dense, Conv2D, Dropout, Flatten, MaxPooling2D
# Creating a Sequential Model and adding the layers
model = Sequential()
model.add(Conv2D(28, kernel_size=(3,3), input_shape=input_shape))
model.add(MaxPooling2D(pool_size=(2, 2)))
model.add(Flatten()) # Flattening the 2D arrays for fully connected layers
model.add(Dense(128, activation=tf.nn.relu))
model.add(Dropout(0.1))
model.add(Dense(10, activation=tf.nn.softmax))
```

## Compile the Model

```
In [6]: model.compile(optimizer='adam',
                    loss='sparse_categorical_crossentropy',
                    metrics=['accuracy'])
```

```
In [7]: model.fit(x=X_train,y=y_train, epochs=10)
model.save('Digit_Recog.h5')

Epoch 1/10
1875/1875 [=====] - 22s 11ms/step - loss: 0.2113 - accuracy: 0.9372
Epoch 2/10
1875/1875 [=====] - 22s 12ms/step - loss: 0.0862 - accuracy: 0.9739
Epoch 3/10
1875/1875 [=====] - 21s 11ms/step - loss: 0.0602 - accuracy: 0.9812
Epoch 4/10
1875/1875 [=====] - 21s 11ms/step - loss: 0.0451 - accuracy: 0.9857
Epoch 5/10
1875/1875 [=====] - 21s 11ms/step - loss: 0.0355 - accuracy: 0.9884
Epoch 6/10
1875/1875 [=====] - 22s 12ms/step - loss: 0.0293 - accuracy: 0.9901
Epoch 7/10
1875/1875 [=====] - 20s 10ms/step - loss: 0.0243 - accuracy: 0.9919
Epoch 8/10
1875/1875 [=====] - 21s 11ms/step - loss: 0.0230 - accuracy: 0.9921
Epoch 9/10
1875/1875 [=====] - 21s 11ms/step - loss: 0.0193 - accuracy: 0.9937
Epoch 10/10
1875/1875 [=====] - 20s 11ms/step - loss: 0.0191 - accuracy: 0.9934
```

## Evaluate and predict the model

```
In [29]: # network evaluation
model.evaluate(X_test, y_test)

# test sample data
image_index = 999
plt.imshow(X_test[image_index].reshape(28, 28), cmap='Greys')
pred = model.predict(X_test[image_index].reshape(1, 28, 28, 1))
print(pred.argmax())

313/313 [=====] - 2s 5ms/step - loss: 0.0629 - accuracy: 0.9857
1/1 [=====] - 0s 39ms/step
2
```

**GITHUB:**

<https://github.com/IBM-EPBL/IBM-Project-173-1658215590>

**PROJECT DEMO LINK:**

[https://drive.google.com/drive/folders/1-PSkAzp8SjnAaPdUnah8oHsbSjhu\\_zhM?usp=sharing](https://drive.google.com/drive/folders/1-PSkAzp8SjnAaPdUnah8oHsbSjhu_zhM?usp=sharing)