

REAL-TIME COMMUNICATION SYSTEM POWERED BY AI FOR SPECIALLY ABLED

TEAM ID - PNT2022TMID37239

S.No.	TEAM MEMBERS	REGISTER NUMBER
1	KARTHICK B (TL)	310719106001
2	SHARUMATHI KS	310719106002
3	ARJUN ANAND V	310719205001
4	DEIVENDARAN S	310719205002
5	KRISTEN M	310719205003

Project Report Format

- 1. INTRODUCTION**
 - 1.1 Project Overview
 - 1.2 Purpose
- 2. LITERATURE SURVEY**
 - 2.1 Existing problem
 - 2.2 References
 - 2.3 Problem Statement Definition
- 3. IDEATION & PROPOSED SOLUTION**
 - 3.1 Empathy Map Canvas
 - 3.2 Ideation & Brainstorming
 - 3.3 Proposed Solution
 - 3.4 Problem Solution fit
- 4. REQUIREMENT ANALYSIS**
 - 4.1 Functional requirement
 - 4.2 Non-Functional requirements
- 5. PROJECT DESIGN**
 - 5.1 Data Flow Diagrams
 - 5.2 Solution & Technical Architecture
 - 5.3 User Stories
- 6. PROJECT PLANNING & SCHEDULING**
 - 6.1 Sprint Planning & Estimation
 - 6.2 Sprint Delivery Schedule
 - 6.3 Reports from JIRA
- 7. CODING & SOLUTIONING (Explain the features added in the project along with code)**
 - 7.1 Feature 1
 - 7.2 Feature 2
 - 7.3 Database Schema (if Applicable)
- 8. TESTING**
 - 8.1 Test Cases
 - 8.2 User Acceptance Testing
- 9. RESULTS**
 - 9.1 Performance Metrics
- 10. ADVANTAGES & DISADVANTAGES**
- 11. CONCLUSION**
- 12. FUTURE SCOPE**
- 13. APPENDIX**
 - Source Code
 - GitHub & Project Demo Link

CHAPTER-1

INTRODUCTION

1.1 Project Overview

The goal of this project was to build a neural network able to classify which letter of the American Sign Language(ASL) alphabet is being signed, given an image of a signing hand. This project is a first step towards building a possible sign language translator, which can take communications in sign language and translate them into written and oral language. Such a translator would greatly lower the barrier for many deaf and mute individuals to be able to better communicate with others in day to day interactions.

This goal is further motivated by the isolation that is felt within the deaf community. Loneliness and depression exists in higher rates among the deaf population, especially when they are immersed in a hearing world . Large barriers that profoundly affect life quality stem from the communication disconnect between the deaf and the hearing. Some examples are information deprivation, limitation of social connections, and difficulty integrating in society.

Most research implementations for this task have used depth maps generated by depth camera and high resolution images. The objective of this project was to see if neural networks are able to classify signed ASL letters using simple images of hands taken with a personal device such as a laptop webcam. This is in alignment with the motivation as this would make a future implementation of a real time ASL-to-oral/written language translator practical in an everyday situation.

1.2 Purpose

In our society, we have people with disabilities. The technology is developing day by day but no significant developments are undertaken for the betterment of these people.

Communications between deaf-mute and a normal person has always been a challenging task. It is very difficult for mute people to convey their message to normal people. Since normal people are not trained on hand sign language. In emergency times conveying their message is very difficult. The human hand has remained a popular choice to convey information in situations where other forms like speech cannot be used. Voice Conversion System with Hand Gesture Recognition and translation will be very useful to have a proper conversation between a normal person and an impaired person in any language.

The project aims to develop a system that converts the sign language into a human hearing voice in the desired language to convey a message to normal people, as well as convert speech into understandable sign language for the deaf and dumb. We are making use of a convolution neural network to create a model that is trained on different hand gestures. An app is built which uses this model. This app enables deaf and dumb people to convey their information using signs which get converted to human-understandable language and speech is given as output.

CHAPTER-2

LITERATURE SURVEY

Literature survey:

A literature survey or a literature review in a project report is that section which shows the various analyses and research made in the field of your interest and the results already published, taking into account the various parameters of the project and the extent of the project. It is the most important part of your report as it gives you a direction in the area of your research. It helps you set a goal for your analysis - thus giving you your problem statement.

2.1 Existing Problem

In our society, we have people with disabilities. The technology is developing day by day but no significant developments are undertaken for the betterment of these people. Communications between deaf-mute and a normal person has always been a challenging task. It is very difficult for mute people to convey their message to normal people. Since normal people are not trained on hand sign language. In emergency times conveying their message is very difficult. The human hand has remained a popular choice to convey information in situations where other forms like speech cannot be used. Voice Conversion System with Hand Gesture Recognition and translation will be very useful to have a proper conversation between a normal person and an impaired person in any language.

2.2 References

TITLE: Innovative study of an AI voice based smart device to assist deaf people

AUTHOR: Dhaya Sindhu Battina

YEAR: 2021

Assistive technology consists of a wide range of hardware and software tools that enable a person to receive information in the format that suits their needs best. These Various technology may be available to the deaf.many items, including cochlear implants, loop systems,accessibility,FM technology and assistive listening devices,visual warning systems, videophones, and much more . Recognizing the worth and boundaries of different assistive devices can be advantageous for both.Artificial intelligence (AI) enables computers to learn from existing experiences, adapt to new information, and perform tasks that are similar to those carried out by humans . The vast majority of artificial intelligence applications that users know of today – ranging from chess playing robots to self-driving vehicles – are primarily reliant on deep learning and computational linguistics.Computers may be taught to do particular jobs by processing huge quantities of data and detecting trends in the data. This is accomplished via the use of various technologies.

TITLE:Communication system for deaf and dumb people

AUTHOR: Shraddha R. Ghorpade, Prof. Surendra K. Waghmare2

YEAR: 2019

People with disabilities are having a difficult time keeping up with the rapidly evolving technology, which is one of the major issues that our society is dealing with. For those with disabilities, having access to communication tools has become crucial. typically deaf and stupid people use sign language to communicate, but they struggle to do so with non-sign language users language. Information is the main topic of communication between normal and deaf individuals using sign language, which is expressive and natural. So that we can converse with them and comprehend what they're saying, we need a translation. A language translation technology converts common sign language into voice, enabling regular people to communicate with one another. When it comes to communicating with other people,sign language (SL) is the primary method of communication for hearing-impaired individuals and other groups. It is conveyed via both manual (body and hand movements) and non-manual (face expressions) characteristics. All of these characteristics are combined to create utterances that communicate the meaning of words or statements.

TITLE: Educational Status of Differently Abled Persons and Developed Policies in India

AUTHOR: Chiranjit Majumder

YEAR: 2019 April

One of the socially created phenomenon is basically Disability. The fact is that many children and adults suffered from disabilities excluded from mainstream education benefits.

Disabled persons are segregated from education system because of social negligence and absence of support system in the home and inadequacy of sufficient facilities in schools particularly.

However, education is the most important medium for social, economic and political transformation. Socialization of children with disabilities (CWD) through education receives an unremarkably important roles in societies such as India where social exclusion of Physically Challenged Persons (PCPs) is significant. Indisputably, the literacy level of Physically Challenged Persons (PCPs) is very low in India. Very poor educational outcomes for children with disabilities remain in developing countries specially. Most of disabled persons do not get the full benefits of education. However, some policies in India has started to display some concern for Physically Challenged students. Education is utmost significant to lift up the socioeconomic status of PCPs. But education of disabled persons has not received adequate intentness and resources that it requires. Physically Challenged Persons (PCPs), few who are enrolled in schools are not given equal opportunity for middle secondary and higher education levels. Many

Disabled persons are educated but they do not get any work for earning in our society.

2.3 Problem Statement Definition

Communication is the only medium by which we can share our thoughts or convey the message but communications between deaf-mute and a normal person has always been a challenging task. It is very difficult for mute people to convey their message to normal people.

Since normal people are not trained on hand sign language.

In emergency times conveying their message is very difficult.

Problem:

Vedha has difficulty in hearing. He uses sign language to **communicate** with others. But he can't able to communicate with normal people who don't understand sign language.

Solution:

To develop a system that converts the sign language into a human hearing voice in the desired language to convey a message to normal people, as well as convert speech into **understandable** sign language for the deaf ,the system enhances the user friendly experience.

Problem:

Ram is a dumb by birth. He uses sign language to communicate with others. But he can't able to communicate with normal people who don't understand sign language.

Solution:

To create a app for understanding sign language and convert into Speech signal as output for normal people.

CHAPTER-3

IDEATION AND PROPOSED SOLUTION

3.1 Empathy Map Canvas

Definition:

An empathy map canvas is a more in-depth version of the original empathy map, which helps identify and describe the user's needs and pain points. And this is valuable information for improving the user experience.


An empathy map canvas helps brands provide a better experience for users by helping teams understand the perspectives and mindset of their customers. Using a template to create an empathy map canvas reduces the preparation time and standardizes the process so you create empathy map canvases of similar quality.

Empathy Map Canvas

Gain insight and understanding on solving customer problems.

1


Build empathy and keep your focus on the user by putting yourself in their shoes.

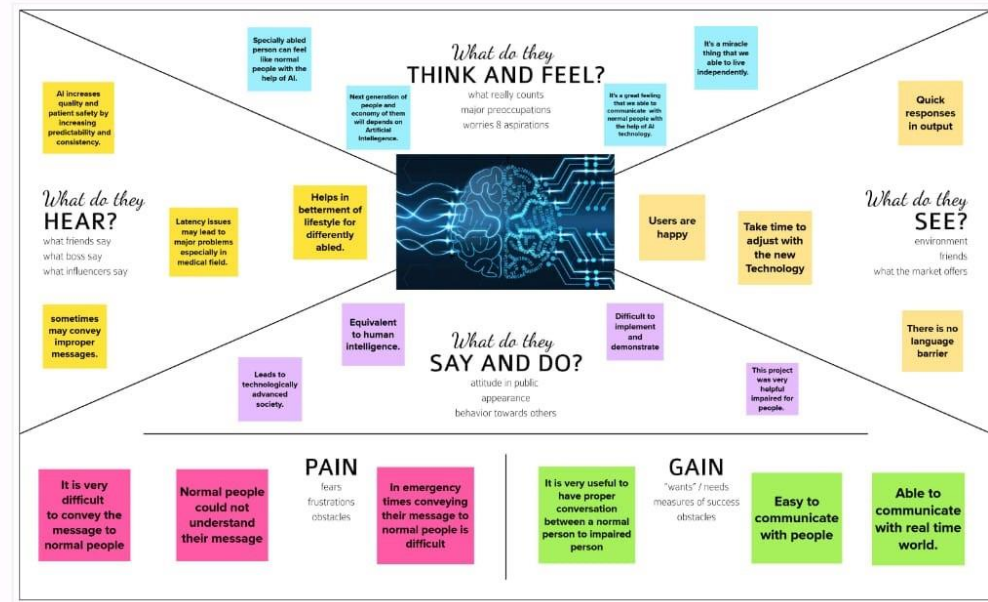

3.2 Ideation & Brainstorming

Definition:

Brainstorming provides a free and open environment that encourages everyone within a team to participate in the creative thinking process that leads to problem solving. Prioritizing volume over value, out-of-the-box ideas are welcome and built upon, and all participants are encouraged to collaborate, helping each other develop a rich number of creative solutions.

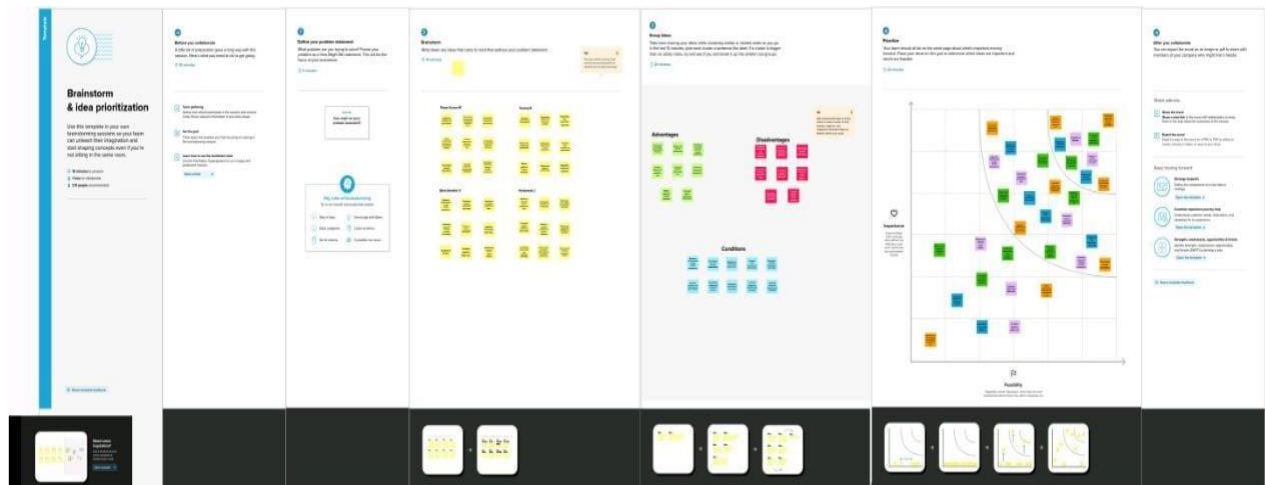

3.3 proposed Solution

S.No	Parameter	Description
1.	Problem Statement (Problem to be solved)	Deaf and dumb people couldn't able to communicate with the normal people easily.
2.	Idea/Solution description	A real time ML based system is built for the real time sign language detection with a Tensor Flow object detection

3.	Novelty/Uniqueness	This model using SSD ML algorithm recognizing the signs as words instead of old traditional translators, that are very slow and take too much since every alphabet as to be recognized to form the whole statement in old methods.
4.	Social Impact/Customer satisfaction	It drastically reduce communication difference gap between normal people and specially abled people with the help of AI. So they can live their life independently.
5.	Business Model (Revenue Model)	We use freemium business revenue model for making revenue. In our device, we give most of the basic features for free of charge but they have to pay if they need more advanced features.
6.	Scalability of the Solution	The model which is TensorFlow model that has been used can be replaced with another model as well. The same system can be implemented for different sign languages by substituting the dataset.

3.4 Problem Solution Fit

Definition:

The Problem-Solution Fit simply means that you have found a problem with your customer and that the solution you have realized for it actually solves the customer's problem.

Problem-Solution fit canvas 2.0

Purpose / Vision

Define CS, fit into	1. CUSTOMER SEGMENT(S) CS Who is your customer? People who lost their speech or hearing ability by birth or due to some other factors.	6. CUSTOMER CC What constraints prevent your customers from taking action or limit their choices of solutions? I.e. spending power, budget, no cash, network connection, available devices. Difficult accessibility, not user friendly, need more technical knowledge to handle, cost,...etc. There are so many choice of solutions available but due to these some constraints, choice of solutions were limited.	5. AVAILABLE SOLUTIONS AS Which solutions are available to the customers when they face the problem or need to get the job done? What have they tried in the past? What pros & cons do these solutions have? I.e. pen and paper is an alternative to digital notetaking. The first ever approach to sign language it has only 6 sign gestures detection. Using colored hands for hand position recognition. But our model is trained to detect different sign languages without any colour gloves, using bare hands only.	Explore AS.
	2. JOBS-TO-BE-DONE / PROBLEMS J&P Which jobs-to-be-done (or problems) do you address for your customers? There could be more than one; explore different sides. Deaf and dumb people couldn't able to convey their messages to the normal people easily. Deaf people cannot hear the words as others speaks and dumb people cannot express their feelings by words.	9. PROBLEM ROOT CAUSE RC What is the real reason that this problem exists? What is the back story behind the need to do this job? I.e. customers have to do it because of the change in regulations. In Previously developed solution, they have to use coloured hand gloves for hand position recognition. Also, the old method uses traditional translators which take too much of time to process.	7. BEHAVIOUR BE What does your customer do to address the problem and get the job done? I.e. directly related: find the right solar panel installer, calculate usage and benefits; indirectly associated: customers spend free time on volunteering work (I.e. Greenpeace) In our device, there's an option called problem detection display in which our customer can able to see the type of problem occurs & solution will be displayed.	
Identify strong TR & EM	3. TRIGGERS TR What triggers customers to act? I.e. seeing their neighbour installing solar panels, reading about a more efficient solution in the news. By comparing normal people, Specially Abled people should depend on others and want to live their life independently like other people	10. YOUR SOLUTION SL If you are working on an existing business, write down your current solution first, fill in the canvas, and check how much it fits reality. If you are working on a new business proposition, then keep it blank until you fill in the canvas and come up with a solution that fits within customer limitations, solves a problem and matches customer behaviour. Using SSD ML algorithm recognizing the signs as words instead of old traditional translators, that are very slow and take too much since every alphabet as to be recognized to form the whole statement in old methods.	8. CHANNELS of BEHAVIOUR CH 8.1 ONLINE What kind of actions do customers take online? Extract online channels from #7 Advertise on online with influencers to test the product and promote it also on blog channels 8.2 OFFLINE What kind of actions do customers take offline? Extract offline channels from #7 and use them for customer development. On offline, we have our product experience stores where our customer can experience the product in real	Extract online & offline CH of BE
	4. EMOTIONS: BEFORE / AFTER EM How do customers feel when they face a problem or a job and afterwards? I.e. lost insurance > confident in control > use it in your communication strategy & decision BEFORE: It is very difficult to convey the message to normal people. AFTER: They overcome their reluctance to have communication with normal people.			



Problem-Solution fit canvas is licensed under a Creative Commons Attribution-NonCommercial-NoDerivatives 4.0 license. Created by Daria Neprikhina / Amaltama.com

 **AMALTAMA**

CHAPTER- 4

REQUIREMENT ANALYSIS

4.1 Functional Requirements

FR No.	Functional Requirement	Sub Requirements
FR-1	User Registration	Registration through Form Registration through Gmail.
FR-2	User confirmation	Confirmation via Email Confirmation via OTP
FR-3	System	Desktop with high resolution camera
FR-4	Authorization Levels	There are two levels of authorization namely standard access level and advanced access level.
FR-5	External interface	Ethernet, Wi-Fi, USB to provide internet facility to access the resources with real time communication.
FR-6	Reporting	If any issues found in the application, automatically it will be notified to the developer.

4.2 Non-Functional Requirements


FR No.	Non-Functional Requirement	Description
NFR-1	Usability	To convey a message to normal people, as well as convert speech into understandable sign language for the deaf and dumb people.
NFR-2	Security	Converted information using signs into speech is accessed only by the user.
NFR-3	Reliability	Provides insight into potential issues for desktop applications on managed devices.
NFR-4	Performance	The time for converting signs into speech should be faster for the real time communication.
NFR-5	Availability	Provides automatic recovery as much as possible.
NFR-6	Scalability	This app enables deaf and dumb people to convey their information using signs which get converted to human-understandable language and speech is given as output.

CHAPTER-5

PROJECT DESIGN

5.1 Data Flow Diagram

A Data Flow Diagram (DFD) is a traditional visual representation of the information flows within a system. A neat and clear DFD can depict the right amount of the system requirement graphically. It shows how data enters and leaves the system, what changes the information, and where data is stored.

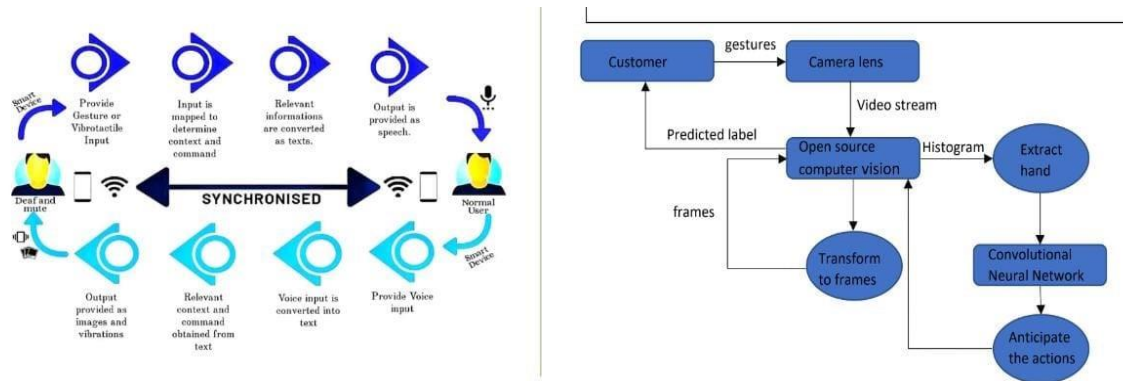


5.2 Solution & Technical Architecture

Solution architecture is a complex process – with many sub-processes – that bridges the gap between business problems and technology solutions. Its goals are to:

1. Find the best tech solution to solve existing business problems.
2. Describe the structure, characteristics, behaviour, and other aspects of the software to project stakeholders.
3. Define features, development phases, and solution requirements.
4. Provide specifications according to which the solution is defined, managed, and delivered.

Solution Architecture Diagram :

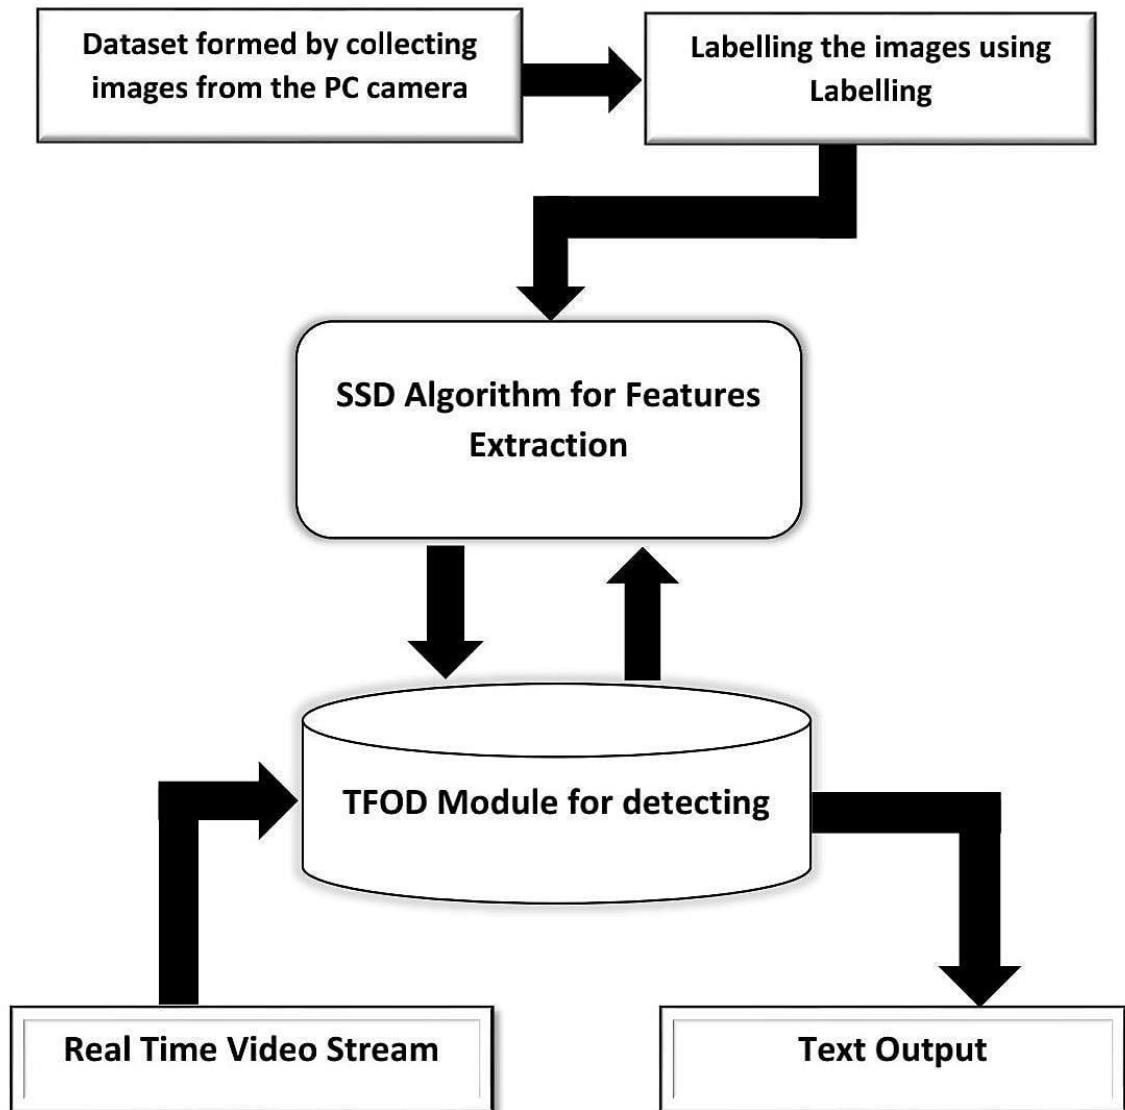

SYSTEM ARCHITECTURE

Technology Stack (Architecture & Stack):

Technical Architecture:

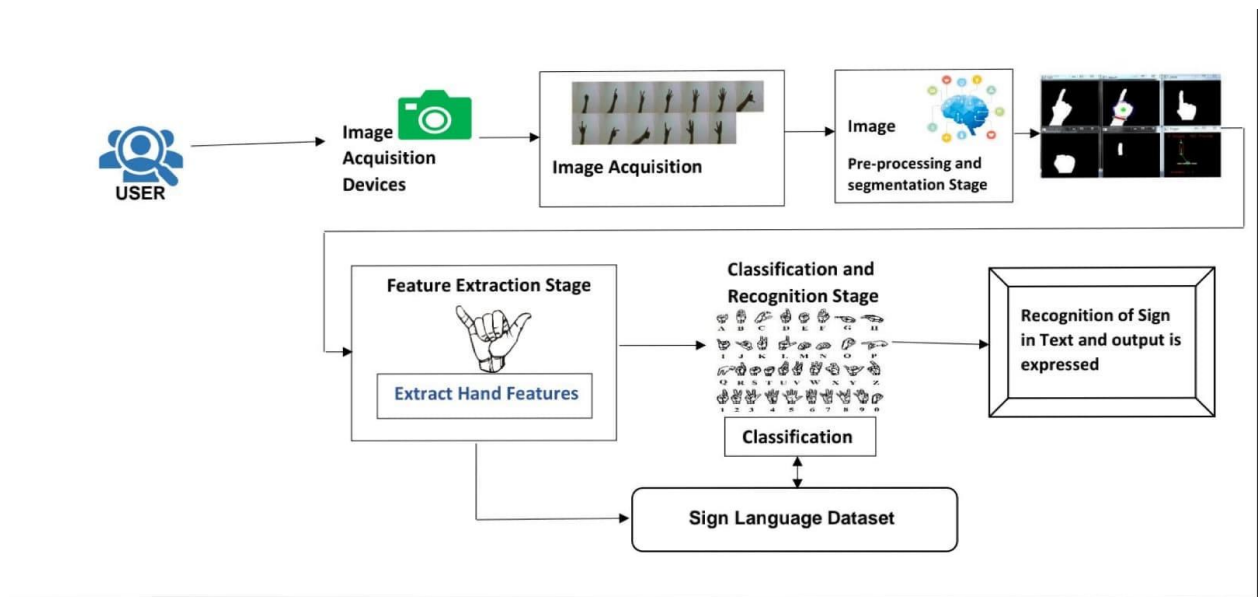


Table-1 Components and Technologies:

S.NO	Component	Description	Technology
1.	User Interface	Customer have to login through their respective website or phone number. Then interaction will happen with the User interface.	javascript, CSS,HTML
2.	Application Logic-1	It requires various types libraries, frameworks to develop the project	Java / Python
3.	Application Logic-2	Helps to converting the human gestures/actions into written words.	Machine learning
4.	Application Logic-3	Provides helpful,feasible answers after recognising the human gestures.	ANN,CNN
5.	Database	Data could be numbers or words.	MySQL, Rational database
6.	Cloud Database	Providing customer to use host database without buying additional hardware..	Deep learning and neural networks
7.	File Storage	File storage could be fast, reliable and flexible..	Local filesystem
8.	External API-1	Used to access the information in the cloud	Weather API
9.	External API-2	Used to access the information for data driven decision making...	Aadhar API
10.	Machine Learning Model	Machine learning interact with various algorithms that are required for implementation.	Image acquisition
11.	Infrastructure (Server / Cloud)	Application deployment on local system / local cloud server configuration. Install the windows version and execute the installer..	Local, Cloud Foundry, Kubernetes, etc.

Table-2: Application Characteristics:

S.No	Characteristics	Description	Technology
1.	Open-Source Frameworks	The framework which are used.	Tensor flow, Theano, RNN, PyTorch
2.	Security Implementations	Security controls which can implemented by using firewall..	Firewall and some security related softwares..
3.	Scalable Architecture	The architecture will be scalable (Micro services).	Data, models, speedand consistency..
4.	Availability	The availablity of application (use of load balancers, distributed servers etc)	Image recognition, sign/gestures recognition, text recognition & real time captioning..
5.	Performance	Design aspects for the performance of application (number of requests per second, use of cacheetc.,	Using Convolutional neural network, maching learning for conversation and improve the sensivity of the performance..

5.3 User Stories

User Type	Functional Requirement (Epic)	User Story Number	User Story / Task	Acceptance criteria	Priority	Release
Customer (Mobile user)	Registration	USN-1	As customer, I couldable to register for the app by entering my E-mail and proper password.	I could able to access my registered account.	High	Sprint 1
		USN-2	As a user, I'll get the acknowledgement verification emailonce after my registration hasbeen done for theapp	I can get verification email and clickok to confirm it..	High	Sprint 1
		USN-3	As a customer, I could able to register for application via their official websites and social media.	I could able to register and access my account by using theirwebsite & socialmedia.	Medim	Sprint 2
		USN-4	As a customer, I could able to register for application through Gmail	via some thirdparties link	Low	Sprint 2

	Login	USN-5	As a customer, I could able to login into application by entering alreadyregistered email and password	I can type manually and also can used saved login credentials	High	Sprint 1
--	-------	-------	--	---	------	----------

	Dashboard	USN6	As a customer,I can get all services andhelp in dashboard	I can access my dashboard and change profile	Medium	Sprint 2
Customer (Webuser)	Registration	USN7	As a customer, I could able to login throughregistered phone numberby using otp instead of Gmail	I could able to register & login via phone numberto access my account	High	Sprint 2
Customer Care Executive	Service	USN8	Can avail the service by calling customer care or reaching through E-mail.	Can avail the service by calling customer care or reaching throughE-mail.	Medium	Sprint 1
Administrator		USN9	Respective personin the companyshould take care all of this.	All the requirements arethere.	High	Sprint 2
	Sign up	USN-10	Customer have to sign-up to use these things andall	Have to enter validcredentials.	High	Sprint 2

User Type	Functional Requirement (Epic)	User Story Number	User Story / Task	Acceptance criteria	Priority	Release
-----------	-------------------------------	-------------------	-------------------	---------------------	----------	---------

	Wish list	USN-11	Customer's desired choices to avail these services.	As a customer can review and choose their services as he want/preferred.	Medium	Sprint 1
	Enrollment	USN-12	Now, customer can avail all services once he/she enrolled.	As a customer, it's quite enchanting	Medium	Sprint 2

CHAPTER-6

PROJECT PLANNING & SCHEDULING

6.1 Sprint Planning & Estimation

Product Backlog, Sprint Schedule, and Estimation:

Sprint	Functional Requirement (Epic)	User Story Number	User Story / Task	Story Points	Priority	Team Members
Sprint-1	Data Collection	USN-1	Collect Dataset.	9	High	PAVAN KUMAR M, YUVARAJ R
Sprint-1		USN-2	Image preprocessing	8	Medium	PAVAN KUMAR M, YUVARAJ R
Sprint-2	Model Building	USN-3	Import the required libraries, add the necessary layers and compile the model	10	High	BALACHANDHAR V, HARIPRASAD J
Sprint-2		USN-4	Training the image classification model using CNN	7	Medium	BALACHANDHAR V, HARIPRASAD J
Sprint-3	Training and Testing	USN-5	Training the model and testing the model's performance	9	High	PAVAN KUMAR M, BALACHANDHAR V.
Sprint-4	Implementation of the application	USN-6	Converting the input sign language images into English alphabets	8	Medium	YUVARAJ R, HARIPRASAD J.

6.2 Sprint Delivery Schedule

Project Tracker, Velocity & Burndown Chart:

Sprint	Total Story Points	Duration	Sprint Start Date	Sprint End Date (Planned)	Story Points Completed (as on Planned End Date)	Sprint Release Date(Actual)
Sprint-1	10	6 Days	24 Oct 2022	29 Oct 2022	8	29 Oct 2022
Sprint-2	10	6 Days	31 Oct 2022	04 Nov 2022	5	04 Nov 2022
Sprint-3	10	6 Days	07 Nov 2022	11 Nov 2022	7	11 Nov 2022
Sprint-4	10	6 Days	14 Nov 2022	18 Nov 2022	5	18 Nov 2022

Velocity:

$$AV = 6/10 = 0.6$$

Burndown chart:

A burn down chart is a graphical representation of work left to do versus time. It is often used in agile software development methodologies such as Scrum. However, burn down charts can be applied to any project containing measurable progress over time.



6.3 Reports from JIRA

Reports from JIRA:

Jira helps teams plan, assign, track, report, and manage work and brings teams together for everything from agile software development and customer support to start-ups and enterprises. Software teams build better with Jira Software, the #1 tool for agile teams. As a Jira administrator, you can create project categories so your team can view work across related projects in one place. Your team can use categories in advanced search, filters, reports, and more.




CHAPTER-7

CODING & SOLUTIONING

(Explain the features added in the project along with code)

7.1 Feature 1

The user can choose which sign language to read based on the different sign language standards that exist.

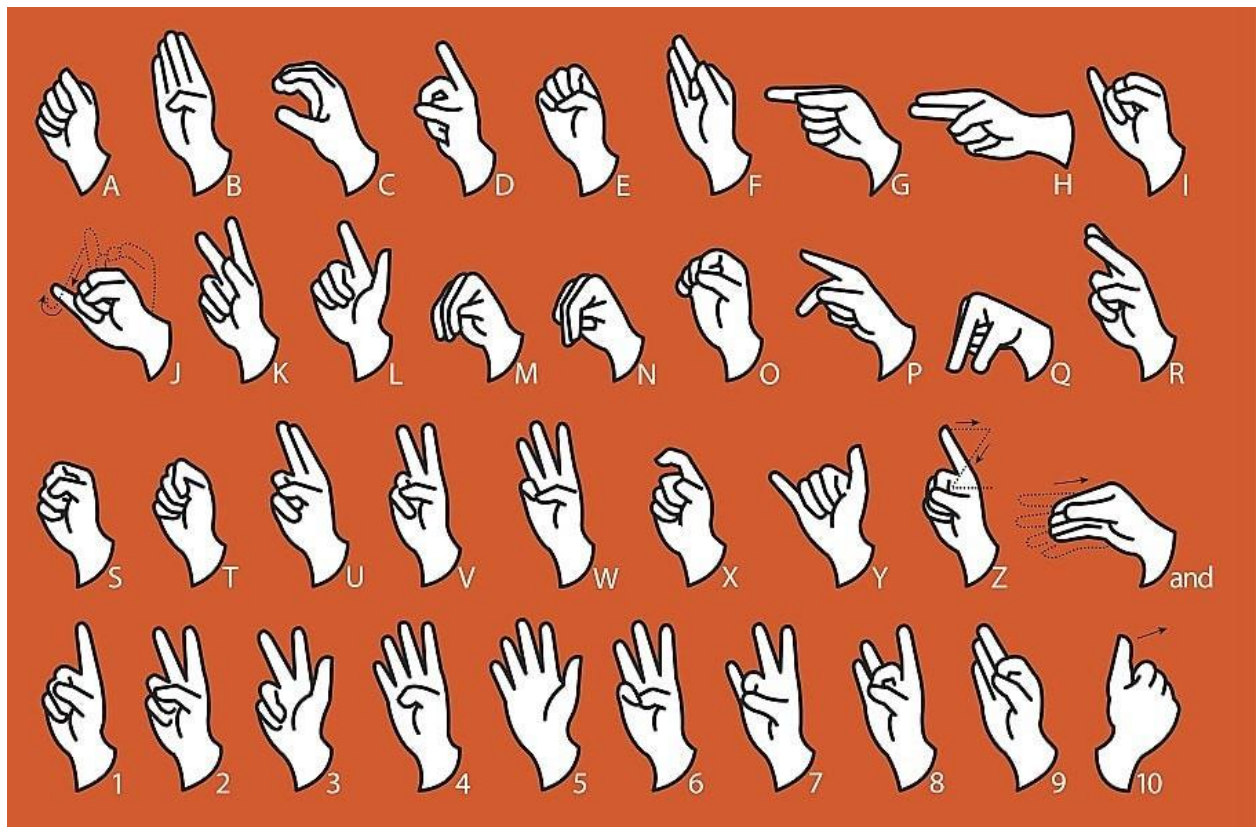

MODEL BUILDING

```
from keras.models import Sequential from keras.layers
import Dense from keras.layers import Convolution2D from
tensorflow.keras.layers import Conv2D, MaxPooling2D from
keras.layers import Dropout from keras.layers import Flatten
```

In [101]:

```
#Creating the model
model=Sequential()
#Adding the layers
model.add(Convolution2D(32,(3,3), input_shape=(64,64,1), activation = 'relu'))
model.add(MaxPooling2D(pool_size=(2,2))) model.add(Flatten())

#adding hidden layers
model.add(Dense(400, activation='relu'))
model.add(Dense(200, activation='relu'))
model.add(Dense(100, activation='relu'))

#Adding the output layer
model.add(Dense(9, activation='softmax'))
```

In [102]:

```
model.compile(loss='categorical_crossentropy', optimizer='adam', metrics=['accuracy'])
```

In [157]:

```
model.fit_generator(x_train, steps_per_epoch=30, epochs=10,
validation_data=x_test,validation_steps=50)
Epoch 1/10
/usr/local/lib/python3.7/dist-packages/ipykernel_launcher.py:1: UserWarning:
`Model.fit_generator` is deprecated and will be removed in a future version. Please use
`Model.fit`, which supports generators.
    """Entry point for launching an IPython kernel.
30/30 [=====] - ETA: 0s - loss: 0.0083 - accuracy: 0.9957
WARNING:tensorflow:Your input ran out of data; interrupting training. Make sure that your
dataset or generator can generate at least `steps_per_epoch * epochs` batches (in this case, 50
batches). You may need to use the repeat() function when building your dataset.
30/30 [=====] - 18s 587ms/step - loss: 0.0083 - accuracy:
0.9957 - val_loss: 0.2910 - val_accuracy: 0.9693
```

Epoch 2/10
30/30 [=====] - 12s 402ms/step - loss: 0.0081 - accuracy:
0.9980
Epoch 3/10
30/30 [=====] - 12s 400ms/step - loss: 0.0102 - accuracy:
0.9963
Epoch 4/10
30/30 [=====] - 12s 402ms/step - loss: 0.0049 - accuracy:
0.9993
Epoch 5/10
30/30 [=====] - 12s 402ms/step - loss: 0.0030 - accuracy:
0.9997
Epoch 6/10
30/30 [=====] - 12s 394ms/step - loss: 0.0019 - accuracy:
0.9997
Epoch 7/10
30/30 [=====] - 12s 401ms/step - loss: 0.0081 - accuracy:
0.9973
Epoch 8/10
30/30 [=====] - 12s 402ms/step - loss: 0.0124 - accuracy:
0.9960
Epoch 9/10
30/30 [=====] - 12s 401ms/step - loss: 0.0070 - accuracy:
0.9987
Epoch 10/10
30/30 [=====] - 12s 399ms/step - loss: 0.0089 - accuracy:
0.9973

model.save('Real_time.h5')

TEST THE MODEL

```
from tensorflow.keras.models import load_model
from tensorflow.keras.preprocessing import
image import numpy as np import cv2
```

In [105]:


```
model = load_model('/content/Real_time.h5')
```

In [151]:

```
img = image.load_img('/content/Dataset/test_set/H/107.png',target_size = (100,100))img
```



```
from skimage.transform import resize
def detect(frame):
    img=image.img_to_array(frame)
    img = resize(img,(64,64,1))
    img = np.expand_dims(img,axis=0)
    pred=np.argmax(model.predict(img))
    op=['A','B','C','D','E','F','G','H','I']
    print("THE PREDICTED LETTER IS ",op[pred])
```

In [150]:

```
img=image.load_img("/content/Dataset/test_set/H/107.png") detect(img)
1/1 [=====] - 0s 28ms/step
THE PREDICTED LETTER IS H
```

In [155]:

```
img = image.load_img('/content/Dataset/test_set/A/110.png') pred=detect(img)
1/1 [=====] - 0s 26ms/step
THE PREDICTED LETTER IS A
```

In [158]:

```
img=image.load_img('/content/Dataset/test_set/E/111.png') detect(img)
1/1 [=====] - 0s 30ms/step THE
PREDICTED LETTER IS E
```

7.2 Feature 2

The communication gap between deaf and dumb people and the general public can be bridged with a mobile application.

Mobile App:

```
from flask import Flask, Response, render_template from  
camera import Video
```

```
app = Flask(__name__) @app.route('/') def  
index(): return  
render_template('index.html')
```

```
def gen(camera): while  
    True:  
        frame = camera.get_frame() yield(b'--frame\r\n'  
        b'Content-Type: image/jpeg\r\n\r\n' + frame +  
        b'\r\n\r\n')
```

```
@app.route('/video_feed  
) def video_feed(): video  
= Video()  
    return Response(gen(video), mimetype='multipart/x-mixed-replace; boundary = frame')
```

```
if __name__ == '__main__': app.run()
```

CHAPTER-8

TESTING

8.1 Test cases

- Our code was tested on various angle to check whether it gives the correct output.
- To satisfy the customer's expectations we tested it fully

8.2 User Acceptance Testing

Our project was tested by an end user to verify that it has working correctly.


S.No.	Parameter	Values	Screenshot
1	Model Summary		 <pre> In [15]: x_test = test_datagen.flow_from_directory('./content/Dataset/test_set', target_size=(64,64), batch_size=100, class_mode='categorical', color_mode='grayscale') Found 2230 images belonging to 9 classes. In [16]: from keras.models import Sequential from keras.layers import Dense from keras.layers import Convolution2D from keras.layers import MaxPooling2D from keras.layers import Dropout from keras.layers import Flatten In [17]: model = Sequential() In [18]: model.add(Convolution2D(32,(3,3),input_shape=(64,64,1), activation='relu')) #no. of feature detectors, size of feature detector, image size, activation function In [19]: model.add(MaxPooling2D(pool_size=(2,2))) In [20]: model.add(Flatten()) In [21]: model.add(Dense(units=512, activation = 'relu')) In [22]: model.add(Dense(units=9, activation = 'softmax')) In [23]: model.compile(loss='categorical_crossentropy', optimizer = 'adam', metrics = ['accuracy']) </pre>
2	Accuracy	Training Accuracy – 99.6% Validation Accuracy –98.3%	 <pre> In [16]: model.compile(loss='categorical_crossentropy', optimizer = 'adam', metrics = ['accuracy']) In [17]: model.fit_generator(x_train, steps_per_epoch=24, epochs=10, validation_data = x_test, validation_steps= 40) #steps_per_epoch = no. of train images//batch size /usr/local/lib/python3.7/dist-packages/IPykernel_launcher.py:1: UserWarning: "Model.fit_generator" is deprecated. Please use "Model.fit", which supports generators. """Entry point for launching an IPython kernel. Epoch 1/10 24/24 [=====] - ETA: 0s - loss: 1.0716 - accuracy: 0.7176 WARNING:tensorflow:Your input ran out of data; interrupting training. Make sure that your dataset or generator " epochs" batches (in this case, 40 batches). You may need to use the repeat() function when building your 24/24 [=====] - 96s 4s/step - loss: 1.0716 - accuracy: 0.7176 - val_loss: 0.4701 Epoch 2/10 24/24 [=====] - 82s 3s/step - loss: 0.2010 - accuracy: 0.9400 Epoch 3/10 24/24 [=====] - 94s 4s/step - loss: 0.0867 - accuracy: 0.9751 Epoch 4/10 24/24 [=====] - 85s 4s/step - loss: 0.0403 - accuracy: 0.9893 Epoch 5/10 24/24 [=====] - 82s 3s/step - loss: 0.0289 - accuracy: 0.9915 Epoch 6/10 24/24 [=====] - 82s 3s/step - loss: 0.0209 - accuracy: 0.9949 Epoch 7/10 24/24 [=====] - 83s 3s/step - loss: 0.0137 - accuracy: 0.9957 Epoch 8/10 24/24 [=====] - 81s 3s/step - loss: 0.0090 - accuracy: 0.9979 Epoch 9/10 24/24 [=====] - 82s 3s/step - loss: 0.0153 - accuracy: 0.9957 Epoch 10/10 24/24 [=====] - 81s 3s/step - loss: 0.0086 - accuracy: 0.9986 Out[17]: In [18]: model.save('as1png1.h5') </pre>

CHAPTER-9

RESULTS

9.1 Performance Metrics

- The proposed procedure was implemented and tested on a set of images.
- The training database consists of 15750 images of Alphabets from "A" to "I", while the testing database consists of 2250 images of Alphabets from "A" to "I".
- Once the gesture is recognized the equivalent alphabet is shown on the screen.

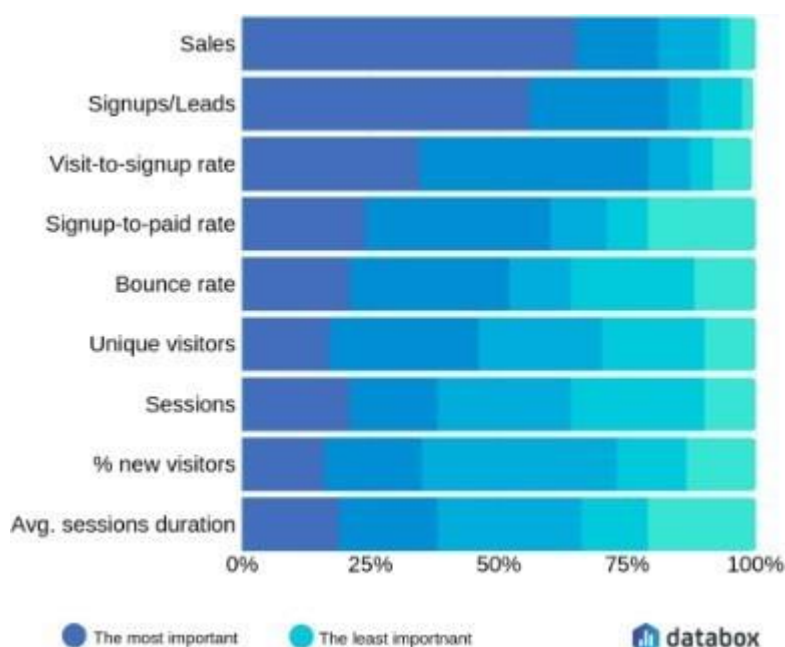

CHAPTER-10

ADVANTAGES & DISADVANTAES

Advantages:

- The speech is converted to sign language very quick to provide greater and faster understanding to specially-abled people.
- The user interface is convenient and simple for both people.

Disadvantages:

- The number of images and pixels for the model to train in the dataset is not high so accuracy is moderate level.
- It will be improved by changing the dataset.
- Currently, we have deployed a dataset in the model for the alphabets A to I only.

CHAPTER-11

CONCLUSION

CONCLUSION:

It aims to bridge the communication gap between deaf people and the rest of society. The proposed methodology translates sign language into English alphabets that are understandable to humans. This system sends hand gestures to the model, who recognizes them and displays the equivalent.

CHAPTER-12

FUTURE SCOPE

FUTURE OF SCOPE:

With the introduction of gesture recognition, the web app can easily be expanded to recognize letters beyond 'l', digits, and other symbols plus gesture recognition can also allow controlling of software/hardware interfaces. Having a technology that can translate hand sign language to its corresponding alphabet is a game changer in the field of communication and Ai for specially-abled people such as thosedead or dumb.


CHAPTER-13

APPENDIX

APPENDIX:

Source code:

Flask:

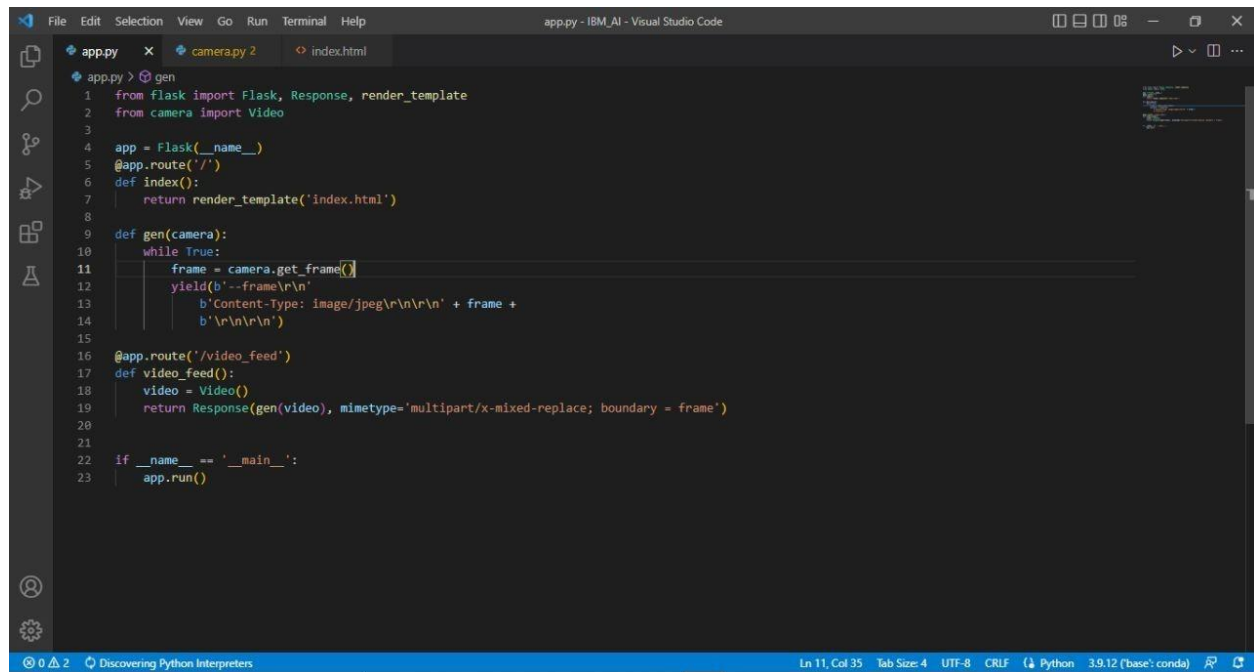


The screenshot shows a Visual Studio Code editor window titled 'app.py - IBM_AI - Visual Studio Code'. The editor has three tabs open: 'app.py', 'camera.py 2', and 'index.html'. The 'app.py' tab is active, displaying the following Python code:

```
1 from flask import Flask, Response, render_template
2 from camera import Video
3
4 app = Flask(__name__)
5 @app.route('/')
6 def index():
7     return render_template('index.html')
8
9 def gen(camera):
10     while True:
11         frame = camera.get_frame()
12         yield(b'--frame\r\n'
13              b'Content-Type: image/jpeg\r\n\r\n' + frame +
14              b'\r\n\r\n\r\n')
15
16 @app.route('/video_feed')
17 def video_feed():
18     video = Video()
19     return Response(gen(video), mimetype='multipart/x-mixed-replace; boundary = frame')
20
21
22 if __name__ == '__main__':
23     app.run()
```

The status bar at the bottom indicates the file is at 'Ln 11, Col 35', the tab size is 4, the encoding is UTF-8, the line ending is CRLF, and the Python interpreter is 'Python 3.9.12 (base: conda)'.

HTML:

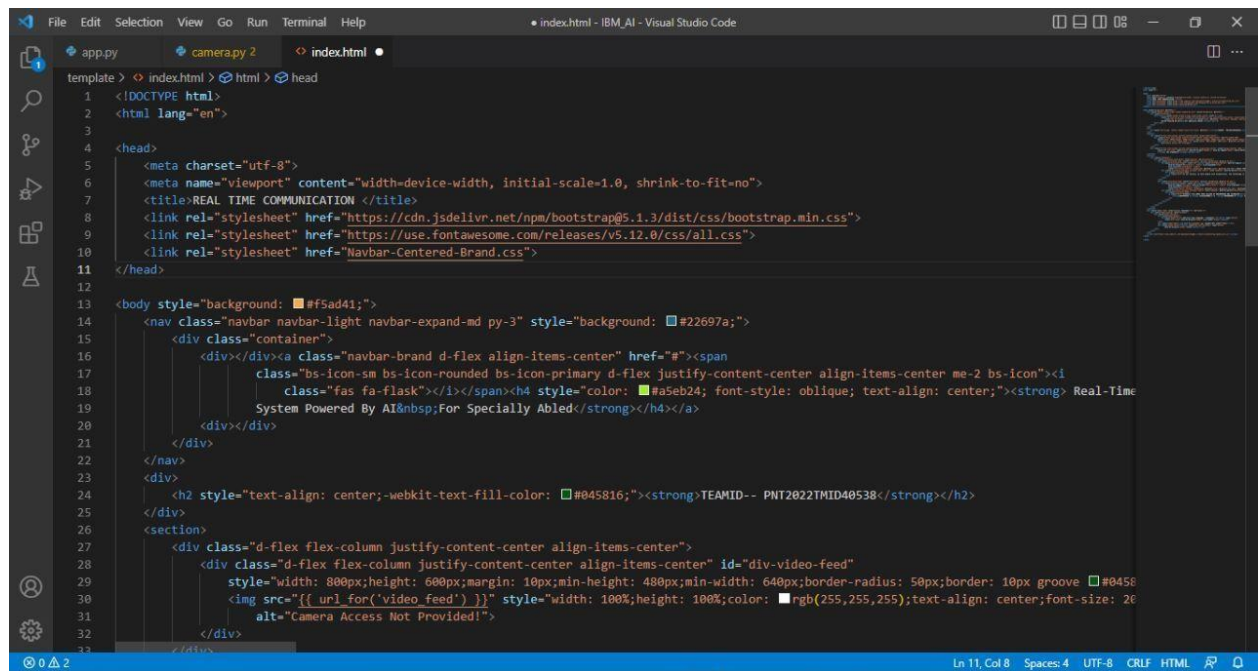

```
1 <!DOCTYPE html>
2 <html lang="en">
3
4 <head>
5   <meta charset="utf-8">
6   <meta name="viewport" content="width=device-width, initial-scale=1.0, shrink-to-fit=no">
7   <title>REAL TIME COMMUNICATION </title>
8   <link rel="stylesheet" href="https://cdn.jsdelivr.net/npm/bootstrap@5.1.3/dist/css/bootstrap.min.css">
9   <link rel="stylesheet" href="https://use.fontawesome.com/releases/v5.12.0/css/all.css">
10  <link rel="stylesheet" href="Navbar-Centered-Brand.css">
11 </head>
12
13 <body style="background: #f5ad41;">
14   <nav class="navbar navbar-light navbar-expand-md py-3" style="background: #22697a;">
15     <div class="container">
16       <div></div><a class="navbar-brand d-flex align-items-center" href="#"><span
17         class="bs-icon-sm bs-icon-rounded bs-icon-primary d-flex justify-content-center align-items-center me-2 bs-icon"><i
18           class="fas fa-flask"></i></span><h4 style="color: #a5eb24; font-style: oblique; text-align: center;"><strong> Real-Time
19       System Powered By AI&nbsp;   For Specially Abled</strong></h4></a>
20     </div></div>
21   </nav>
22   <div>
23     <h2 style="text-align: center; webkit-text-fill-color: #045816;"><strong>TEAMID-- PNT2022TMID40538</strong></h2>
24   </div>
25   <div>
26     <section>
27       <div class="d-flex flex-column justify-content-center align-items-center">
28         <div class="d-flex flex-column justify-content-center align-items-center" id="div-video-feed"
29           style="width: 800px; height: 600px; margin: 10px; min-height: 480px; min-width: 640px; border-radius: 50px; border: 10px groove #0458
30             
32         </div>
33       </div>
34     </section>
35   </div>
36 </body>
37 </html>
```


```
File Edit Selection View Go Run Terminal Help
index.html - IBM_AI - Visual Studio Code

app.py camera.py 2 index.html
template > index.html > html > body > section > div.container > div#accordion-1.accordion-text-white > div.accordion-item > div.accordion-collapse.collapse.item-2 > div.accordion-body
32 </div>
33
34 <div class="d-flex flex-column justify-content-center align-items-center" style="margin-bottom: 20px;"><button
35 class="btn btn-info" type="button" data-bs-target="#modal-1" data-bs-toggle="modal">>Quick Reference
36 <strong> ASL Alphabets</strong></button></div>
37 </section>
38 <section>
39 <div class="container">
40 <div class="accordion text-white" role="tablist" id="accordion-1">
41 <div class="accordion-item" style="font-style: oblique; background: linear-gradient(to top right, transparent 49%, #333 49%, #333 51%, transparent 51%);">
42 <h2 class="accordion-header" role="tab"><button class="accordion-button" data-bs-toggle="collapse"
43 data-bs-target="#accordion-1 .item-1" aria-expanded="true" data-bs-parent="#accordion-1"
44 aria-controls="accordion-1 .item-1"
45 style="font-style: inherit; background: linear-gradient(to top right, transparent 49%, #333 49%, #333 51%, transparent 51%); color: white;">About The Project</button></h2>
46 <div class="accordion-collapse collapse show item-1" role="tabpanel" data-bs-parent="#accordion-1">
47 <div class="accordion-body">
48 <p class="mb-0">>In our society, we have people with disabilities. The technology is developing day by day but no sign
49 </p>
50 </div>
51 </div>
52 <div class="accordion-item" style="font-style: oblique; background: linear-gradient(to top right, transparent 49%, #333 49%, #333 51%, transparent 51%);">
53 <h2 class="accordion-header" role="tab"><button class="accordion-button collapsed"
54 data-bs-toggle="collapse" data-bs-target="#accordion-1 .item-2" aria-expanded="false" data-bs-parent="#accordion-1"
55 aria-controls="accordion-1 .item-2"
56 style="font-style: oblique; background: linear-gradient(to top right, transparent 49%, #333 49%, #333 51%, transparent 51%); color: white;">Developed By</button></h2>
57 <div class="accordion-collapse collapse item-2" role="tabpanel" data-bs-parent="#accordion-1">
58 <div class="accordion-body">
59 <p class="mb-0">>Students From ANNAI MIRA COLLEGE OF ENGINEERING AND TECHNOLOGY<br><br>TEAM ID-- <strong>PNT2022TMID40
60 <strong>HARIPRASAD J</strong> 513519106006<br>3. <strong>PAVANKUMAR M</strong> 513519106014<br>4. <strong>YUVARAJ
61 </p>
62 </div>
63 </div>
64 </div>
Ln 62, Col 1 Spaces: 4 UTF-8 CRLF HTML
```

```
File Edit Selection View Go Run Terminal Help
index.html - IBM_AI - Visual Studio Code


app.py camera.py 2 index.html
template > index.html > html
54 <div class="accordion-collapse collapse item-2" role="tabpanel" data-bs-parent="#accordion-1">
55 <div class="accordion-body">
56 <p class="mb-0">>Students From ANNAI MIRA COLLEGE OF ENGINEERING AND TECHNOLOGY<br><br>TEAM ID-- <strong>PNT2022TMID40
57 <strong>HARIPRASAD J</strong> 513519106006<br>3. <strong>PAVANKUMAR M</strong> 513519106014<br>4. <strong>YUVARAJ
58 </p>
59 </div>
60 </div>
61 </div>
62 </div>
63 </div>
64 </div>
65 </div>
66 </div>
67 </section>
68 <div class="modal fade" role="dialog" tabindex="-1" id="modal-1">
69 <div class="modal-dialog" role="document">
70 <div class="modal-content">
71 <div class="modal-header">
72 <h4 class="modal-title">>American Sign Language - Alphabets</h4><button type="button"
73 class="btn-close" data-bs-dismiss="modal" aria-label="Close"></button>
74 </div>
75 <div class="modal-body"></div>
76 <div class="modal-footer"><button class="btn btn-secondary" type="button"
77 data-bs-dismiss="modal">Close</button></div>
78 </div>
79 </div>
80 </div>
81 <script src="https://cdn.jsdelivr.net/npm/bootstrap@5.1.3/dist/js/bootstrap.bundle.min.js"></script>
82 </body>
83
84 </html>
Ln 84, Col 8 Spaces: 4 UTF-8 CRLF HTML
```

Camera:

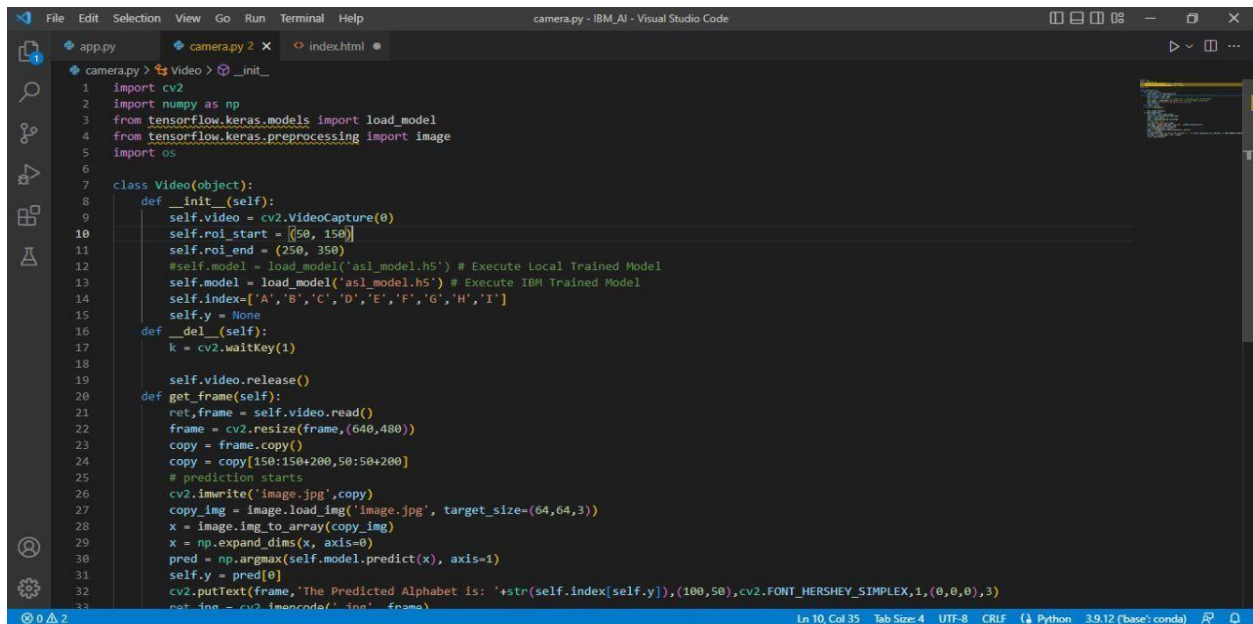


```
1 import cv2
2 import numpy as np
3 from tensorflow.keras.models import load_model
4 from tensorflow.keras.preprocessing import image
5 import os
6
7 class Video(object):
8     def __init__(self):
9         self.video = cv2.VideoCapture(0)
10        self.roi_start = [50, 150]
11        self.roi_end = (250, 350)
12        #self.model = load_model('asl_model.h5') # Execute Local Trained Model
13        self.model = load_model('asl_model.h5') # Execute IBM Trained Model
14        self.index=['A','B','C','D','E','F','G','H','I']
15        self.y = None
16
17    def __del__(self):
18        k = cv2.waitKey(1)
19
20        self.video.release()
21
22    def get_frame(self):
23        ret, frame = self.video.read()
24        frame = cv2.resize(frame, (640, 480))
25        copy = frame.copy()
26        copy = copy[150:150+200, 50:50+200]
27        # prediction starts
28        cv2.imwrite('image.jpg', copy)
29        copy_img = image.load_img('image.jpg', target_size=(64, 64, 3))
30        x = image.img_to_array(copy_img)
31        x = np.expand_dims(x, axis=0)
32        pred = np.argmax(self.model.predict(x), axis=1)
33        self.y = pred[0]
34        cv2.putText(frame, 'The Predicted Alphabet is: '+str(self.index[self.y]), (100, 50), cv2.FONT_HERSHEY_SIMPLEX, 1, (0, 0, 0), 3)
35        ret, img = cv2.imencode('.jpg', frame)
```

Main:

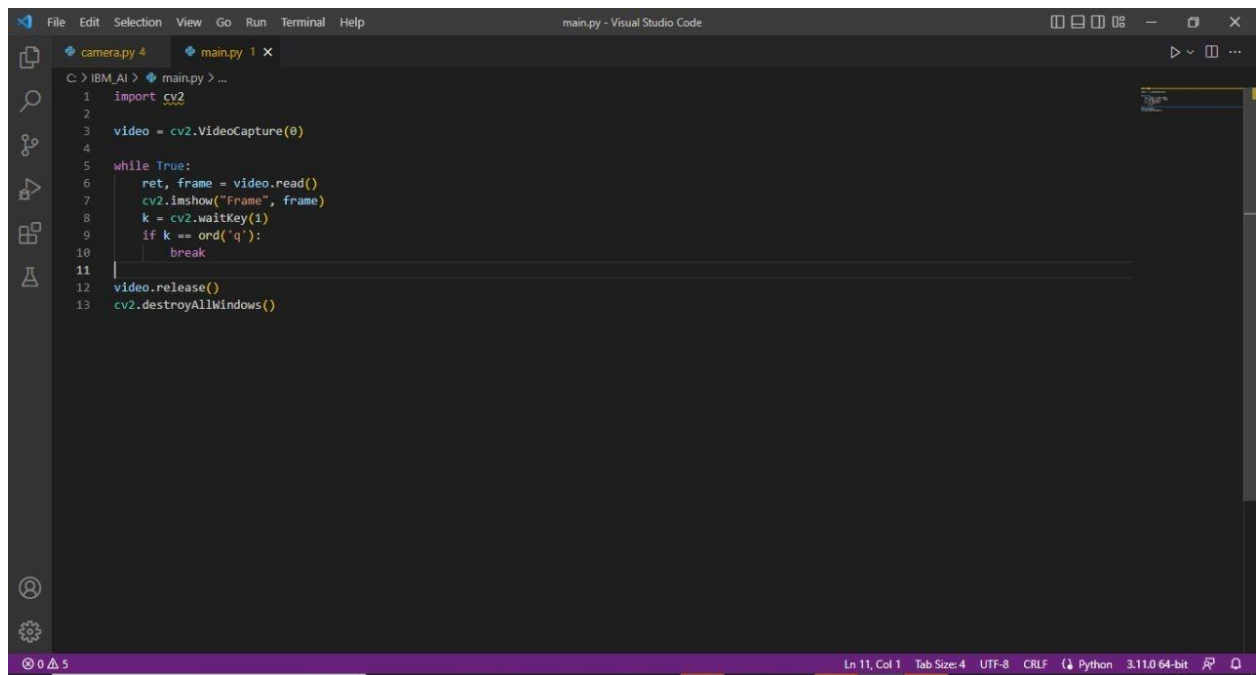

```
1 import cv2
2
3 video = cv2.VideoCapture(0)
4
5 while True:
6     ret, frame = video.read()
7     cv2.imshow("Frame", frame)
8     k = cv2.waitKey(1)
9     if k == ord('q'):
10         break
11
12 video.release()
13 cv2.destroyAllWindows()
```

Trained Model:

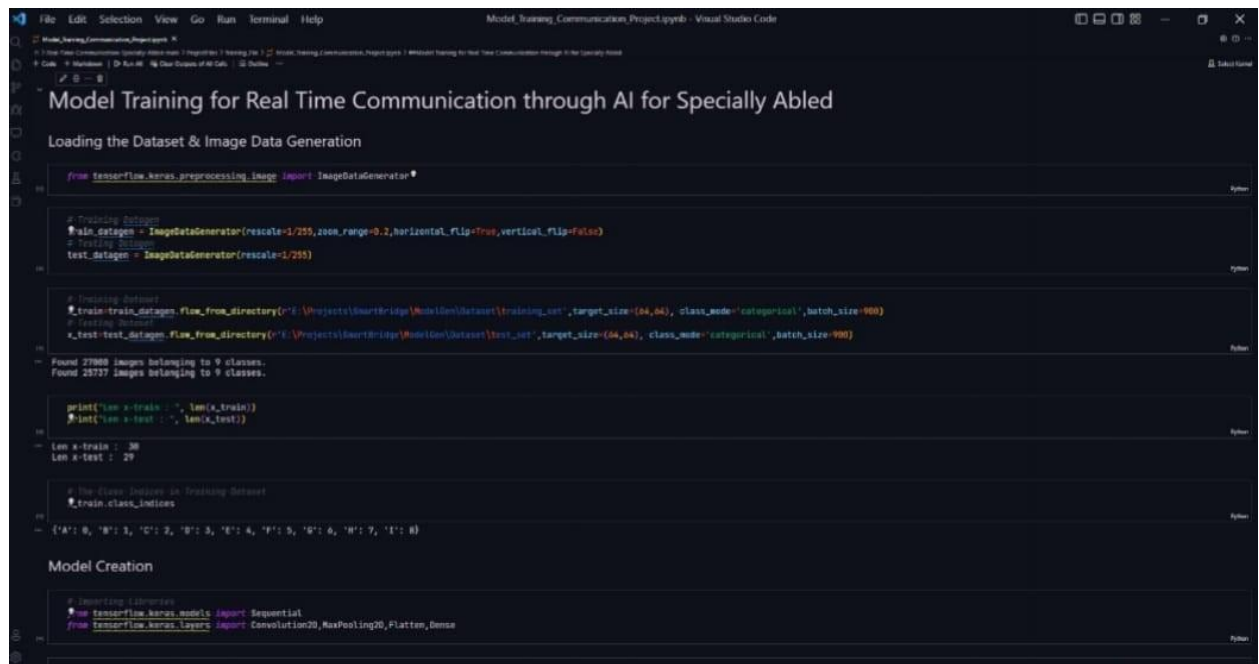

```
File Edit Selection View Go Run Terminal Help
Model_Training_Communications_Project.ipynb - Visual Studio Code

Model_Training_Communications_Project.ipynb
1
2
3
4
5
6
7
8
9
10
11
12
13
14
15
16
17
18
19
20
21
22
23
24
25
26
27
28
29
30
31
32
33
34
35
36
37
38
39
40
41
42
43
44
45
46
47
48
49
50
51
52
53
54
55
56
57
58
59
60
61
62
63
64
65
66
67
68
69
70
71
72
73
74
75
76
77
78
79
80
81
82
83
84
85
86
87
88
89
90
91
92
93
94
95
96
97
98
99
100
101
102
103
104
105
106
107
108
109
110
111
112
113
114
115
116
117
118
119
120
121
122
123
124
125
126
127
128
129
130
131
132
133
134
135
136
137
138
139
140
141
142
143
144
145
146
147
148
149
150
151
152
153
154
155
156
157
158
159
160
161
162
163
164
165
166
167
168
169
170
171
172
173
174
175
176
177
178
179
180
181
182
183
184
185
186
187
188
189
190
191
192
193
194
195
196
197
198
199
200
201
202
203
204
205
206
207
208
209
210
211
212
213
214
215
216
217
218
219
220
221
222
223
224
225
226
227
228
229
230
231
232
233
234
235
236
237
238
239
240
241
242
243
244
245
246
247
248
249
250
251
252
253
254
255
256
257
258
259
260
261
262
263
264
265
266
267
268
269
270
271
272
273
274
275
276
277
278
279
280
281
282
283
284
285
286
287
288
289
290
291
292
293
294
295
296
297
298
299
300
301
302
303
304
305
306
307
308
309
310
311
312
313
314
315
316
317
318
319
320
321
322
323
324
325
326
327
328
329
330
331
332
333
334
335
336
337
338
339
340
341
342
343
344
345
346
347
348
349
350
351
352
353
354
355
356
357
358
359
360
361
362
363
364
365
366
367
368
369
370
371
372
373
374
375
376
377
378
379
380
381
382
383
384
385
386
387
388
389
390
391
392
393
394
395
396
397
398
399
400
401
402
403
404
405
406
407
408
409
410
411
412
413
414
415
416
417
418
419
420
421
422
423
424
425
426
427
428
429
430
431
432
433
434
435
436
437
438
439
440
441
442
443
444
445
446
447
448
449
450
451
452
453
454
455
456
457
458
459
460
461
462
463
464
465
466
467
468
469
470
471
472
473
474
475
476
477
478
479
480
481
482
483
484
485
486
487
488
489
490
491
492
493
494
495
496
497
498
499
500
501
502
503
504
505
506
507
508
509
510
511
512
513
514
515
516
517
518
519
520
521
522
523
524
525
526
527
528
529
530
531
532
533
534
535
536
537
538
539
540
541
542
543
544
545
546
547
548
549
550
551
552
553
554
555
556
557
558
559
560
561
562
563
564
565
566
567
568
569
570
571
572
573
574
575
576
577
578
579
580
581
582
583
584
585
586
587
588
589
590
591
592
593
594
595
596
597
598
599
600
601
602
603
604
605
606
607
608
609
610
611
612
613
614
615
616
617
618
619
620
621
622
623
624
625
626
627
628
629
630
631
632
633
634
635
636
637
638
639
640
641
642
643
644
645
646
647
648
649
650
651
652
653
654
655
656
657
658
659
660
661
662
663
664
665
666
667
668
669
670
671
672
673
674
675
676
677
678
679
680
681
682
683
684
685
686
687
688
689
690
691
692
693
694
695
696
697
698
699
700
701
702
703
704
705
706
707
708
709
710
711
712
713
714
715
716
717
718
719
720
721
722
723
724
725
726
727
728
729
730
731
732
733
734
735
736
737
738
739
740
741
742
743
744
745
746
747
748
749
750
751
752
753
754
755
756
757
758
759
760
761
762
763
764
765
766
767
768
769
770
771
772
773
774
775
776
777
778
779
780
781
782
783
784
785
786
787
788
789
790
791
792
793
794
795
796
797
798
799
800
801
802
803
804
805
806
807
808
809
810
811
812
813
814
815
816
817
818
819
820
821
822
823
824
825
826
827
828
829
830
831
832
833
834
835
836
837
838
839
840
841
842
843
844
845
846
847
848
849
850
851
852
853
854
855
856
857
858
859
860
861
862
863
864
865
866
867
868
869
870
871
872
873
874
875
876
877
878
879
880
881
882
883
884
885
886
887
888
889
890
891
892
893
894
895
896
897
898
899
900
901
902
903
904
905
906
907
908
909
910
911
912
913
914
915
916
917
918
919
920
921
922
923
924
925
926
927
928
929
930
931
932
933
934
935
936
937
938
939
940
941
942
943
944
945
946
947
948
949
950
951
952
953
954
955
956
957
958
959
960
961
962
963
964
965
966
967
968
969
970
971
972
973
974
975
976
977
978
979
980
981
982
983
984
985
986
987
988
989
990
991
992
993
994
995
996
997
998
999
1000

from tensorflow.keras.preprocessing.image import ImageDataGenerator

# Training Dataset
train_datagen = ImageDataGenerator(rescale=1/255, zoom_range=0.2, horizontal_flip=True, vertical_flip=False)
# Testing Dataset
test_datagen = ImageDataGenerator(rescale=1/255)

# Loading Dataset
train=train_datagen.flow_from_directory("../E:/Projects/SmartBridge/MobileNetDataset/training_set", target_size=(64,64), class_mode='categorical', batch_size=900)
# Loading Dataset
x_test=test_datagen.flow_from_directory("../E:/Projects/SmartBridge/MobileNetDataset/test_set", target_size=(64,64), class_mode='categorical', batch_size=900)

Found 27968 Images belonging to 9 classes.
Found 25737 Images belonging to 9 classes.

print("len x-train : ", len(x_train))
print("len x-test : ", len(x_test))

len x-train : 30
len x-test : 29

# The flow returns the training dataset
train_class_indices

['A': 0, 'B': 1, 'C': 2, 'D': 3, 'E': 4, 'F': 5, 'G': 6, 'H': 7, 'I': 8]

Model Creation

# Importing Libraries
from tensorflow.keras.models import Sequential
from tensorflow.keras.layers import Convolution2D, MaxPooling2D, Flatten, Dense
```

GitHub Repository: <https://github.com/IBM-EPBL/IBM-Project-32197-1660208557>

Project Demonstration Link:
https://drive.google.com/file/d/1uz637QPmnA459k_YDe8QMC0cxNfnMCx0/view?usp=drivesdk