

## Assignment - 4

Assignment Date	22 October 2022
Student Name	Saravana Kumar R
Student Roll No	812419104057
Maximum Marks	2 Marks

### Question-1:

**Pull an Image from docker hub and run it in Docker Playground**

### Solution:

- Pull an image *uifd/ui-for-docker* from the docker hub
- This image is used for viewing and managing the docker engine
- Use **docker pull image name** and **docker run -it image name** commands to run the above image in the Docker Playground

The screenshot shows a web browser window displaying the Docker Hub page for the repository `uifd/ui-for-docker`. The page header includes the Docker Hub logo, a search bar with the text `uifd/ui-for-docker`, and navigation links for Explore, Repositories, Organizations, and Help. A banner at the top promotes Wasm as a fast, light alternative to Linux containers. The repository page shows the repository name `uifd/ui-for-docker` with a star icon, indicating it is a favorite. Below the name, it says "By uifd • Updated 6 years ago" and "A web interface for Docker, formerly known as DockerUI. Deprecated, use Portainer for new features." The page also shows a download icon and "Pulls 10M+". The main content area has tabs for Overview and Tags. The Overview tab is active, showing a message that the repository is deprecated and development continues at `portainer/portainer`. It also includes a "chat on github" button. A section titled "UI For Docker" describes it as a web interface for the Docker Remote API. A "Goals" section lists "Minimal dependencies - I really want to keep this project a pure html/js app." On the right side, there is a "Docker Pull Command" section with a code block containing the command `docker pull uifd/ui-for-docker`.

IBM-EPBL/IBM-Project-32447-10 | Assignment 4 | uifd/ui-for-docker - Docker ima | Docker Playground

labs.play-with-docker.com/p/cdn8agf91rrg0087gaf0/cdn8agf9\_cdn8agf91rrg0087gafg

03:56:43

CLOSE SESSION

Instances

+ ADD NEW INSTANCE

192.168.0.18  
node1

cdn8agf9\_cdn8ajf91rrg0087gafg

IP  
192.168.0.18  
OPEN PORT 9000

Memory  
1.58% (63.02MiB / 3.906GiB)

CPU  
0.05%

SSH  
ssh ip172-18-0-48-cdn8agf91rrg0087gaf0@direct.labs.play-

DELETE EDITOR

```
[node1] (local) root@192.168.0.18 ~
$ docker pull uifd/ui-for-docker
Using default tag: latest
latest: Pulling from uifd/ui-for-docker
Digest: sha256:fe371ff5a69549269b24073a5ab1244dd4c0b834cbadf244870572150b1cb749
Status: Image is up to date for uifd/ui-for-docker:latest
docker.io/uifd/ui-for-docker:latest
(node1) (local) root@192.168.0.18 ~
$ docker run -d -p 9000:9000 --privileged -v /var/run/docker.sock:/var/run/docker.sock uifd/ui-for-docker
887268aa46172d25dd2fbd9957df147d5c3d6c5b2d5dc6f170b2840bd05e108
(node1) (local) root@192.168.0.18 ~
$
```

72°F Raining now

IBM-EPBL/IBM-Project-32447-10 | Assignment 4 | uifd/ui-for-docker - Docker ima | Docker Playground | UI For Docker

Not secure | ip172-18-0-48-cdn8agf91rrg0087gaf0-9000.direct.labs.play-with-docker.com/#/

Dashboard Containers Containers Network Images Networks Volumes Info Refresh

Running Containers

suspicious\_nash Up 29 seconds

Status

Running Stopped Ghost

Containers created

Images created

72°F Raining now

## Question-2:

Create a docker file for the jobportal application and deploy it in Docker desktop application

### Solution:

- d. Create a docker file for build and deploy flask app.
- e. Use **docker build -t image\_name** in the current directory to start building the docker image and deploy in our local docker
- f. Use **docker run -p 5000:5000 image\_name** to run in local system

### Dockerfile

```
FROM ubuntu/apache2
FROM python
COPY ./requirements.txt /flaskApp/requirements.txt WORKDIR /flaskApp
RUN pip install -r requirements.txt COPY . /flaskApp
ENTRYPOINT [ "python" ] CMD
["app.py" ]
```

## Steps Involved

```
PROBLEMS OUTPUT DEBUG CONSOLE TERMINAL JUPYTER
root@jagz-mx:/home/jagadish/Documents/DockerLearning# docker images
REPOSITORY TAG IMAGE ID CREATED SIZE
root@jagz-mx:/home/jagadish/Documents/DockerLearning# docker build -t job-portal-app .
Sending build context to Docker daemon 65.02kB
Step 1/8 : FROM ubuntu/apache2
latest: Pulling from ubuntu/apache2
b572d2b36365: Pull complete
3a1193867518: Pull complete
8bfd5261bf9e: Pull complete
Digest: sha256:d9b8fe0cde6964360a1b4037d521ce326c287679bd1da6cd909997dc2509302
Status: Downloaded newer image for ubuntu/apache2:latest
----> 6ca4f2c95e83
Step 2/8 : FROM python
latest: Pulling from library/python
f606d8928ed3: Pull complete
47db815c6a45: Pull complete
```

```
PROBLEMS OUTPUT DEBUG CONSOLE TERMINAL JUPYTER

Step 7/8 : ENTRYPOINT [ "python" ]
----> Running in d4e98c363815
Removing intermediate container d4e98c363815
----> 7a8fadbf86d7
Step 8/8 : CMD ["app.py" ]
----> Running in 0380311c3e1d
Removing intermediate container 0380311c3e1d
----> 3b55665956a8
Successfully built 3b55665956a8
Successfully tagged job-portal-app:latest
root@jagz-mx:/home/jagadish/Documents/DockerLearning# docker images
REPOSITORY TAG IMAGE ID CREATED SIZE
job-portal-app latest 3b55665956a8 About a minute ago 1.13GB
ubuntu/apache2 latest 6ca4f2c95e83 3 days ago 208MB
python latest f05c8762fe15 9 days ago 921MB
root@jagz-mx:/home/jagadish/Documents/DockerLearning#
```

```
root@jagz-mx:/home/jagadish/Documents/DockerLearning# docker run -p 5000:5000 job-portal-app
* Serving Flask app 'app'
* Debug mode: on
WARNING: This is a development server. Do not use it in a production deployment. Use a production WSGI serv
er instead.
* Running on all addresses (0.0.0.0)
* Running on http://127.0.0.1:5000
* Running on http://172.17.0.2:5000
Press CTRL+C to quit
* Restarting with stat
* Debugger is active!
* Debugger PIN: 481-117-531
```

## Run locally using docker

← → ↺ ⓘ localhost:5000/application

Job Application Page

Applicant Name

Name

Email


Email

### Question-3:

Create a IBM container registry and deploy helloworld app or jobportal app

#### Solution:

- g. Log into IBM cloud
- h. Create a **container registry**
- i. Using IBM Cloud CLI, install the **container registry plugin** in our system
- j. Push our docker image into the created container registry using **docker push**
- k. So, our job portal app is deployed in the IBM container registry

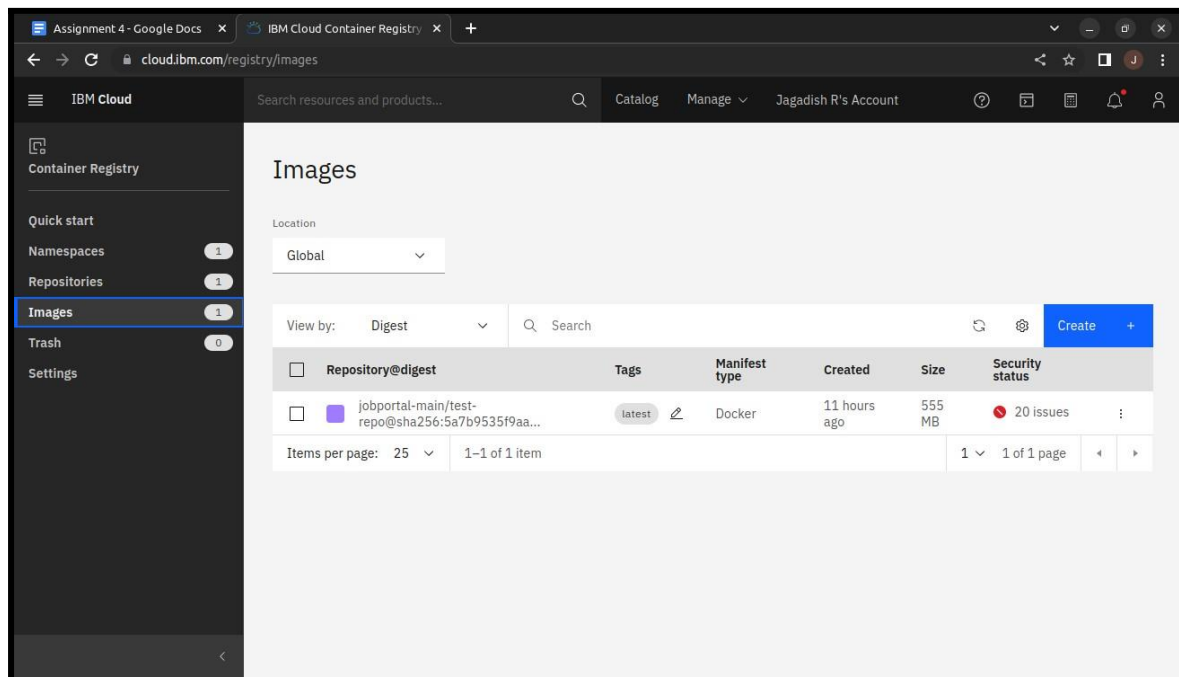

### Question-4:

Create a Kubernetes cluster in IBM cloud and deploy helloworld image or jobportal image and also expose the same app to run in nodeport

#### Solution:

- l. Log into IBM cloud
- m. Create a **kubernetete**
- n. Using IBM Cloud CLI, install the **ks plugin** in our system
- o. Create a **cluster** in the kubernetes
- p. Now, go to the **kubernetes dashboard** where we need to create a service based on a yml file (given below)
- q. In that file, we have to mention *which image we are going to use* and the *app name*
- r. Take the **public IP address** and **Nodeport** since we exposed the *flask app innodeport*
- s. Finally, we got the **url address** where our flask app is hosted

## job-portal-app.yml

apiVersion: v1 kind:

Service metadata:

name: job-portal-app spec:

selector:

app: job-portal-app ports:

- port: 5000 type:

NodePort

---

apiVersion: apps/v1 kind:

Deployment metadata:

name: job-portal-app labels:

app: job-portal-app spec:

selector:

matchLabels:

app: job-portal-app replicas:

1

template:

metadata:

labels:

app: job-portal-app spec:

containers:

- name: job-portal-app image:

image\_name ports:

- containerPort: 5000 env:

- name: DISABLE\_WEB\_APP

value: "false"

## Cluster creation

The screenshot shows the IBM Cloud console interface for managing Kubernetes clusters. The left sidebar contains navigation links for Kubernetes, Clusters, Reservations, Helm catalog, and Container Registry. The main content area is titled "Kubernetes clusters" and features a table listing existing clusters. A "Create cluster" button is visible in the top right corner of the table area.

Name	State	Location	Worker count	Created	Version	Infrastructure
jaga-cluster	Normal	Amsterdam 03	1	Expires in 30 days	1.23.12_1546	Classic

Items per page: 25 | 1-1 of 1 item

## Configuring the cluster

The screenshot displays the "Overview" page for a specific Kubernetes cluster named "jaga-cluster". The page includes a sidebar with navigation options like "Worker nodes", "Worker pools", and "DevOps". The main content area shows the cluster's status as "Normal" with a warning that it "Expires in 30 days". Key metrics are displayed in a grid, including node status (1 of 1), add-on status (0 of 0), master status (Normal), and ingress status (Unknown). A "Details" section at the bottom provides specific information about the cluster's configuration, including its ID, version, infrastructure type, zones, creation time, resource group, and an option to enable image security enforcement.


**Expires in 30 days:** Be sure to back up your data, your cluster will be deleted in 30 days. To access the full capabilities of the service, try out a [standard cluster](#).

Node status	Add-on status	Master status	Ingress status
1 of 1 Normal	0 of 0 Normal	Normal	Unknown

**Details**

Cluster ID cda1b3kf078fsvd9aogq	Version 1.23.12_1546	Infrastructure Classic	Zones Milan 01
Created 23/10/2022, 16:59	Resource group Default	Image security enforcement <a href="#">Enable</a>	

## Creating a service based on the yml file

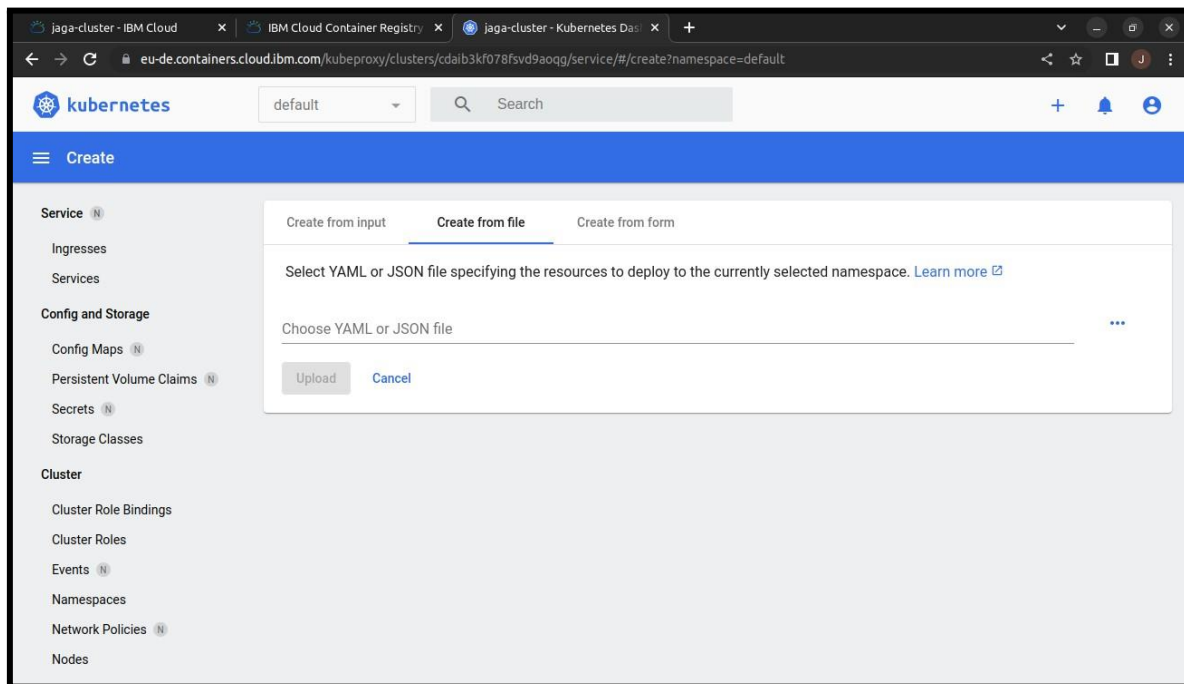

## Procedure to find the exposed url

```
root@ravi-HP-Slim-Desktop-290-p0xxx: ~  
/ # ibmcloud ks cluster config --cluster cdaib3kf078fsvd9aoqg  
OK  
The configuration for cdaib3kf078fsvd9aoqg was downloaded successfully.  
  
Added context for cdaib3kf078fsvd9aoqg to the current kubeconfig file.  
You can now execute 'kubectl' commands against your cluster. For example, run 'kubectl get nodes'.  
If you are accessing the cluster for the first time, 'kubectl' commands might fail for a few seconds while RBAC synchronizes.  
/ # kubectl config current-context  
jaga-cluster/cdaib3kf078fsvd9aoqg  
/ # kubectl get nodes  
NAME                STATUS    ROLES    AGE   VERSION  
10.144.183.60        Ready    <none>    6h7m   v1.23.12+IKS  
/ # kubectl get pods  
NAME                READY   STATUS    RESTARTS   AGE  
job-portal-app-57f769b8b6-4rggl  1/1     Running    0           5h51m  
/ # ibmcloud cs workers --cluster cdaib3kf078fsvd9aoqg  
OK  
ID                                     Public IP      Private IP      Flavor    State    Status    Zone    Version  
kube-cdaib3kf078fsvd9aoqg-jagacuster-default-00000073  159.122.179.243  10.144.183.60  free     normal  Ready    mil01  1.23.12_1548  
/ # kubectl describe service job-portal-app  
Name: job-portal-app  
Namespace: default  
Labels: <none>  
Annotations: <none>  
Selector: app=job-portal-app  
Type: NodePort  
IP Family Policy: SingleStack  
IP Families: IPv4  
IP: 172.21.183.254  
IPs: 172.21.183.254  
Port: <unset> 5000/TCP  
TargetPort: 5000/TCP  
NodePort: <unset> 30508/TCP  
Endpoints: 172.30.146.139:5000  
Session Affinity: None  
External Traffic Policy: Cluster  
Events: <none>  
/ #
```



## Run our flask app in the IBM kubernetes

