


SETTING CLOUD APPLICATION ENVIRONMENT


Team ID : PNT2022TMID43999

IBM CLOUD CLI INSTALLATION


Step1: Log in to the IBM cloud

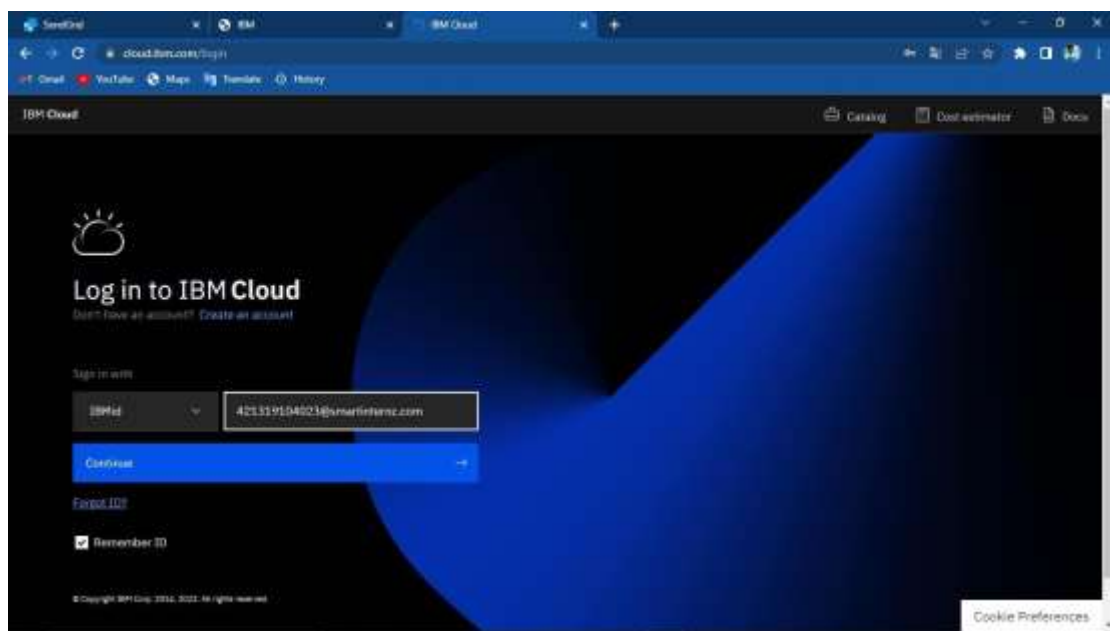


Step 2: Select container registry

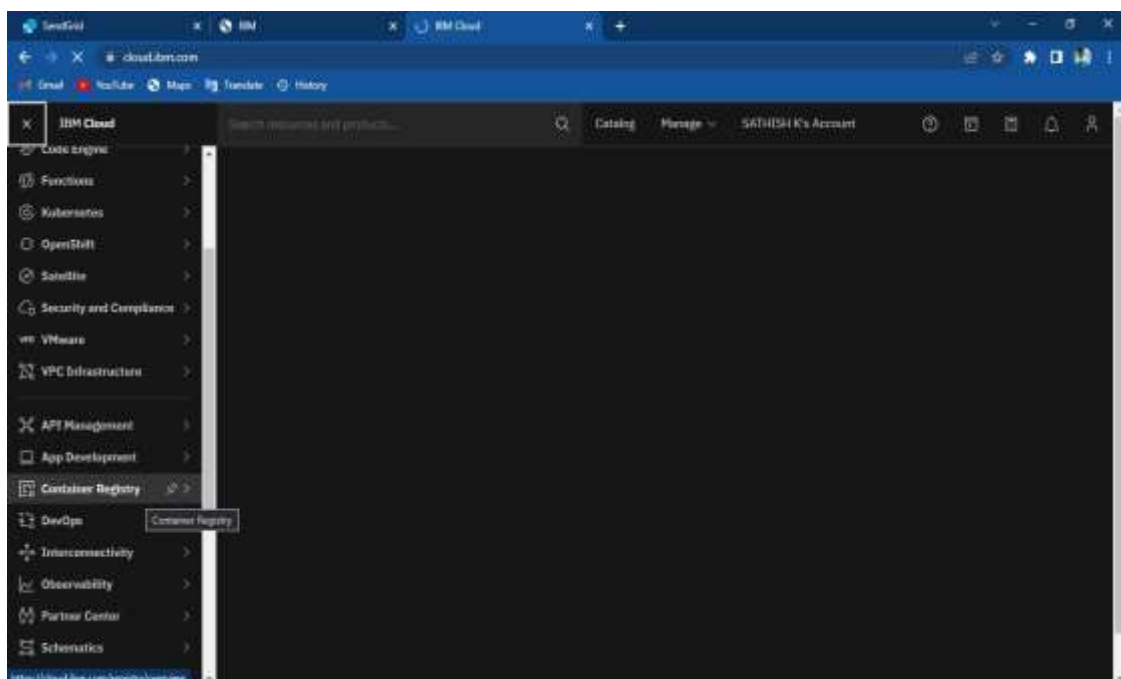


Step3: Select Quickstart to open container registry and click on install IBM Cloud CLI

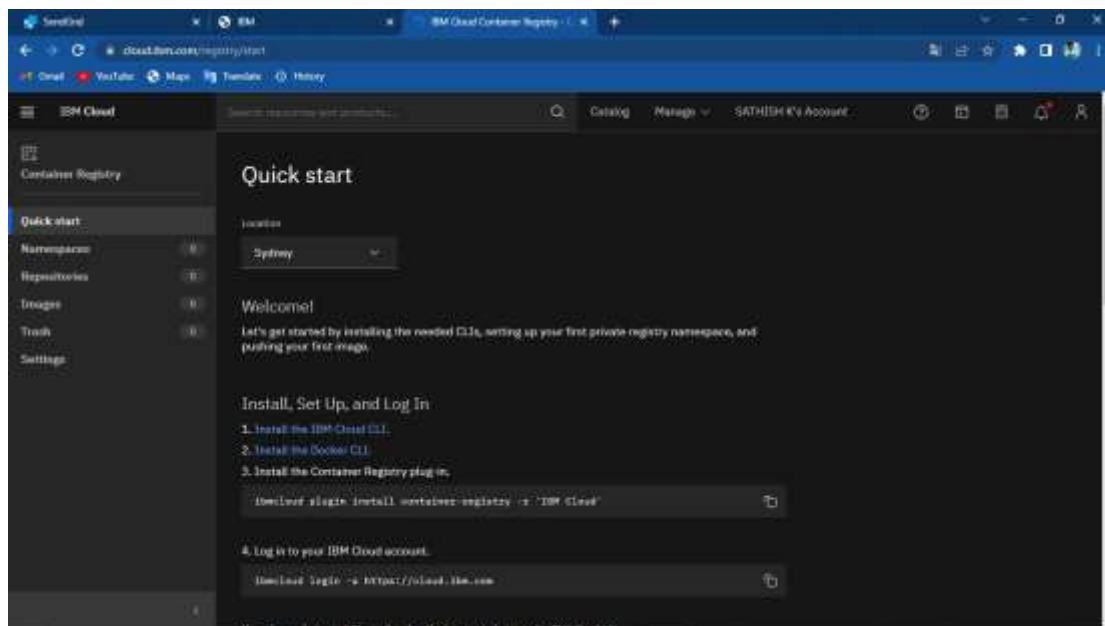


Step 4: Click on IBM Cloud CLI

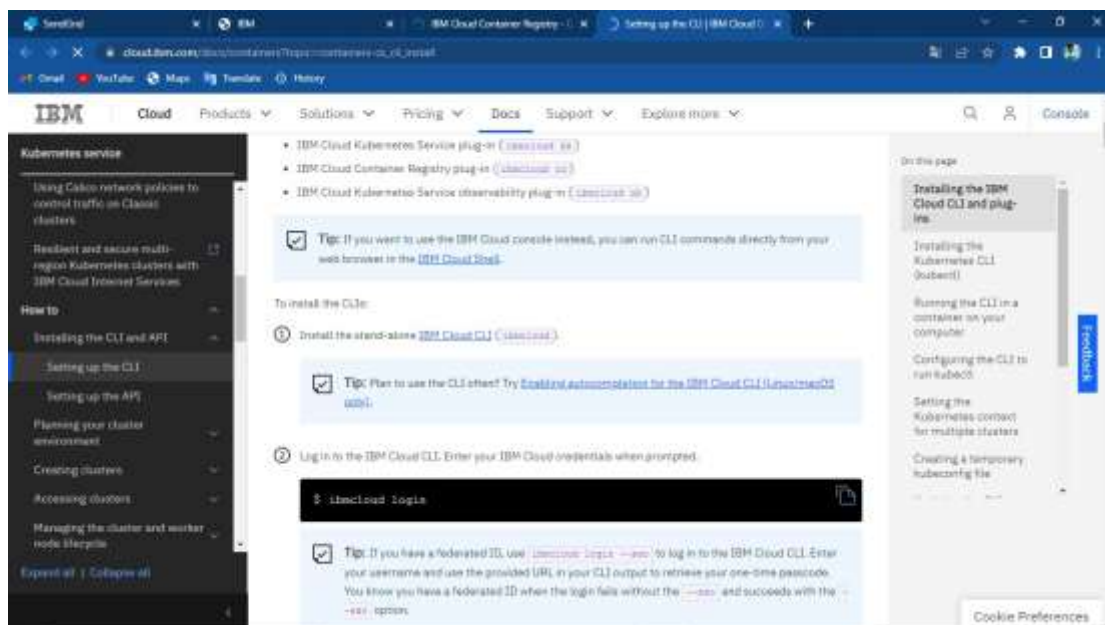



Step 5: Click on IBM Cloud CLI releases

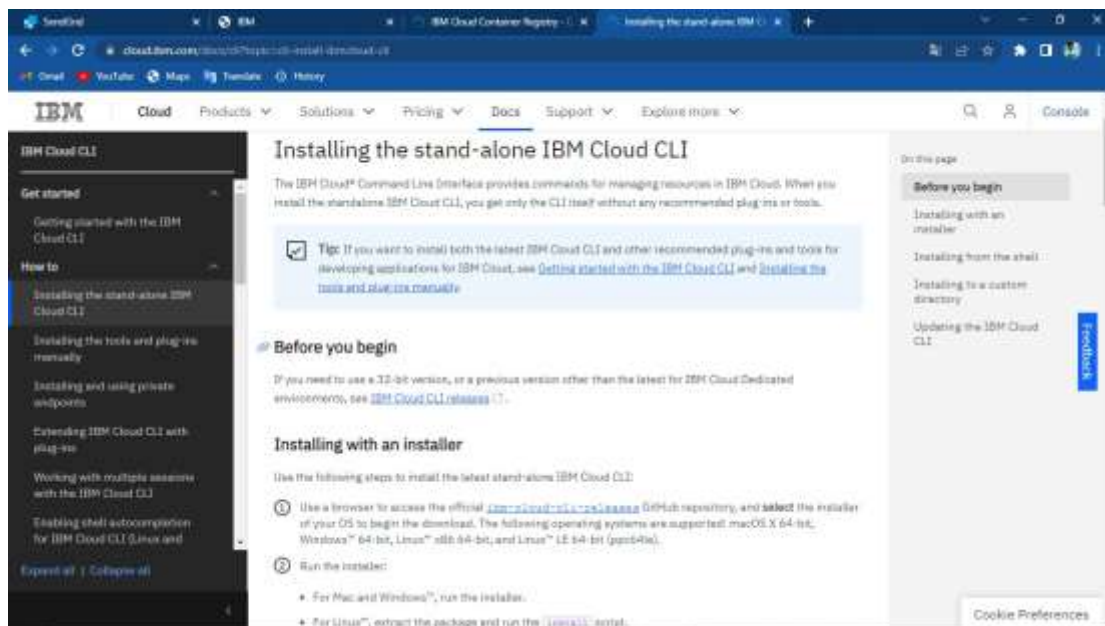

Step 6: then GitHub page will open and download the IBM CLI installer by selecting as per your system required installer.


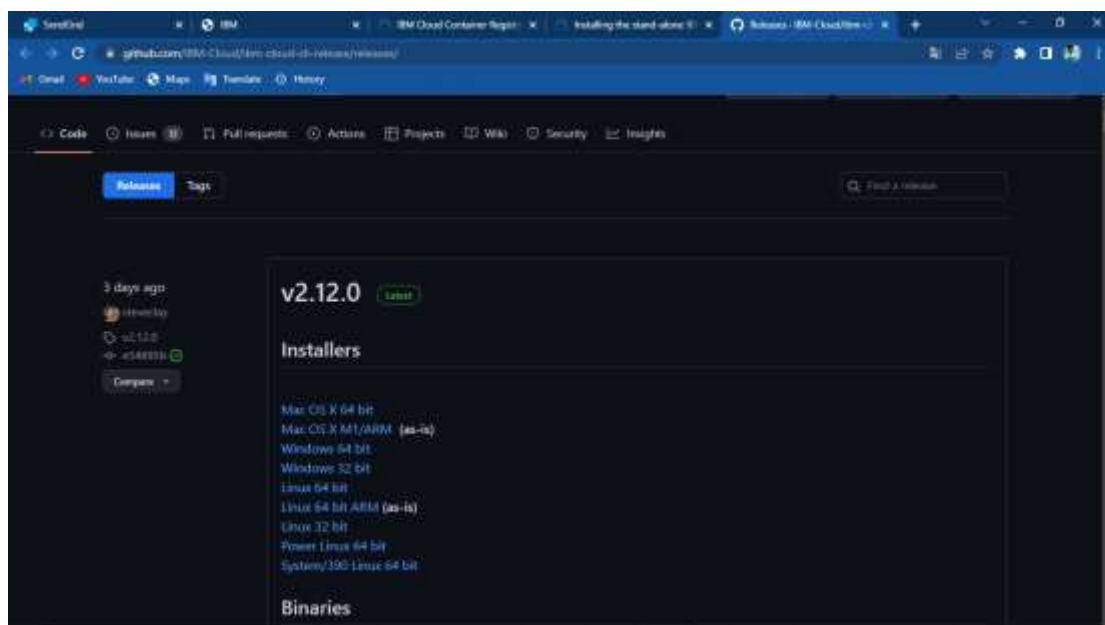


Step 7: After the download, Click the downloaded setup to run the installer

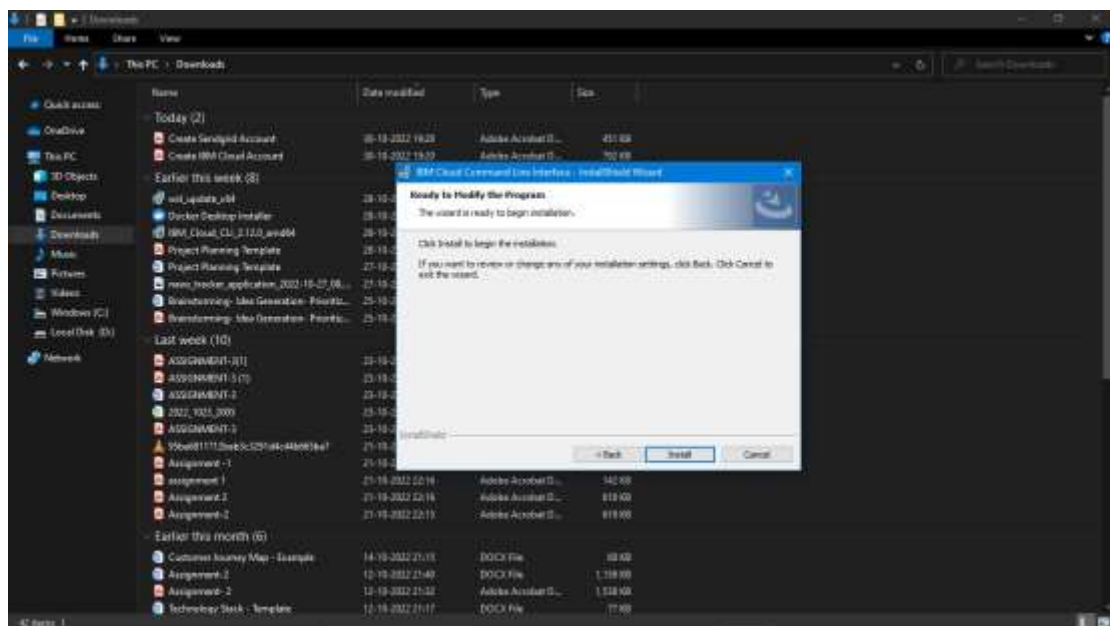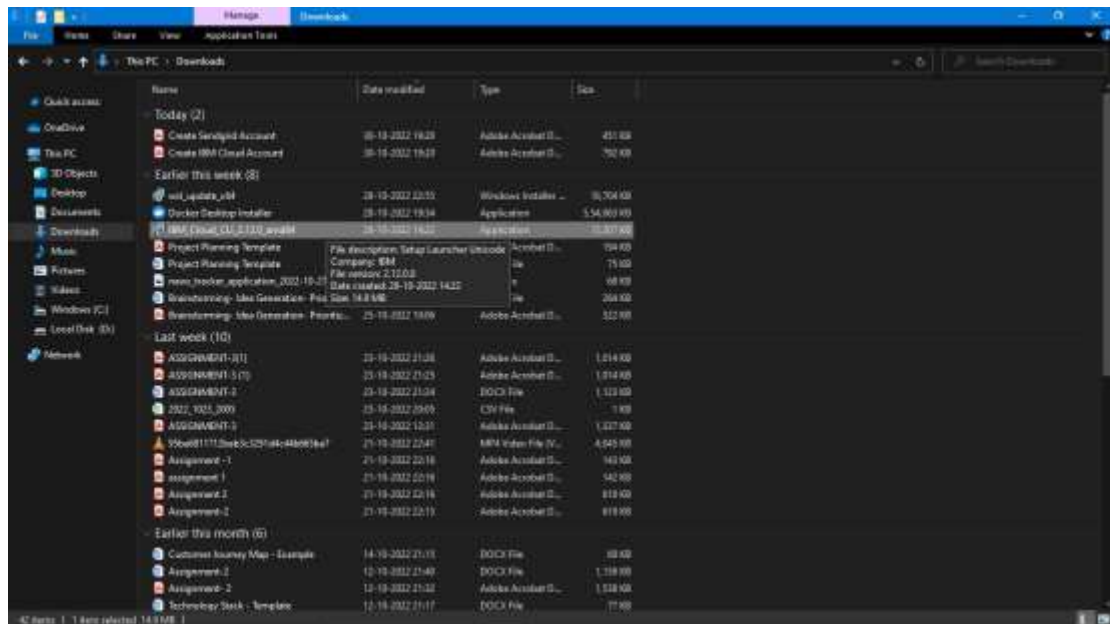

Step 8: After the installation set environment variable and then open CMD (Windows). Type this command to login in IBM cloud


“IBM cloud login”

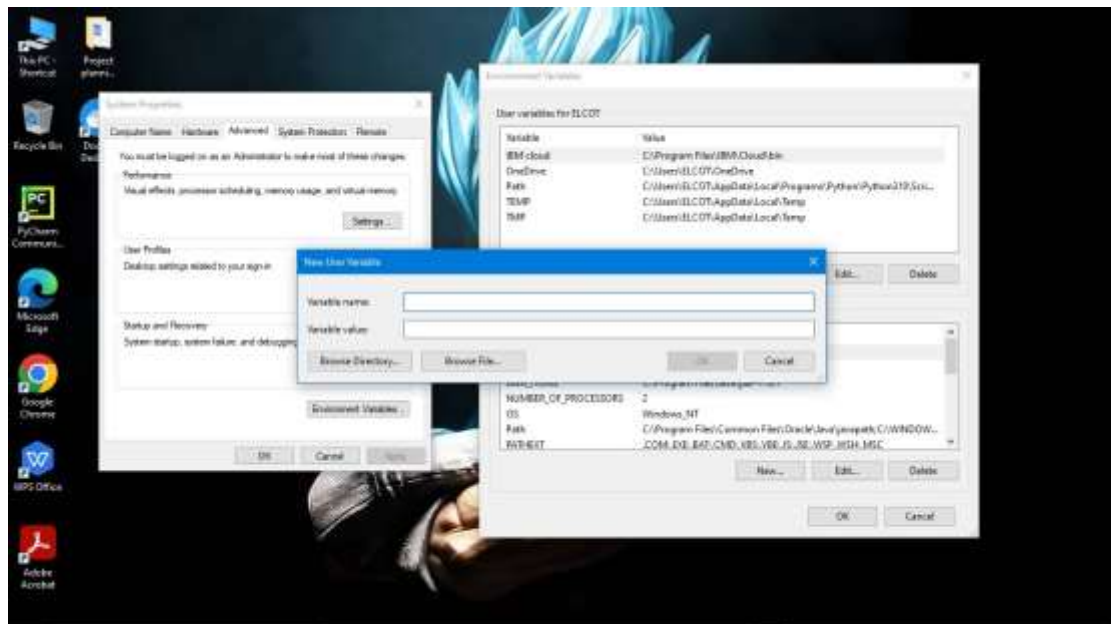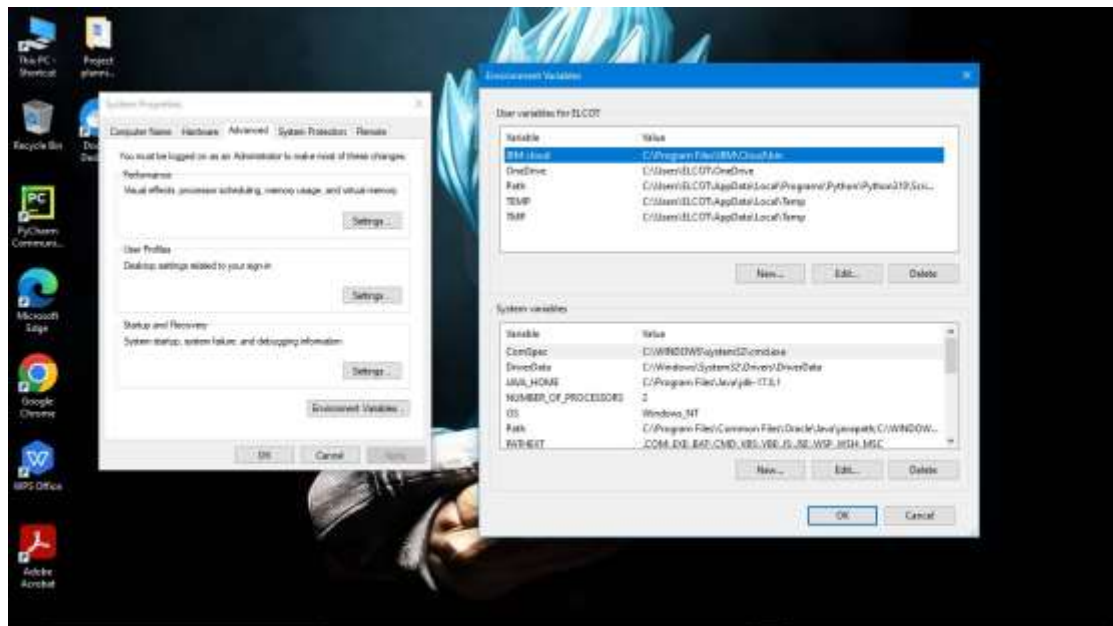

In the variable name, name it as “IBM Cloud” and in variable value the path location of the IBM.




Step 9: Enter your IBM cloud email id and password, Then it will authenticate and signals “OK” . The number of regions will displayed, select one of them for your targeted account.

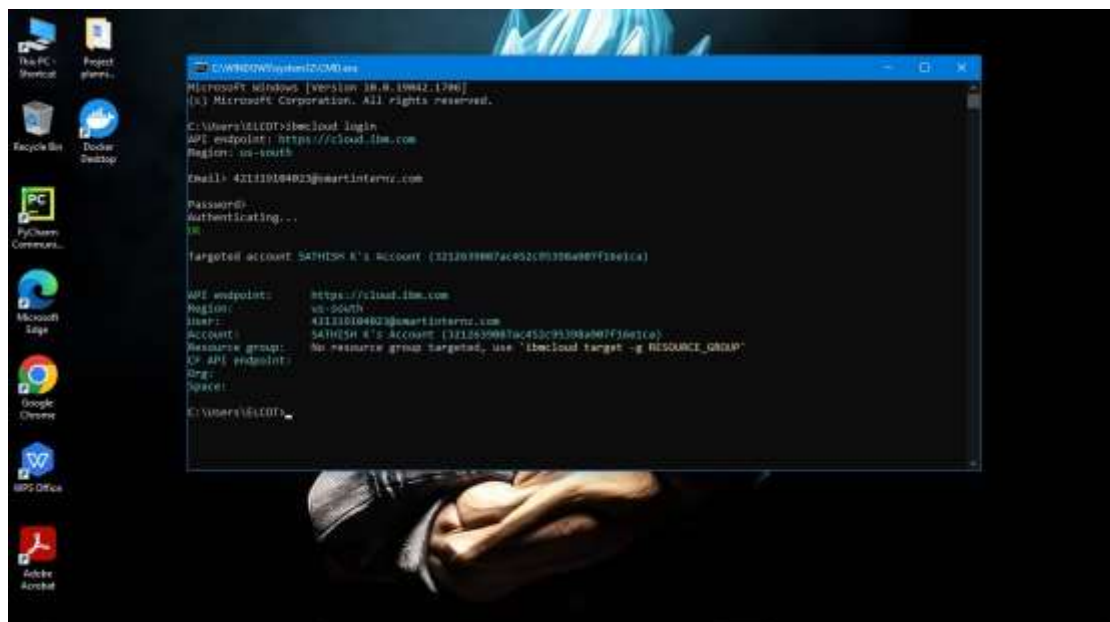


Step 10: Then copy the plugin command in your container registry (where the command displayed in your container registry which is opened on web browser) and paste and run it on cmd.

“IBM cloud plugin install container-registry -r”

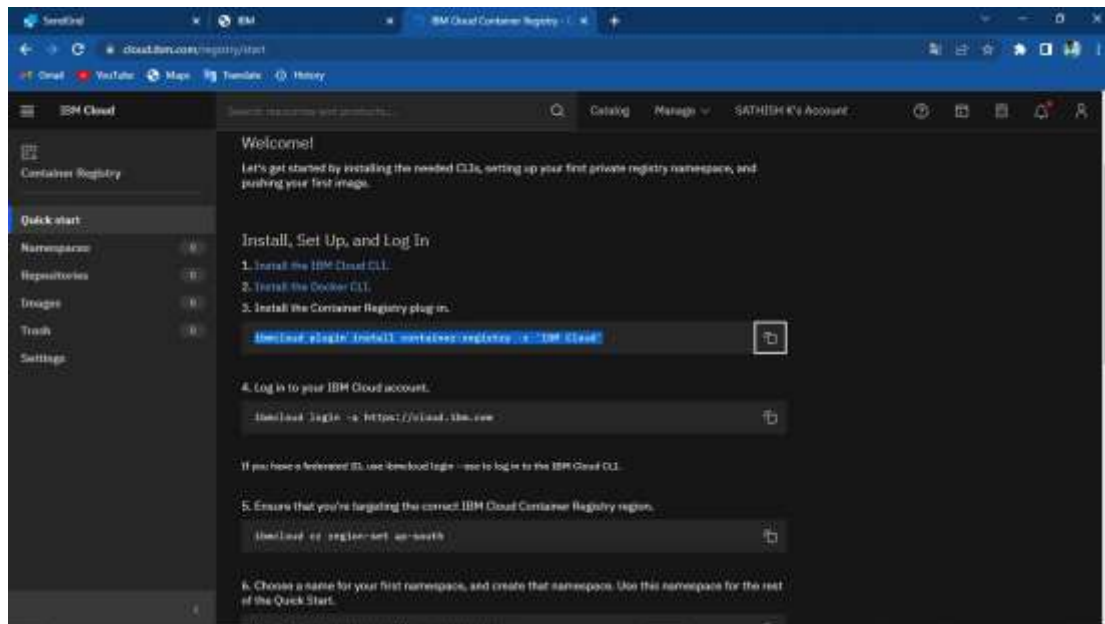

Step 11: Set your region to global.
“IBM cloud cr region-set global”

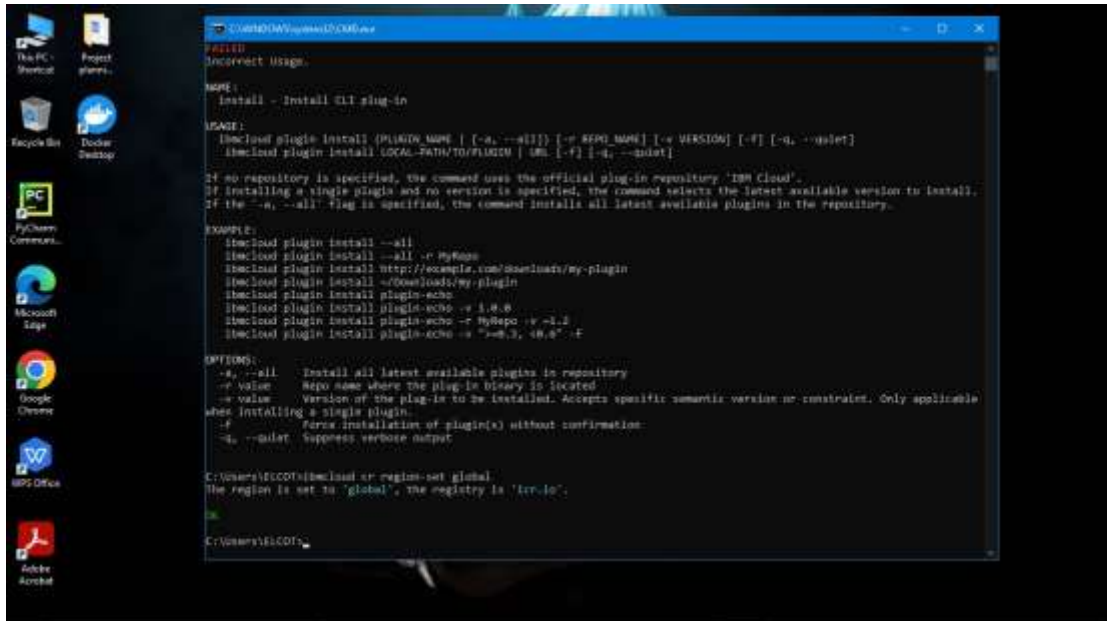

```
Failed
Incorrect Usage.

NAME:
  ibmcloud plugin install - Install CLI plug-in

USAGE:
  ibmcloud plugin install [PLUGIN NAME | [-a, --all]] [-r REPO NAME] [-v VERSION] [-f] [-q, --quiet]
  ibmcloud plugin install LOCAL_PATH/TO/PLUGIN | URL [-f] [-q, --quiet]

If no repository is specified, the command uses the official plug-in repository 'IBM Cloud'.
If installing a single plugin and no version is specified, the command selects the latest available version to install.
If the '-a, --all' flag is specified, the command installs all latest available plugins in the repository.

EXAMPLE:
  ibmcloud plugin install --all
  ibmcloud plugin install --all -r myrepo
  ibmcloud plugin install http://example.com/downloads/my-plugin
  ibmcloud plugin install ~/Downloads/my-plugin
  ibmcloud plugin install plugin-echo
  ibmcloud plugin install plugin-echo -r 1.0.0
  ibmcloud plugin install plugin-echo -r myrepo -v 1.0
  ibmcloud plugin install plugin-echo -r "v0.3, 0.6" -f

OPTIONS:
  -a, --all      Install all latest available plugins in repository
  -r value       Repo name where the plug-in binary is located
  -v value       Version of the plug-in to be installed. Accepts specific semantic version or constraints. Only applicable
when installing a single plugin.
  -f            Force installation of plugin(s) without confirmation.
  -q, --quiet    Suppress verbose output

C:\Users\ECCOT>ibmcloud cr region-set global.
The region is set to 'global', the registry is 'cr-global'.

C:\Users\ECCOT>
```

Step 12 : Create namespace in your container registry

