# **ASSIGNMENT 4**

Ultrasonic sensor simulation in Wokwi

Student Name	S.SELVA LAKSHMI
TEAM ID	PNT2022TMID17335
Maximum Marks	2 Marks

#### **Ouestion-1:**

Write a code and connections in wokwi for the ultrasonic sensor. Whenever the distance is less than 100 cms send an "Alert" to IBM cloud and display in the device recent events.

```
Code:
#include <WiFi.h>
#include
<PubSubClient.h>
void callback(char* subscribetopic, byte* payload, unsigned int
payloadLength); //----credentials of IBM Accounts-----
#define ORG "kotoq5"//IBM ORGANITION ID
#define DEVICE TYPE "ESP32"//Device type mentioned in ibm watson IOT
Platform#define DEVICE ID "12345"//Device ID mentioned in ibm watson IOT
Platform #define TOKEN "12345678" //Token
String data3;
char server[] = ORG ".messaging.internetofthings.ibmcloud.com";
char publishTopic[] = "iot-2/evt/Data/fmt/json";
char subscribetopic[] = "iot-2/cmd/test/fmt/String"; char
authMethod[] = "use-token-auth";
char token[] = TOKEN;
char clientId[] = "d:" ORG ":" DEVICE_TYPE ":" DEVICE_ID;
WiFiClient wifiClient;
PubSubClient client(server, 1883, callback, wifiClient);
const int trigPin = 5;
const int echoPin = 18;
```

#define SOUND\_SPEED 0.034long duration; float distance;

```
void setup() {
Serial.begin(115200);
pinMode(trigPin,
OUTPUT);
pinMode(echoPin,
INPUT);wificonnect();
mqttconnect();
void loop()
digitalWrite(trigPin, LOW);
delayMicroseconds(2);
digitalWrite(trigPin, HIGH);
delayMicroseconds(10);
digitalWrite(trigPin, LOW);
duration = pulseIn(echoPin, HIGH);
distance = duration *
SOUND SPEED/2;
Serial.print("Distance (cm): ");
Serial.println(distance);
if(distance<100)
Serial.println("ALERT!!");
delay(1000);
PublishData(distance);
delay(1000);
if (!client.loop()) {
mqttconnect();
delay(1000);
void PublishData(float dist) {
mqttconnect();
String payload = "{\"Distance\":";
```

```
payload += dist;
payload += ",\"ALERT!!\":""\"Distance less than 100cms\"";
payload += "}";
Serial.print("Sending payload: ");
Serial.println(payload);
if (client.publish(publishTopic, (char*) payload.c_str())) {
    Serial.println("Publish ok");
    } else {
        Serial.println("Publish failed");
    }
}
```


```
void mqttconnect() {
if (!client.connected()) {
Serial.print("Reconnecting client to ");
Serial.println(server);
while (!!!client.connect(clientId, authMethod, token)) {
Serial.print(".");
delay(500);
initManagedDevice();
Serial.println();
void wificonnect()
Serial.println(); Serial.print("Connecting
to "); WiFi.begin("Wokwi-GUEST", "",
6); while (WiFi.status() !=
WL_CONNECTED) {delay(500); Serial.print(".");
Serial.println("");
Serial.println("WiFi connected");
Serial.println("IP address: ");
Serial.println(WiFi.localIP());
void initManagedDevice() {
if (client.subscribe(subscribetopic)) {
Serial.println((subscribetopic));
Serial.println("subscribe to cmd OK");
 else 3
Serial.println("subscribe to cmd FAILED");
void callback(char* subscribetopic, byte* payload, unsigned int payloadLength)
Serial.print("callback invoked for topic: ");
Serial.println(subscribetopic);
```

```
for (int i = 0; i < payloadLength; i++) {
//Serial.print((char)payload[i]); data3
+= (char)payload[i];
}
Serial.println("data: "+ data3);</pre>
```

```
data3="";
}
```

### Diagram.json:

# **Circuit Diagram:**

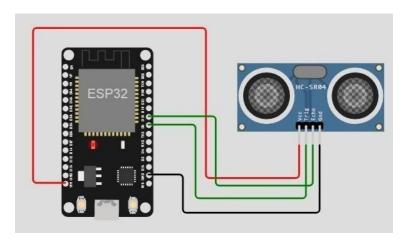

## **Output:**

## Wokwi output:

```
Connecting to ....
WiFi connected
IP address:
10.10.0.2
Reconnecting client to ytluse.messaging.internetofthings.ibmcloud.com
iot-2/cmd/test/fmt/String
subscribe to cmd OK

Distance (cm): 399.92
Distance (cm): 399.96
Distance (cm): 399.94
Distance (cm): 399.98
Distance (cm): 399.94
Distance (cm): 399.94
Distance (cm): 399.92
Distance (cm): 399.92
```

#### IBM cloud output:

