

filter nodes


Flow 2

common

- inject
- debug
- complete
- catch
- status
- link in
- link call
- link out
- comment

function

- function
- switch
- change

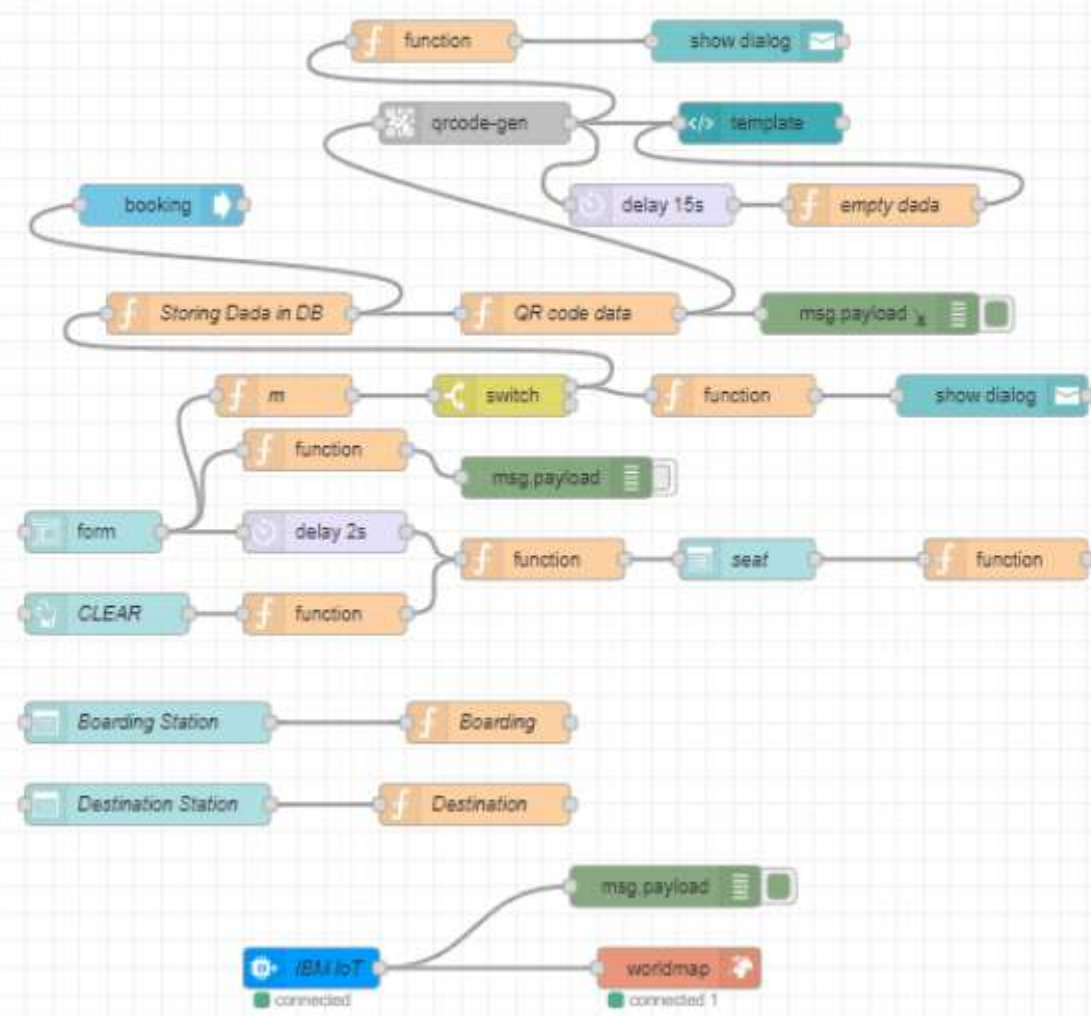

help

Search help

- Node-RED v2.2.3-git
- Node Help
 - node-red
 - batch
 - catch
 - change

ibmiot in

Input node that can be used with Watson IoT Platform to receive events sent from devices, receive commands sent to devices, or receive status updates concerning devices or applications. It produces an object called `msg` and sets `msg.payload` to be a String containing the payload of the incoming message.

The value of "Device Id" is stored in `msg.deviceId`

The value of "Application Id" is stored in `msg.applicationId`

The value of "Device Type" is stored in `msg.deviceType`