

## SPRINT -1

<b>Team Id</b>	<b>PNT2022TMID16477</b>
<b>Project Name</b>	<b>Smart Farmer-IoT enabled smart farming application</b>
<b>TEAM</b>	<b>KANAGARAJ.P(TL)</b> <b>AKASH.R(™)</b> <b>MANOJKUMAR.R(™)</b> <b>MOUNIESH.M.K(™)</b>

### Code:

```
#include <WiFi.h>//library for wifi
#include <PubSubClient.h>//library for MQTT
#include "DHT.h"// Library for dht11
#define DHTPIN 15      // what pin we're connected to
#define DHTTYPE DHT22  // define type of sensor DHT 11
#define LED 2

DHT dht (DHTPIN, DHTTYPE);// creating the instance by passing pin and typr of dht
connected

void callback(char* subscribetopic, byte* payload, unsigned int payloadLength);

//-----credentials of IBM Accounts-----

#define ORG "mwjyar"//IBM ORGANITION ID
#define DEVICE_TYPE "abcd"//Device type mentioned in ibm watson IOT Platform
#define DEVICE_ID "1234"//Device ID mentioned in ibm watson IOT Platform
#define TOKEN "12345678"      //Token
String data3;
float h, t;

//----- Customise the above values -----
char server[] = ORG ".messaging.internetofthings.ibmcloud.com";// Server Name
char publishTopic[] = "iot-2/evt/Data/fmt/json";// topic name and type of event
perform and format in which data to be send
```

```

char subscribetopic[] = "iot-2/cmd/command/fmt/String";// cmd REPRESENT command
type AND COMMAND IS TEST OF FORMAT STRING
char authMethod[] = "use-token-auth";// authentication method
char token[] = TOKEN;
char clientId[] = "d:" ORG ":" DEVICE_TYPE ":" DEVICE_ID;//client id

//-----
WiFiClient wifiClient; // creating the instance for wificlient
PubSubClient client(server, 1883, callback ,wifiClient); //calling the predefined
client id by passing parameter like server id,portand wificredential

void setup()// configureing the ESP32
{
    Serial.begin(115200);
    dht.begin();
    pinMode(LED,OUTPUT);
    delay(10);
    Serial.println();
    wificonnect();
    mqttconnect();
}

void loop()// Recursive Function
{

    h = dht.readHumidity();
    t = dht.readTemperature();
    Serial.print("temp:");
    Serial.println(t);
    Serial.print("Humid:");
    Serial.println(h);

    PublishData(t, h);
    delay(1000);
    if (!client.loop()) {
        mqttconnect();
    }
}

/*.....retrieving to
Cloud.....*/

```

```

void PublishData(float temp, float humid) {
    mqttconnect();//function call for connecting to ibm
    /*
        creating the String in in form JSon to update the data to ibm cloud
    */
    String payload = "{\"temp\":";
    payload += temp;
    payload += "," " \"Humid\":";
    payload += humid;
    payload += "}";

    Serial.print("Sending payload: ");
    Serial.println(payload);

    if (client.publish(publishTopic, (char*) payload.c_str())) {
        Serial.println("Publish ok");// if it sucessfully upload data on the cloud
        then it will print publish ok in Serial monitor or else it will print publish
        failed
    } else {
        Serial.println("Publish failed");
    }
}

void mqttconnect() {
    if (!client.connected()) {
        Serial.print("Reconnecting client to ");
        Serial.println(server);
        while (!!!client.connect(clientId, authMethod, token)) {
            Serial.print(".");
            delay(500);
        }

        initManagedDevice();
        Serial.println();
    }
}

void wificonnect() //function defination for wificonnect
{
    Serial.println();
    Serial.print("Connecting to ");

    WiFi.begin("Wokwi-GUEST", "", 6);//passing the wifi credentials to establish the

```

```

connection
while (WiFi.status() != WL_CONNECTED) {
    delay(500);
    Serial.print(".");
}
Serial.println("");
Serial.println("WiFi connected");
Serial.println("IP address: ");
Serial.println(WiFi.localIP());
}

void initManagedDevice() {
    if (client.subscribe(subscribetopic)) {
        Serial.println((subscribetopic));
        Serial.println("subscribe to cmd OK");
    } else {
        Serial.println("subscribe to cmd FAILED");
    }
}

void callback(char* subscribetopic, byte* payload, unsigned int payloadLength)
{
    Serial.print("callback invoked for topic: ");
    Serial.println(subscribetopic);
    for (int i = 0; i < payloadLength; i++) {
        //Serial.print((char)payload[i]);
        data3 += (char)payload[i];
    }
    Serial.println("data: "+ data3);
    if(data3=="lighton")
    {
        Serial.println(data3);
        digitalWrite(LED,HIGH);
    }
    else
    {
        Serial.println(data3);
        digitalWrite(LED,LOW);
    }
    data3="";
}

```

# WOKWI SKETCH:


WOKWI

SAVE SHARE sketch.ino Docs

sketch.ino diagram.json libraries.txt Library Manager

```
1 #include <wifi.h> //library for wifi
2 #include <PubSubClient.h> //library for MQTT
3 #include "DHT.h" // Library for dht11
4 #define DHTPIN 15 // what pin we're connected to
5 #define DHTTYPE DHT22 // define type of sensor DHT 11
6 #define LED 2
7
8 DHT dht (DHTPIN, DHTTYPE); // creating the instance by passing pin and type of dht connect
9
10 void callback(char* subscribetopic, byte* payload, unsigned int payloadLength);
11
12 //-----credentials of IBM Accounts-----
13
14 #define ORG "mcjyar" //IBM ORGANIZATION ID
15 #define DEVICE_TYPE "abcd" //Device type mentioned in ibm watson IOT Platform
16 #define DEVICE_ID "1234" //Device ID mentioned in ibm watson IOT Platform
17 #define TOKEN "12345678" //Token
18 String data3;
19 float h, t;
20
21
22 //----- Customise the above values -----
23 char server[] = ORG ".messaging.internetofthings.ibmcloud.com"; // Server Name
24 char publishTopic[] = "iot-2/evt/Data/fmt/json"; // topic name and type of event perform a
25 char subscribetopic[] = "iot-2/cmd/command/fmt/String"; // cmd REPRESENT command type AND
26 char authMethod[] = "use-token-auth"; // authentication method
27 char token[] = TOKEN;
28 char clientId[] = "d:" ORG ":" DEVICE_TYPE ":" DEVICE_ID; //client id
29
30
31 //-----
32 WiFiClient wificlient; // creating the instance for wificlient
33 PubSubClient client(server, 1883, callback, wificlient); //calling the predefined client
34
```

Simulation

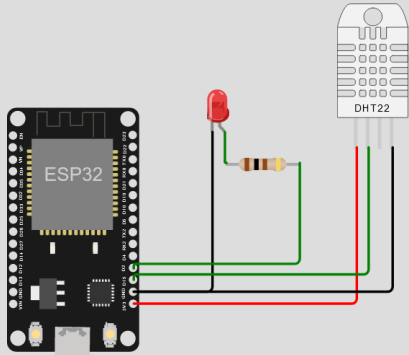

# JSON FLOW:


WOKWI

SAVE SHARE sketch.ino Docs

sketch.ino diagram.json libraries.txt Library Manager

```
1 {
2   "version": 1,
3   "author": "Kanagaraj P",
4   "editor": "wokwi",
5   "parts": [
6     { "type": "wokwi-esp32-devkit-v1", "id": "esp", "top": 4.8, "left": -127.69, "attrs": {} },
7     { "type": "wokwi-dht22", "id": "dht1", "top": -76.72, "left": 137.76, "attrs": {} },
8     {
9       "type": "wokwi-led",
10      "id": "led1",
11      "top": -16.04,
12      "left": 21.83,
13      "attrs": { "color": "red" }
14    },
15    {
16      "type": "wokwi-resistor",
17      "id": "r1",
18      "top": 41.63,
19      "left": 48.17,
20      "attrs": { "value": "100" }
21    }
22  ],
23  "connections": [
24    [ "esp:TX0", "$serialMonitor:RX", "", [ ] ],
25    [ "esp:RX0", "$serialMonitor:TX", "", [ ] ],
26    [ "dht1:VCC", "esp:3V3", "red", [ "v0" ] ],
27    [ "dht1:GND", "esp:GND.1", "black", [ "v0" ] ],
28    [ "led1:A", "r1:1", "green", [ "v0" ] ],
29    [ "led1:C", "esp:GND.1", "black", [ "v0" ] ],
30    [ "dht1:SDA", "esp:D15", "green", [ "v101.76", "h-2.06" ] ],
31    [ "r1:2", "esp:D2", "green", [ "v80.85", "h-3.49" ] ]
32  ]
33 }
```

Simulation

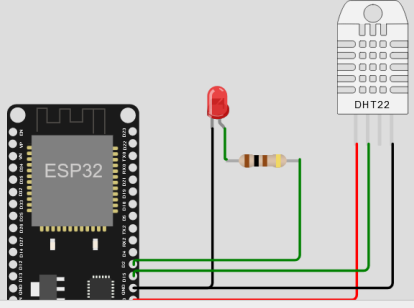

Connecting to .....  
WiFi connected  
IP address:  
10.10.0.2  
Reconnecting client to mwjyar.messaging.internetofthings.ibmcloud.com  
....

# LIBRARIES:


WOKWI

SAVE SHARE sketch.ino Docs

sketch.ino diagram.json libraries.txt Library Manager

```
1 # Wokwi Library List
2 # See https://docs.wokwi.com/guides/libraries
3
4 # Automatically added based on includes:
5 DHT sensor library
6 PubSubClient
7 ArduinoJson
```

Simulation

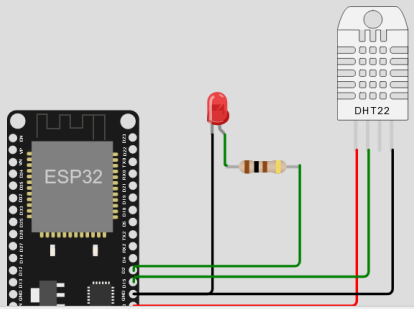

Connecting to .....  
WiFi connected  
IP address:  
10.10.0.2  
Reconnecting client to mwjyar.messaging.internetofthings.ibmcloud.com  
....