#### **CUSTOMER CARE REGISTRY**

Project Name : Customer Care Registry

Project Domain : Cloud Application Development

College : Paavai college of engineering

College SPOC : Mr.L.vasanth M.E,Ph.D,.

Team ID : **PNT2022TMID41783** 

Team Size : 4

Manikandan

R. Sudhagar

Team Members

J. Sivachidambaram

M. Rararajan

Team Mentor : Mr.V.Sundhararaj M.E, Ph.D,.

Team Evaluator : Mr.P.Gopinathan M.E.,

Github Link : <u>Click Here</u>

# **TABLE OF CONTENTS**

Chapter No.	Title	Page No.
	INTRODUCTION	
1	1.1 Project Overview	3
	1.2 Project Purpose	3
	LITERATURE SURVEY	
2	2.1 Existing Problem	4
	2.2 References	4
	2.3 Problem Statement Definition	4
	IDEATION AND PROPOSED SOLUTION	
	3.1 Empathy Map Canvas	5
3	3.2 Ideation and Brainstorming	6
	3.3 Proposed Solution	8
	3.4 Problem Solution Fit	9
	REQUIREMENT ANALYSIS	
4	4.1 Functional Requirements	10
	4.2 Non-functional Requirements	11
	PROJECT DESIGN	
5	5.1 Data Flow Diagram	12
	5.2 Solution and Technical Architecture	13
	5.3 User Stories	14

PROJECT PLANNING AND SCHEDULING	
6.1 Sprint Planning and Estimation	16
6.2 Sprint Delivery Schedule	17
6.3 Reports from JIRA	18
CODING AND SOLUTIONING	
7.1 Admin assigning an agent to a ticket	20
7.2 Customer closing a ticket	21
7.3 Database Schema	22
TESTING	
8.1 Test Cases	23
8.2 User Acceptance Testing	24
RESULTS	
9.1 Performance Metrics	25
ADVANTAGES AND DISADVANTAGES	26
CONCLUSION	27
	6.2 Sprint Delivery Schedule 6.3 Reports from JIRA  CODING AND SOLUTIONING  7.1 Admin assigning an agent to a ticket  7.2 Customer closing a ticket  7.3 Database Schema  TESTING  8.1 Test Cases  8.2 User Acceptance Testing  RESULTS  9.1 Performance Metrics  ADVANTAGES AND DISADVANTAGES

12	FUTURE SCOPE	27
13	APPENDIX	28
14	Source Code	29
15	GitHub Link and Project Demo Link	38

#### 1. INTRODUCTION

#### 1.1 PROJECT OVERVIEW

#### **Short Description:**

This Application has been developed to help the customer in processing their complaints. The customers can raise the ticket with a detailed description of the issue. An Agent will be assigned to the Customer to solve the problem. Whenever the agent is assigned to a customer, they will be notified with an email alert. Customers can view the status of the ticket till the service is provided.

**Admin**: The main role and responsibility of the admin are to take care of the whole process. Starting from Admin login followed by the agent creation and assigning the customer's complaints. Finally, He will be able to track the work assigned to the agent and a notification will be sent to the customer.

**User**: They can register for an account. After the login, they can create the complaint with a description of the problem they are facing. Each user will be assigned with an agent. They can view the status of their complaint.

#### 1.2 PURPOSE

The purpose of the whole project is to:

- Provide a common platform to the customers to clarify their queries
- Having expert agents in the platform for better answering
- Customer's tickets (queries) are answered quickly by the agents
- · Customers and Agents can chat with one another for better understanding
- While doing so, the former asks questions
- Later, answers those questions as quickly and as legitimately as possible
- Customers can raise as many tickets as they want
- Customers and Agents can also submit their feedbacks to the Admin, for the betterment of the platform

#### 2. LITERATURE SURVEY

#### 2.1 Existing Problem

- Reviews and rating in the e-commerce websites are not reliable
- Even more so, they are often been given by the manufactures themselves
- Reviews are not from the authentic individuals
- After buying the products, I am left with no option to clear my doubts
- There is no common platform available to us, the customers, to have our doubts cleared
- If it is existing, we are not getting fast replies. By the time, the reply comes, the issue might have been cleared or of not worth of being cleared to the customers

#### **2.2 References**

https://www.helpdesk.com/

https://freshdesk.com/helpdesk-software

https://freshdesk.com/resources/case-study/hamleys

https://pulsedesk.com/

https://www.redpoints.com/blog/amazon-fake-reviews/

#### 2.3 Problem Statement Definition


I am Surya and I am a regular customer in famous e-commerce websites like Amazon, Flipkart. I order regularly. The problem I have is that in most times, I don't have any reliable sources to clear my doubts in some of the products I buy.

There are reviews and customer ratings in those websites, but somehow, I don't feel they are authentic and real. It would make my world if those replies were from a real expert, and I could clarify all my doubts in a single platform. Of course, I would need instant replies from a real expert who knows about the products I am asking for.

#### 3. IDEATION AND PROPOSED SOLUTION

#### 3.1 Empathy Map Canvas

- Empathy Map is a simple, easy-to-digest visual that captures knowledge about a user's behaviours and attitudes
- It is a useful tool to help teams to better understand their users
- Creating an effective solution requires understanding the true problem and the person who us experiencing it
- The exercise of creating the map helps participants consider things from the user's perspective along with his or her goals and challenges

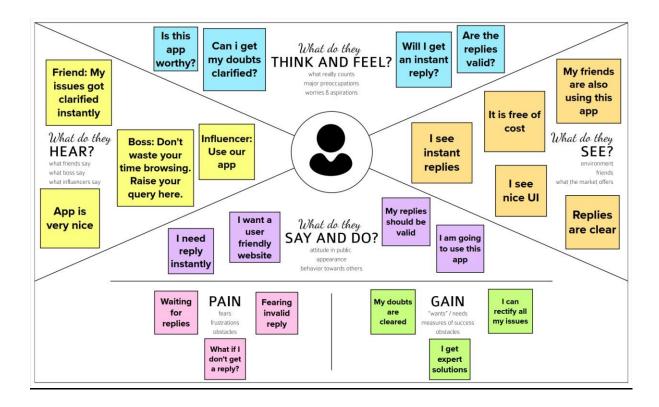

#### 3.2 Ideation and Brainstorming

Brainstorming provides a free and open environment that encourages everyone within a team to participate in the creative thinking process that leads to problem solving. Prioritizing volume over value, out-of-the-box ideas are welcome and built upon, and all participants are encouraged to collaborate, helping each other develop a rich number of creative solutions

**Step-1**: Team Gathering, Collaboration and Select the Problem Statement

**Team Gathering:** 


Team Members					
Team Leader	Manikandan A				
	Sudhagar R				
Team Members	Rajarajan M				
	Sivachidambaram J				

# **Problem Statement:**


I am Surya and I am a regular customer in famous e-commerce websites like Amazon, Flipkart. I order regularly. The problem I have is that in most times, I don't have any reliable sources to clear my doubts in some of the products I buy.

There are reviews and customer ratings in those websites, but somehow, I don't feel they are authentic and real. It would make my world if those replies were from a real expert, and I could clarify all my doubts in a single platform. Of course, I would need instant replies from a real expert who knows about the products I am asking for.

Step-2: Brainstorm, Idea Listing and Grouping

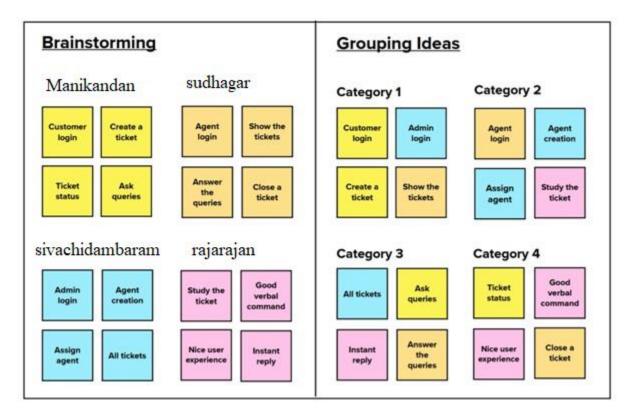

#### **Prioritization**

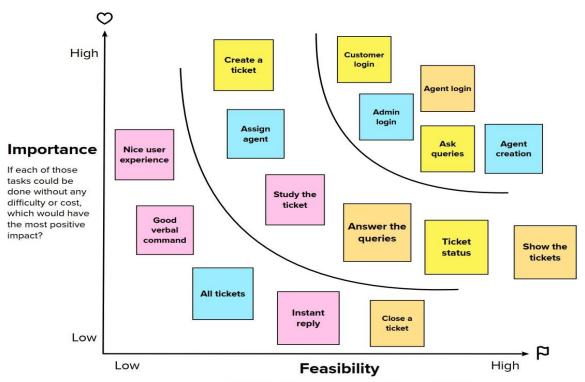


Regardless of their importance, which tasks are more feasible than others? (Cost, time, effort etc.,)

# 3.3 Proposed Solution

S. No.	Parameter	Description
•	Problem Statement (Problem to be solved)	I am Surya and I am a regular customer in famous ecommerce websites like Amazon, Flipkart. I order regularly. The problem I have is that in most times, I don't have any reliable sources to clear my doubts in some of the products I buy.  There are reviews and customer ratings in those websites, but somehow, I don't feel they are authentic and real. It would make my world if those replies are from a real expert and I could clarify all my doubts in a single platform. Of course, I would need instant replies from a real expert who knows about the products I am asking for.
•	Idea / Solution description	Creating a Customer Care Registry, where the customers can raise their queries in form of tickets. An agent will be assigned to them for replying/clarifying their issue.
•	Novelty / Uniqueness	The agents are experts in the product domain and they will communicate well with the customers
•	Social Impact / Customer Satisfaction	Customers will be satisfied with the instant and valid replies. Also, it creates a doubtless society, that boosts sales.
•	Business Model (Revenue Model)	Customers can be charged a minimal amount based on the number of queries (tickets) they can rise in a said period of time.
•	Scalability of the Solution	May be in the future, may be a cross-platform mobile application may be developed, making this customer care registry much more accessible to the users.

### 3.4 Problem Solution Fit.

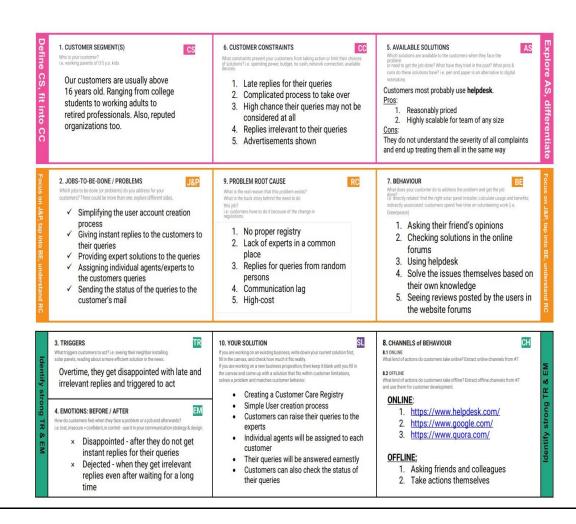

# 4. REQUIREMENT ANALYSIS

# 4.1 Functional Requirements

- A functional requirement defines a function of a system or its component, where a function is described as a specification of behaviour between inputs and outputs.
- It specifies "what should the software system do?"
- Defined at a component level
- Usually easy to define
- Helps you verify the functionality of the software

FR No.	Functional Requirement	Sub Requirement (Story / Sub-Task)		
	(Epic)			
FR-1	User Registration	Registration through Signup form (customer)		
FR-2	Forgot Password	Resetting the password by sending an OTP to user's mail (customer, agent, admin)		
FR-3	User Login	Login through Login form (customer, agent, user)		
FR-4	R-4 Agent creation (admin) Create an agent profile with username, en password			
FR-5	Dashboard (customer)	Show all the tickets raised by the customer		
FR-6	Dashboard (agent)	Show all the tickets assigned to the agent by admir		
FR-7	Dashboard (Admin) Show all the tickets raised in the entire			
FR-8	Ticket creation (customer)	Customer can raise a new ticket with the detailed description of his/her query		
FR-9	Assign agent (admin)	Assigning an agent for the created ticket		
FR-10	Ticket details (customer)	. Showing the actual query, status, assigned agent details 2. Status of the ticket		
FR-11	Address Column	Agent clarifies the doubts of the customer		

# 4.2 Non-functional Requirements


- A non-functional requirement defines the quality attribute of a software system
- It places constraint on "How should the software system fulfil the functional requirements?"
- It is not mandatory
- Applied to system as a whole
- Usually more difficult to define
- Helps you verify the performance of the software

FR	Non-Functional	Description
No.	Requirement	
NFR-1	Usability	Customers can use the application in almost all the web
		browsers. Application is with good looking and detailed
		UI, which makes it more friendly to use.
NFR-2	Security	Customers are asked to create an account for themselves
		using their email which is protected with an
		8 character-long password, making it more secure.
NFR-3	Reliability	Customers can raise their queries and will be replied with
		a valid reply, as soon as possible, making the application
		even more reliable and trust-worthy.
NFR-4	Performance	Customers will have a smooth experience while using
		the application, as it is simple and is well optimised.
NFR-5	Availability	Application is available 24/7 as it is hosted on IBM
		Cloud
NFR-6	Scalability	In future, may be cross-platform mobile applications can
		be developed as the user base grows.

# 5. PROJECT


# DESIGN 5.1

# Dataflow Diagram:

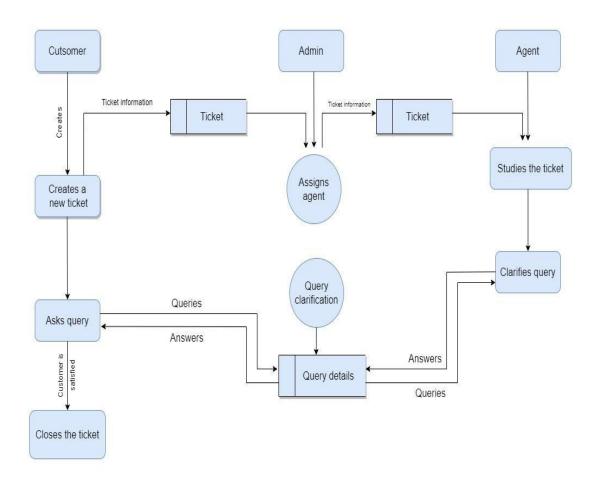


# 5.2 Solution and Technical Architecture

#### Solution Architecture

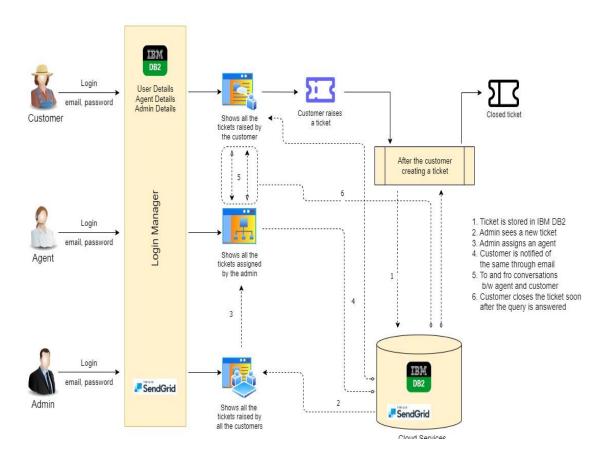

**Technical Architecture** 

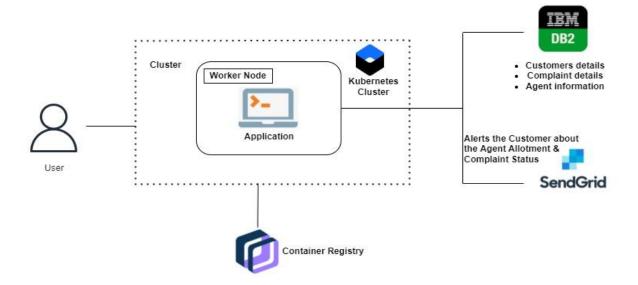

	Functional	User					
User Type	Requirement	tStory	User Story / Task	Acceptance criteria	Priority	Release	
	(Epic)	Number		Citteria			
Customer (Web user)	Registration	USN-1	As a customer, I can register for the application by entering my email, password, and confirming my password.	I can access my account / dashboard	High	Sprint-1	
	Login	USN-2	As a customer, I can login to the application by entering correct email and password	I can access my	High	Sprint-1	
	Dashboard	USN-3	As a customer, I can see all the tickets raised by me and lot more	needed in	High	Sprint-1	
	Ticket creation	USN-4	As a customer, I can create a new ticket with the detailed description of my query	I can ask my query	High	Sprint-2	
	Address Column	USN-5	As a customer, I can have conversations with the assigned agent and get my queries clarified	My queries are	High	Sprint-3	
	Forgot password	USN-6	As a customer, I can reset my password by this option in case I forgot my old password	I get access to my account again	Medium	Sprint-4	

	Ticket details	USN-7	As a customer, I can see the current status of my tickets	I get better understanding	Medium	Sprint-4
Agent (Web user)	Login	USN-1	As an agent, I can login to the application by entering correct email and password	I can access my account / dashboard	High	Sprint-3
	Dashboard	USN-2	As an agent, I can see all the tickets assigned to me by the admin	I can see the tickets to which I could answer	High	Sprint-3
	Address Column	USN-3	As an agent, I get to have conversations with the customer and clear his/her queries	I can clarify the issues	High	Sprint-3
	Forgot password	USN-4	As an agent, I can reset my password by this option in case I forgot my old password	I get access to my account again	Medium	Sprint-4
Admin (Web user)	Login	USN-1	As an admin, I can login to the application by entering correct email and password	I can access my account / dashboard	High	Sprint-1
	Dashboard	USN-2	As an admin, I can see all the tickets raised in the entire system and lot more	I can assign agents by seeing those tickets	High	Sprint-1

Agent creation	USN-3	As an admin, I can create an agent for clarifying the customer's queries	I can create agents	High	Sprint-2
Assigning agent	USN-4	As an admin, I can assign an agent for each ticket created by the customer	Enables agent to clarify the queries	High	Sprint-2
Forgot password	USN-4	As an admin, I can reset my password by this option in case I forgot my old password		Medium	Sprint-4

# **5.3** User Stories

# 6. PROJECT DESIGN AND PLANNING

Sprint	User Type	Functional Requireme nt (Epic)	User Story Numb er	User Story / Task	Story Points	Priori ty	Team Members
Sprint-1	Custom er (Web User)	Registration	USN-1	As a customer, I can register for the application by entering my email, password, and confirming my password.	2	High	Manikandan, Sudhagar.
Sprint-1		Login	USN-2	As a customer, I can login to the application by entering correct email and password	1	High	Manikandan.
Sprint-1		Dashboard	USN-3	As a customer, I can see all the tickets raised by me and lot more	3	High	Maniakandan, Sudhagar, Siva.
Sprint-2		Ticket creation	USN-4	As a customer, I can create a new ticket with the detailed description of my query	2	High	Manikandan, Sudhagar.
Sprint-3		Address Column	USN-5	As a customer, I can have conversations with the assigned agent and get my queries clarified	3	High	Manikandan, Sudhagar, Rajarajan.
Sprint-4		Forgot password	USN-6	As a customer, I can reset my password by this option in case I forgot my old password	2	Mediu m	Manikandan, Rajarajan.
Sprint-4		Ticket details	USN-7	As a customer, I can see the current status of my tickets	2	Mediu m	Manikandan, Sudhagar.
Sprint-3	Agent (Web user)	Login	USN-1	As an agent, I can login to the application by entering correct email	2	High	Manikandan, Siva.

				and password			
Sprint-3		Dashboard	USN-2	As an agent,I can see all the tickets assigned to me by the admin	3	High	Manikandan.
Sprint-3		Address Column	USN-3	As an agent, I get to have conversations with the customer and clear his/her queries	3	High	Manikandan, Rajarajan, Siva.
Sprint	User Type	Functional Requiremen t (Epic)	USN	User Story / Task	Story Points	Priorit y	Team Members
Sprint-4		Forgot password	USN-4	As an agent, I can reset my password by this option in case I forgot my old password	2	Mediu m	Sudhagar, Siva.
Sprint-1	Admin (Web user)	Login	USN-1	As an admin, I can login to the application by entering correct email and password	1	High	Manikandan.
Sprint-1		Dashboard	USN-2	As an admin, I can see all the tickets raised in the entire system and lot more	3	High	Sudhagar.
Sprint-2		Agent creation	USN-3	As an admin, I can create an agent for clarifying the customer's queries	2	High	Manikandan.
Sprint-2		Assigning agent	USN-4	As an admin, I can assign an agent for each ticket created by the customer	3	High	Rajarajan, Siva.
Sprint-4		Forgot password	USN-4	As an admin, I can reset my password by this option in case I forgot my old password	2	Mediu m	Manikandan,

# 6.2 Sprint Delivery Plan


Sprint	Total Story Points	Duration	Sprint Start Date	Sprint End Date (Planned)	Story Points  Completed (as on  Planned End  Date)	Sprint Release Date (Actual)
Sprint-	10	6 Days	24 Oct 2022	29 Oct 2022	10	29 Oct 2022
Sprint-	7	6 Days	31 Oct 2022	05 Nov 2022	7	05 Nov 2022
Sprint-	11	4 Days	06 Nov 2022	11 Nov 2022	11	09 Nov 2022
Sprint-	8	4 Days	10 Nov 2022	15 Nov 2022	8	13 Nov 2022

# 6.3 Reports from JIRA

## Sprint 1 - Burndown Chart


#### **Burndown Chart**



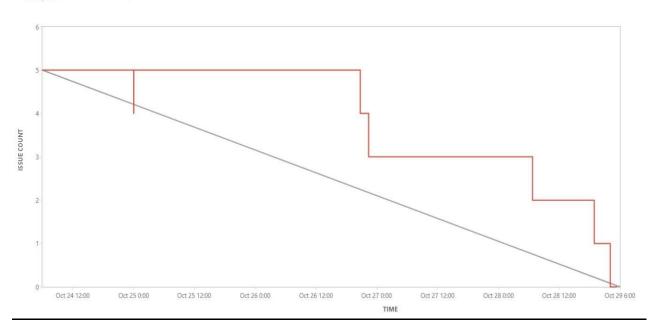

# Sprint 2 – Burndown Chart


#### **Burndown Chart**

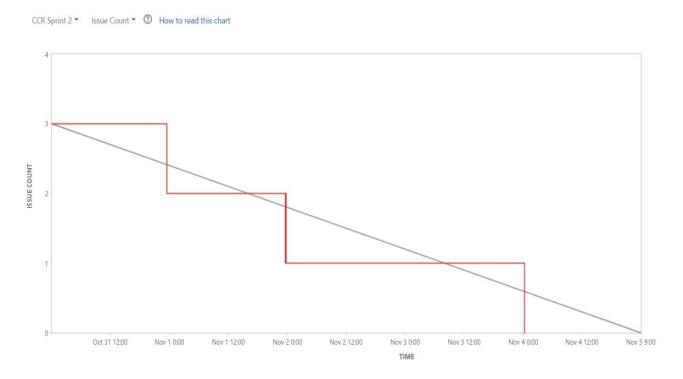

Sprint 3 – Burndown Chart

#### **Burndown Chart**


CCR Sprint 3 ▼ Issue Count ▼ ② How to read this chart

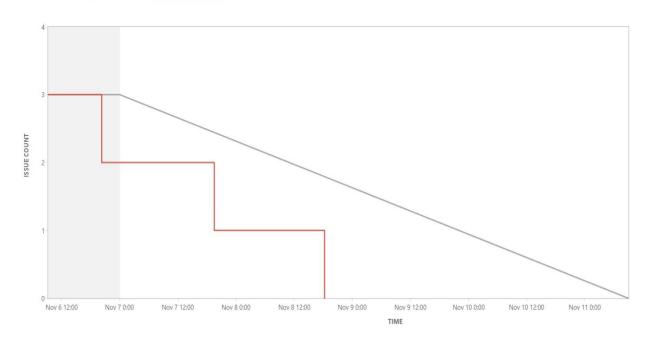

#### Sprint 4 – Burndown Chart

#### **Burndown Chart**

CCR Sprint 4 ▼ Issue Count ▼ ② How to read this chart

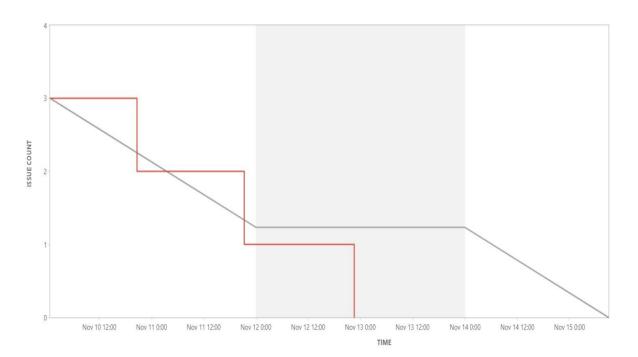

#### 7. CODING AND SOLUTIONING

#### 7.1 Admin assigning an agent to a ticket

#### Code:

```
@admin.route('/admin/update/<agent_id>/<ticket_id>')
@login_required
def assign(agent_id, ticket_id):
       Assigning an agent to the ticket
   from .views import admin
    if(hasattr(admin, 'email')):
       # query to update the ASSIGNED TO of a ticket
       assign_agent_query = '''
         UPDATE tickets SET assigned_to = ? WHERE ticket_id = ?
        stmt = ibm_db.prepare(conn, assign_agent_query)
        ibm_db.bind_param(stmt, 1, agent_id)
       ibm_db.bind_param(stmt, 2, ticket_id)
       ibm db.execute(stmt)
        return "None"
    else:
       # logging out
        return redirect(url_for('blue_print.logout'))
```

#### Explanation:

- User creates a ticket by describing the query
- Admin views the newly created ticket in the dashboard
- In the dropdown given, admin selects an agent
- Once selected, using fetch() the request is sent to the server
- The request URL contains both the Ticket ID and the selected Agent ID
- Using the shown SQL query, the assigned\_to column of the tickets
- table is set to agent\_id where the ticket\_id column = ticket\_id
- Then, the dashboard of the admin gets refreshed

#### **7.2 Customer closing a ticket** Code:

```
@cust.route('/customer/close/<ticket id>/')
@login_required
def close(ticket_id):
       Customer can close the ticket
       :param ticket_id ID of the ticket that should be closed
    from .views import customer
    if(hasattr(customer, 'uuid')):
        # query to close the ticket
        close_ticket = '''
          UPDATE tickets SET query_status = ? WHERE ticket_id = ?
        stmt = ibm_db.prepare(conn, close_ticket)
        ibm db.bind param(stmt, 1, "CLOSED")
       ibm_db.bind_param(stmt, 2, ticket_id)
       ibm db.execute(stmt)
       return redirect(url_for('customer.tickets'))
    else:
       # logging out
        return redirect(url_for('blue_print.logout'))
```


#### **Explanation:**

- User creates a ticket by describing the query
- Admin assigns an agent to this ticket
- The customer and the agent, chat with each other, in the view of clearing the customer's doubts
- Once the customer is satisfied, the customer decides to close the ticket
- Using fetch() the request is sent to the server. The requested URL contains the Ticket ID
- Using the shown SQL query, the status of the ticket is set to "CLOSED"
- Thus the ticket is closed
- Then the customer gets redirected to the all-tickets page

#### 7.3 Database Schema

A database schema is the skeleton structure that represents the logical view of the entire database. It defines how the data is organized and how the relations among them are associated. It formulates all the constraints that are to be applied on the data.

A database schema defines its entities and the relationship among them. It contains a descriptive detail of the database, which can be depicted by means of schema diagrams. It's the database designers who design the schema to help programmers understand the database and make it useful.

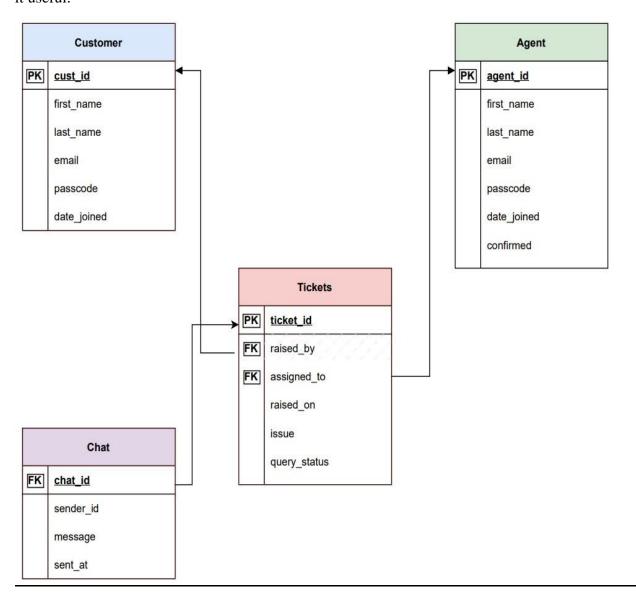

#### 8. TESTING

#### 8.1 Test Cases

The test case is defined as a group of conditions under which a tester determines whether a software application is working as per the customer's requirements or not. Test case designing includes preconditions, case name,

input conditions, and expected result. A test case is a first level action and derived from test scenarios.

Test case gives detailed information about testing strategy, testing process, preconditions, and expected output. These are executed during the testing process to check whether the software application is performing the task for that it was developed or not.

Test case helps the tester in defect reporting by linking defect with test case ID. Detailed test case documentation works as a full proof guard for the testing team because if developer missed something, then it can be caught during execution of these full-proof test cases.

To write the test case, we must have the requirements to derive the inputs, and the test scenarios must be written so that we do not miss out on any features for testing. Then we should have the test case template to maintain the uniformity, or every test engineer follows the same approach to prepare the test document.

#### **Test Cases Performed:**

- 1. Sprint 1
  - Click Here
- 2. Sprint 2
  - Click Here
- 3. Sprint 3
  - Click Here
- 4. Sprint 4
  - Click Here
- 5. Test Cases Report

#### Click Here

# **8.2 User Acceptance Testing**

#### 1. Purpose of Document

The purpose of this document is to briefly explain the test coverage and open issues of the **Customer Care Registry** project at the time of the release to User Acceptance Testing (UAT).

#### 2. Defect Analysis

This report shows the number of resolved or closed bugs at each severity level, and how they were resolved

Resolution	Severity 1	Severity 2	Severity 3	Severity 4	Subtotal
By Design	5	0	0	2	7
External	0	2	0	0	2
Fixed	12	11	35	45	103
Not Reproduced	0	5	0	0	5
Skipped	0	0	0	0	0
Totals	17	18	35	47	117

#### 3. Test Case Analysis

This report shows the number of test cases that have passed, failed, and untested


Section	Total Cases	Not Tested	Fail	Pass
Client Application	72	0	0	72
Security	7	0	0	7
Exception Reporting	5	0	0	5
Final Report Output	4	0	0	4

#### 9. RESULTS

# 9.1 Performance Metrics:


# CPU usage:

- Since all the operations run using Flask is in server-side, the client (browser) need not worry about the CPU usage. Just rendering the page, static contents take place in the client-side.
- Memory for client-side functions (Javascript) is allocated using heap. It can be either increased based upon the requirement or removed from the heap.

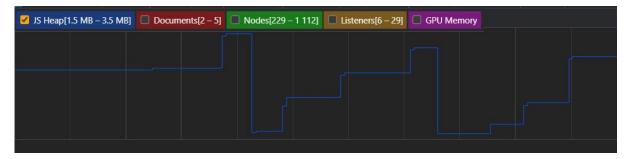

## **Errors:**

Since all the backend functions are done using flask, any exceptions / errors
rising are wellhandled. Though they appear, user's interaction with the site is
not affected in any way

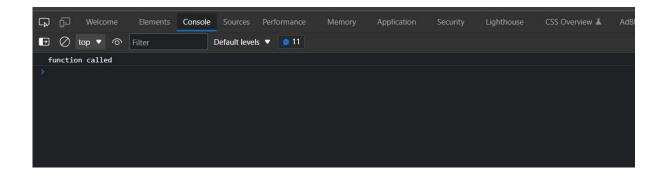

#### **Latency and Response time:**

It takes less than a second to load a page in the client. From this it is evident that there is low latency

11 requests 238 kB transferred 285 kB resources Finish: 892 ms DOMContentLoaded: 810 ms Load: 905 ms

#### 10. ADVANTAGES AND DISADVANTAGES

#### **Advantages:**

- Customers can clarify their doubts just by creating a new ticket
- Customer gets replies as soon as possible
- Not only the replies are faster, the replies are more authentic and practical
- Customers are provided with a unique account, to which the latter can login at any time
- Very minimal account creation process
- Customers can raise as many tickets as they want
- Application is very simple to use, with well-known UI elements
- Customers are given clear notifications through email, of all the processes related lo login, ticket creation etc.,
- Customers' feedbacks are always listened and free of cost

#### Disadvantages:

× Only web application is available right now (as of writing)

- × UI is not so attractive, it's just simple looking
- × No automated replies
- × No SMS alerts
- × Supports only text messages while chatting with the Agent
- × No tap to reply feature
- × No login alerts
- × Cannot update the mobile number
- × Account cannot be deleted, once created
- × Customers cannot give feedback to the agent for clarifying the queries

#### 11. CONCLUSION

Thus, there are many customer service applications available on the internet. Noting down the structural components of those applications and we built a customer care registry application. It will be a web application build with Flask (Python micro-web framework), HTML, JavaScript. It will be a ticket-based customer service registry. Customers can register into the application using their email, password, first name and lastname. Then, they can login to the system, and raise as tickets as they want in the form of their tickets. These tickets will be sent to the admin, for which an agent is assigned. Then, the assigned agent will have a one-to-one chat with the customer and the latter's queries will be clarified. It is also the responsibility of the admin, to create an agent.

#### 12. FUTURE SCOPE

Our application is not finished yet. There are many rooms for improvement. Some of

them will be improved in the future versions

• Attracting and much more responsive UI throughout the application

- Releasing cross-platform mobile applications
- Incorporating automatic replies in the chat columns
- Deleting the account whenever customer wishes to
- Supporting multi-media in the chat columns
- Creating a community for our customers to interact with one another
- Call support
- Instant SMS alerts

#### 13. APPENDIX

- Flask:
- Flask is a micro web framework written in Python. It is classified as a microframework because it does not require particular tools or libraries
- It has no database abstraction layer, form validation, or any other components where pre-existing third-party libraries provide common functions
- JavaScript:
- JavaScript, often abbreviated as JS, is a programming language that is one of the core technologies of the World Wide Web, alongside HTML and CSS
- As of 2022, 98% of websites use JavaScript on the client side for webpage behavior, often incorporating third-party libraries
- <u>IBM Cloud:</u>
- IBM cloud computing is a set of cloud computing services for business offered by the information technology company IBM
- <u>Kubernetes:</u>
- Kubernetes is an open-source container orchestration system for automating software deployment, scaling, and management
- Docker:

• Docker is a set of platforms as a service product that use OS-level virtualization to deliver software in packages called containers

### **SOURCE CODE (Only Samples)**

alert('{{ message }}')

```
base,html
<!DOCTYPE html>
<html lang="en">
<head>
  <meta charset="UTF-8">
  <meta http-equiv="X-UA-Compatible" content="IE=edge">
  <meta name="viewport" content="width=device-width, initial-scale=1.0">
  <title>{% block title %}{% endblock %}</title>
  <link rel="icon" type="image" href="{{ url_for('static', filename='images/cart logo</pre>
white-modified.png') }}">
  <!-- Linking css, js, Google fonts -->
  k rel="preconnect" href="https://fonts.googleapis.com">
  k rel="preconnect" href="https://fonts.gstatic.com" crossorigin>
  <link rel="stylesheet" href="{{ url_for('static', filename='css/style.css') }}"/>
  link
href="https://fonts.googleapis.com/css2?family=Roboto:ital,wght@0,100;0,300;0,400;
0,500;0,700;0,900;1,100;1,300;1,400
                                                 ;1,500;1,700;1,900&display=swap"
rel="stylesheet">
  <script src="{{ url_for('static', filename='js/pass.js') }}"></script>
              rel="stylesheet"
                                    href="https://cdnjs.cloudflare.com/ajax/libs/font-
awesome/4.7.0/css/font-awesome.min.css">
  <!-- Linking Watson Assistant -->
  {% block watson %}
  {% endblock %}
</head>
<body>
  {% block alert %}
    { % if to_show % }
                              <script>
```

```
</script>
    { % endif % }
  {% endblock %}
  {% block main %}
  {% endblock %}
</body>
</html>
login.html:
{% extends 'base.html' %}
{% block title %}
  Login
{% endblock %}
{% block main %}
  <div class="bg-main-div">
    <section class="login-section">
<div class="login-div">
<div class="login-header">
<img src="{{ url_for('static', filename='images/cart logo white.png') }}" class="login-</pre>
img" alt="logo" />
                              <h2>Sign in</h2>
Use your Registry Account
</div>
<div class="login-remind">
<form action="{{ url_for('blue_print.login') }}" method="POST" class="login-
form">
<label>Email</label>
<input type="email" required value="{{ email }}" name="email" placeholder="Enter</pre>
your email"/>
<label>Password</label>
<input type="password" required value="{{ password }}" name="password"</pre>
id="password-input" placeholder="Enter your password"/>
<div class="show-pass-div">
```

```
<input type="checkbox" onclick="showPassword()" style="height: 20px;"/>
Show Password
</div>
<div class="role-div">
Role : 
<div>
<div>
<input type="radio" style="height: 20px;" value="Customer" checked name="role-</pre>
check"/>
Customer
</div>
<div>
<input type="radio" style="height: 20px;" value="Agent" name="role-check"/>
Agent
</div>
</div>
</div>
<button class="submit-btn" type="submit">Login</button>
             <div>
                <!-- {{ url_for('blue_print.forgot') }} -->
                <a href="{{ url_for('blue_print.forgot') }}" class="links">Forgot
Password?</a> <br>
                  <a href="{{ url_for('blue_print.register') }}" class="links">Don't
have an account yet? Register</a>
                </div>
             </div>
           </form>
         </div>
       </div>
    </section>
  </div>
{% endblock %}
```

#### address.html:

```
{% extends 'base.html' %}
{% block title %}
  Address Column
{% endblock %}
{% block main %}
  <div class="dashboard-div">
    <nav>
       <div class="dash-nav">
         <div>
            <div class="dash-img-text">
              { % if user == "AGENT" % }
                 <a href="{{ url_for('agent.assigned') }}">
                   <i class="fa fa-arrow-left" aria-hidden="true"></i>
                 </a>
                 <img src="{{ url_for('static', filename='images/cust profile.png') }}"</pre>
class="img-in-nav" alt="logo"/>
                                              {% else %}
                <a href="{{ url_for('customer.tickets') }}">
                   <i class="fa fa-arrow-left" aria-hidden="true"></i>
</a>
                 <img src="{{ url_for('static', filename='images/agent.png') }}"</pre>
class="img-in-nav" alt="logo"/>
              {% endif %}
              <h3>{{ name }}</h3>
            </div>
         </div>
         <div>
            <div style="align-items: center;">
              {% if value == "True" % }
                 {% if user == "CUSTOMER" %}
                   <a href="/customer/close/{ { id } }"><button class="logout-
btn">CLOSE TICKET</button></a>
                 {% endif %}
              {% endif %}
            </div>
```

```
</div>
       </div>
    </nav>
    <div class="chat-body">
       <div class="chat-contents" id="content">
         {% if msgs_to_show %}
           {% for chat in chats %}
              {% if chat['SENDER_ID'] == sender_id %}
                <div class="message-sent">{{ chat['MESSAGE'] }}</div>
              {% else %}
                <div class="message-sent received">{{ chat['MESSAGE'] }}</div>
              {% endif %}
           {% endfor %}
         {% endif %}
       </div>
       <div class="chat-input-div">
         {% if value == "True" %}
           <form method="POST" action="{{ post_url }}">
              <input name="message-box" class="chat-input" type="text"</pre>
placeholder="Type something" required/>
              <button type="submit" class="chat-send">
                <i class="fa fa-paper-plane-o" aria-hidden="true"></i>
              </button>
           </form>
         {% else %}
           <div>
              {% if user == "CUSTOMER" %}
<h4>You closed this ticket. Chats are disabled</h4>
              {% else %}
                <h4>{{ name }} closed this ticket. Chats are disabled</h4>
              {% endif %}
           </div>
         {% endif %}
       </div>
    </div>
  </div>
```

```
{% endblock %}
chat.py:
from flask import render_template, Blueprint, request, session, redirect, url_for import
ibm_db from datetime import datetime import time
chat = Blueprint("chat_bp", __name__)
@chat.route('/chat/<ticket_id>/<receiver_name>/', methods = ['GET', 'POST']) def
address(ticket_id, receiver_name):
    Address Column - Agent and Customer chats with one another
    : param ticket_id ID of the ticket for which the chat is being opened
    : param receiver_name Name of the one who receives the texts, may be Agent /
Customer
  ,,,
  # common page for both the customer and the agent
  # so cannot use login_required annotation
  # so to know who signed in, we have to use the session user = ""
                                                                      sender_id =
    value = "" can trust = False
  post_url = f'/chat/{ticket_id}/{receiver_name}/'
  if session['LOGGED_IN_AS'] is not None:
                                                 if session['LOGGED_IN_AS'] ==
"CUSTOMER":
       # checking if the customer is really logged in
       # by checking, if the customer has uuid attribute
       from .views import customer
                                            user = "CUSTOMER"
       if(hasattr(customer, 'uuid')):
sender_id = customer.uuid
                                   can\_trust = True
```

```
# logging out the so called customer return redirect(url_for('blue_print.logout'))
```

elif session['LOGGED\_IN\_AS'] == "AGENT":

else:

```
# checking if the agent is really logged in
                                                       # by checking, if the agent
has uuid aatribute
                         from .views import agent
       if (hasattr(agent, 'uuid')):
                                          user = "AGENT"
                                                                     sender_id =
agent.uuid
                    can\_trust = True
     else:
       # Admin is the one who logged in
       # admin should not see the chats, sp directly logging the admin out
return redirect(url_for('blue_print.logout'))
    to\_show = False
                          message = ""
     if can trust:
       # importing the connection string
                                                from .views import conn
       if request.method == 'POST':
         # chats are enabled, only if the ticket is OPEN
                                                                # getting the data
collected from the customer / agent
                                            myMessage =
request.form.get('message-box')
         if len(myMessage) == 0:
            to_show = True
                                        message = "Type something!"
else:
            # inserting the message in the database
            # query to insert the message in the database
message_insert_query = "
              INSERT INTO chat
                 (chat_id, sender_id, message, sent_at)
              VALUES
                (?,?,?,?)
                                         try:
              stmt = ibm_db.prepare(conn, message_insert_query)
ibm_db.bind_param(stmt, 1, ticket_id)
                                                    ibm_db.bind_param(stmt, 2,
sender id)
                         ibm_db.bind_param(stmt, 3, myMessage)
ibm_db.bind_param(stmt, 4, datetime.now())
              ibm_db.execute(stmt)
            except:
```

```
to_show = True
                                            message = "Please send again!"
         return redirect(post_url)
                   else:
         # method is GET
         # retrieving all the messages, if exist from the database
                                                                       msgs_to_show =
False
         # query to get all the messages for this ticket
                                                              get_messages_query
= ""
               SELECT * FROM chat
                                                     WHERE chat_id = ?
           ORDER BY sent at ASC
         # query to check if the ticket is still OPEN
                                                            query_status_check = "
            SELECT query_status FROM tickets WHERE ticket_id = ?
         ,,,
          try:
           # first checking if the ticket is OPEN
            check = ibm_db.prepare(conn, query_status_check)
ibm_db.bind_param(check, 1, ticket_id)
                                                  ibm_db.execute(check)
           value = "True" if ibm_db.fetch_assoc(check)['QUERY_STATUS'] ==
"OPEN" else "False"
           # getting all the messages concerned with this ticket
                                                                          stmt =
ibm_db.prepare(conn, get_messages_query)
                                                      ibm_db.bind_param(stmt, 1,
ticket_id)
                     ibm_db.execute(stmt)
           messages = ibm_db.fetch_assoc(stmt)
                                                            messages_list = []
            while messages != False:
              messages_list.append(messages)
                                                            print(messages)
              messages = ibm_db.fetch_assoc(stmt)
            # then some messages exist in this chat
                                                              if len(messages_list)
> 0:
                  msgs\_to\_show = True
```

```
elif len(messages list) == 0 and value == "True":
             # ticket is OPEN
             # but no messages are sent b/w the customer and the agent
msgs\_to\_show = False
                                   to_show = True
             message = f'Start the conversation with the {"Customer" if user ==
"AGENT" else "Agent"}'
         except:
           to_show = True
           message = "Something happened! Try Again"
         return render_template(
           'address.html',
                                      to_show = to_show,
                                                                      message =
message,
                                                          chats = messages_list,
           id = ticket_id,
msgs\_to\_show = msgs\_to\_show,
                                                          sender_id = sender_id,
name = receiver_name,
                                  user = user,
                                                             post_url = post_url,
value = value
  else:
    # logging out whoever came inside the link
                                                                           return
redirect(url_for('blue_print.logout'), user = user)
__init__.py:
from flask import Flask, session from flask_login import LoginManager
def create_app():
              Flask(__name__)
                                                app.config['SECRET_KEY']
  app
"PHqtYfAN2v@CCR2022"
  # registering the blue prints with the app
                                                from .routes.views import views
app.register_blueprint(views, appendix='/')
  from .routes.cust import cust app.register_blueprint(cust, appendix='/customer/')
  from .routes.admin import admin app.register_blueprint(admin, appendix='/admin/')
```

```
from .routes.agent import agent app.register_blueprint(agent, appendix='/agent/')
  from .routes.chat import chat
                                 app.register_blueprint(chat, appendix='/chat/')
setting up the login manager
                                             login_manager = LoginManager()
login_manager.login_view = "blue_print.login"
                                               login_manager.init_app(app)
                                         def load_user(id):
                                                                               if
  @login_manager.user_loader
session.get('LOGGED_IN_AS') is not None:
                                                    if session['LOGGED_IN_AS']
== "CUSTOMER":
         from .routes.views import customer
         if hasattr(customer, 'first_name'):
           return customer
      elif session['LOGGED_IN_AS'] == "AGENT":
         from .routes.views import agent
         if hasattr(agent, 'first_name'):
           return agent
      elif session['LOGGED_IN_AS'] == "ADMIN":
         from .routes.views import admin
         if hasattr(admin, 'email'):
           return admin
     else:
       return None
  return app
```

#### GITHUB AND PROJECT DEMO LINK

#### Github Rep Link:

https://github.com/IBM-EPBL/IBM-Project-36993-1660299473

# ANY QUERIES.....?