### Sprint -4

#### **TEAM ID: PNT2022TMID12173**

#### Node js installation:


Download the Node. is source code or a pre-built installer for your platform, and start developing today.



Configure command prompt for error check .open node-red from the generated link:

```
node-red
                                                                                                                                                                                                                     П
                                                                                                                                                                                                                                 X
                                 [info] Node-RED version: v3.0.2
[info] Node.js version: v18.12.1
[info] Windows_NT 10.0.22000 x64 LE
[info] Loading palette nodes
[info] Settings file : C:\Users\ebin
[info] Context store : 'default' [n
[info] User directory : \Users\ebin
[warn] Projects directory : \Users\ebin
 10 Nov 11:15:19 -
10 Nov 11:15:19 -
10 Nov 11:15:19 -
                                              Loading palette nodes
Settings file : C:\Users\ebinp\.node-red\settings.js
Context store : 'default' [module=memory]
User directory : \Users\ebinp\.node-red
10 Nov 11:15:24 -
10 Nov 11:15:36 -
     Nov 11:15:36
10 Nov 11:15:36 -
                                  [warn]
[info]
[info]
     Nov 11:15:36 -
                                               Projects disabled : editorTheme.projects.enabled=false
10 Nov 11:15:36 -
10 Nov 11:15:36 -
                                               Flows file
                                                                          : \Users\ebinp\.node-red\flows.json
                                              Creating new flow file
10 Nov 11:15:36 -
                                  [warn]
  our flow credentials file is encrypted using a system-generated key.
If the system-generated key is lost for any reason, your credentials
file will not be recoverable, you will have to delete it and re-enter
 your credentials.
You should set your own key using the 'credentialSecret' option in
your settings file. Node-RED will then re-encrypt your credentials
  ile using your chosen key the next time you deploy a change.
10 Nov 11:15:36 - [warn] Encrypted credentials not found
10 Nov 11:15:36 - [info] Server now running at http://127.0.0.1:1880/
10 Nov 11:15:36 - [info] Starting flows
10 Nov 11:15:36 - [info] Started flows
```

# Connection IBM IOT in debug 1 and deploy:

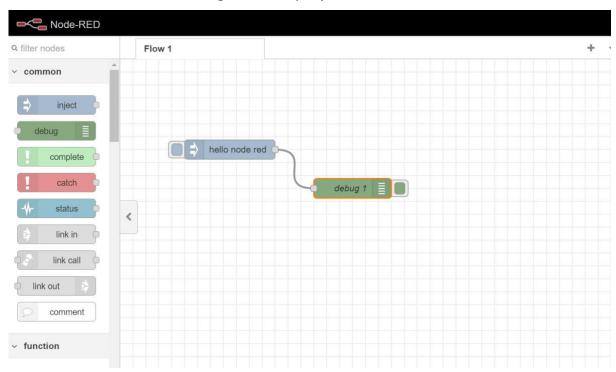

## Output:

