



Create Node-RED Service

To create a web application create a Node-RED service.

Step 1: Go to IBM cloud and Click the Catalog and go to Nodered :

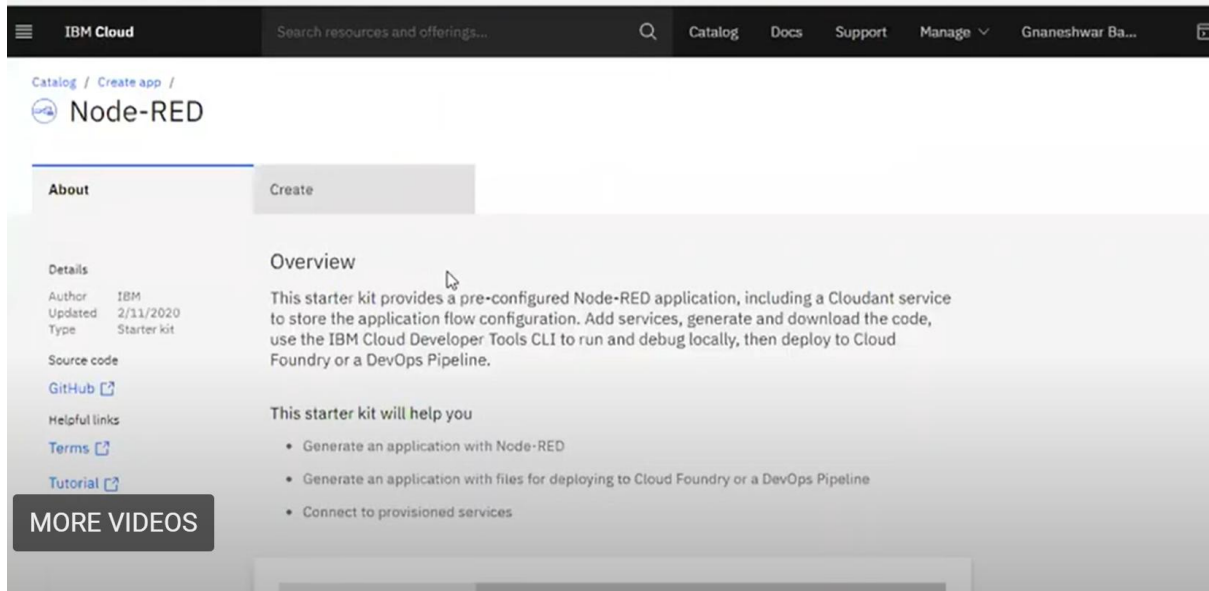

Step 2: Create and Choose the Pricing plan and Deploy your app:

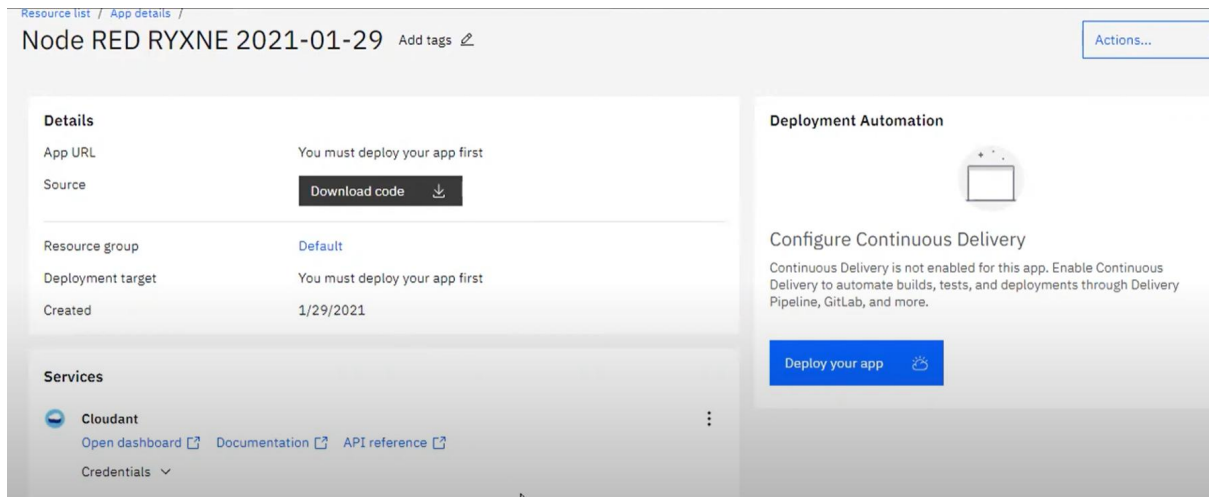

Step 3: Choose API key and fill the details and press next:

IBM Cloud API key

Number of instances: 1

Memory allocation per instance: 64 MB to 2000 MB (256 MB selected)

Region: London

Organization: gnaneshwar@thesmartbridge.cor

Space: dev

Host: node-red-ryxne-2021-01-29

Domain: eu.gb.mybluemix.net

Buttons: Cancel, Next

Step 4: After Successfully completed, the refresh the page and click the App URL:

Resource list / App details /

Node RED RYXNE 2021-01-29 Add tags

Details

App URL: <https://node-red-ryxne-2021-01-29.eu.gb.mybluemix.net>

Source: <https://us-south.git.cloud.ibm.com/gnaneshwar/NodeREDRYXNE2021-01-29>

Resource group: [Default](#)

Deployment target: [Node RED RYXNE 2021-01-29](#)

Created: 1/29/2021

Services

Cloudant

[Open dashboard](#) [Documentation](#) [API reference](#)

Deployment Automation

Name: [NodeREDRYXNE2021-01-29](#)

Location: Dallas

Tool integrations:

Delivery Pipelines


Name: [ci-pipeline](#)

Status: [Success](#)

Last input: Last commit by IBM Cloud DevOps Services (7 minutes ago)

[Clone from zip](#)

Step 5: After click next and click not recommended for username:

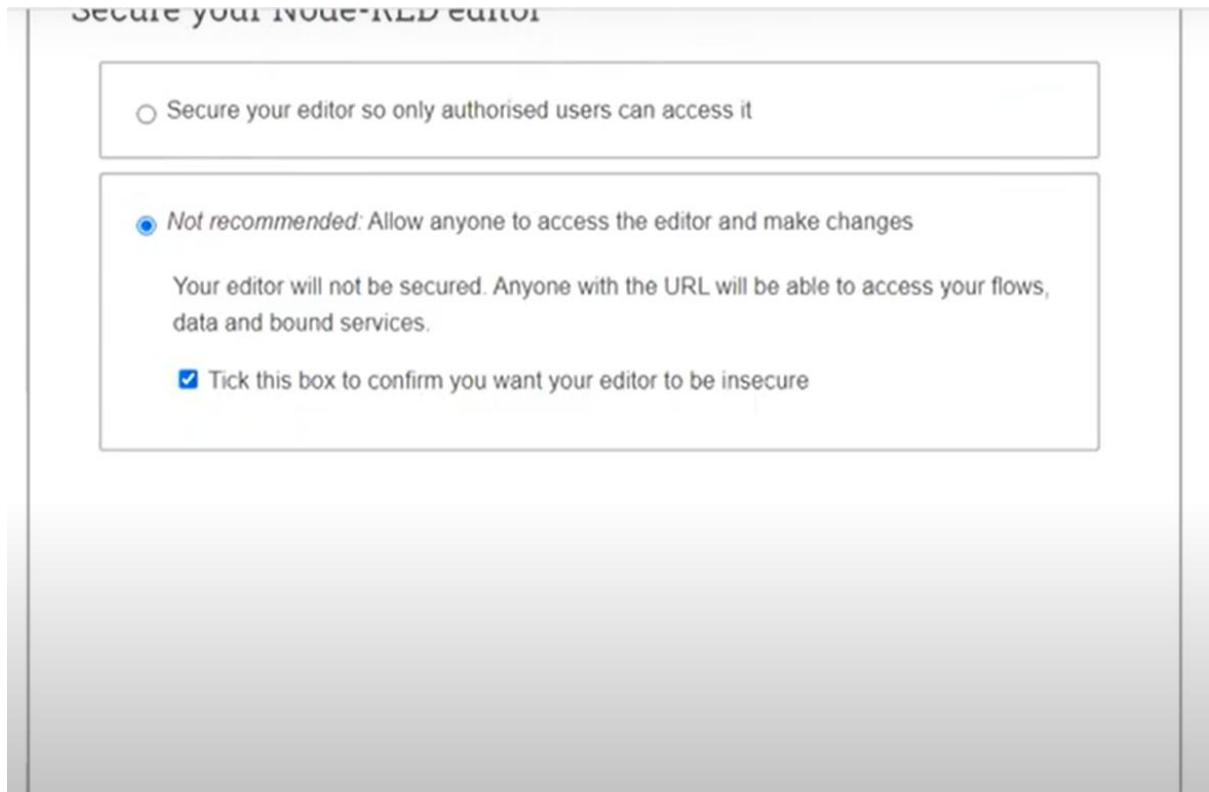

Step 6: Click Go to Node-Red and start your work:

