

Project Development Phase Model Performance Test

Date	12 November 2022
Team ID	PNT2022TMID26267
Project Name	Project – Web Phishing Detection
Maximum Marks	10 Marks

Model Performance Testing:

Project team shall fill the following information in model performance testing template.

S.No.	Parameter	Values	Screenshot
1.	Metrics	Classification Model: Gradient Boosting Classification Accuracy Score- 97.4%	<pre>In [52]: #computing the classification report of the model print(metrics.classification_report(y_test, y_test_gbc))</pre> <pre> precision recall f1-score support -1 0.99 0.96 0.97 976 1 0.97 0.99 0.98 1235 accuracy 0.98 macro avg 0.97 weighted avg 0.97</pre>
2.	Tune the Model	Hyperparameter Tuning - 97% Validation Method – KFOLD & Cross Validation Method	<p>Wilcoxon signed-rank test</p> <pre>In [74]: #KFOLD and Cross Validation Model from scipy.stats import wilcoxon from sklearn.datasets import load_iris from sklearn.ensemble import GradientBoostingClassifier from sklearn.metrics import accuracy_score from sklearn.model_selection import cross_val_score, kfold # Load the dataset X = load_iris().data y = load_iris().target # Prepare model and select your CV method model = GradientBoostingClassifier(n_estimators=100) model = GBClassifier(n_estimators=100) # Fit the model to the training data results_model = cross_val_score(model, X, y, cv=kf) # Display results for each model on the same dataset results_model = cross_val_score(model, X, y, cv=kf) stat, p = wilcoxon(results_model, results_model, zero_method='logit') stat</pre> <p>Out[74]: 95.4</p>

1. METRICS: CLASSIFICATION REPORT:

```
In [52]: #computing the classification report of the model
print(metrics.classification_report(y_test, y_test_gbc))
```


```

precision    recall  f1-score   support

-1          0.99      0.96      0.97       976
 1          0.97      0.99      0.98      1235

accuracy          0.98
macro avg          0.97
weighted avg          0.97
```

PERFORMANCE :

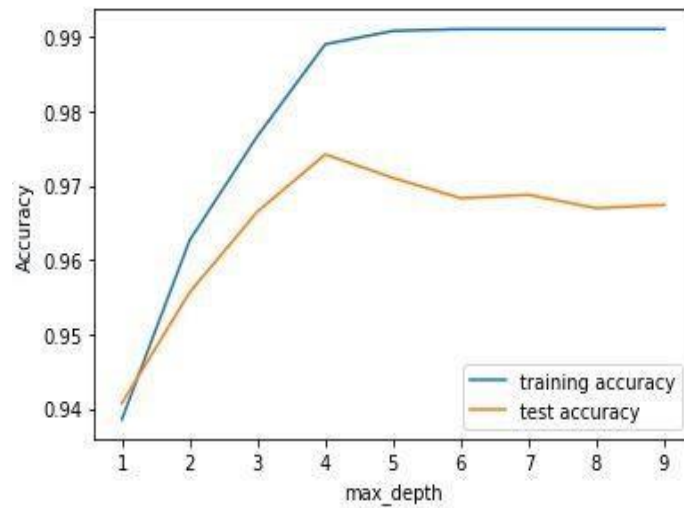

Out[83]:

	ML Model	Accuracy	f1_score	Recall	Precision
0	Gradient Boosting Classifier	0.974	0.977	0.994	0.986
1	CatBoost Classifier	0.972	0.975	0.994	0.989
2	Random Forest	0.969	0.972	0.992	0.991
3	Support Vector Machine	0.964	0.968	0.980	0.965
4	Decision Tree	0.958	0.962	0.991	0.993
5	K-Nearest Neighbors	0.956	0.961	0.991	0.989
6	Logistic Regression	0.934	0.941	0.943	0.927
7	Naive Bayes Classifier	0.605	0.454	0.292	0.997
8	XGBoost Classifier	0.548	0.548	0.993	0.984
9	Multi-layer Perceptron	0.543	0.543	0.989	0.983

2. TUNE THE MODEL – HYPERPARAMETER TUNING

```
In [58]: #HYPERPARAMETER TUNING
grid.fit(X_train, y_train)
```

```
Out[58]: GridSearchCV
GridSearchCV(cv=5,
             estimator=GradientBoostingClassifier(learning_rate=0.7,
                                                    max_depth=4),
             param_grid={'max_features': array([1, 2, 3, 4, 5]),
                         'n_estimators': array([ 10, 20, 30, 40, 50, 60, 70, 80, 90, 100, 110, 120, 130,
140, 150, 160, 170, 180, 190, 200])})
└─ estimator: GradientBoostingClassifier
   GradientBoostingClassifier(learning_rate=0.7, max_depth=4)
   └─ GradientBoostingClassifier
      GradientBoostingClassifier(learning_rate=0.7, max_depth=4)
```

```
In [59]: print("The best parameters are %s with a score of %.2f"
              % (grid.best_params_, grid.best_score_))
```

The best parameters are {'max_features': 5, 'n_estimators': 200} with a score of 0.97

VALIDATION METHODS: KFOLD & Cross Folding

Wilcoxon signed-rank test

```
In [78]: #KFOLD and Cross Validation Model

from scipy.stats import wilcoxon
from sklearn.datasets import load_iris
from sklearn.ensemble import GradientBoostingClassifier
from xgboost import XGBClassifier
from sklearn.model_selection import cross_val_score, KFold

# Load the dataset
X = load_iris().data
y = load_iris().target

# Prepare models and select your CV method
model1 = GradientBoostingClassifier(n_estimators=100)
model2 = XGBClassifier(n_estimators=100)
kf = KFold(n_splits=20, random_state=None)
# Extract results for each model on the same folds
results_model1 = cross_val_score(model1, X, y, cv=kf)
results_model2 = cross_val_score(model2, X, y, cv=kf)
stat, p = wilcoxon(results_model1, results_model2, zero_method='zsplit');
stat
```

Out[78]: 95.0

5x2CV combined F test

```
In [89]: from mlxtend.evaluate import combined_ftest_5x2cv
from sklearn.tree import DecisionTreeClassifier, ExtraTreeClassifier
from sklearn.ensemble import GradientBoostingClassifier
from mlxtend.data import iris_data

# Prepare data and clfs
X, y = iris_data()
clf1 = GradientBoostingClassifier()
clf2 = DecisionTreeClassifier()

# Calculate p-value
f, p = combined_ftest_5x2cv(estimator1=clf1,
                             estimator2=clf2,
                             X=X, y=y,
                             random_seed=1)

print('f-value:', f)
print('p-value:', p)

f-value: 1.727272727272733
p-value: 0.2840135734291782
```