

#SPRINT 1 TEAM ID:PNT2022TMID01457

#Importing required Libraries

```
import numpy#for numerical analysis
import tensorflow#open source ml tool by google

from tensorflow.keras.datasets import mnist #mnist dataset
from tensorflow.keras.models import Sequential# stack for layers
from tensorflow.keras import layers#input,middle and output layers
forcnn structure

from tensorflow.keras.layers import Dense,Flatten#dense and flatten
layers
from tensorflow.keras.layers import Conv2D#convolutional layers
from tensorflow import keras#library for building neural networks
built on tensorflow

from tensorflow.keras.optimizers import Adam#optimizers
from keras.utils import np_utils
```

#Loading dataset

Dataset is available in tensorflow dataset repository

```
(x_train,y_train),(x_test,y_test)=mnist.load_data()
```

Downloading data from <https://storage.googleapis.com/tensorflow/tf-keras-datasets/mnist.npz>
11490434/11490434 [=====] - 0s 0us/step

automatically data is splitted for train ,test -70:30 ratio

```
print(x_train.shape)
print(y_train.shape)

(60000, 28, 28)
(60000,)
```

Training Dataset has 60000 images & testing has 10000 images

```
print(x_test.shape)
print(y_test.shape)

(10000, 28, 28)
(10000,)
```

Analyze the data

```
x_train[3]
```


[illegible]

```

253,      [ 0,  0,  0,  0,  0,  0,  0,  0,  0, 159, 255, 253,
0,        31,  0,  0,  0,  0,  0,  0,  0,  0,  0,  0,  0,
0,        0,  0],
140,      [ 0,  0,  0,  0,  0,  0,  0,  0,  0, 48, 228, 253, 247,
0,        8,  0,  0,  0,  0,  0,  0,  0,  0,  0,  0,  0,
0,        0,  0],
0,        [ 0,  0,  0,  0,  0,  0,  0,  0,  0, 64, 251, 253, 220,
0,        0,  0,  0,  0,  0,  0,  0,  0,  0,  0,  0,  0,
0,        0,  0],
0,        [ 0,  0,  0,  0,  0,  0,  0,  0,  0, 64, 251, 253, 220,
0,        0,  0,  0,  0,  0,  0,  0,  0,  0,  0,  0,  0,
0,        0,  0],
0,        [ 0,  0,  0,  0,  0,  0,  0,  0,  0, 24, 193, 253, 220,
0,        0,  0,  0,  0,  0,  0,  0,  0,  0,  0,  0,  0,
0,        0,  0],
0,        [ 0,  0,  0,  0,  0,  0,  0,  0,  0,  0,  0,  0,  0,
0,        0,  0,  0,  0,  0,  0,  0,  0,  0,  0,  0,  0,
0,        0,  0],
0,        [ 0,  0,  0,  0,  0,  0,  0,  0,  0,  0,  0,  0,  0,
0,        0,  0,  0,  0,  0,  0,  0,  0,  0,  0,  0,  0,
0,        0,  0],
0,        [ 0,  0,  0,  0,  0,  0,  0,  0,  0,  0,  0,  0,  0,
0,        0,  0,  0,  0,  0,  0,  0,  0,  0,  0,  0,  0,
0,        0,  0],
0,        [ 0,  0,  0,  0,  0,  0,  0,  0,  0,  0,  0,  0,  0,
0,        0,  0,  0,  0,  0,  0,  0,  0,  0,  0,  0,  0,
0,        0,  0],
0,        0,  0]], dtype=uint8)

```

```
y_train[36]
```


```
6
```

image in 36th position in training dataset

```
import matplotlib.pyplot as plt
```

```
plt.imshow(x_train[36])
```

<matplotlib.image.AxesImage at 0x7fa70fb3b550>

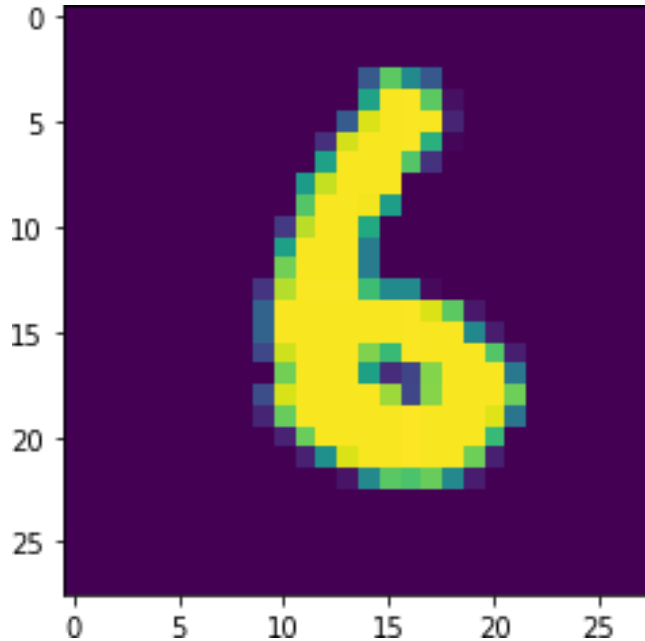

#Reshaping the data

As we are using Deep learning neural network, the input for this network to get trained on should be of higher dimensional. Our dataset is having three-dimensional images so we have to reshape them too higher dimensions

```
# (batch,height,width,channel)
x_train=x_train.reshape(60000,28,28,1).astype('float32')
x_test=x_test.reshape(10000,28,28,1).astype('float32')
```

#Applying one hot encoding

One hot encoding to convert numerical values to classes where 0 to 9 are 10 separate classes if value is 5 class 5 is 1 else 0

```
no_of_classes=10
y_train=np_utils.to_categorical(y_train,no_of_classes)
y_test=np_utils.to_categorical(y_test,no_of_classes)

y_test[3]

array([1., 0., 0., 0., 0., 0., 0., 0., 0., 0.], dtype=float32)
```