ASSIGNMENT - 4

Date	22 October 2022
Team ID	PNT2022TMID51935
Name	SMART WASTE MANAGEMENT FOR METROPOLITAN CITIES - IOT
Maximum Marks	2 Marks

QUESTION:

Write code and connections in wokwi for ultrasonic sensor. Whenever distance is less than 100 cms send "alert" to IBM cloud and display in device recent events.

CODE:

```
#include <WiFi.h>
                                                    // library for wifi
#include < PubSubClient.h>
                                                   // library for MQTT
//----- credentials of IBM Accounts ------
#define ORG "9gbe4w"
                                                  // IBM organisation id
#define DEVICE_TYPE "ULTASON"
#define DEVICE_ID "assignment"
                                               // Device type mentioned in ibm watson iot platform
                                                // Device ID mentioned in ibm watson iot platform
#define TOKEN "DSVsRN1CU9-eEPkcc3"
#define speed 0.034
#define led 14
String data3;
int LED = 4;
//----- customise above values ------
char server[] = ORG ".messaging.internetofthings.ibmcloud.com"; // server name
char publishTopic[] = "iot-2/evt/sreedhar/fmt/json";
                                                                 // topic name and type of event perform and format in which data
to be send
char topic[] = "iot-2/cmd/led/fmt/String";
                                                               // cmd Represent type and command is test format of strings
char authMethod[] = "use-token-auth";
                                                                 // authentication method
char token[] = TOKEN;
char clientId[] = "d:" ORG ":" DEVICE_TYPE ":" DEVICE_ID; //Client id
WiFiClient wifiClient;
                                                           // creating instance for wificlient
PubSubClient client(server, 1883, wifiClient);
                                                           // calling the predefined client id by passing parameter like server
id, port and wifi credential
const int trigpin=5;
const int echopin=18;
String command;
String data="";
long duration;
float dist;
void setup()
 Serial.begin(115200);
 pinMode(led, OUTPUT);
 pinMode(trigpin, OUTPUT);
 pinMode(echopin, INPUT);
 wifiConnect();
 mqttConnect();
```

```
}
void loop() {
 bool isNearby = dist < 100;
 digitalWrite(led, isNearby);
 publishData();
 delay(500);
 if (!client.loop())
                                                                      // function call to connect to ibm
  mqttConnect();
          -----*/
void wifiConnect()
 Serial.print("Connecting to ");
 Serial.print("Wifi");
 WiFi.begin("Wokwi-GUEST", "", 6);
while (WiFi.status() != WL_CONNECTED)
  delay(500);
  Serial.print(".");
 Serial.print("WiFi connected, IP address: ");
 Serial.println(WiFi.localIP());
void mqttConnect()
 if (!client.connected())
  Serial.print("Reconnecting MQTT client to ");
  Serial.println(server);
  while (!client.connect(clientId, authMethod, token))
   Serial.print(".");
    delay(500);
  initManagedDevice();
  Serial.println();
}
void initManagedDevice() {
 if (client.subscribe(topic))
  Serial.println("IBM subscribe to cmd OK");
 else
  Serial.println("subscribe to cmd FAILED");
void publishData()
 digitalWrite(trigpin,LOW);
 digitalWrite(trigpin,HIGH);
 delayMicroseconds(10);
 digitalWrite(trigpin,LOW);
duration=pulseIn(echopin,HIGH);
 dist=duration*speed/2;
 if(dist<100)
  digitalWrite(LED,HIGH);
  String payload = "{\"Alert Distance\":";
  payload += dist;
```


```
payload += "}";
  Serial.print("\n");
  Serial.print("Sending payload: ");
  Serial.println(payload);
  if (client.publish(publishTopic, (char*) payload.c_str())) // if data is uploaded to cloud successfully,prints publish ok else prints
publish failed
   Serial.println("Publish OK");
  if(dist>100)
     digitalWrite(LED,HIGH);
     String payload = "{\"Distance\":";
     payload += dist;
     payload += "}";
  Serial.print("\n");
  Serial.print("Sending payload: ");
  Serial.println(payload);
  if(client.publish(publishTopic, (char*) payload.c_str()))
   Serial.println("Publish OK");
  else
   digitalWrite(LED,LOW);
   Serial.println("Publish FAILED");
 }
 }
```

OUTPUT:

Code simulation on wokwi

```
⋒ wokwi.com/projects/346500611514040916
                                                                                                                                                            e ☆ ∃ □ 🚳
WOKWI 🖥 SAVE
                                                                                                                                                                          Docs
  esp32-blink.ino •
                    diagram.json
                                      libraries.txt Library Manager ▼
                                                                                               Simulation
                                                                                                                                                                   Ō01:20.688 (%)99%
         #include <PubSubClient.h> // library for MQTT
                                                                                             Editing Ultrasonic Distance Sensor
         //---- credentials of IBM Accounts -----
          #define ORG "9gbe4w"
                                                         // IBM organisation id
         #define DEVICE_TYPE "ULTASON"
                                                        // Device type mentioned in ib
// Device ID mentioned in ibm
          #define DEVICE_ID "assignment"
         #define TOKEN "DSVsRN1CU9-eEPkcc3"
                                                        // Token
         #define speed 0.034
   11
   13
         String data3;
         int LED = 4;
   14
   15
   16
         //---- customise above values -----
         char server[] = ORG ".messaging.internetofthings.ibmcloud.com";
char publishTopic[] = "iot-2/evt/distance/fmt/json";
char topic[] = "iot-2/cmd/led/fmt/String";
   19
                                                                                            Sending payload: {"Distance":193.97}
                                                                                            Publish OK
         char authMethod[] = "use-token-auth";
char token[] = TOKEN;
char clientId[] = "d:" ORG ":" DEVICE_TYPE ":" DEVICE_ID;
   21
   22
                                                                                            Sending payload: {"Distance":193.97}
                                                                                            Publish OK
   25
                                                                                            Reconnecting MQTT client to
```

Data sent to IBM Cloud with distance

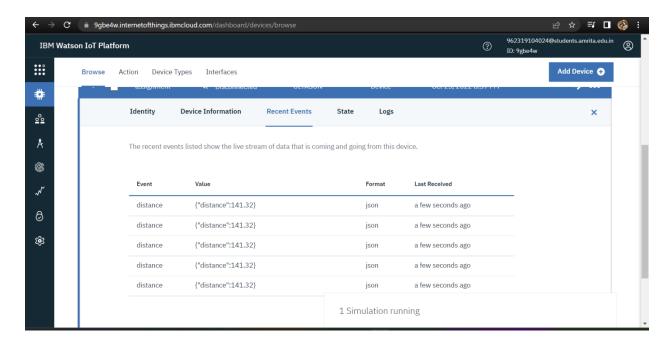

<u>Link</u>: https://wokwi.com/projects/346506659494888018