→ Name: Vignesh G

RollNo:611219106084

Date:08\10\2022

→ Assignment 3

1.Download the data set /content/Flowers-Dataset.zip

importing libraries

```
import warnings
warnings.filterwarnings("ignore")

import numpy as np
import matplotlib.pyplot as plt
import pandas as pd
from tensorflow.keras.models import Sequential
from tensorflow.keras.layers import Dense,Activation,Dropout,Conv2D,Flatten,MaxPool2D,Reshape
from tensorflow.keras.applications.resnet50 import ResNet50
from tensorflow.keras.applications.resnet50 import preprocess_input
from tensorflow.keras.preprocessing import image
from tensorflow.keras.preprocessing.image import ImageDataGenerator,load_img,img_to_array
from tensorflow.keras.callbacks import EarlyStopping, ReduceLROnPlateau
```

DataSet Augmentation

- 1.dataset consists of 5 different flowers
- 2.daisy
- 3.dandelion
- 4.rose
- 5.sunflower
- 6.tulip

Unzip the dataset

```
from google.colab import drive
drive.mount('/content/gdrive')
     Mounted at /content/gdrive
!unzip gdrive/MyDrive/Flowers-Dataset.zip
folder = 'flowers/'
train_data = ImageDataGenerator(rescale = 1./255,
                             shear_range = 0.2,
                             zoom_range = 0.2,
                             horizontal_flip = True,
                             validation split = 0.30)
test data = ImageDataGenerator(rescale = 1./255, validation split = 0.30)
training_set = train_data.flow_from_directory(folder,
                                                  target size=(64,64),
                                                  batch size=100,
                                                  class mode='categorical',
                                                  shuffle=True,
                                                  color mode='rgb',
                                                  subset = 'training')
testing set = test data.flow from directory(folder,
                                                  target size=(64,64),
                                                  batch_size=100,
                                                  class mode='categorical',
                                                  shuffle=True,
                                                  color mode='rgb',
                                                  subset = 'validation')
     Found 3024 images belonging to 5 classes.
     Found 1293 images belonging to 5 classes.
```

Model Build Using CNN

1.Create the model

```
Cnn_model = Sequential()
#convolution layer and Pooling layer 1
Cnn_model.add(Conv2D(filters=48,kernel_size=3,activation='relu',input_shape=(64,64,3)))
Cnn_model.add(MaxPool2D(pool_size=2,strides=2))
Cnn_model.add(Dropout(0.4))
```

```
#convolution layer and Pooling layer 2
Cnn_model.add(Conv2D(filters=32,kernel_size=3,activation='relu'))
Cnn_model.add(MaxPool2D(pool_size=2,strides=2))
Cnn_model.add(Dropout(0.4))
#Flattening the images
Cnn_model.add(Flatten())
#Fully Connected layers
Cnn_model.add(Dense(64,activation='relu'))
Cnn_model.add(Dropout(0.4))
Cnn_model.add(Dense(5,activation='softmax'))
```

Cnn_model.summary()

Model: "sequential 2"

| Layer (type) | Output Shape | Param # |
|--|---|----------|
| conv2d_4 (Conv2D) | (None, 62, 62, 48) | 1344 |
| <pre>max_pooling2d_4 (MaxPooling 2D)</pre> | (None, 31, 31, 48) | 0 |
| dropout_6 (Dropout) | (None, 31, 31, 48) | 0 |
| conv2d_5 (Conv2D) | (None, 29, 29, 32) | 13856 |
| <pre>max_pooling2d_5 (MaxPooling 2D)</pre> | (None, 14, 14, 32) | 0 |
| dropout_7 (Dropout) | (None, 14, 14, 32) | 0 |
| flatten_2 (Flatten) | (None, 6272) | 0 |
| dense_4 (Dense) | (None, 64) | 401472 |
| dropout_8 (Dropout) | (None, 64) | 0 |
| dense_5 (Dense) | (None, 5) | 325 |
| | ======================================= | ======== |

Total params: 416,997 Trainable params: 416,997 Non-trainable params: 0

2.Compile the model

Cnn_model.compile(loss='categorical_crossentropy',optimizer='adam',metrics=['accuracy'])

3.

4. Training the models

Result = Cnn model.fit(x=training set, validation data=testing set, epochs=40)


```
Epoch 1/40
31/31 [============== ] - 33s 1s/step - loss: 0.9899 - accuracy: 0.608
Epoch 2/40
Epoch 3/40
Epoch 4/40
Epoch 5/40
31/31 [================= ] - 37s 1s/step - loss: 0.9501 - accuracy: 0.6250
Epoch 6/40
Epoch 7/40
Epoch 8/40
Epoch 9/40
Epoch 10/40
31/31 [================== ] - 37s 1s/step - loss: 0.8747 - accuracy: 0.6574
Epoch 11/40
Epoch 12/40
31/31 [================ ] - 33s 1s/step - loss: 0.8652 - accuracy: 0.6640
Epoch 13/40
Epoch 14/40
31/31 [============= ] - 33s 1s/step - loss: 0.8431 - accuracy: 0.672!
Epoch 15/40
Epoch 16/40
Epoch 17/40
31/31 [================= ] - 33s 1s/step - loss: 0.8075 - accuracy: 0.6829
Epoch 18/40
31/31 [=============== ] - 33s 1s/step - loss: 0.8095 - accuracy: 0.681!
```

```
Epoch 19/40
Epoch 20/40
31/31 [============ ] - 33s 1s/step - loss: 0.7821 - accuracy: 0.693
Epoch 21/40
31/31 [============== ] - 33s 1s/step - loss: 0.7786 - accuracy: 0.698
Epoch 22/40
Epoch 23/40
Epoch 24/40
31/31 [============= ] - 33s 1s/step - loss: 0.7691 - accuracy: 0.703
Epoch 25/40
Epoch 26/40
Epoch 27/40
31/31 [============= ] - 33s 1s/step - loss: 0.7644 - accuracy: 0.702
Epoch 28/40
Epoch 29/40
```

5.Plot loss and accuracy

```
#Loss
plt.plot(Result.history['loss'], label='train loss')
plt.plot(Result.history['val_loss'], label='value loss')
plt.legend()
plt.show()

#Accuracy
plt.plot(Result.history['accuracy'], label='train accuracy')
plt.plot(Result.history['val_accuracy'], label='value accuracy')
plt.legend()
plt.show()
```

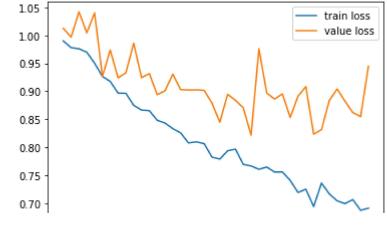

6.Save the model

```
0.74 | — train accuracy | . /

Cnn_model.save('flower.h5')
```

Test The Model


```
1 /N /
      0.04
training_set.class_indices
     {'daisy': 0, 'dandelion': 1, 'rose': 2, 'sunflower': 3, 'tulip': 4}
                     10
                          15
                               20
                                     25
classes = ['Daisy', 'Dandelion', 'Rose', 'Sunflower', 'Tulip']
def testing(img):
   img = image.load_img(img,target_size=(64,64))
   x = image.img_to_array(img)
   x = np.expand_dims(x,axis=0)
   pred = np.argmax(model.predict(x))
   return print("Predicted class as:",classes[pred])
def img_show(img):
   img1 = image.load_img(img,target_size=(64,64))
   plt.imshow(img1)
#Sample1
img_show('/content/flowers/daisy/20580471306_ab5a011b15_n.jpg')
testing('/content/flowers/daisy/20580471306_ab5a011b15_n.jpg')
```


Predicted class as: Daisy



#Sample2

img_show('/content/flowers/dandelion/3372748508_e5a4eacfcb_n.jpg')
testing('/content/flowers/dandelion/3372748508_e5a4eacfcb_n.jpg')






#Sample3

img_show('/content/flowers/rose/15236835789_6009b8f33d.jpg')
testing('/content/flowers/rose/15236835789_6009b8f33d.jpg')


Predicted class as: Tulip



#Sample4

img_show('/content/flowers/sunflower/9231555352_d2dd8f8e68_m.jpg')
testing('/content/flowers/sunflower/9231555352_d2dd8f8e68_m.jpg')

Predicted class as: Tulip



#Sample5
img_show('/content/flowers/tulip/8555123165_2fe57eff4f.jpg')
testing('/content/flowers/tulip/8555123165_2fe57eff4f.jpg')





In this Assignment,

- 1.I have find how many classes in the dataset.
- 2. Then create cnn layers
- 3. Two cnn layers consists 1344 parameters.
- 4. Testing model gives an 95% accuracy.

Colab paid products - Cancel contracts here