Assignment - 4
Docker and Kubernetes

Assignment Date	24 October 2022
Student Name	Swetha.S
Student Roll Number	913319104046
Maximum Marks	2 Marks

Question-1:

**1. Pull an Image from docker hub and run it in docker playground.**

Solution:

docker run --rm -p 8787:8787 rocker/verse
docker pull rocker/verse
docker   login
--username=punithavennilan--email=punithavennila025@gmail.com   WARNING:
login credentials saved in /home/punithavennilan/.docker/config.json   Login
Succeeded

REPOSITORY TAG IMAGE ID CREATED SIZE
verse_gapminder_gsl latest 023ab91c6291 3 minutes ago 1.975 GB
verse_gapminder latest bb38976d03cf 13 minutes ago 1.955 GB
rocker/verse latest 0168d115f220 3 days ago 1.954 GB
docker tag bb38976d03cf punithavennilan
/verse_gapminder:firsttry
docker push
punithavennilan/verse_gapminder

Saving and loading images
docker save
verse_gapminder
docker save verse_gapminder > verse_gapminder.tar
docker load --input verse_gapminder.tar
docker load --input verse_gapminder.tar
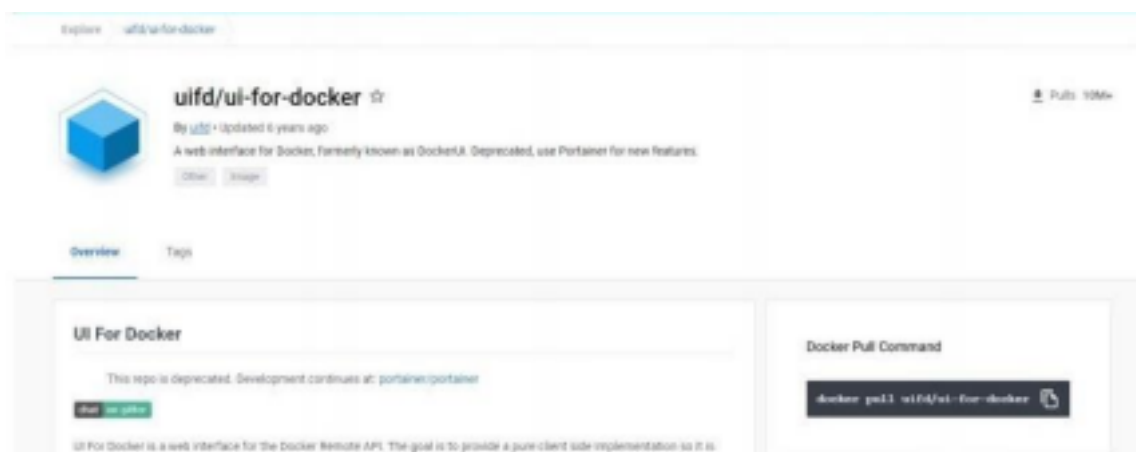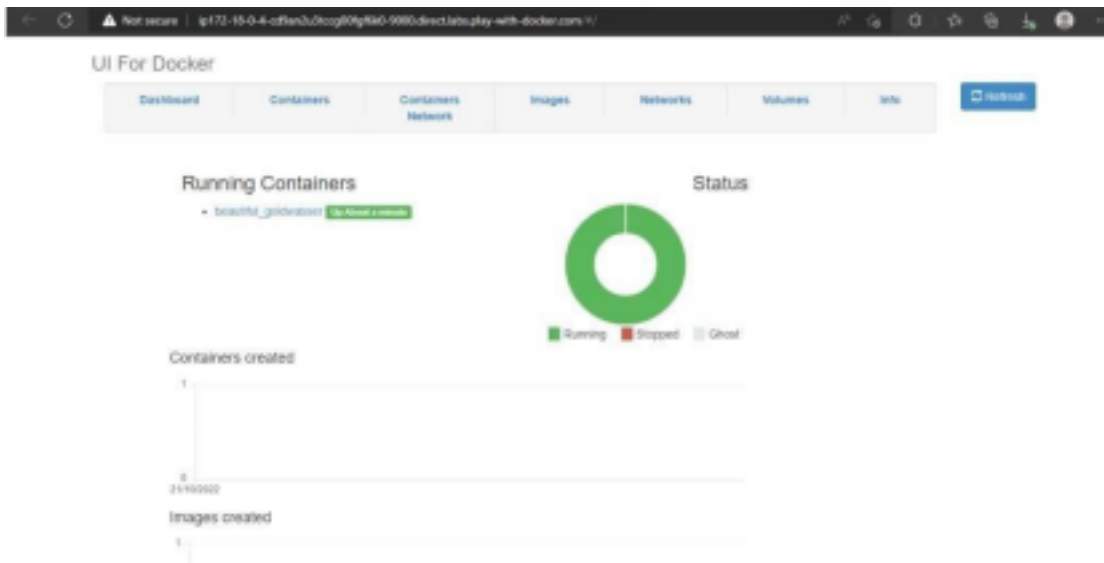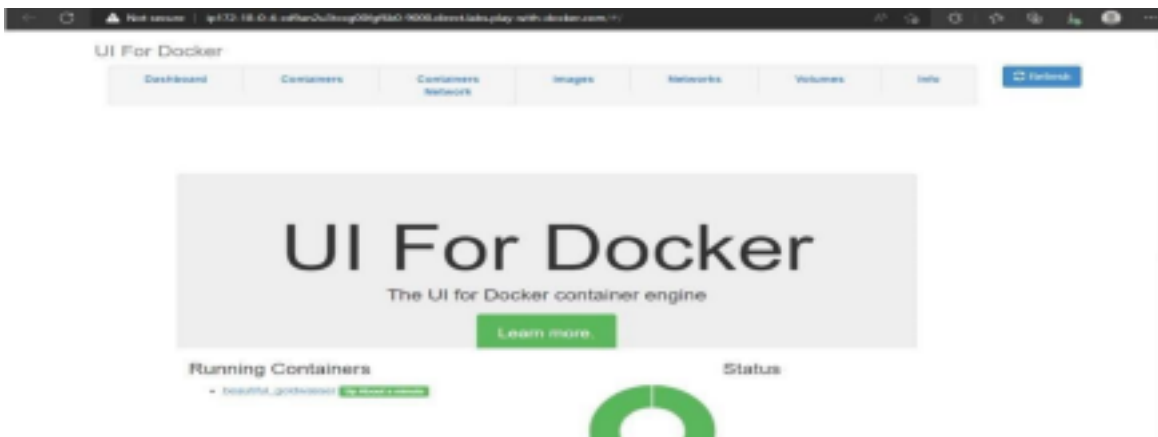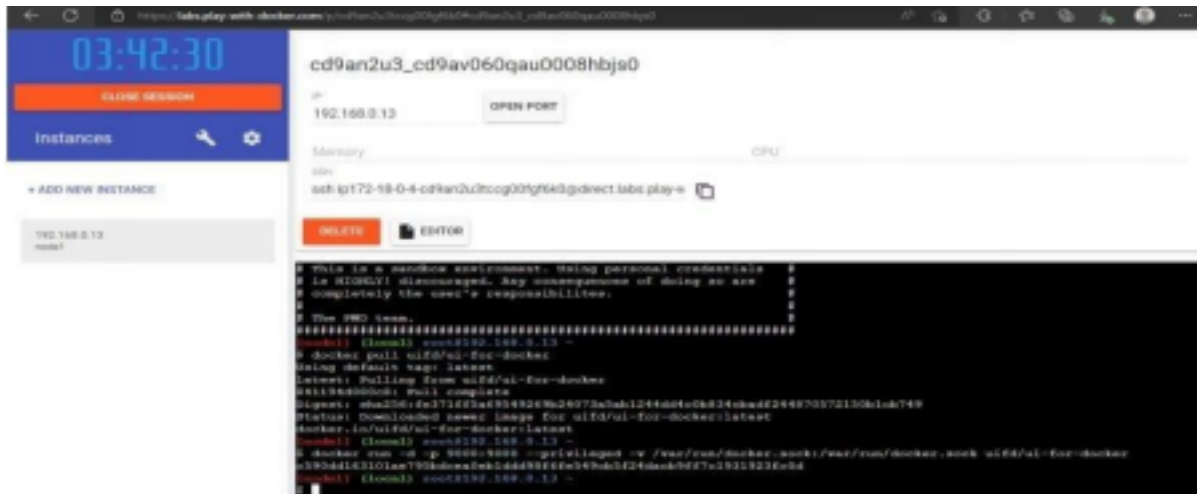
Question-2:

2. Create a docker file for the jobportal application and deploy it in Docker desktop application.

SOLUTION:

QUESTION-3:

3. Create a IBM container registry and deploy helloworld app or

jobportalapp. Solution:

```
<html>
<body>
Hello, IBM Cloud World!
</body>
</html>---
applications:
- buildpack: https://github.com/cloudfoundry/staticfile-buildpack.git
 host: simple-website-${random}
 name: simple-website-${random}
 memory: 64M
 stack: cflinuxfs2
```

```
1  {
2      "ServiceId": "com.ibm.cloudoe.orion.client.deploy",
3      "Params": {
4          "Target": {
5              "Url": "https://api.ng.bluemix.net",
6              "Org": "bluemix_devops@ibm.com",
7              "Space": "demo"
8          },
9          "Name": "simple-website-ae7f5ff6",
10         "Instrumentation": {}
11     },
12     "Path": "manifest.yml",
13     "Type": "Cloud Foundry"
14 }
```

Hello, IBM Cloud World!

QUESTION-4:

4. Create a Kubernetes cluster in IBM cloud and deploy helloworld image or jobportal image and also expose the same app to run in nodeport.

Solution:

ibmcloud target -g <resource_group_name>ibmcloud cr punithavennilan-add <your_punithavennilan>ibmcloud resource service-instance-create example-postgresql databases for-postgresql standard us-southibmcloud ks cluster-service-bind mycluster default example postgresqlgit clone -b node git@github.com:IBM-Cloud/clouddatabases-helloworld-kubernetes examples.gitspec:

replicas: 3name: cloudpostgres-nodejs-app

image: "registry.<region>.bluemix.net/<namespace>/icdpg" # Edit me

imagePullPolicy: Alwaysibmcloud cr regionYou are targeting region 'us-south', the registry is 'registry.ng.bluemix.net'.ibmcloud cr build -t registry.ng.bluemix.net/<namespace>/icdpg .ibmcloud cr images

env:

- name: BINDING

```yaml
      valueFrom:
       secretKeyRef:
        name: <postgres-secret-name> # Edit me
        key: binding
apiVersion: v1
kind: Service
metadata:
  name: cloudpostgres-service
  labels:
    run: clouddb-demo
spec:
  type: NodePort
  selector:
    run: clouddb-demo
  ports:
  - protocol: TCP
    port: 8080
    nodePort: 30081
```

```
kubectl apply -f clouddb-deployment.yml

deployment.apps/icdpostgres-app created

service/cloudpostgres-service created

kubectl get pods -o wideibmcloud ks workers <your_cluster_name>
```

Hello World!

Thanks for creating an IBM Cloud Databases for PostgreSQL database.

Add a word to the database

The word `hello` is defined as `a greeting` [Add]

Database output

The word **bye** is defined as **a goodbye**
The word **bye** is defined as **a farewell**
The word **hello** is defined as **a greeting**
The word **hello** is defined as **a greeting**
The word **hello bob** is defined as **a greeting**
The word **hello bob** is defined as **a greeting**