

PROJECT REPORT

A NOVEL METHOD FOR HANDWRITTEN DIGIT RECOGNITION

submitted by
PNT2022TMID48537

DEVI SRI T	-	920319104007
YASMI FASTINA	-	920319104035
ARATHI PRADEEP	-	920319104002
KAVIYA E	-	920319104013

TABLE OF CONTENTS

1	INTRODUCTION	1
	1.1 PROJECT OVERVIEW	1
	1.2 PURPOSE	1
2	LITERATURE SURVEY	2
	2.1 EXISTING PROBLEM	2
	2.2 REFERENCES	2
	2.3 PROBLEM STATEMENT DEFINITION	5
3	IDEATION AND PROPOSED SOLUTION	6
	3.1 EMPATHY MAP CANVAS	6
	3.2 IDEATION & BRAINSTORMING	7
	3.3 PROPOSED SOLUTION	8
	3.4 PROBLEM SOLUTION FIT	9
4	REQUIREMENT ANALYSIS	10
	4.1 FUNCTIONAL REQUIREMENTS	10
	4.2 NON FUNCTIONAL REQUIREMENTS	11
5	PROJECT DESIGN	12
	5.1 DATA FLOW DIAGRAM	12
	5.2 SOLUTION & TECHNICAL ARCHITECTURE	13
	5.3 USER STORIES	15

6 PROJECT PLANNING AND SCHEDULING	16
SPRINT PLANNING AND ESTIMATION	16
SPRINT DELIVERY SCHEDULE	17
7 CODING & SOLUTIONING	18
8 TESTING	20
TEST CASES	20
USER ACCEPTANCE TESTING	22
DEFECT ANALYSIS	22
TEST CASE ANALYSIS	22
9 RESULTS	23
PERFORMANCE METRICS	23
10 ADVANTAGES & DISADVANTAGES	25
ADVANTAGES	25
DISADVANTAGES	25
11 CONCLUSION	26
12 FUTURE SCOPE	27
APPENDIX	28
SOURCE CODE	28
GITHUB	37
PROJECT DEMO	37

CHAPTER 1

INTRODUCTION

PROJECT OVERVIEW

Machine learning and deep learning play an important role in computer technology and artificial intelligence. With the use of deep learning and machine learning, human effort can be reduced in recognizing, learning, predictions and in many more region.

Handwritten Digit Recognition is the ability of computer systems to recognise handwritten digits from various sources, such as images, documents, and so on. This project aims to let users take advantage of machine learning to reduce manual tasks in recognizing digits.

PURPOSE

Digit recognition systems are capable of recognizing the digits from different sources like emails, bank cheque, papers, images, etc. and in different real-world scenarios for online handwriting recognition on computer tablets or system, recognize number plates of vehicles, processing bank cheque amounts, numeric entries in forms filled up by hand (tax forms) and so on.

CHAPTER 2

LITERATURE SURVEY

EXISTING PROBLEM

The fundamental problem with handwritten digit recognition is that handwritten digits do not always have the same size, width, orientation, and margin since they vary from person to person. Additionally, there would be issues with identifying the numbers because of similarities between numerals like 1 and 7, 5 and 6, 3 and 8, 2 and 5, 2 and 7, etc. Finally, the individuality and variation of each individual's handwriting influence the structure and appearance of the digits.

REFERENCES

Improved Handwritten Digit Recognition Using Convolutional Neural Networks(CNN) (2020)

Ahlawat, Savita and Choudhary, Amit and Nayyar, Anand and Singh, Saurabh and Yoon, Byungun

This paper's primary goal was to enhance handwritten digit recognition ability. To avoid difficult pre-processing, expensive feature extraction, and a complex ensemble (classifier combination) method of a standard recognition system, they examined different convolutional neural network variations. Their current work makes suggestions on the function of several hyper-parameters through thorough evaluation utilizing an MNIST dataset. They also confirmed that optimizing hyper-parameters is crucial for enhancing CNN architecture performance. With the Adam optimizer for the MNIST database, they were able to surpass many previously published results with a recognition rate of 99.89%. Through the trials, it is made

abundantly evident how the performance of handwritten digit recognition is affected by the number of convolutional layers in CNN architecture. According to the paper, evolutionary algorithms can be explored for optimizing convolutional filter kernel sizes, CNN learning parameters, and the quantity of layers and learning rates.

An Efficient And Improved Scheme For Handwritten Digit Recognition Based On Convolutional Neural Network (2019)

Ali, Saqib and Shaukat, Zeeshan and Azeem, Muhammad and Sakhawat, Zareen and Mahmood, Tariq and others

This study uses rectified linear units (ReLU) activation and a convolutional neural network (CNN) that incorporates the Deeplearning4j (DL4J) architecture to recognize handwritten digits. The proposed CNN framework has all the necessary parameters for a high level of MNIST digit classification accuracy. The system's training takes into account the time factor as well. The system is also tested by altering the number of CNN layers for additional accuracy verification. It is important to note that the CNN architecture consists of two convolutional layers, the first with 32 filters and a 5x5 window size and the second with 64 filters and a 7x7 window size. In comparison to earlier proposed systems, the experimental findings show that the proposed CNN architecture for the MNIST dataset demonstrates great performance in terms of time and accuracy. As a result, handwritten numbers are detected with a recognition rate of 99.89% and high precision (99.21%) in a short amount of time.

Improved Handwritten Digit Recognition Using Quantum K-Nearest Neighbor Algorithm (2019)

Wang, Yuxiang and Wang, Ruijin and Li, Dongfen and Adu-Gyamfi, Daniel and Tian, Kaibin and Zhu, Yixin

The KNN classical machine learning technique is used in this research to enable quantum parallel computing and superposition. They used the KNN algorithm with quantum acceleration to enhance handwritten digit recognition. When dealing with more complicated and sizable handwritten digital data sets, their suggested method considerably lowered the computational time complexity of the traditional KNN algorithm. The paper offered a theoretical investigation of how quantum concepts can be applied to machine learning. Finally, they established a fundamental operational concept and procedure for machine learning with quantum acceleration.

Handwritten Digit Recognition Using Machine And Deep Learning Algorithms(2021)

Pashine, Samay and Dixit, Ritik and Kushwah, Rishika

In this study, they developed three deep and machine learning-based models for handwritten digit recognition using MNIST datasets. To determine which model was the most accurate, they compared them based on their individual properties.

Support vector machines are among the simplest classifiers, making them faster than other algorithms and providing the highest training accuracy rate in this situation. However, due to their simplicity, SVMs cannot categorize complicated and ambiguous images as accurately as MLP and CNN algorithms can. In their research, they discovered that CNN produced the most precise outcomes for handwritten digit recognition. This led them to the conclusion that CNN is the most effective

solution for all types of prediction issues, including those using picture data. Next, by comparing the execution times of the algorithms, they determined that increasing the number of epochs without changing the configuration of the algorithm is pointless due to the limitation of a certain model, and they discovered that beyond a certain number of epochs, the model begins over-fitting the dataset and provides biased predictions.


PROBLEM STATEMENT DEFINITION

For years, the traffic department has been combating traffic law violators. These offenders endanger not only their own lives, but also the lives of other individuals. Punishing these offenders is critical to ensuring that others do not become like them. Identification of these offenders is next to impossible because it is impossible for the average individual to write down the license plate of a reckless driver. Therefore, the goal of this project is to help the traffic department identify these offenders and reduce traffic violations as a result.

CHAPTER 3

IDEATION AND PROPOSED SOLUTION

EMPATHY MAP CANVAS

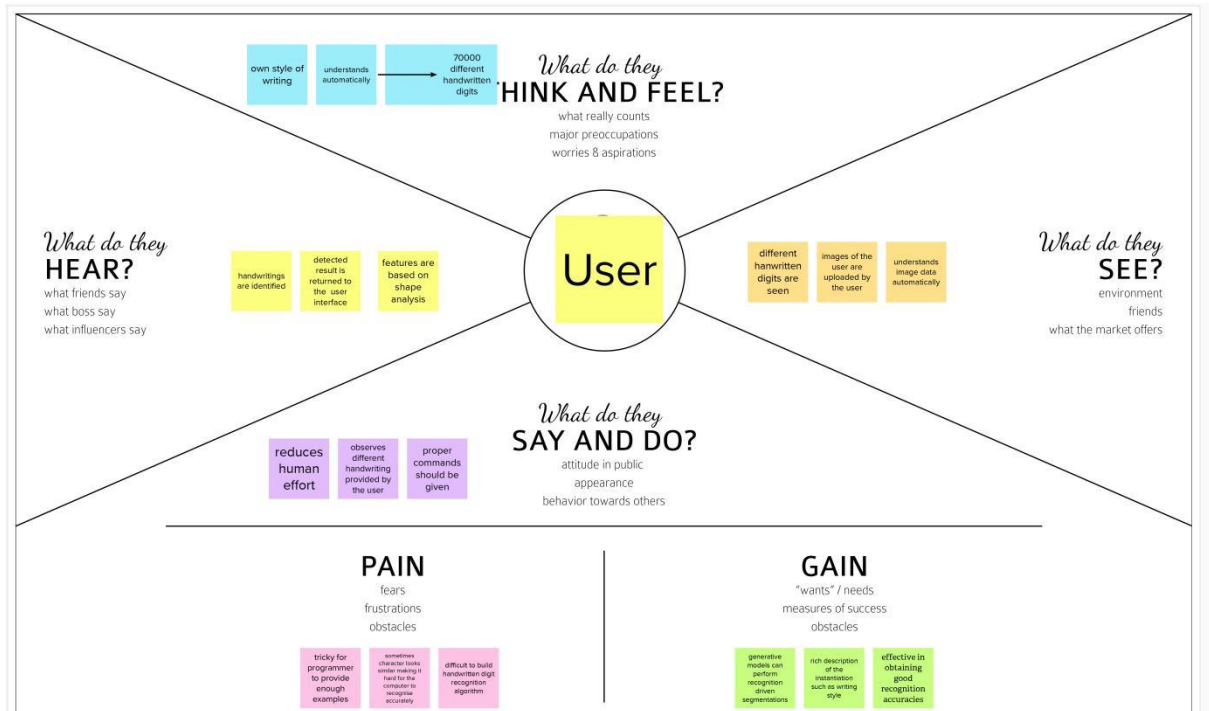

IDEATION & BRAINSTORMING

The workspace is divided into several panels, each with a specific function:

- Brainstorm & Idea prioritization:** A panel on the left with a blue header and a list of steps: 1. Generate ideas, 2. Filter ideas, 3. Prioritize ideas. It includes a small icon of a lightbulb.
- Before you collaborate:** A panel with a blue header and a list of steps: 1. Set the context, 2. Define the problem, 3. Generate ideas, 4. Prioritize ideas. It includes a small icon of a group of people.
- Define your problem statement:** A panel with a blue header and a list of steps: 1. Define the problem, 2. Generate ideas, 3. Prioritize ideas. It includes a small icon of a document.
- Brainstorm:** A central panel with a blue header and a list of steps: 1. Generate ideas, 2. Filter ideas, 3. Prioritize ideas. It includes a small icon of a lightbulb.
- Group ideas:** A panel with a blue header and a list of steps: 1. Generate ideas, 2. Filter ideas, 3. Prioritize ideas. It includes a small icon of a group of people.
- Prioritize:** A panel with a blue header and a list of steps: 1. Generate ideas, 2. Filter ideas, 3. Prioritize ideas. It includes a small icon of a document.
- After you collaborate:** A panel on the right with a blue header and a list of steps: 1. Set the context, 2. Define the problem, 3. Generate ideas, 4. Prioritize ideas. It includes a small icon of a group of people.

At the bottom of the workspace, there is a row of six small icons representing different tools or templates: a lightbulb, a group of people, a document, a list, a chart, and a group of people.

PROPOSED SOLUTION

S.NO	PARAMETER	DESCRIPTION
1	Problem Statement (Problem to be solved)	I am user trying to make a digit recognition to extract and remove the redundancy from the data, but it is quiet exhausting that human cannot recognise even their own return script because most of the humans digit handwriting looks more similar which makes me feel to build a new platform to recognise every unique handwriting.
2	Idea / Solution description	Input layer:Layer for calculation. Hidden layer:Provides nonlinear ties for network. Output layer:Final prediction of neural network.
3	Novelty / Uniqueness	OCR technology provides higher than 99% accuracy with typed characters in high quality images.
4	Social Impact / Customer Satisfaction	The system not only produces classification of the digit but also a rich description of the instantiation parameters which can yield information such as style writing.

5	Business Model	Slope Detail feature for handwritten digit recognition are based on shape analysis of the digit image and extract slant or slope information.
6	Scalability of the Solution	SVM classifier was the most accurate ,whereas decision tree were the least! hence we conclude that both interms of accuracy score and F1-score ,the SVM classifier performed the best .

PROBLEM SOLUTION FIT

Project Title: Handwritten digit recognition
Team ID: PNT2022TMID48537

Project Design Phase-I - Solution Fit Template

Define CS, fit into CC Focus on J&P, lap into BE, understand RC	1. CUSTOMER SEGMENT(S) User is the customer who are capable to write CS	6. CUSTOMER CONSTRAINTS It requires much more computation than more standards OCR techniques. It is not done real time as a person writes and therefore not appropriate for immediate text input. CC	5. AVAILABLE SOLUTIONS The established CNN model can determined and recognized hand written digits with high accuracy as it combines the weight of convolution layers during feature extraction with fully connected layers. Deep Learning/CNN SVM Gaussian Naive Bayes Decision Tree Random Forests AS	Explore AS, different Focus on J&P, lap into BE, understand RC
	2. JOBS-TO-BE-DONE / PROBLEMS User will approach this project by using a three layer neural network Input Layer : Distributes feature to next layer for calculation of activations of next layer. Hidden Layer : They are made of hidden units called activation providing non linear type for network. Output layer : Output units provides as with the final prediction of neural network on the basis of which final predictions can be made. J&P	9. PROBLEM ROOT CAUSE Humans could not remember thousands of individual handwriting and some of them could not identify the handwriting. So we use these technique to reduce the work load of human. RC	7. BEHAVIOUR Computer uses the clear photocopy of individual handwriting to recognize and fetch the unique required handwriting. BE	

3. TRIGGERS It is attracting many researches due to its usage in a number of machine learning and computer vision applications. Quicker and Easier recognition makes human to use this technique. However there is a limited work on arabic pattern digits since arabic digits are more difficult than english pattern. TR	10. YOUR SOLUTION In our work, filter sizes are determined by calculating the size of the ERF. Proposed CNN architecture has achieved recognition accuracy of 99.98% on the MNIST handwritten digit dataset, and 99.40% with the same dataset contaminated with 50% noise. With the usage of batch normalization, we can speedup the training, reduce training and testing time, in addition to lowering the sensitivity initialization. SL	8. CHANNELS of BEHAVIOUR 8.1 ONLINE In online hand writing recognition sensor picks up the pen tip movements as well as penup /pendown switching . 8.2 OFFLINE Offline handwriting recognition often referred as optical character recognition is performed writing is completed by converting the handwritten document into digital form. CH
---	--	---

CHAPTER 4

REQUIREMENT ANALYSIS

FUNCTIONAL REQUIREMENTS

FR.NO	FUNCTIONAL REQUIREMENTS	SUB REQUIREMENTS
1	Model Creation	Get access the MNIST dataset
		Analyze the dataset
		Define a CNN model
		Train and Test the Model
2	Application Development	Create a website to let the user recognize handwritten digits.
		Create a home page to upload images
		Create a result page to display the results
		Host the website to let the user use it from anywhere
3	Input Image Upload	Let users upload images of various formats.
		Let users upload images of various size
		Prevent users from uploading unsupported image formats
		Pre-Process the image to use it on the model

		Create a database to store all the input images
4	Display Results	Display the result from the model
		Display input image
		Display accuracy the result
		Display other possible predictions with their respective accuracy


NON FUNCTIONAL REQUIREMENTS

NFR. NO	NON-FUNCTIONAL REQUIREMENTS	DESCRIPTION
1	Usability	The application must be usable in all devices
2	Security	The application must protect user uploaded image
3	Reliability	The application must give an accurate result as much as possible
4	Performance	The application must be fast and quick to load up
5	Availability	The application must be available to use all the time
6	Scalability	The application must scale along with the user base


CHAPTER 5

PROJECT DESIGN

DATA FLOW DIAGRAM

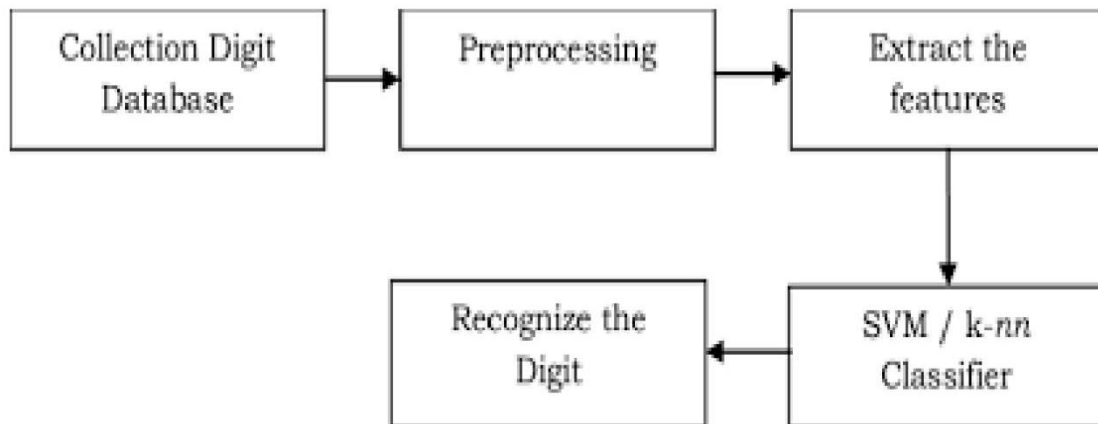

SOLUTION & TECHNICAL ARCHITECTURE

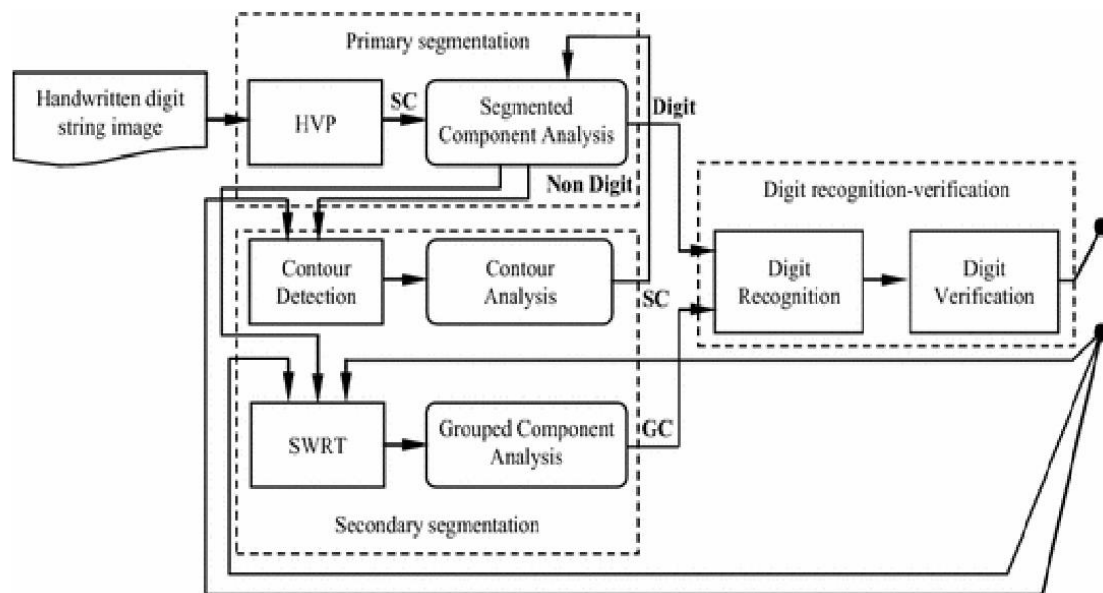

USER STORIES

User Type	Functional Requirements	User Story Number	User Story / Task	Acceptance Criteria	Priority	Release
Customer	Accessing the Application	USN-1	As a user, I should be able to access the application from anywhere and use on any devices	User can access the application using the browser on any device	High	Sprint-4
	Uploading Image	USN-2	As a user, I should be able to upload images to predict the digits	User can upload images	High	Sprint-3
	Viewing the Results	USN-3	As a user, I should be able to view the results	The result of the prediction is displayed	High	Sprint-3
	Viewing Other Prediction	USN-4	As a user, I should be able to see other close predictions	The accuracy of other values must be displayed	Medium	Sprint-4
	Usage Instruction	USN-5	As a user, I should have a usage instruction to know how to use the application	The usage instruction is displayed on the homepage	Medium	Sprint-4

CHAPTER 6

PROJECT PLANNING AND SCHEDULING

SPRINT PLANNING AND ESTIMATION

SPRINT	USER STORY / TASK	STORY POINTS	PRIORITY	TEAM MEMBERS
Sprint - I	Get the dataset	3	High	DEVI SRI T ARATHI PRADEEP
	Explore the data	2	Medium	YASMI FASTINA KAVIYA
	Data Pre-Processing	3	High	DEVI SRI YASMI FASTINA
	Prepare training and testing data	3	High	ARATHI PRADEEP KAVIYA
Sprint - II	Create the model	3	High	YASMI FASTINA
	Train the model	3	High	ARATHI PRADEEP
	Test the model	3	High	DEVI SRI KAVIYA
Sprint - III	Improve the model	2	Medium	ARATHI PRADEEP
	Save the model	3	High	DEVI SRI
	Build the Home Page	3	High	YASMI FASTINA
	Setup a database to store input images	2	Medium	KAVIYA

Sprint - IV	Build the results page	3	High	DEVI SRI YASMI FASTINA
-------------	------------------------	---	------	---------------------------

	Integrate the model with the application	3	High	ARATHI PRADEEP
	Test the application	3	High	KAVIYA

SPRINT DELIVERY SCHEDULE

SPRINT	TOTAL STORY POINTS	DURATION	SPRINT START DATE	SPRINT END DATE (PLANNED)	STORY POINTS COMPLETED (AS ON PLANNED DATE)	SPRINT RELEASE DATE (ACTUAL)
Sprint - I	11	6 Days	10 Nov 2022	17 Nov 2022	11	10 Nov 2022
Sprint - II	9	6 Days	10 Nov 2022	17 Nov 2022	9	10 Nov 2022
Sprint - III	10	6 Days	10 Nov 2022	17 Nov 2022	10	10 Nov 2022
Sprint - IV	9	6 Days	10 Nov 2022	19 Nov 2022	9	19 Nov 2022

CHAPTER 7

CODING & SOLUTIONING

```
# Import necessary packages
import os
import random
import string
from pathlib import Path
import numpy as np
from tensorflow.keras.models import load_model
from PIL import Image, ImageOps
```

```
def random_name_generator(n: int) -> str:
    """
    Generates a random file name.

    Args:
        n (int): Length the of the file name.

    Returns:
        str: The file name.
    """
    return ''.join(random.choices(string.ascii_uppercase + string.digits, k=n))
```

```

def recognize(image: bytes) -> tuple:
    """
    Predicts the digit in the image.

    Args:
        image (bytes): The image data.

    Returns:
        tuple: The best prediction, other predictions and file name
    """

    model=load_model(Path("./model/model.h5"))

    img = Image.open(image).convert("L")

    # Generate a random name to save the image file.
    img_name = random_name_generator(10) + '.jpg'
    if not os.path.exists(f"./static/data/"):
        os.mkdir(os.path.join('./static/', 'data'))
    img.save(Path(f"./static/data/{img_name}"))

    # Convert the Image to Grayscale, Invert it and Resize to get better prediction.
    img = ImageOps.grayscale(img)
    img = ImageOps.invert(img)
    img = img.resize((28, 28))

    # Convert the image to an array and reshape the data to make prediction.
    img2arr = np.array(img)
    img2arr = img2arr / 255.0
    img2arr = img2arr.reshape(1, 28, 28, 1)

    results = model.predict(img2arr)
    best = np.argmax(results,axis = 1)[0]

    # Get all the predictions and it's respective accuracy.
    pred = list(map(lambda x: round(x*100, 2), results[0]))

    values = [0, 1, 2, 3, 4, 5, 6, 7, 8, 9]
    others = list(zip(values, pred))

    # Get the value with the highest accuracy
    best = others.pop(best)

    return best, others, img_name

```


CHAPTER 8

TESTING

TEST CASES

Test case ID	Feature Type	Component	Test Scenario	Expected Result	Actual Result	Status
HP_TC_001	UI	Home Page	Verify UI elements in the Home Page	The Home page must be displayed properly	Working as expected	PASS
HP_TC_002	UI	Home Page	Check if the UI elements are displayed properly in different screen sizes	The Home page must be displayed properly in all sizes	The UI is not displayed properly in screen size 2560 x 1800 and 768 x 630	FAIL
HP_TC_003	Functional	Home Page	Check if user can upload their file	The input image should be uploaded to the application successfully	Working as expected	PASS
HP_TC_004	Functional	Home Page	Check if user cannot upload unsupported files	The application should not allow user to select a non image file	User is able to upload any file	FAIL
HP_TC_005	Functional	Home Page	Check if the page redirects to the result page once the input is given	The page should redirect to the results page	Working as expected	PASS

BE_TC_001	Functional	Backend	Check if all the routes are working properly	All the routes should properly work	Working as expected	PASS
M_TC_001	Functional	Model	Check if the model can handle various image sizes	The model should rescale the image and predict the results	Working as expected	PASS
M_TC_002	Functional	Model	Check if the model predicts the digit	The model should predict the number	Working as expected	PASS
M_TC_003	Functional	Model	Check if the model can handle complex input image	The model should predict the number in the complex image	The model fails to identify the digit since the model is not built to handle such data	FAIL
RP_TC_001	UI	Result Page	Verify UI elements in the Result Page	The Result page must be displayed properly	Working as expected	PASS
RP_TC_002	UI	Result Page	Check if the input image is displayed properly	The input image should be displayed properly	The size of the input image exceeds the display container	FAIL
RP_TC_003	UI	Result Page	Check if the result is displayed properly	The result should be displayed properly	Working as expected	PASS
RP_TC_004	UI	Result Page	Check if the other predictions are displayed properly	The other predictions should be displayed properly	Working as expected	PASS

USER ACCEPTANCE TESTING DEFECT ANALYSIS

Resolution	Severity 1	Severity 2	Severity 3	Severity 4	Total
By Design	1	0	1	0	2
Duplicate	0	0	0	0	0
External	0	0	2	0	2
Fixed	4	1	0	1	6
Not Reproduced	0	0	0	1	1
Skipped	0	0	0	1	1
Won't Fix	1	0	1	0	2
Total	6	1	4	3	14

TEST CASE ANALYSIS

Section	Total Cases	Not Tested	Fail	Pass
Client Application	10	0	3	7
Security	2	0	1	1
Performance	3	0	1	2
Exception Reporting	2	0	0	2

CHAPTER 9

RESULTS

PERFORMANCE METRICS


Locust Test Report									
During: 11/12/2022, 7:05:40 AM - 11/12/2022, 7:14:47 AM									
Target Host: http://127.0.0.1:5000/									
Script: locust.py									
Request Statistics									
Method	Name	# Requests	# Fails	Average (ms)	Min (ms)	Max (ms)	Average size (bytes)	RPS	Failures/s
GET	/	1043	0	13	4	290	1079	1.9	0.0
GET	/predict	1005	0	39648	385	59814	2670	1.8	0.0
Aggregated		2048	0	19462	4	59814	1859	3.7	0.0
Response Time Statistics									
Method	Name	50%ile (ms)	60%ile (ms)	70%ile (ms)	80%ile (ms)	90%ile (ms)	95%ile (ms)	99%ile (ms)	100%ile (ms)
GET	/	10	11	13	15	19	22	62	290
GET	/predict	44000	46000	47000	48000	50000	52000	55000	60000
Aggregated		36	36000	43000	45000	48000	50000	54000	60000

Charts


Total Requests per Second



Response Times (ms)

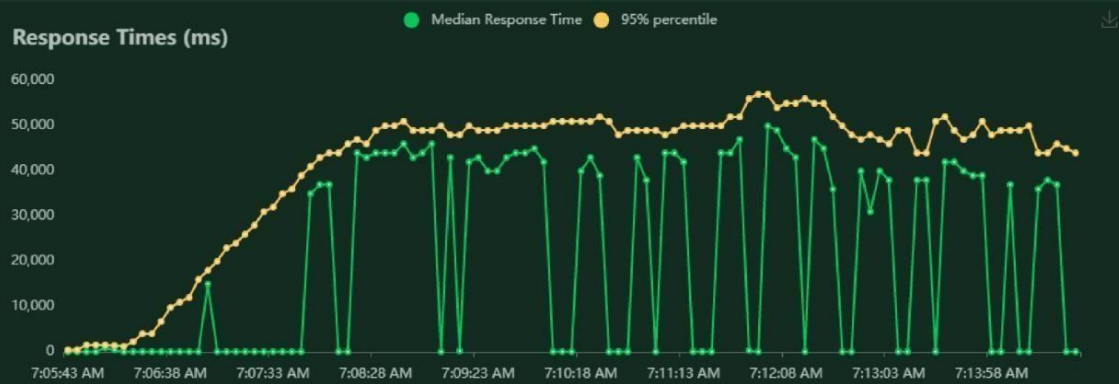

Number of Users

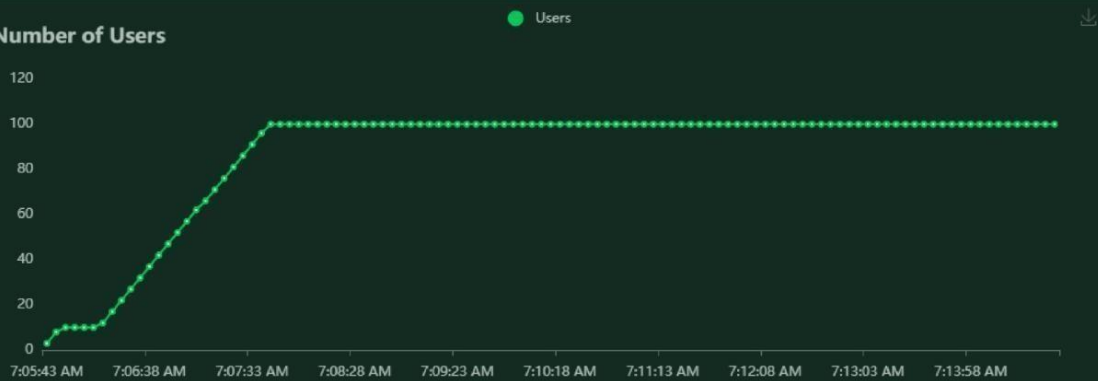

CHAPTER 10

ADVANTAGES & DISADVANTAGES

ADVANTAGES

- Reduces manual work
- More accurate than average human
- Capable of handling a lot of data
- Can be used anywhere from any device

DISADVANTAGES

- Cannot handle complex data
- All the data must be in digital format
- Requires a high performance server for faster predictions
- Prone to occasional errors

CHAPTER 11

CONCLUSION

This project demonstrated a web application that uses machine learning to recognise handwritten numbers. Flask, HTML, CSS, JavaScript, and a few other technologies were used to create this project. The model predicts the handwritten digit using a CNN network. During testing, the model achieved a 99.61% recognition rate. The proposed project is scalable and can easily handle a huge number of users. Since it is a web application, it is compatible with any device that can run a browser. This project is extremely useful in real-world scenarios such as recognizing number plates of vehicles, processing bank cheque amounts, numeric entries in forms filled up by hand (tax forms) and so on. There is so much room for improvement, which can be implemented in subsequent versions.

CHAPTER 12

FUTURE SCOPE

This project is far from complete and there is a lot of room for improvement. Some of the improvements that can be made to this project are as follows:

- Add support to detect from digits multiple images and save the results
- Add support to detect multiple digits
- Improve model to detect digits from complex images
- Add support to different languages to help users from all over the world

This project has endless potential and can always be enhanced to become better. Implementing this concept in the real world will benefit several industries and reduce the workload on many workers, enhancing overall work efficiency.

APPENDIX

SOURCE CODE

MODEL CREATION

```
# Load the necessary packages
import numpy as np
import pandas as pd
import matplotlib.pyplot as plt
from keras.utils import np_utils
from tensorflow.keras.datasets import mnist
from tensorflow.keras.models import Sequential
from tensorflow.keras.layers import Conv2D, Dense, Flatten
from tensorflow.keras.optimizers import Adam
from tensorflow.keras.models import load_model
from PIL import Image, ImageOps

# Load the data
(X_train, y_train), (X_test, y_test) = mnist.load_data()

# Data pre-processing
X_train = X_train.reshape(60000, 28, 28, 1).astype('float32')
X_test = X_test.reshape(10000, 28, 28, 1).astype('float32')

number_of_classes = 10
Y_train = np_utils.to_categorical(y_train, number_of_classes)
Y_test = np_utils.to_categorical(y_test, number_of_classes)
```

```
# Create the model
model = Sequential()
model.add(Conv2D(64, (3, 3), input_shape=(28, 28, 1), activation="relu"))
model.add(Conv2D(32, (3, 3), activation="relu"))
model.add(Flatten())
model.add(Dense(number_of_classes, activation="softmax"))

model.compile(loss='categorical_crossentropy', optimizer="Adam", metrics=["accuracy"])

# Train the model
model.fit(X_train, Y_train, batch_size=32, epochs=5, validation_data=(X_test, Y_test))

# Evaluate the model
metrics = model.evaluate(X_test, Y_test, verbose=0)
print("Metrics (Test Loss & Test Accuracy): ")
print(metrics)

# Save the model
model.save("model.h5")
```

```
# Test the saved model
model=load_model("model.h5")

img = Image.open("sample.png").convert("L")
img = img.resize((28, 28))
img2arr = np.array(img)
img2arr = img2arr.reshape(1, 28, 28, 1)
results = model.predict(img2arr)
results = np.argmax(results,axis = 1)
results = pd.Series(results,name="Label")
print(results)
```

FLASK APP

```
from flask import Flask,render_template,request
from recognizer import recognize

app=Flask(__name__)

@app.route('/')
def main():
    return render_template("home.html")

@app.route('/predict',methods=['POST'])
def predict():
    if request.method=='POST':
        image = request.files.get('photo', '')
        best, others, img_name = recognize(image)
        return render_template("predict.html", best=best, others=others, img_name=img_name)

if __name__=="__main__":
    app.run()
```

RECOGNIZER

```
# Import necessary packages
import os
import random
import string
from pathlib import Path
import numpy as np
from tensorflow.keras.models import load_model
from PIL import Image, ImageOps
```

```
def random_name_generator(n: int) -> str:
    """
    Generates a random file name.

    Args:
        n (int): Length the of the file name.

    Returns:
        str: The file name.
    """
    return ''.join(random.choices(string.ascii_uppercase + string.digits, k=n))
```

```
def recognize(image: bytes) -> tuple:
    """
    Predicts the digit in the image.

    Args:
        image (bytes): The image data.

    Returns:
        tuple: The best prediction, other predictions and file name
    """

    model=load_model(Path("./model/model.h5"))

    img = Image.open(image).convert("L")

    # Generate a random name to save the image file.
    img_name = random_name_generator(10) + '.jpg'
    if not os.path.exists(f"./static/data/"):
        os.mkdir(os.path.join('./static/', 'data'))
    img.save(Path(f"./static/data/{img_name}"))

    # Convert the Image to Grayscale, Invert it and Resize to get better prediction.
    img = ImageOps.grayscale(img)
    img = ImageOps.invert(img)
    img = img.resize((28, 28))

    # Convert the image to an array and reshape the data to make prediction.
    img2arr = np.array(img)
    img2arr = img2arr / 255.0
    img2arr = img2arr.reshape(1, 28, 28, 1)

    results = model.predict(img2arr)
    best = np.argmax(results,axis = 1)[0]

    # Get all the predictions and it's respective accuracy.
    pred = list(map(lambda x: round(x*100, 2), results[0]))

    values = [0, 1, 2, 3, 4, 5, 6, 7, 8, 9]
    others = list(zip(values, pred))

    # Get the value with the highest accuracy
    best = others.pop(best)

    return best, others, img_name
```

HOME PAGE (HTML)

```
<html>
  <head>
    <meta name="viewport" content="width=device-width, initial-scale=1.0" />
    <title>Handwritten Digit Recognition</title>
    <link rel="icon" type="image/svg" sizes="32x32" href="{{url_for('static',filename='images/icon.svg')}}" />
    <link rel="stylesheet" href="{{url_for('static',filename='css/main.css')}}" />
    <script src="https://unpkg.com/feather-icons"></script>
    <script defer src="{{url_for('static',filename='js/script.js')}}"></script>
  </head>
  <body>
    <div class="container">
      <div class="heading">
        <h1 class="heading__main">Handwritten Digit Recognizer</h1>
        <h2 class="heading__sub">Easily analyze and detect handwritten digits</h2>
      </div>
      <div class="upload-container">
        <div class="form-wrapper">
          <form class="upload" action="/predict" method="post" enctype="multipart/form-data">
            <label id="Label" for="upload-image"><i data-feather="file-plus"></i>Select File</label>
            <input type="file" name="photo" id="upload-image" hidden />
            <button type="submit" id="up_btn"></button>
          </form>
          
        </div>
      </div>
    </div>
  </body>
</html>
```

HOME PAGE (CSS)

```
@import url("https://fonts.googleapis.com/css2?family=Overpass:wght@200;300;400;500;600;700;900&display=swap");

* {
  padding: 0;
  margin: 0;
}

body {
  color: black;
  font-family: "Overpass", sans-serif;
}
```

```

.container {
  width: 100%;
  height: 100%;
  display: flex;
  flex-direction: column;
  justify-content: center;
  align-items: center;
  background-color: white;
}

.heading {
  margin-top: -2rem;
  padding-bottom: 2rem;
  width: fit-content;
  text-align: center;
}

.heading .heading__main {
  font-size: 3rem;
  font-weight: 550;
}

.heading .heading__sub {
  font-size: 1rem;
  color: rgb(90, 88, 88);
}

.upload-container {
  box-shadow: 0 0 20px rgb(172, 170, 170);
  width: 40rem;
  height: 25rem;
  padding: 1.5rem;
}

.form-wrapper {
  background-color: rgba(190, 190, 190, 0.5);
  width: 100%;
  height: 100%;
  display: flex;
  border: 1px dashed black;
  justify-content: center;
  align-items: center;
}

.form-wrapper #Loading {
  display: none;
  position: absolute;
}

```

```

.form-wrapper .upload {
  display: flex;
  justify-content: center;
  align-items: center;
  width: 8rem;
  height: -webkit-fit-content;
  height: -moz-fit-content;
  height: fit-content;
  border-radius: 6px;
  color: white;
  background-color: rgb(114, 96, 182);
  box-shadow: 0 5px 10px rgb(146, 135, 247);
}

.form-wrapper .upload #up_btn {
  display: none;
}

.form-wrapper .upload label {
  font-size: 1rem;
  font-weight: 600;
  color: white;
  height: 100%;
  width: 100%;
  padding: 10px;
  display: block;
}

.form-wrapper .upload svg {
  height: 15px;
  width: auto;
  padding-right: 8px;
  margin-bottom: -2px;
}

@media screen and (max-width: 700px) {
  .upload-container {
    height: 20rem;
    width: 18rem;
    margin-top: 3.5rem;
    margin-bottom: -8rem;
  }

  .heading .heading__main {
    margin-top: -6rem;
    font-size: 2rem;
    padding-bottom: 1rem;
  }
}

```

HOME PAGE (JS)

```
feather.replace(); // Load feather icons

form = document.querySelector('.upload')
loading = document.querySelector("#loading")
select = document.querySelector("#upload-image");

select.addEventListener("change", (e) => {
  e.preventDefault();

  form.submit()
  form.style.visibility = "hidden";
  loading.style.display = 'flex';
});
```

PREDICT PAGE (HTML)

```
<html>
  <head>
    <title>Prediction | Handwritten Digit Recognition</title>
    <link rel="stylesheet" href="{{url_for('static',filename='css/predict.css')}}"/> />
    <link rel="icon" type="image/svg" sizes="32x32" href="{{url_for('static',filename='images/icon.svg')}}"/>
  />
  <meta name="viewport" content="width=device-width, initial-scale=1.0" />
</head>
<body>
  <div class="container">
    <h1>Prediction</h1>
    <div class="result-wrapper">
      <div class="input-image-container">
         />
      </div>
      <div class="result-container">
        <div class="value">{{best.0}}</div>
        <div class="accuracy">{{best.1}}%</div>
      </div>
    </div>
    <h1>Other Predictions</h1>
    <div class="other_predictions">
      {% for x in others %}
        <div class="value">
          <h2>{{x.0}}</h2>
          <div class="accuracy">{{x.1}}%</div>
        </div>
      {% endfor %}
    </div>
  </div>
</body>
</html>
```

```

@import url("https://fonts.googleapis.com/css2?family=Overpass:wght@200;300;400;500;600;700;900&display=swap");

body {
  color: black;
  font-family: "Overpass", sans-serif;
}

h1 {
  padding-top: 2rem;
}

.container {
  display: flex;
  justify-content: center;
  align-items: center;
  flex-direction: column;
}

.result-wrapper {
  width: -webkit-fit-content;
  width: -moz-fit-content;
  width: fit-content;
  height: -webkit-fit-content;
  height: -moz-fit-content;
  height: fit-content;
  box-shadow: 0 0 10px rgb(126, 125, 125);
  padding: 1.5rem;
  display: flex;
  justify-content: center;
  align-items: center;
  -moz-column-gap: 1rem;
  column-gap: 1rem;
}

.result-wrapper .input-image-container,
.result-wrapper .result-container {
  width: 15rem;
  height: 15rem;
  border: 1px dashed black;
  justify-content: center;
  display: flex;
  align-items: center;
  flex-direction: column;
  background-color: rgb(209, 206, 206);
}

```



```

.result-wrapper .input-image-container img {
  width: 60%;
  height: 60%;
  background-color: aqua;
  background-size: contain;
}

.result-wrapper .result-container .value {
  font-size: 6rem;
}

.result-wrapper .result-container .accuracy {
  margin-top: -1rem;
}

.other_predictions {
  display: flex;
  justify-content: center;
  align-items: center;
  flex-wrap: wrap;
  column-gap: 1rem;
  row-gap: 1rem;
  font-weight: 700;
}

.other_predictions .value {
  display: flex;
  justify-content: center;
  align-items: center;
  flex-direction: column;
  width: 5rem;
  height: 5rem;
  box-shadow: 0 0 7px rgb(158, 157, 157);
}

.other_predictions .value div {
  margin-top: -1.2rem;
}

@media screen and (max-width: 700px) {
  h1 {
    font-size: 2.3rem;
  }

  .result-wrapper .input-image-container,
  .result-wrapper .result-container {
    width: 7rem;
    height: 7rem;
  }

  .result-wrapper .result-container .value {
    font-size: 4rem;
  }
}

```



GITHUB

<https://github.com/IBM-EPBL/IBM-Project-41799-1660644980>