EMERGING METHODS FOR EARLY DETECTION OF FOREST FIRES

A PROJECT REPORT

Submitted by

KAMALAKAR. S (950019106019)

MAHARAJ.R (950019106022)

SHAAMINI.S (950019106039)

SELSHIA MARY.C (950019106038)

TEAM ID: PNT2022TMID49620

BACHELOR OF ENGINEERING IN

ELECTRONICS AND COMMUNICATION

ENGINEERING



S.NO TABLE OF CONTENT 1 **INTRODUCTION** 1.1 **Project Overview** 1.2 Purpose 2 LITERATURE SURVEY 2.1 Existing problem 2.2 Reference 2.3 **Problem Statement Definition** 3 **IDEATION & PROPOSED SOLUTION** 3.1 **Empathy Map Canvas** 3.2 Ideation &Brainstorming 3.3 **Proposed Solution** 3.4 Problem Solution Fit 4 REQUIREMENT ANALYSIS 4.1 Functional requirements 4.2 Non-Functional requirements 5 PROJECT DESIGN 5.1 Data Flow Diagrams 5.2 Solution & Technical Architecture 5.3 **User Stories** 6 PROJECT PLANNING & SCHEDULING 6.1 Sprint Planning & Estimation 6.2 Sprint Delivery Schedule 6.3 Reports from JIRA 7 **CODING & SOLUTIONING (Explain the features**

added in the project along with code)

- 7.1 Feature 1
- 7.2 Feature 2
- 7.3 Database Scheme (if applicable)

8 **TESTING**

8.1 **Test Cases**

- 8.2 User Acceptance Testing
- 9 RESULT
 - 9.1 Performance Metrics
- 10 ADVANTAGES & DISADVANTAGES
- 11 CONCLUSION
- 12 FUTURE SCOPE
- 13 APPENDIX

Source Code

GitHub & Project Demo Link

1.INTRODUCTION

1.1.PROJECT OVERVIEW

It is difficult to predict and detect forest fires in sparsely populated forest areas and it is more difficult when the prediction is done using ground-based models like cameras. Satellites can be an important source of data prior to and also during the fire due to their reliability and efficiency. The various real time forest fire detection and prediction approaches, results in the goal of informing the local fire authorities.

1.2.PURPOSE:

To detect the forest fire in the early stage. For the early detection of forest fire, the proposed model has an image recognition system method based on Deep learning model.

2.LITERATURE SURVEY

2.1.EXISTING METHOD:

S.NO	AUTHOR	TITLE	NAME OF JOURNAL
	Medi RahuL, Karnekanti	Early Detection	2020.IEEE REGION10
1.	Shiva, SakethAttiliSanjeet and	of Forest fire	Conference(TENCON),2020,pp.
	Nenavath Srinivas Naik.	using Deep	11361140,doi:10.1109/tencon
		Learning.	50793.2020.9293722.

- The system involves pre-processing the image data and applying data augmentation such as shearing, flipping, etc.
- It uses models like VGG16, ResNet50, and DenseNet121 for the classification of images.
- The model initially divides the train and test sets in 80% and 20% and then sent to the pre-processing phase, where finally it is trained to classify them into two classes fire and non-fire.
- By using the optimal learning rate the proposed model was able to achieve a training set accuracy of 92.7% and an est set accuracy of 82.57%.

S.NO	AUTHOR	THOR TITLE	
	Byron Arteaga, Mauricio	Deep Learning	2020 IEEE International
2.	Diaz, Mario jajoa, University	Applied forest	Symposium on signal processing
	of Naino Pasto Columbia .	Fire Detection.	and information
			Technology(ISSPIT),2020,pp,
			16,doi:10,1109/ISSPIT51521.20
			20.9408859.

- The data processing was done through open source programming language Python, the cloud service Googlecollab, and deep learning algorithms using Pytorch's library.
- After the data augmentation and pre-processing of the training image, three types of transformation takes place cropping of the image, rotating of an image, and normalizing of the image.
- The classification of images is done by using the pre-trained models of ResNet and VGG
 pre-trained models.
- To validate the performance of each pre-trained model the k-fold method is used.
- The model obtained during the validation is sent to Raspberry to test its functionality.

S.NO	AUTHOR	TITLE	NAME OF JOURNAL
3.	Raghad k. Mohammed(Department of Basic sciences,college of Density, University Baghdad,Baghdad,Iraq).	A Real-time forest fire and Smoke detection System Using Deep Learning.	International Journal of Nonlinear Analysis and Application 13.1(2022):2053- 2063.

- The proposed framework aims to detect smoke and fire based on the images received from the video stream from the Raspberry Pi
- Pre-processing of image data.
- Image data augmentation (Scale, horizontal flip, and vertical flip).
- Pre-trainingng model imagenet dataset ->{inception-ResNet-V2}.
- By fine-tuning the above two steps we have to send that to the fully connected layer with softmax.
- we can view the model accuracy as instead.

S.NO	AUTHOR	TITLE	NAME OF JOURNAL
4.	Suhas.G ,Chetan Kumar,Abhishek.B.S, Digvijay Gowda.K.A, Prajwal.R . student of Department of Computer Science and Engineering, Maharaja Institute of Technology Mysore, Karnataka,India	Fire DetectionUsing Deep Learning.	International Journal of Progressive Research in ScienceAnd Engineeering Volume-1,Issue-5,August- 2020.

- The model is divided into two parts
- a. Data collection and Pre-processing.
- b. Building fire detection model by transfer learning.
- The first step is to gather video frames and it should be divided into two classes fire and non-fire. The collected dataset is divided into train and test sets.
- The second step is to extract the video features of pre-trained models using Keras.
- We have used ResNet-50, Inception V3, and InceptionResNetV2 models to extract the features and various ML algorithms on the extracted features to detect fire in video frames.

2.2.REFERENCES:

- 1.Early detection of forest fire https://ieeexplore.ieee.org/document/9293722 using deep learning.
- 2.Deep Learning Applied -https://ieeexplore.ieee.org/document/9408859
 Forest fire Detection.
- 3.A Real-time Forest Fire Smoke detection https://ijnaa.semnan.ac.ir/article-5899.html
 System Using Deep Learning.
- 4.Fire Detection Using https://journals.grdpublications.com/index.php/ijprse/article/view/141
 Deep Learning.


2.3.PROBLEM STATEMENT DEFINITION

Forest fires is a wide spread and critical factor in the earth's ecosystem. The most effective and vital solution is early detection fires to preserve natural resources and to protect living creatures.

Who does the problem affect?	People living in the forest.
When does the issue occurs?	When there is a climate change in the
	environment .
Where is the issue occurring?	The issue occurs when there is a
	difficulty to identify the forest fires.
What is the issue?	Forest fires are a major environmental
	issue,creating economic and
	ecological damage while endangering
	human lives.
Why is it important that we fix the	By solving these issues,it can reduce
problem?	the forest fire in the beginning
	stage,by alerting user and can save the
	ecosystem and human lives.

3.IDEATION & PROPOSED SOLUTION

3.1.EMPATHY MAP CANVAS

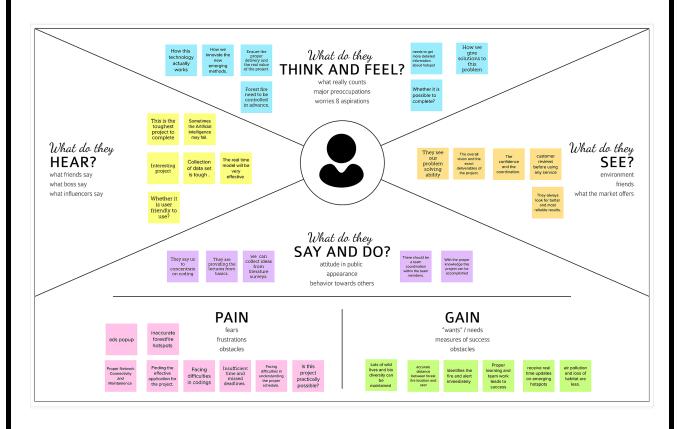

3.2.BRAINSTORMING:

Problem Statements:

PROBLEM

How might we able to find a simple way to alert the forest fire in advance?

PROBLEM

How might we are going to setup the process in user friendly model?

Brainstorm:



Brainstorm

Write down any ideas that come to mind that address your problem statement.

10 minutes

TIP You can select a sticky note and hit the pencil [switch to sketch] icon to start drawing!

KAMALAKAR

Collect various datasets with high accuracy.

User need

to have a

seamless

connection

The web application should be available in all languages

424 and 475

Average temperature at which the fire will ignite is between

Simple and easier user interface should be made

Monitor the project work.

SHAAMINI

Avoid the use of heating and spark producing for driedup vegetation

Drone water spraying system

Alert can be sent via alarm system and messages.

Gather the information from experts.

MAHARAJ

Camera monitoring system

The camera should have night vision to monitor in dark

SELSHIA MARY

Visualize the hotspot

Maintains the histogram

Creates

simple as

well as

clearheaded

UI

Periodically update hotspot data

Generates the monthly report

Plot the mind map to track the activities.

> Keep the accurate yearly records.

Search for the relevant references and the data sets.

Follow with a group discussion.


Improve the communicatiom networks

Track down the monthly activities.

Alerts the user

Group ideas: Collect Alert can be various sent via alarm datasets with system and high messages. accuracy. Track down Alerts the the monthly activities. user Plot the Gather the mind map information to track the from activities. experts. Periodically Monitor the update hotspot data project work.

Priortize:

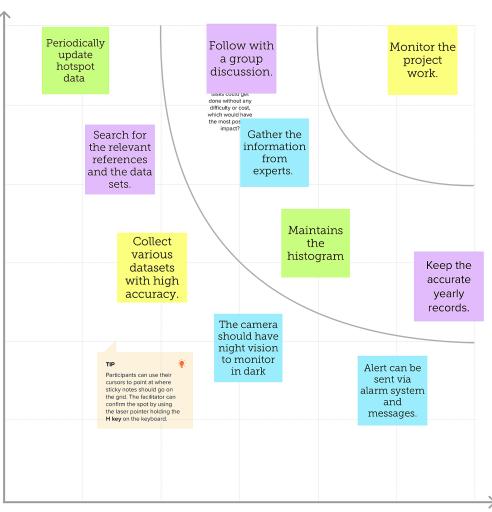

3.3.PROPOSED SOLUTION:

S. No.	Parameter	Description
1.	Problem Statement (Problem to be solved)	1.Forest fires are a major environmental issue, creating economic and ecological damage while endangering human lives. 2.It is difficult to predict and detect Forest Fire in a sparsely populated forest area. 3.So, it is necessary to detect the fire in an early stage to control it.
2.	Idea / Solution description	1.The model will detect forest fires automatically with the help of image processing in deep learning, with the use of images and videos given by the user to observe, detect and report fire events.
3.	Novelty / Uniqueness	When the fire is detected, the station will get a notification via message and an alarm system will be activated automatically to alert the user.
4.	Social Impact / Customer Satisfaction	1.This can reduce the forest fire in the beginning stage, by alerting users.2.The user can also use this as a surveillance3.Camera to monitor the forest.Saving the most essential Forest cover.
5.	Business Model (Revenue Model)	1.This application will be available in a subscription-based model.2.Supply chain, power & supply, Fire stations, and government by providing services.
6.	Scalability of the Solution	1.This application can monitor different places simultaneously and can detect fire accurately2.This application can handle a large number of users and data simultaneously.

3.4.PROPOSED SOLUTION FIT:

Project	Title:Early Detection of forest fire using deep learning	Project Design Phase-I Solution Fit Template	Team ID: PNT2022TMID49620
Define CS, fit into CC	1.Customer service 1.Tribal people and forest department officers living in forest. 2.Animals , birds and other living things in the forest.	6. CUSTOMER CONSTRAINTS 1. Solar power cameras can be used as a power source 2. Waterproof cameras. 3. Seamless connection.	1.Notification is sent via messages. 2.Fire alarm is activated to nearby stations.
Focus on J&P, into BE, understand RC	2. JOBS-TO-BE-DONE / PROBLEMS 1. Detecting small fire sparks in forest becomes difficult. 2. Camera should always be in motion	9. PROBLEM ROOT CAUSE 1. Special analysis system can be used. 2. Wireless mobile network via SIM can be used transfer alert message throughout areas.	7. BEHAVIOUR 1. Climate change should be monitored. 2. Hot areas should be monitored clearly.
Identify strong TR & EM	3. TRIGGERS 1. Correct detection. 2. Alarm alert 3. Follow correct algorithm 4. EMOTIONS: BEFORE / AFTER BEFORE 1. Unable to detect small sparks. 2. camera should always be in motion. 1. Able to detect small sparks. 2. 360 view of camera is used.	1. Mobile application can be developed for specific areas. 2. Forest can be monitored by several cameras. 3. This can be used in wild life sanctuaries.	8.CHANNELS of BEHAVIOUR ONLINE Connected direc1tly to the user via Internet. OFFLINE Alerts can be sent via Offline messages and an alarm system is activated.

4.REQUIREMENT ANALYSIS

4.1.FUNCTIONAL REQUIREMENTS:


FR No.	FunctionalRequirement(Epic)	SubRequirement(Story/Sub-Task)
FR-1	User Registration	Registration through Form Registration through
		Gmail Registration through LinkedIN
FR-2	User Confirmation	Confirmation via Email
		Confirmation via OTP
FR-3	Image recognition	The system shall be able to take real inputs of
		satellites images and determine whether image
		contains fire or not.
FR-4	Forest Monitoring	Forest are monitored 24/7 through
FR-5	Alert	The system will send notification to the user when
		fire is detected
FR-6	Detection	The system shall take training sets of fire and
		checks for fire or no fire or smoke
FR-7	Operating system	The system can run as a service on Windows .

4.2.NON-FUNCTIONAL REQUIREMENTS


FR No.	Non-FunctionalRequirement	Description
NFR-1	Usability	Model is user friendly to use and very
		effective.
NFR-2	Security	More secure environment.
NFR-3	Reliability	Model is safe to install.
NFR-4	Performance	Model will achieve high accuracy.
NFR-5	Availability	Build model is available in all thetime
NFR-6	Scalability	Model can handle large amount of data and can
		easily adapt to every environment.
NFR-7	Testability	Putting in more training data into the model
		can Improve the accuracy level of the system.

5.PROJECT DESIGN

5.1.DATA FLOW DIAGRAMS:

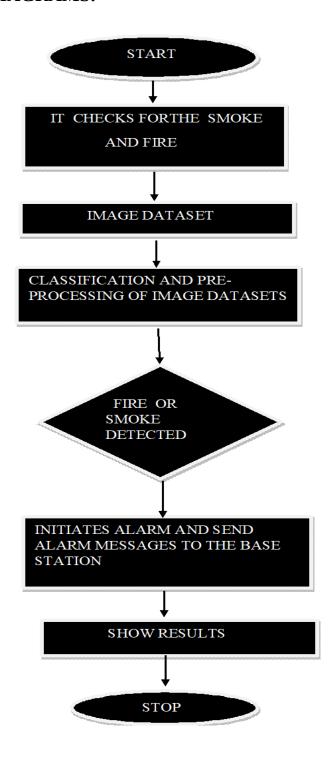

5.2.SOLUTION AND TECHNICAL ARCHIETECTURE:

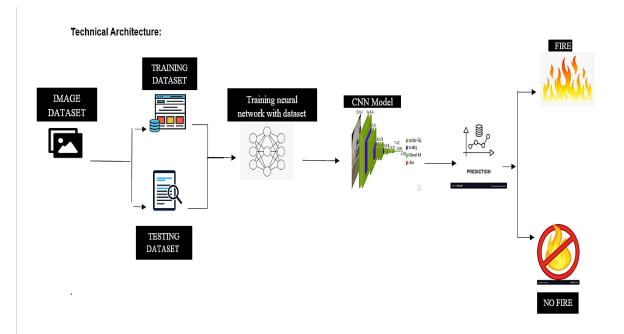

5.3.USER STORIES:

UserType	Function	User	UserStory/Task	Acceptance	Priority	Release
	al	Story		criteria		
	Requirem ent(Epic)	Number				
Customer (Mobile user)	Registration	USN-1	As a user,I can register for the application by entering my email, password, and confirming my password.	I can access my account/dashboa rd	High	Sprint-1
		USN-2	As a user, I will receive confirmation email on cell phone have registered for the application	I can receive confirmation email & click confirm	High	Sprint-1
		USN-3	As a user, I can register for the application through Facebook	I can register & access the dashboard with Facebook Login	Low	Sprint-2
		USN-4	As a user , I can register for the application through Gmail		Medium	Sprint-1
	Login	USN-5	As a user,I can log into the application by entering email & password		High	Sprint-1
	Dashboard					

6.PROJECT PLANNING & SCHEDULING:

6.1.SPRINT PLANNING & ESTIMATION:

Sprint	Functional Requirement	User Story	User Story / Task	Story Points	Priority	Team Members
	(Epic)	Number				
Sprint-1	Download data set	USN-1	The data is downloaded from the Kaggle website and then the data set is classified into training and testing images.	10	High	S. Kamalakar
Sprint-1	Image pre- processing	USN-1	In Image processing technique the first step is usually importing the libraries that will be needed in the program. Import Keras library from that library and import the ImageDataGenerator Library to the Python script. The next step is definig the arguments for the ImageDataGenerator . Here the arguments which we are given inside the image data generator class are, rescale, shear_range, rotation range of image, and zoom range that we can consider for images. The next step is applying	10	High	S. Kamalakar S. Shaamini C. Selshia Mary R. Maharaj

			the ImageDataGenerator arguments to the train and test dataset.			
Sprint-2	Training image	USN-2	In this training phase the ImageDataGeneratorargu ments is applied to the training images and the model is tested with several images and the model is saved.	20	High	S. Kamalakar S. Shaamini C. Selshia Mary R. Maharaj
Sprint-3	Testing image	USN-3	In this testing phase the Image processing techniques is applied to the testing images and executed for prediction.	20	High	S. Kamalakar S. Shaamini C. Selshia Mary R. Maharaj
Sprint-4	Evaluation metrics and accuracy	USN-4	In this phase the result, prediction, accuracy, and performance of the model are tested.	20	High	S. Kamalakar S. Shaamini C. Selshia Mary R. Maharaj

MILESTONE & ACTIVITY LIST:

Activity Number	Activity Name	Detailed Activity Description	Task Assigned	Status
1.1	Access Resources	Accesstheresources(courses)inproject dashboard.	All Members	COMPLETED
1.2	Rocket chat registration	Join the mentoring channel via platform& rocket-chat mobile app.	All Members	COMPLETED
1.3	Access workspace	Access the guided project workspace.	All Members	COMPLETED
1.4	IBM Cloud registration	Register on IBM Academic Initiative &Apply Feature code for IBM Cloud Credits.	All Members	COMPLETED

1.5	Project Repository	Create GitHub account &	All Members	COMPLETED
	Creation	collaboratewith Project		
		Repository in project workspace.		
1.6	Environment Setup	Set-up the Laptop / Computers	All Members	COMPLETED
		basedon the pre-requisites for each		
		technology track.		
2.1	Literature survey	Literature survey on the selected	All	COMPLETED
		project& Information Gathering.	Members	
2.2	Technology	Attend the technology trainings as	All Members	COMPLETED
	Training	perthe training Calendar.		
2.3	Empathy Map	Prepare EmpathyMapCanvasto	All Members	COMPLETED
		capture the user Pains &Gains,		
		Preparelistofproblemstatements		
2.4	Technology	Attend the technology trainings as	All Members	COMPLETED
	Training	perthe training Calendar.		
2.5	Brainstorming	List the ideas (at least 4 per each	All Members	COMPLETED
		team member) by organizing the		
		brainstorm session and prioritize		
		the ideas		

2.6	Technology Training	Attend the technology trainings as perthe training Calendar.	All Members	COMPLETED
3.1	Proposed Solution Document	Prepare theproposedsolution document, which includes the novelty, feasibility of idea, business model, social impact, scalability of solution, etc.	All Members	COMPLETED
3.2	Technology Training	Attend the technology trainings as perthe training Calendar.	All Members	COMPLETED

3.3	Problem - Solution fit &	Prepare problem - solution fit	All Members	COMPLETED
	SolutionArchitecture	document& Solution		
		Architecture.		
3.4	Technology Training	Attend the technology trainings	All Members	COMPLETED
		as per		
		the training		
		Calendar.		
4.1	Customer Journey Map	Prepare the customer journey	All Members	COMPLETED
		maps to understand the user		
		interactions & experiences with		
		the application (entry to exit).		
4.2	Technology Training	Attend the technology trainings	All Members	COMPLETED
		as perthe training Calendar.		
4.0	5 11 15 1 10	Durana	Allad	0014015750
4.3	Functional Requirements&	Prepare	All Members	COMPLETED
	Data Flow Diagrams	theFunctionalRequirement		
		Document &DataFlow		
		Diagrams.		
4.4	Technology Architecture	Prepare Technology	All Members	COMPLETED
		Architecture		
		of the solution.		
4.5	Technology Training	Attend the technology trainings	All Members	COMPLETED
		as		
		per the training Calendar.		
5.1	Milestone&Activity List	Prepare Milestone &	All Members	COMPLETED
		Activity List.		
5.2	Sprint Delivery Plan	Prepare Sprint Delivery Plan.	All Members	COMPLETED
<u> </u>	1	<u> </u>		


6	Data Collection	Collect datasets from different open sources likekaggle.com, data.gov, UCI machine learningrepository, etc.	All Members	COMPLETED
7.1	Image Preprocessing	Importingthe ImageDataGenerator Library	All Members	COMPLETED
7.2	Image Preprocessing	Define the parameters/arguments for ImageDataGenerator class.	All Members	COMPLETED
7.3	Image Preprocessing	ApplyingImageDataGenerator functionality to trainset and test set.	All Members	COMPLETED

	ı	1	1	
8.1	Model Building	Importing the model building	All	COMPLETED
		libraries.	Members	
8.2	Model Building	Initializing the model.	All Members	COMPLETED
8.3	Model Building	Adding CNN Layers.	All	COMPLETED
			Members	
8.4	Model Building	Adding Dense Layers	All Members	COMPLETED
8.5	Model Building	Configuring the learning process	All	COMPLETED
			Members	
8.6	Model Building	Training the Model	All Members	COMPLETED
8.7	Model Building	Save the model	All Members	COMPLETED
8.8	Model Building	Predictions	All Members	COMPLETED
9.1	Video Analysis	OpenCV for video processing.	All Members	COMPLETED
9.2	Video Analysis	Creating an account in Twilio service.	All Members	COMPLETED
9.3	Video Analysis	Sending alert message.	All Members	COMPLETED
10.1	Train CNN Model on IBM	Register for IBM Cloud	All Members	COMPLETED
10.2	Train CNN Model on IBM	Train Image Classification Model	All Members	COMPLETED
<u> </u>	1		1	

6.2.SPRINT DELIVERY SCHEDULE:

Sprint	Total Story Points	Duration	Sprint Start Date	Sprint End Date (Planned)	Story Points Completed (as on Planned End Date)	Sprint Release Date (Actual)
Sprint-1	20	6 Days	24 Oct 2022	29 Oct 2022	20	29 Oct 2022
Sprint-2	20	6 Days	31 Oct 2022	05 Nov 2022	20	05 Nov 2022
Sprint-3	20	6 Days	07 Nov 2022	12 Nov 2022	20	12 Nov 2022
Sprint-4	20	6 Days	14 Nov 2022	19 Nov 2022	20	19 Nov 2022

6.3.REPORTS FROM JIRA:

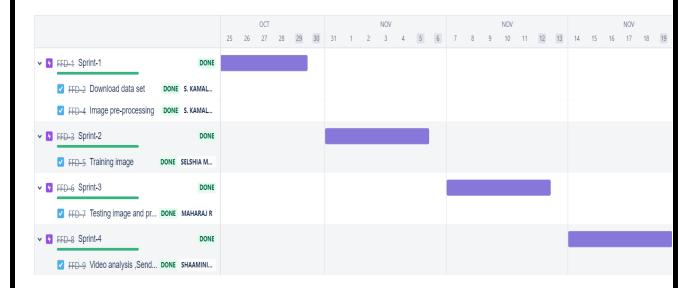

7.CODING & SOLUTIONING

7.1.FEATURE 1:

1.IMAGE DATA GENERATOR:

Keras ImageDataGenerator is used for getting the input of the original data and further, it makes the transformation of this data on a random basis and gives the output resultant containing only the data that is newly transformed. It does not add the data.

from keras.preprocessing.image import ImageDataGenerator

2.PARAMETERS

2.1.Rescale:

The ImageDataGenerator class can be used to rescale pixel values from the range of 0-255 to the range 0-1 preferred for neural network models. Scaling data to the range of 0-1 is traditionally referred to as normalization.

2.2.Shear Range:

Shear range means that the image will be distorted along an axis, mostly to create or rectify the perception angles. It's usually used to augment images so that computers can see how humans see things from different angles.

2.3. Rotation range:

ImageDataGenerator class allows you to randomly rotate images through any degree between 0 and 360 by providing an integer value in the rotation_range argument. When the image is rotated, some pixels will move outside the image and leave an empty area that needs to be filled in.

2.4.Zoom Range:

The zoom augmentation method is used to zooming the image. This method randomly zooms the image either by zooming in or it adds some pixels aroundthe

image to enlarge the image. This method uses the zoom_range argument of the ImageDataGenerator class. It can specify the percentage value of the zooms either in a float, range in the form of an array.

2.5. Horizontal Flip:

Horizontal flip basically flips both rows and columns horizontally. So for this, It have to pass the horizontal_flip=True argument in the ImageDataGenerator constructor.

3.CONVOLUTION NEURAL NETWORK:

A CNN is a kind of network architecture for deep learning algorithms and is specifically used for image recognition and tasks that involve the processing of pixel data. There are other types of neural networks in deep learning, but for identifying and recognizing objects, CNNs are the network architecture of choice. The layers used in the CNN is Convolutional ,maxpooling, and flatten layer.

3.1. Convolutional Layer:

A convolutional layer is the main building block of a CNN. It contains a set of filters (or kernels), parameters of which are to be learned throughout the training. The size of the filters is usually smaller than the actual image. Each filter convolves with the image

Convolution layer is used for a image processing to blur and sharpen images, but also to perform other operations.

from keras.layers import Convolution2D

3.2. Maxpooling Layer:

Max pooling is a pooling operation that selects the maximum element from the region of the feature map covered by the filter.

from keras.layers import MaxPooling2D

3.3.Flatten Layer:

Flattening is used to convert all the resultant 2-Dimensional arrays from pooled feature maps into a single long continuous linear vector. The flattened matrix is fed

as input to the fully connected layer to classify the image.

from keras.layers import Flatten

4.DENSE LAYER:

Dense Layer is used to classify image based on output from convolutional layers.

7.2.FEATURE 2(CODE):

Importing Keras libraries

import keras

Importing ImageDataGenerator from Keras

from matplotlib import pyplot as plt from keras.preprocessing.image import ImageDataGenerator

Defining the Parameters

train_datagen=ImageDataGenerator(rescale=1./255,shear_range=0.2,rotation_range=180,zoom_r ange=0.2,horizontal_flip=True) test_datagen=ImageDataGenerator(rescale=1./255,shear_range=0.2,rotation_range=180,zoom_ra nge=0.2,horizontal_flip=True)

Applying ImageDataGenerator functionality to train dataset

from google.colab import drive
drive.mount('/content/drive')

x_train=train_datagen.flow_from_directory('/content/drive/MyDrive/IBM

PROJECT/dataset/DATA

SET/archive/Dataset/Dataset/train_set',target_size=(64,64),batch_size=32,class_mode='binary')

Applying ImageDataGenerator functionality to test dataset

```
x_test=test_datagen.flow_from_directory('/content/drive/MyDrive/IBM
PROJECT/dataset/DATA
SET/archive/Dataset/Dataset/test_set',target_size=(64,64),batch_size=32,class_mode='binary')
Importing Model Building Libraries
#to define the linear Initialisation import sequential
from keras.models import Sequential
#to add layers import Dense
from keras.layers import Dense
#to create Convolutional kernel import convolution2D
from keras.layers import Convolution2D
#import Maxpooling layer
from keras.layers import MaxPooling2D
#import flatten layer
from keras.layers import Flatten
import warnings
warnings.filterwarnings('ignore')
Initializing the model
model = Sequential()
Adding CNN Layers
model.add(Convolution2D(32,(3,3),input_shape=(64,64,3),activation='relu'))
#add maxpooling layers
model.add(MaxPooling2D(pool_size=(2,2)))
#add faltten layer
model.add(Flatten())
```

Add Dense layers

```
#add hidden layers
model.add(Dense(150,activation='relu'))
#add output layer
model.add(Dense(1,activation='sigmoid'))
configuring the learning process
model.compile(loss='binary_crossentropy',optimizer="adam",metrics=["accuracy"])
Training the model
model.fit_generator(x_train,steps_per_epoch=14,epochs=10,validation_data=x_test,validation_st
eps=4)
Save the model
model.save("forest.h5")
Predictions
#import load model from keras.model
from keras.models import load_model
#import image from keras
from tensorflow.keras.preprocessing import image
import numpy as np
#import cv2
import cv2
#load the saved model
model=load_model("/content/drive/MyDrive/IBM PROJECT/dataset/forest.h5")
img=image.load_img('/content/drive/MyDrive/IBM PROJECT/dataset/DATA
SET/archive/Dataset/Dataset/test_set/with fire/FORESTFIRE (1).jpg')
x=image.img_to_array(img)
```

```
res=cv2.resize(x,dsize=(64,64),interpolation=cv2.INTER_CUBIC)
#expand the image shape
x=np.expand_dims(res,axis=0)
pred=model.predict(x)
pred = int(pred[0][0])
pred
int(pred)
pip install twilio
from twilio.rest import Client
if pred==0:
 print('Forest fire')
 account_sid='AC0f20fb7b8e71118fa14d874dc2384676'
 auth token='74902c8f190f5a4d288bbf5e3b48c84e'
 client=Client(account_sid,auth_token)
 message=client.messages \
 .create(
   body='forest fire is detected, stay alert',
   #use twilio free number
   from_='+18608542959',
   #to number
   to='+916380889559')
 print(message.sid)
 print("Fire detected")
 print("SMS Sent!")
elif pred==1:
 print('No Fire')
```

Open cv for video processing

pip install twilio

from logging import WARNING

#import opency library

import cv2

#import numpy

import numpy as np

#import image function from keras

from keras.preprocessing import image

#import load_model from keras

from keras.models import load_model

#import client from twilio API

from twilio.rest import Client

#import playsound package

Creating An Account in Twilio Service

Sending Alert Message

import cv2

import numpy as np

from google.colab.patches import cv2_imshow

from matplotlib import pyplot as plt

import librosa

from tensorflow.keras.preprocessing import image

from keras.models import load_model

Create a VideoCapture object and read from input file

If the input is the camera, pass 0 instead of the video file name

cap = cv2.VideoCapture('/content/drive/MyDrive/IBM PROJECT/dataset/datasetvideo.mp4')

Check if camera opened successfully

```
if (cap.isOpened()== False):
 print("Error opening video stream or file")
# Read until video is completed
while(cap.isOpened()):
 # Capture frame-by-frame
 ret, frame = cap.read()
 if ret == True:
  cv2_imshow(frame)
  x=image.img_to_array(frame)
  res=cv2.resize(x,dsize=(64,64),interpolation=cv2.INTER_CUBIC)
  #expand the image shape
  x=np.expand_dims(res,axis=0)
  model=load_model("/content/drive/MyDrive/IBM PROJECT/dataset/forest.h5")
  pred=model.predict(x)
  pred = int(pred[0][0])
  pred
  int(pred)
  if pred==0:
   print('Forest fire')
   break
  else:
   print("no danger")
   break
# When everything done, release the video capture object
cap.release()
# Closes all the frames
cv2.destroyAllWindows()
```

```
from twilio.rest import Client
if pred==0:
 print('Forest fire')
 from twilio.rest import Client
 account_sid='AC0f20fb7b8e71118fa14d874dc2384676'
 auth token='74902c8f190f5a4d288bbf5e3b48c84e'
 client=Client(account_sid,auth_token)
 message=client.messages \
 .create(
   body='forest fire is detected, stay alert',
   #use twilio free number
   from_='+18608542959',
   #to number
   to='+916380889559')
 print(message.sid)
 print("Fire detected")
 print("SMS Sent!")
elif pred==1:
 print('No Fire')
```

8.TESTING

8.1.Test Cases:

8.2.User Acceptance Testing:

Purpose of Document:

The purpose of this document is to briefly explain the test coverage and open issues of the [Early detection of forest fire using Deep Learning] project at the time of the release to User Acceptance Testing (UAT).

Defect Analysis:

This report shows the number of resolved or closed bugs at each severity level, and how they were resolved

Resolution	Severit	Severit	Severit	Severit	Subtotal
	y1	y2	y 3	y4	
By Design	5	1	1	1	8
Duplicate	1	0	3	0	4
External	2	3	0	1	6
Fixed	7	2	4	10	23
Not	0	0	0	0	0
Reproduced					
Skipped	0	0	1	1	2
Won'tFix	0	3	2	1	6
Totals	15	9	11	14	4
					9

Test Case Analysis:

This report shows the number of test cases that have passed, failed, and untested

Section	Total Cases	Not Tested	Fail	Pass
Print Engine	5	0	0	5
Client Application	30	0	0	30
Security	2	0	0	2
Out source Shipping	3	0	0	3
Exception Reporting	9	0	0	9
Final Report Output	4	0	0	4
Version Control	2	0	0	2

9.RESULTS

9.1.PERFORMANCSE METRICS:

S.No.	Parameter	Values
1.	Model	As a threat of forest fire increases due to climate
	Summary	changes, the need for finding a detection system
		increases .The proposed Deep Learning-based
		model to predict early detection of forest fire. The
		Proposed model successfully classifies the images
		into fire and no fire, and sends an alert messages
		in case of fire. Thus, the Deep Learning
		algorithms proved their efficiency in detecting
		different objects.
2.	Accuracy	Training Accuracy - 98%
		Validation Accuracy - 95%

10.ADVANTAGES & DISADVANTAGES

ADVANTAGES:


- 1. Ability to cover areas at different altitudes and locations.
- 2. The results is quite accurate with the accuracy upto 95%.
- 3.Reliability The model is very effective, inexpensive and easy to apply.
- 4. The model, it shows the 'fire' and 'no fire' images classified with high accuracy.
- 5. Video analysis of this model leads to low degree of misjudgment of fire detection.

DISADVANTAGES:

- 1.Individual learner is responsible for learning global information to avoid false positives.
- 2.The limited learning and perception ability of individual learners is not sufficient to make them perform well in complex tasks.
- 3. Proper connectivity and maintenance will be a complex task.

11.CONCLUSION

As a threat of forest fire increases due to climate changes, the need for finding a

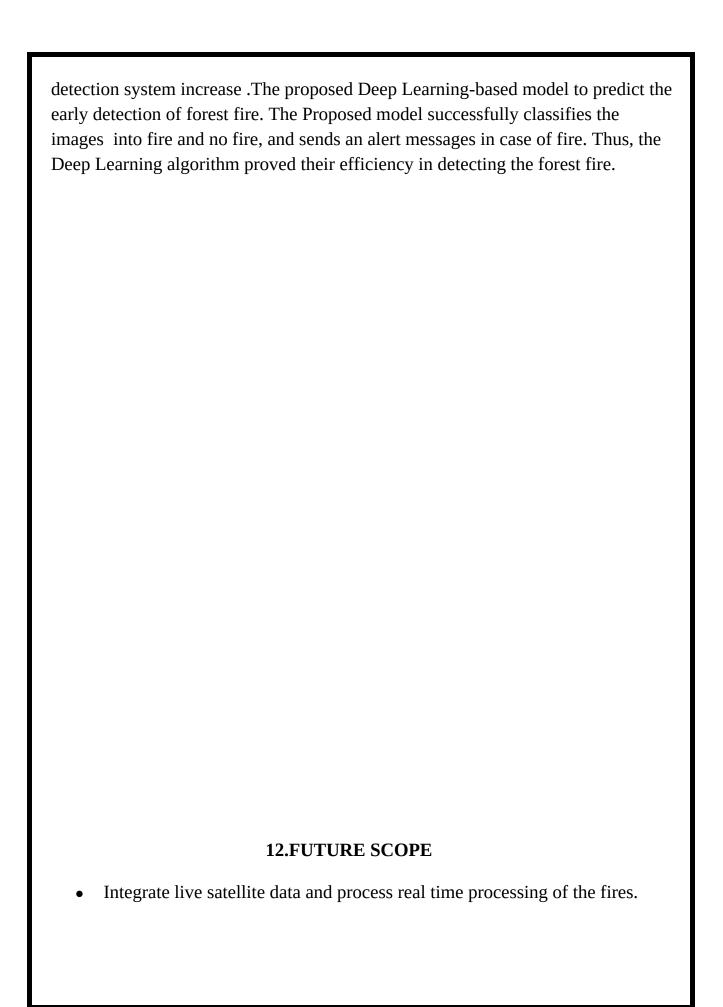

 Enchance the time complexity of the detection of forest fires to improve the speed.
These accidents can be controlled to a greater extend.
• Forest fire leads to destruction of excess of species, by using this technique it will save the life and environment.
13.APPENDIX
SOURCE CODE: Our project source code link:

https://colab.research.google.com/drive/1LzoPeDCL4Mfo4n2lB_iR8HrNAY9IMX
B3 Our Github link - https://github.com/IBM-EPBL/IBM-Project-42560-1660668190
DEMO VIDEO:
Demo video link - https://www.youtube.com/embed/tLLSVqQYB_A