

Date	22 October 2022
Team ID	PNT2022TMID48162
Student Name	S.Parameshwari
Student Rollno	912619104017

Assignment - 4

Kubernetes and Docker

Question

1. Pull an Image from docker hub and run it in Docker Playground
2. Create a docker file for the jobportal application and deploy it in Docker desktop application
3. Create a IBM container registry and deploy helloworld app or jobportal app
4. Create a Kubernetes cluster in IBM cloud and deploy helloworld image or jobportal image and also expose the same app to run in nodeport

Solutions

1. Pull an Image from docker hub and run it in Docker Playground

- a. Pull an image *uifd/ui-for-docker* from the docker hub
- b. This image is used for viewing and managing the docker engine
- c. Use `docker pull image_name` and `docker run -it image_name` commands to run the above image in the Docker Playground

The screenshot shows the 'lets-play-with-docker' website interface. At the top, there's a navigation bar with links like 'Home', 'About', 'Contact', 'Privacy Policy', 'Terms of Service', and 'Help'. Below the navigation bar, there's a large blue header with the time '03:57:12' and a 'CLOSE SESSION' button. The main content area displays the details of a Docker instance named 'cdan30u3_cdan33m3tccg00fgibm0'. The instance has an IP address of '192.168.0.8' and is running the 'alpine:latest' image. There are buttons for 'OPEN PORT', 'DELETE', and 'EDITOR'. Below the instance details, there's a terminal window showing the following commands and output:

```
[root@localhost ~]# docker pull alpine/ui-for-docker
latest: Pulling from alpine/ui-for-docker
Digest: sha256:fe371f95a8954826682487b5eb1244d44c9b34c4ad24487657215b8b149
Status: Image is up to date for alpine/ui-for-docker:latest
docker.io/alpine/ui-for-docker:latest
[root@localhost ~]# docker run -d -p 8080:8080 --privileged -v /var/run/docker.sock:/var/run/docker.sock alpine/ui-for-docker
188447ac786b3272c2f7a9a31826a9b8b8c23f5d387b272f6b832a7ab
[root@localhost ~]#
```

Assignment 4 - Google | x | uifor/docker - Docker | x | Docker Playground | x | UI For Docker | x | New Tab | x | + | v | - | x | x |

Not secure | ip173-18-6-15-cdn1bultrgpo0fg369-9069.direct.labs.play-with-docker.com/ | < | > | ☆ | 📄 | 🔍 |

UI For Docker

[Dashboard](#)
[Containers](#)
[Containers Network](#)
[Images](#)
[Networks](#)
[Volumes](#)
[Info](#)
[Refresh](#)

Running Containers

- tuxing_german Up 10 seconds

Status

Running Stopped Ghost

Containers created

Images created


2. Create a docker file for the jobportal application and deploy it in Docker desktop application

- Create a docker file for build and deploy flask app.
- Use `docker build -t image_name .` in the current directory to start building the docker image and deploy in our local docker
- Use `docker run -p 5000:5000 image_name` to run in local system

Dockerfile

```
FROM ubuntu/apache2
FROM python
COPY ./requirements.txt /flaskApp/requirements.txt
WORKDIR /flaskApp
RUN pip install -r requirements.txt
COPY . /flaskApp
ENTRYPOINT [ "python" ]
CMD ["app.py" ]
```

Steps Involved

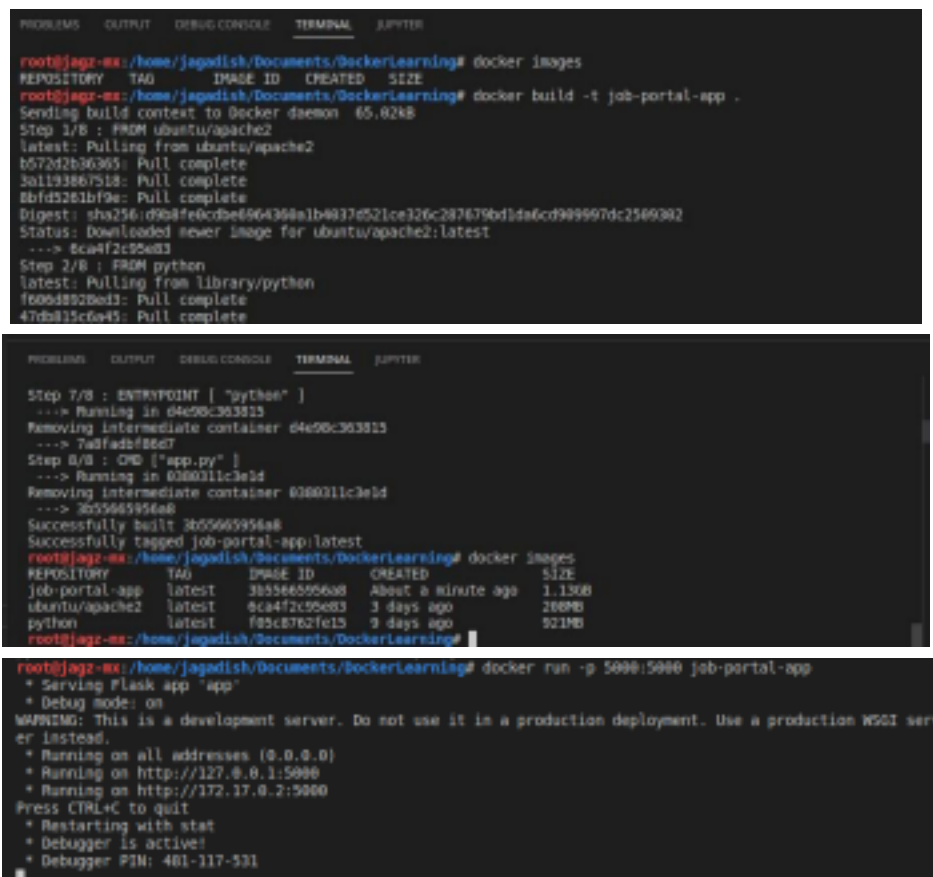


```
root@jagz-ma:/home/jagdish/Documents/DockerLearning# docker images
REPOSITORY TAG IMAGE ID CREATED SIZE
root@jagz-ma:/home/jagdish/Documents/DockerLearning# docker build -t job-portal-app .
Sending build context to Docker daemon 65.02kB
Step 1/8 : FROM ubuntu/apache2
latest: Pulling from ubuntu/apache2
b572d2b36365: Pull complete
3a1193867518: Pull complete
8bfd5261bf9e: Pull complete
Digest: sha256:d9b8fe0cbe6964368a1b4837e521ce326c287679bd1da6cd9989997dc2569382
Status: Downloaded newer image for ubuntu/apache2:latest
--> 8ca4f2c95e83
Step 2/8 : FROM python
latest: Pulling from library/python
f606d8928ed3: Pull complete
47db815c6a45: Pull complete
Step 3/8 : ENTRYPOINT [ "python" ]
--> Running in 64e98c363813
Removing intermediate container 64e98c363813
--> 7a8fadbf86d7
Step 4/8 : CMD ["app.py" ]
--> Running in 0380311c3e1d
Removing intermediate container 0380311c3e1d
--> 3b556e5956a8
Successfully built 3b556e5956a8
Successfully tagged job-portal-app:latest
root@jagz-ma:/home/jagdish/Documents/DockerLearning# docker images
REPOSITORY TAG IMAGE ID CREATED SIZE
job-portal-app latest 3b556e5956a8 About a minute ago 1.15GB
ubuntu/apache2 latest 8ca4f2c95e83 3 days ago 260MB
python latest f89c8762fe13 9 days ago 921MB
root@jagz-ma:/home/jagdish/Documents/DockerLearning# docker run -p 5000:5000 job-portal-app
* Serving Flask app "app"
* Debug mode: on
WARNING: This is a development server. Do not use it in a production deployment. Use a production WSGI serv
er instead.
* Running on all addresses (0.0.0.0)
* Running on http://127.0.0.1:5000
* Running on http://172.17.0.2:5000
Press CTRL+C to quit
* Restarting with stat
* Debugger is active!
* Debugger PIN: 481-117-531
```

Run locally using docker

3. Create a IBM container registry and deploy helloworld app or jobportal app

- a. Log into IBM cloud
- b. Create a **container registry**
- c. Using IBM Cloud CLI, install the **container registry plugin** in our system
- d. Push our docker image into the created container registry using **docker push**
- e. So, our job portal app is deployed in the IBM container registry

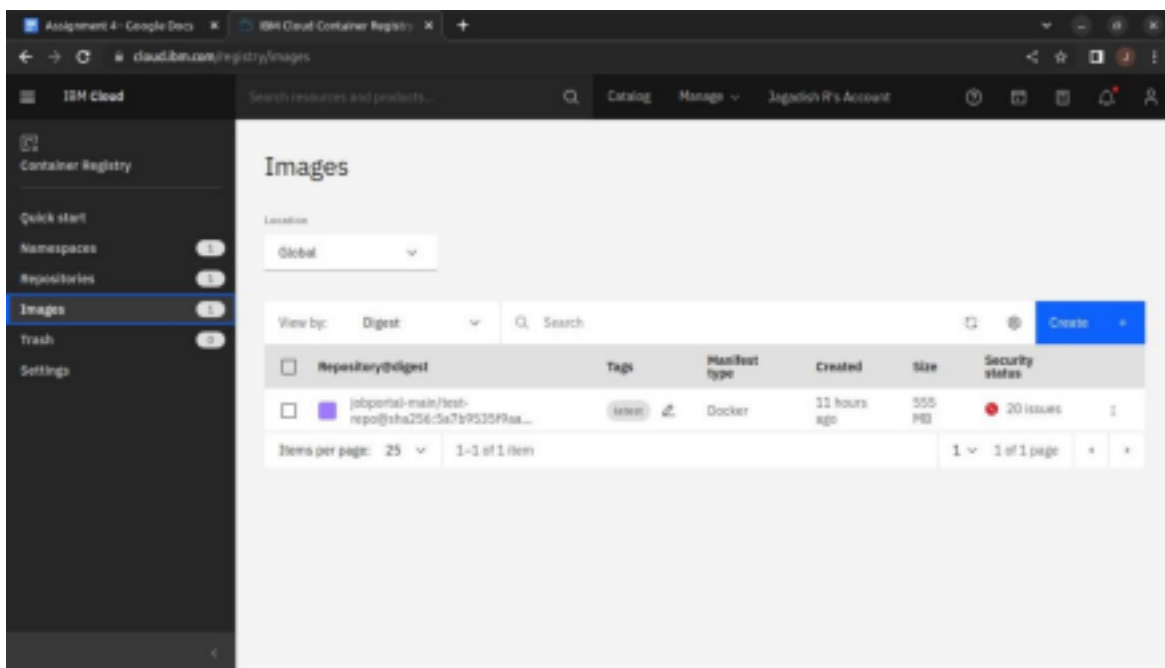


4. Create a Kubernetes cluster in IBM cloud and deploy helloworld image or jobportal image and also expose the same app to run in nodeport

- a. Log into IBM cloud
- b. Create a **kubernete**
- c. Using IBM Cloud CLI, install the **ks plugin** in our system
- d. Create a **cluster** in the kubernetes
- e. Now, go to the **kubernetes dashboard** where we need to create a service based on a yml file (given below)
- f. In that file, we have to mention *which image we are going to use* and the *app name* g.
- Take the **public IP address** and **Nodeport** since we exposed the *flask app in nodeport* h.
- Finally, we got the **url address** where our flask app is hosted


job-portal-app.yml

```
apiVersion: v1
kind: Service
metadata:
  name: job-portal-app
spec:
  selector:
    app: job-portal-app
  ports:
    - port: 5000
    type: NodePort
---
apiVersion: apps/v1
kind: Deployment
metadata:
  name: job-portal-app
  labels:
    app: job-portal-app
spec:
  selector:
    matchLabels:
      app: job-portal-app
  replicas: 1
  template:
    metadata:
      labels:
        app: job-portal-app
    spec:
      containers:
        - name: job-portal-app
          image: image_name
          ports:
            - containerPort: 5000
          env:
            - name: DISABLE_WEB_APP
              value: "false"
```


Cluster creation

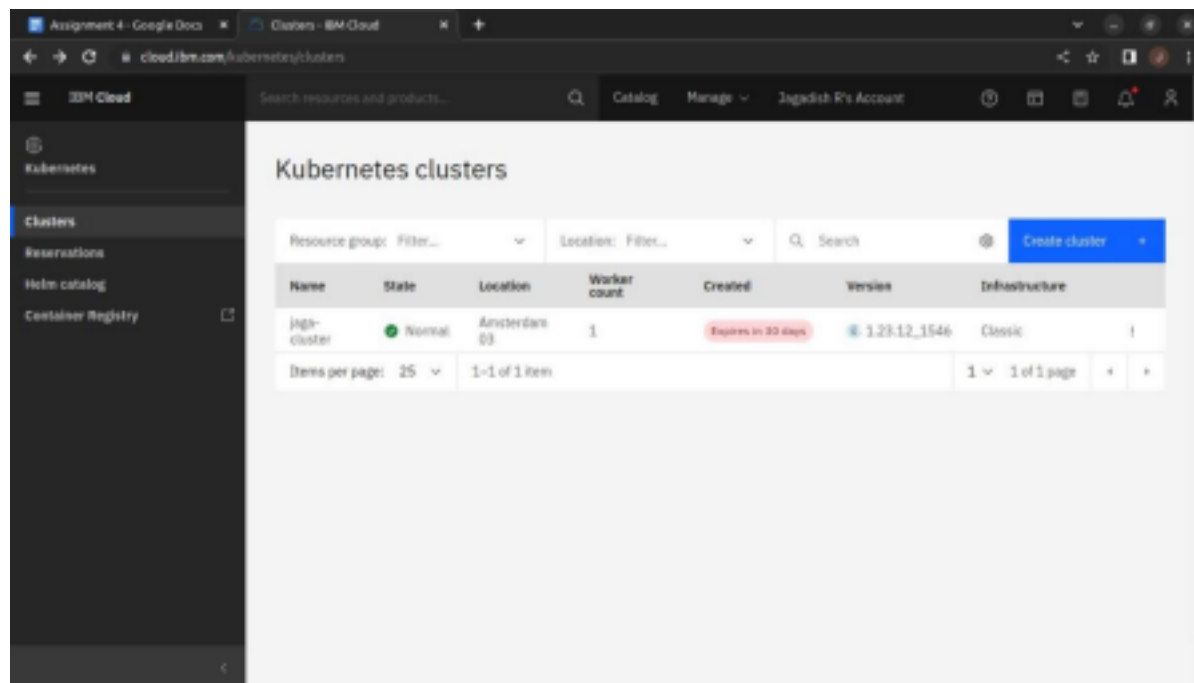

Configuring the cluster

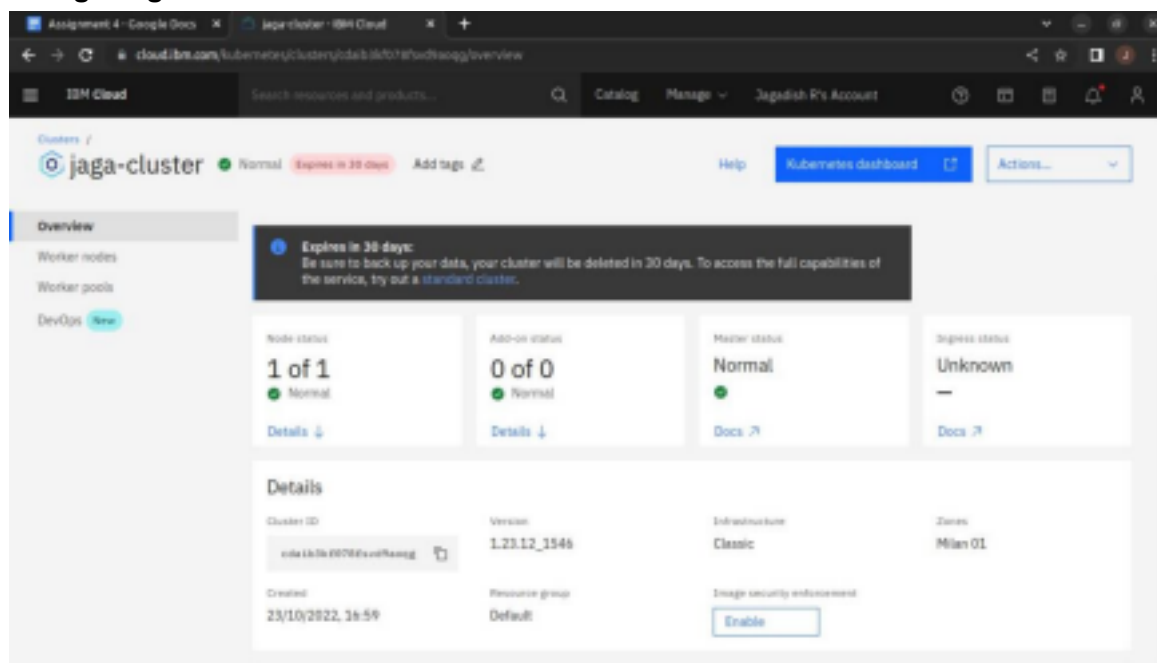

Creating a service based on the yml file

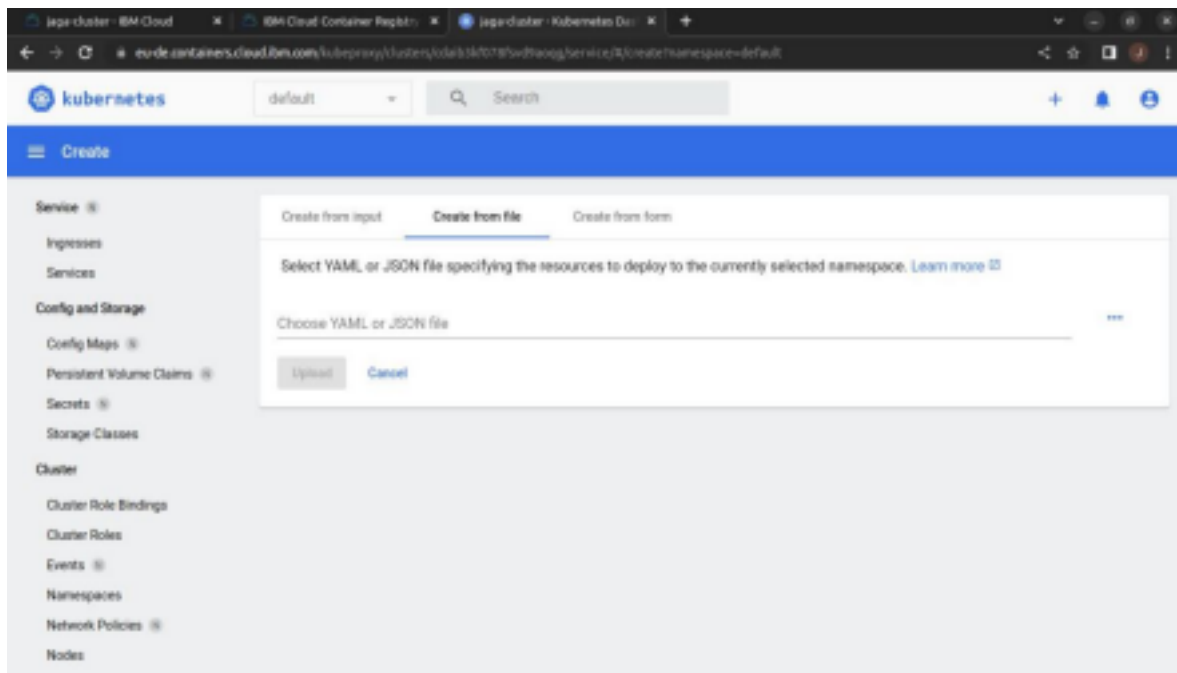


Procedure to find the exposed url

```

root@ravi-HP-58m-Desktop-290-p8xx:-
/ # ibmcloud ks cluster config --cluster cda1b3kf078fsvd9aoqg
OK
The configuration for cda1b3kf078fsvd9aoqg was downloaded successfully.
added context for cda1b3kf078fsvd9aoqg to the current kubecfg file.
You can now execute 'kubectl' commands against your cluster. For example, run 'kubectl get nodes'.
If you are accessing the cluster for the first time, 'kubectl' commands might fail for a few seconds while RBAC synchronizes.
/ # kubectl config current-context
jaga-cluster/cda1b3kf078fsvd9aoqg
/ # kubectl get nodes
NAME                STATUS    ROLES    AGE   VERSION
10.144.183.00       Ready    <none>    6h7m  v1.23.12+IKS
/ # kubectl get pods
NAME                READY     STATUS    RESTARTS   AGE
job-portal-app-57f769b6b6-4rggl  1/1       Running   0           5h51m
/ # ibmcloud cs workers --cluster cda1b3kf078fsvd9aoqg
OK
ID                Public IP      Private IP      Flavor    State    Status    Zone    Version
k8s-cda1b3kf078fsvd9aoqg-jagacuster-default-00000073  159.122.179.243  10.144.183.00  free     normal   Ready    nil01  1.23.12_1540
/ # kubectl describe service job-portal-app
Name:                job-portal-app
Namespace:           default
Labels:              <none>
Annotations:         <none>
Selector:             app=job-portal-app
Type:                NodePort
IP Family Policy:    SingleStack
IP Families:         IPv4
IPs:                 172.21.183.254
172.21.183.254
Port:                <unset> 5000/TCP
TargetPort:          5000/TCP
NodePort:            <unset> 30508/TCP
Endpoints:           172.30.146.139:5000
Session Affinity:    None
External Traffic Policy: Cluster
Events:              <none>
/ #

```

Run our flask app in the IBM kubernetes



Your job application has been submitted.

We have recieved your application, if we find you suitable our recruiting team will reach out to you!

[Press here to logout](#)