Project Report

Team ID	PNT2022TMID41897
Project Name	Smart waste management system for metropolitan cities
Team Lead	Arunadevi S
Team Member 1	Nandhakumar P
Team Member 2	Shivani P
Team Member 3	Azahagupandi M

1. INTRODUCTION

1.1 Project Overview:

Our waste generation is constantly growing to form a global garbage crisis. Even though we indulge in creating a more sustainable and greener, we still fail to handle our waste generation and management. Combining technology support with a vision of social, economic and environmental sustainability is the best way out of this problem. It is done in the following manner. The smart bin system undergoes a thorough system check and battery level monitoring in order to function efficiently. If the battery level is found to be low, it has to be recharged immediately, else it can proceed to the next step. The threshold level levels of the bin are indicated my multiple sensors attached to bin. If the garbage exceeds the level, then an alert message is sent to the garbage collectors as well as to the municipality or area administration. The area in which garbage is found to overflow is allocated to respective garbage collectors in the form of messages through GSM system. Once the waste bin is emptied, an information update is sent to the municipality and server is updated. This is how the waste from bins can be efficiently handled and managed using technology which in turn keeps the environment clean and healthy.

1.2 Purpose:

We amalgamate technology along with waste management in order to effectively create a safe and a hygienic environment. Smart waste management is about using technology and data to create a more efficient waste industry. Based on IoT (Internet of Things) technology, smart waste management aims to optimize resource allocation, reduce running costs, and increase the sustainability of waste services. This makes it possible to plan more efficient routes for the trash collectors who empty the bins, but also lowers the chance of any bin being full for over a week. A good level of coordination exists between the garbage collectors and the information supplied via technology. This makes them well aware of the existing garbage level and instigate them whenever the bins reach the threshold level. They are sent with alert messages so that they can collect the garbage on time without littering the surrounding area. The fill patterns of specific containers can be identified by historical data and managed accordingly in the long term. In addition to hardware solutions, mobile applications are used

to overcome the challenges in the regular waste management system, such as keeping track of the drivers while they are operating on the field. Thus, smart waste management provides us with the most optimal way of managing the waste in an efficient manner using technology

2. LITERATURE SURVEY:

2.1 Existing problem:

Waste management has become an alarming challenge in local towns and cities across the world. Often the local area bins are overflowing and the municipalities are not aware of it. This affects the residents of that particular area in numerous ways starting from bad odour to unhygienic and unsafe surroundings. Poor waste management - ranging from non-existing collection systems to ineffective disposal -causes air pollution, water and soil contamination. Open and unsanitary areas contribute to contamination of drinking water and can cause infection and transmit diseases. Toxic components such as Persistent Organic Pollutants (POPs) pose particularly significant risks to human health and the environment as they accumulate through the food chain. Animals eating contaminated plants have higher doses of contaminants than if they were directly exposed. Precipitation or surface water seeping through waste will absorb hazardous components from landfills, agricultural areas, feedlots, etc. and carry them into surface and groundwater. Contaminated groundwater also poses a great health risk, as it is often used for drinking, bathing and recreation, as well as in agricultural and industrial activities. Landfills and waste transfer stations can attract various pests (insects, rodents, gulls, etc.) that look for food from waste. These pests can spread diseases through viruses and bacteria (i.e., salmonella and e-coli), which are a risk to human health.

2.2 References:

PAPER 1:

TITLE: IoT Based Waste Management for Smart City AUTHOR

NAME: Parkash Tambare, Prabu Venkatachalam

PUBLICATION YEAR: 2016 DESCRIPTION:

In the current situation, we frequently observe that the trash cans or dust cans that are located in public spaces in cities are overflowing due to an increase in the amount of waste produced each day. We are planning to construct "IoT Based Waste Management for Smart Cities" to prevent this from happening because it makes living conditions for people unsanitary and causes unpleasant odours in the surrounding area. There are numerous trash cans scattered throughout the city or on the campus that are part of the proposed system. Each trash can is equipped with a low-cost embedded device that tracks the level of the trash cans and an individual ID that will enable it to be tracked and identified.

PAPER 2:

AUTHOR NAME: Mohammad Aazam, Marc St-Hilaire,

Chung-Horng Lung, Ioannis Lambadaris

PUBLICATION YEAR: 2016 DESCRIPTION:

Each bin in the Cloud SWAM system that Mohammad Aazam et al suggested has sensors that can detect the amount of waste inside. There are separate bins for organic, plastic/paper/bottle/glass, and metal waste. This way, each form of waste is already divided, and it is known how much and what kind of waste is collected thanks to the status. Different entities and stakeholders may benefit from the accessibility of cloud-stored data in different ways. Analysis and planning can begin as soon as garbage is collected and continue through recycling and import/export-related activities. Timely garbage collection is provided via the Cloud SWAM system. A timely and effective method of waste collection improves health, hygiene, and disposal.

PAPER 3:

TITLE: Arduino Microcontroller Based Smart Dustbins for Smart Cities

AUTHOR NAME: K. Suresh, S. Bhuvanesh and B. Krishna Devan

PUBLICATION YEAR: 2019 DESCRIPTION:

In this paper, a technique for cleaning up our surroundings and environment is described. The Indian government just began work on a smart city initiative, and in order for these towns to be smarter than they already are, the garbage collection and disposal system must be improved upon. Self-Monitoring Automated Route Trash (SMART) dustbins are intended for use in smart buildings such as colleges, hospitals, and bus stops, among other places. In this study, we have employed the PIR and Ultrasonic sensors to detect human presence, the Servomotor to open the dustbin lid, and the Ultrasonic sensor to detect the level of rubbish. Signals between two trash cans are transmitted using a communication module, and the GSM module sends the message to the operator.

PAPER 4:

AUTHOR NAME: Mohd Helmy Abd Wahab, Aeslina Abdul Kadir

The objective of this paper is to examine the present methods used in India for the welfare of its people in different waste management efforts. The other goal is to offer advice on how to make Indian municipalities' trash disposal procedures better. On secondary research, this essay is founded. The system is improved by looking at the


reports that have already been written about waste management and the suggestions made for improvement by planners, NGOs, consultants, government accountability organisations, and important business leaders. It provides in-depth understanding of the various waste management programmes in India and identifies areas where waste management might be improved for societal benefit. The essay makes an effort to comprehend the crucial part that our nation's official waste management sector plays in the waste management process.

2.3 problem statement definition:

Problem Statement (PS)	I am (Customer)	I am trying to	But	Because	Which makes me feel
PS-1	Council	Monitor the waste in my city	I have not much effective system for monitoring	Because of high cost	unhygienic
PS-2	Council	Manage the waste in my city	I have not much effective system for managing	Because of more time consuming	unsafe

3.IDEATION & PROPOSED SOLUTION:

- 3.1 Empathy map canvas:
- 3.2 Ideation & Brainstorming:

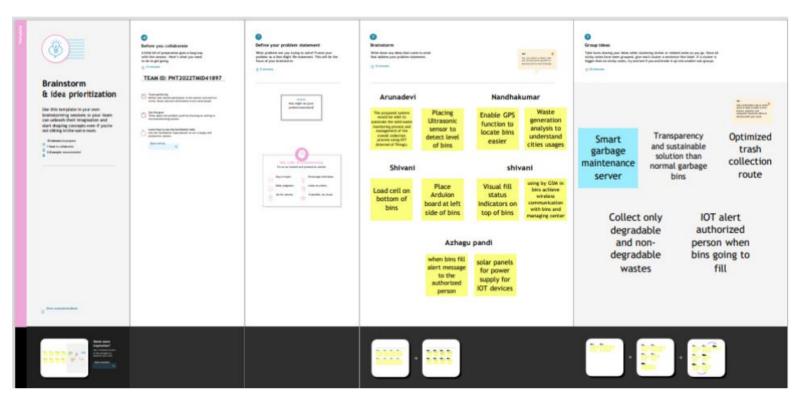

3.3 Proposed Solution:

SI No.	Parameter	Description
1.	Problem Statement (Problem to be solved)	Detecting the level of garbage and informing the garbage collectors through a proper communication channel about the garbage level and alerts them to collect it at a specified time efficiently.

	-	-
2.	Idea / Solution description	By using fill level sensors we can detect the garbage level. Improving the communication channel using proper technology like WiMAX. Using GPS for tracking the location of bin and sorting out the short routes. Using cloud service for the storage purpose.
3.	Novelty / Uniqueness	By using IoT, GPS and GSM like technologies which if properly used in the establishment of this project helps to detect the garbage level and intimating about it to the authority and initiating them to collect the garbage on time.
4.	Social Impact / Customer Satisfaction	It keeps our surroundings clean and green and free from bad odour of wastes, emphasizes on healthy environment. Reduces air pollution
5.	Business Model (Revenue Model)	Smart waste management system is an innovative and effective step to analyze the production of waste annually and it helps to find the ways to reduce the factors which increases the waste produced.
6.	Scalability of the Solution	Smart waste management can attain its scalability by still more advancement in IoT and using many sensors to detect its accurate level accurately. Its implementation can be enhanced by using 5G type of technology for faster communication. Al recycling robots can be used in the nearer future.

3.4 Problem solution fit:

Define CS, fit into CC	CUSTOMER SEGMENT(S) FOR GOVERNMENT: Ensures timely garbage pickups and prevents overflowing of garbage bins. FOR PUBLIC: Promotes cleanliness around the bins and prevents the spread of contagious diseases	6. CUSTOMER CONSTRAINTS . 1.Proper maintenance and checks should be done on a regular basis for long functioning of the bins. 2.Technicians can be appointed for these Periodic checks.	5. AVAILABLE SOLUTIONS Moisture sensors can be used to detect and segregate dry and wet wastes accordingly.	Explore AS, differentia
Focus on J&P, tap into BE,	2. JOBS-TO-BE-DONE / PROBLEMS JOBS TO BE DONE: Automatic garbage threshold detection. Segregation of dry and wet wastes PROBLEMS: The sensors can wrongly assume the threshold level to be achieved when the garbage thrown in the bin touches the sensor	9. PROBLEM ROOT CAUSE 1. Sensors may not function properly at times that may pose a great problem. 2. Also it is challenging in segregating dry and wet waste	7. BEHAVIOUR 1. identifies the threshold limit crossing of the garbage in the bins. (IR sensor) 2. Identifies and segregates dry and wet waste (Moisture sensor)	Focus on J&P, tap into BE,

3 TRIGGERS

When the threshold level is reached, an alert message will be sent to the local municipal body to collect the garbage

10. YOUR SOLUTION

 Throwing of garbage directly over the sensor should be avoided to prevent the false threshold limit assumption.

8. CHANNELS of BEHAVIOUR

ONLINE: Easy relationship and interaction with the local municipal body.

OFFLINE: Implementing and maintenance of the project is easy ローローロー

4.REQUIREMENT ANALYSIS

4.1 Functional requirement

FR No.	Functional Requirement (Epic)	Sub Requirement (Story / Sub-Task)
FR-1	Real time bin monitoring.	The Dashboard shows statistics on the amount of fill in bins as it is being tracked by smart sensors. The application also forecasts when the bin will fill up based on past data in addition to the percentage of fill level, which is one of the features that even the finest waste management software lacks. As picks are also recognized by the sensors, you can determine when the bin was last emptied. You can get rid of the overflowing bins and cease collecting half-empty ones using real-time data and forecasts.
FR-2	Eliminate inefficient picks.	Get rid of the collection of half-empty trash cans. Picks are recognized by sensors. We can demonstrate to you how full the bins you collect are using real-time data on fill-levels and pick recognition.

FR-3	Plan waste collection routes.	Route planning for rubbish pickup is semiautomated using the tool. You are prepared to act and arrange for garbage collection based on the levels of bin fill that are now present and forecasts of approaching capacity. To find any discrepancies, compare the planned and actual paths.			
FR-4	Adjust bin distribution.	Ensure the best possible bin distribution. Determine which regions have a dense or sparse distribution of bins. Ensure that each form of waste has a representative stand. You can make any required adjustments to bin position or capacity based on past data.			
FR-5	Expensive bins.	We assist you in locating containers that increase collection prices. The tool determines a collection cost rating for each bin. The tool takes local average depo-bin discharge into account. The tool determines the distance from depo-bin discharge and rates bins (1–10).			
FR-6	Detailed bin inventory.	On the map, you can see every monitored bin and stand, and you can use Google Street View at any time to visit them. On the map, bins or stands appear as green, orange, or red circles. The Dashboard displays information about each bin, including its capacity, trash kind, most recent measurement, GPS position, and pick-up schedule.			

4.2 Non-Functional requirements:

FR No.	Non-Functional Requirement	Description
NFR-1	Usability	Usability is a unique and significant perspective to examine user needs, which may further enhance the design quality according to IoT devices. Analysing how well people interact with a product may help designers better understand customers' prospective demands for waste management behaviour, and experience in the design process when user experience is at the Centre.

NFR-4	Performance	The Smart Sensors assess the fill levels in bins (along with other data) numerous times each day using ultrasonic technology The sensors feed data to Senone's Smart Waste Management Software System, a robust cloud-based platform with datadriven daily operations and a waste management approximg a variety of IoT networks (NB-IoT, GPRS). As consequence customers receive data-driven decision-making services, and garbage collection routes, frequency, and truck loads are optimized, resulting in at least a 30% decrease in route length.		
NFR-5	Availability	By creating and implementing robust hardware and gorgeou software, we enable cities, companies, and nations to manage garbage more intelligently.		
NFR-6	Scalability	Using smart trash bins allows us to scale up and monitor the rubbish more efficiently while also reducing the number of bins needed in towns and cities.		
NFR-2	Security	Utilize recyclable bottles. Utilize reusable shopping bags. Spend responsibly and recycle Eat and drink in limited-use containers.		
NFR-3	Reliability	Creating improved working conditions for garbage collectors and drivers is another aspect of smart waste management. Waste collectors will use their time more effectively by attending to bins that require service rather than travelling the same collection routes and servicing empty bins.		


5.PROJECT DESIGN:

5.1 Data Flow Diagrams:

A Data Flow Diagram (DFD) is a traditional visual representation of the information flows within a system. A neat and clear DFD can depict the right amount of the system requirement graphically. It shows how data enters and leaves the system, what changes the information, and where data is stored A smart waste management platform uses analytics to translate the data gather in your **bins into actionable insights to help you improve your waste services.** You can receive data on metric such as:


- The first test conducted is the situation where the garbage bin is empty or its garbage level is very low
- Then, the bin is filled with more garbage until its level has surpassed the first threshold value, which is set to 80% then the first warning SMS is being sent, as depicted
- The first notification SMS sent by the system, once the waste reaches the level of 85% full
- The second notification SMS sent by the system, indicating that bin is at least 95% full and the garbage needs to be collected immediately
- Locations prone to overflow
- The number of bins needed to avoid overflowing waste
- The number of collection services that could be saved
- The amount of fuel that could be saved
- The driving distance that could be saved

Data f	low d	iagram:
--------	-------	---------

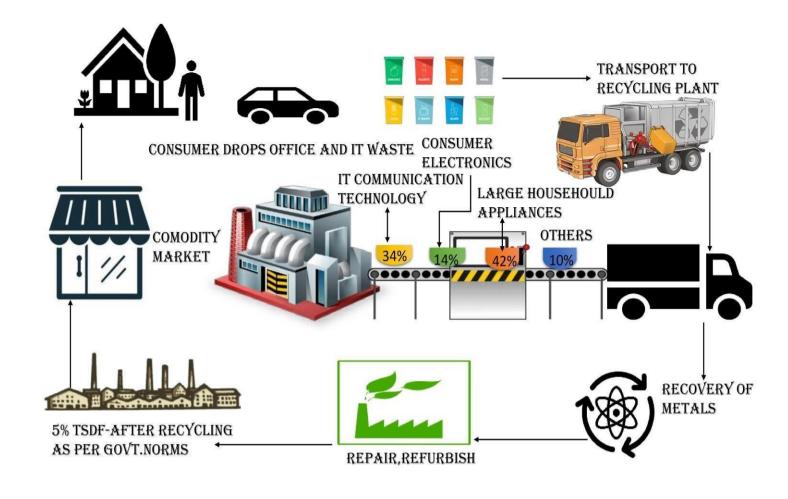

5.2 Solution & Technical Architecture:

DESKTOP APPLICATION FOR JUDO MATCH PROCESSING AND SYNCHRONIZATION

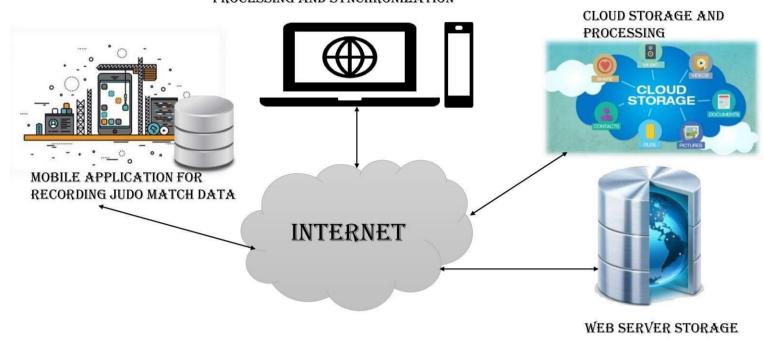

5.3 User stories:

User Type	Functional Requirement (Epic)	User Story Number	User Story / Task	Acceptance criteria	Priority	Release
Admin(who manages server)	Web server login	USN-1	As a admin, I can able to track the truck driver name, id, contact number, location, and also the location of the dustbin.	I can Manage and direct workers through web server	High	Sprint-1

Co-Admin	Login	USN-2	As a co-admin I'll monitor the workers, whether the work has been done properly, checking the availability of workers and also monitor the waste collected by the truck driver within the scheduled time		High	Sprint-1
Customer (Web user)	User	USN-3	As a user , I can able to raise queries to higher authorities about the maintenance and disposal of waste	I can raise queries	Medium	Sprint-2
Customer Care Executive	Worker	USN-4		I can attend calls and respond people and solve their problems	High	Sprint-1

6.PROJECT PLANNING & SCHEDULING:

6.1 Sprint Planning & Estimation:

PHASE	TITLE	DESCRIPTION
Ideation Phase	Literature Survey & Information Gathering	Literature survey on the selected project & gathering information by referring the, technical papers, research publications etc.
	Prepare Empathy Map	Prepare Empathy Map Canvas to capture the user Pains & Gains, Prepare list of problem statements

	Ideation	List the by organizing the brainstorming session and prioritize the top 3 ideas based on the feasibility & importance.
Phase-1	Proposed Solution	Prepare the proposed solution document, which includes the novelty, feasibility of idea, business model, social impact, scalability of solution, etc.
	Problem Solution Fit	Prepare problem - solution fit document.
	Solution Architecture	Prepare solution architecture document.
Phase-2	Customer Journey	Prepare the customer journey maps to understand the user interactions & experiences with the application (entry to exit).
	Functional Requirement	Prepare the functional and Nonfunctional requirement document.
	Data Flow Diagrams	Draw the data flow diagrams and submit for review.
	Technology Architecture	Prepare the technology architecture diagram.
Project planning phase	Prepare Milestone & Activity List	Prepare the milestones & activity list of the project.

Project development	Project Development -	Develop & submit the developed
phase	Delivery of Sprint-1, 2, 3 & 4	code by testing it.


6.2 Sprint Delivery Schedule:


Sprint	Functional Requirement (Epic)	User Story Number	User Story/Task	Story Points	Priority	Team Members
Sprint-1	Cloud	USN-1	Cloud web server is created which connects the bin and the authority who is responsible for the disposal of waste from its bin	10	High	Arunadevi S
Sprint-1	Software	Design the circuit which is to be integrated within the garbage bin using sensors.		10	High	Arunadevi S
Sprint-2	Cloud Server	USN-3	Upload the details of truck driver and location of bin using GPS	5	Medium	Nandhakumar P
Sprint-2	Technology	USN-4	Connect cloud server and bins	5	High	Nandhakumar P
Sprint-2	Sensor	USN-5	Detect the level of garbage using sensor and stores it in the server for specific interval of time.	10	High	Nandhakumar P
Sprint -3	Python, GPS	USN-6	Write the python code for intimating to the authority about alerting message regarding	10	High	Shivani P
			collection of garbage and where to collect			Shivani P
Sprint-3	Cloud	USN-7	Authority should allocate which truck driver should collect the waste at particular area	10	Medium	Shivani P
Sprint-4	Communicating Medium	USN-8	Truck driver receives the message from the authority and goes to collect the garbage	10	Medium	Azhagupandi M
Sprint-4	Communicating Medium	USN-9	After collecting the garbage, truck driver intimates that the garbage has collected		Low	Azhagupandi M

Sprint	Total Story Points	Duration	Sprint StartDate	Sprint End Date (Planned)	Story Points Completed (Planned End Date)	Sprint Release Date (Actual)
Sprint-1	20	6 Days	22 Oct 2022	27 Oct 2022	20	06 Nov 2022
Sprint-2	20	6 Days	31 Oct 2022	05 Nov 2022	30	07 Nov 2022
Sprint-3	20	6 Days	07 Nov 2022	12 Nov 2022	49	08 Nov 2022
Sprint-4	20	6 Days	14 Nov 2022	19 Nov 2022	50	09 Nov 2022

6.3 Reports from JIRA:


Burnout Chart:

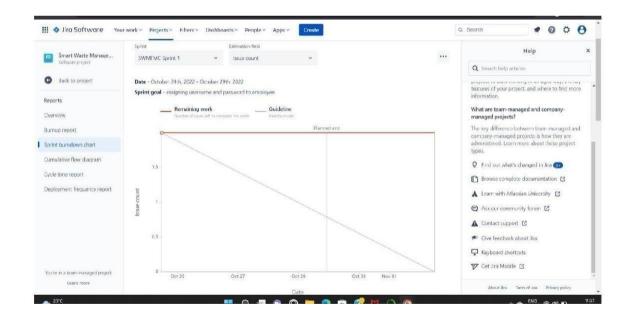

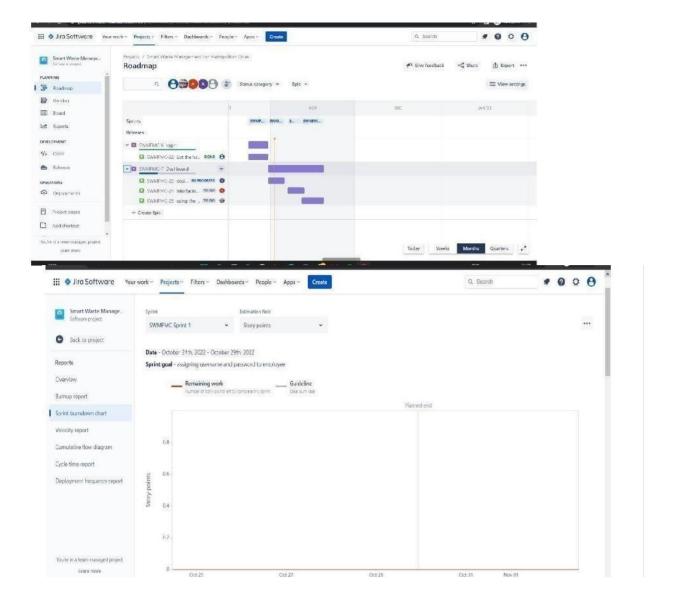


7. CODING & SOLUTIONING:

7.1 Feature 1- TRANSMIT DATA FROM WORKWI ACCOUNT TO IBM WATSOON IOT PLATFORM

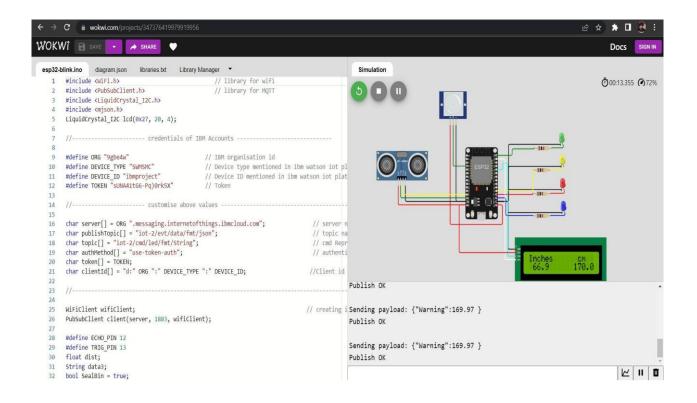

7.2 Feature 2- LIVE UPDATE ON COLLECTED DATA:

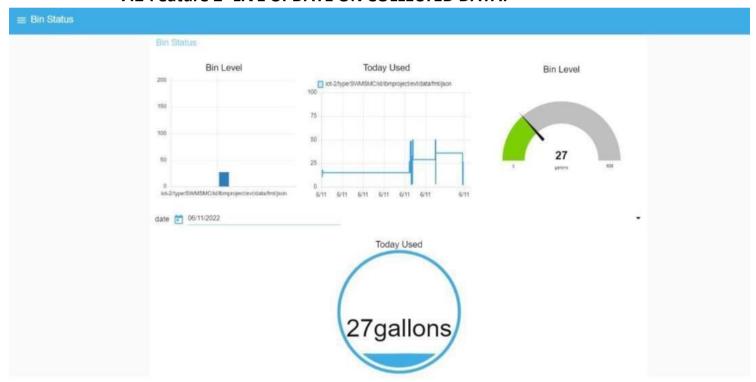

8. Testing:

8.1 Testcases:

TEST CASE ID	FEATUR E TYPE	COM PO NENT	TEST SCENARI O	PR ER EQ UIS ITE	STEPS TO EXEC UT E	TEST DATA	EXPEC TED RESUL T	ACTU AL RESUL T	STAT U S	CO MM ENT S	TC FOR AUTO M ATIO N(Y/N)	BU G ID	EXECUTED BY
-----------------	------------------	-------------------	----------------------	------------------------------	--------------------------------	--------------	----------------------------	--------------------------	-------------	----------------------	--	------------	-------------

LOGIN PAGE_TC	FUNCTI ONA L	HOM E	VERIFY THE USER	1.ENT ER	https://	LOgin page is	Workin g as	PASS	Suc cess	ARUNADEVI
_001		PAGE	IS ABLE	URL	69.51.2	visible	expecte		ful	
			TO SEE	AND	0		d			
			THE	CLICK	4.219.3					
			LOGIN/SI	GO	0					
			G	2.VER	106					
			N UP	IFY						
			WEN	LOGI						
			USER	N/SI						
			CLICK ON	GN						
			MY ACCOUNT BUTTON	UP						

LOGIN	UI	ном	VERIFY	1. ENT	https://	Applicat	Workin	PASS	Succ		NANDHAKUMAR
PAGE_TC		E	THE USER	ER	1	ion	g as		ess		
_002		PAGE		URL	69.51.2	should	expecte		full		
_			TO SEE	AND	0	show	d .				
			THE	CLICK	4.219.3	below					
			LOGIN/SI	GO	0	UI					
			G	2.VER	106	elemen					
			N UP	IFY		t					
			WEN	LOGI							
			USER	N/SI							
			CLICK ON	, GN							
			MY	UP							
			ACCOUNT	Eleme							
			BUTTON	nts							
				a.ID							
				text							
				b o							
				х В							
				•							
				passw ord							
				text							
				box							
				clogi							
				n							
				butto							
				n D.ne							
				w							
				user							
				E.alre							
				ady							
				have							
				an							
				accou							
				nt							
											1

LOGIN PAGE_TC _003	FUNCTI ONA L	LOGI N PAGE	VERIFY THE USER IS ABLE TO SEE THE LOGIN/SI G N UP WEN USER CLICK ON MY ACCOUNT BUTTON		1.ent er url and click go 2.click on my accou nt 3.Ent er valid ID 4.Ent er valid passw ord 5.click on login	Id:1111 Passwo rd d:5678	User should navigate your home page.	Working as expectd	PASS	Succ ess ful		SHIVANI
					button							
LOGIN	FUNCTI ONA	LOGI N	VERIFY		1.ent er url	ld:1111	Confirm	Workin	PASS	Succ ess		SHIVANI
PAGE_TC_004	L			S AB TO SH THE LOGI N UP USER CLICH MY	EE N/SIG WEN K ON	and click go 2.click on my account 3.Enter valid ID 4.Enter valid password 5.click on login butvton	wor m d:56 s6		g as expecte		ful	

LOGIN PAGE_TC_ 005	UI	LOGIN PAGE	VERIFY THE USER IS ABLE TO SEE THE LOGIN/SIG N UP WEN USER CLICK ON MY ACCOUNT BUTTON	1.enter url and click go 2.click on my account 3.Enter valid ID 4.Enter valid password 5.click on login button	Id:1 111 pass wor d:56 78	Confirm ation message sent	g as	PASS	Success	SHIVANI
LOGIN PAGE_TC_ 006	FUNCTIONA L	PAGE FOR	VERIFY THE USER IS ABLE TO SEE THE LOGIN/SIG N UP WEN USER CLICK ON MY ACCOUNT BUTTON	1.enter url and click go 2.click on my account 3.Enter valid ID 4.Enter valid password 5.click on login button	pass wor d:56 78	Custom er databas e is visible	Workin g as expecte d		Success ful	AZAHAGUPANDI

8.2 User acceptance Testing:

^{1.} Purpose of Document

The purpose of this document is to briefly explain the test coverage and open issues of the [ProductName] project at the time of the release to User Acceptance Testing (UAT).

^{2.} Defect Analysis

This report shows the number of resolved or closed bugs at each severity level, and how they were resolved

Resolution					Subtotal
	Severity				
	1	Severity 2	Severity 3	Severity 4	

By Design	10	4	2	3	20
Duplicate	1	0	3	0	4
External	2	3	0	1	6
Fixed	11	2	4	20	37

Not Reproduced	0	0	1	0	1
Skipped	0	0	1	1	2
Won't Fix	0	5	2	1	8
Totals	24	14	13	26	7

1. Test Case Analysis:


This report shows the number of test cases that have passed, failed, and untested


Section	Total Cases	Not Tested	Fai I	Pas s
Print Engine	7	0	0	7
Client Application	51	0	0	51
Security	2	0	0	2
Outsource Shipping	3	0	0	3
Exception Reporting	9	0	0	9

Final Report Output	4	0	0	4
Version Control	2	0	0	2

9. RESULTS:

9.1 Performance Metrics:

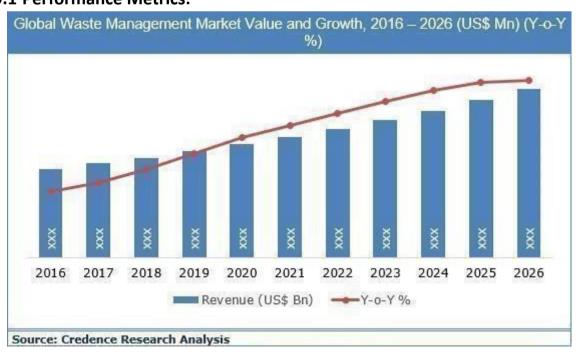

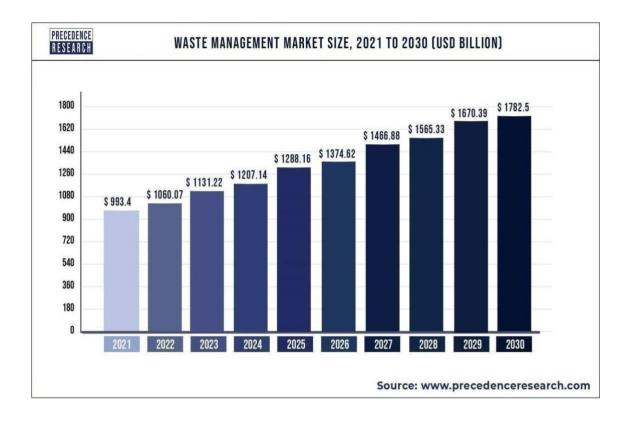

10. ADVANTAGES & DISADVANTAGES

ADVANTAGES:

- Reduction in Collection Cost
- No Missed Pickups
- · Reduced Overflows
- Waste Generation Analysis
- CO2 Emission Reduction

DISADVANTAGES:

- System requires a greater number of waste bins for separate waste collection as per population in the city.
- This results into high initial cost due to expensive smart dustbins compare to other methods. Sensor nodes used in the dustbins have limited memory size.

11. CONCLUSION:

A Smart Waste Management system that is more effective than the one in use now is achievable by using sensors to monitor the filling of bins. Our conception of a "smart waste management system" focuses on monitoring waste management, offering intelligent

technology for waste systems, eliminating human intervention, minimizing human time and effort, and producing a healthy and trash-free environment. The suggested approach can be implemented in smart cities where residents have busy schedules that provide little time for garbage management. If desired, the bins might be put into place in a metropolis where a sizable container would be able to hold enough solid trash for a single unit. The price might be high.

12. FUTURE SCOPE:

There are several future works and improvements for the proposed system, including the following:

- 1. Change the system of user authentication and atomic lock of bins, which would aid in protecting the bin from damage or theft.
- 2. The concept of green points would encourage the involvement of residents or end users, making the idea successful and aiding in the achievement of collaborative waste management efforts, thus fulfilling the idea of Swachh Bharath.
- 3. Having case study or data analytics on the type and times waste is collected on different days or seasons, making bin filling predictable and removing the reliance on electronic components, and fixing the coordinates.
- 4. Improving the Server's and Android's graphical interfaces

13. Appendix:

CODING:

CODE FOR USER INTERFACE:

HTML CODE:

```
<!DOCTYPE html>
```

<html lang="en">

<head>

<meta charset="UTF-8" />

<meta name="viewport" content="width=device-width, initial-scale=1.0" />

<title>Smart Waste Management System</title>

<!-- Bootstrap 4 CSS CDN -->

<link rel="stylesheet" href="https://cdnjs.cloudflare.com/ajax/libs/twitter-bootstrap/4.5.2/css/bootstrap.min.css" />

```
<!-- Fontawesome CSS CDN -->
<link rel="stylesheet" href="https://cdnjs.cloudflare.com/ajax/libs/font-</pre>
awesome/5.14.0/css/all.min.css"/>
<link rel="stylesheet" href="css/style.css" />
</head>
<body class="bg-info">
<div class="container">
<!-- Login Form Start -->
<div class="row justify-content-center wrapper" id="login-box">
<div class="col-lg-10 my-auto myShadow">
<div class="row">
<div class="col-lg-7 bg-white p-4">
<h1 class="text-center font-weight-bold text-primary">Sign in</h1>
<hr class="mv-3" />
<form action="#" method="post" class="px-3" id="login-form">
<div class="input-group input-group-lg form-group">
<div class="input-group-prepend">
<span class="input-group-text rounded-0"><i class="far fa-envelope fa-lg fa-</pre>
fw"></i></span> </div>
<input type="email" id="email" name="email" class="form-control rounded-0"
placeholder="E-Mail" required />
</div>
<div class="input-group input-group-lg form-group">
<div class="input-group-prepend">
<span class="input-group-text rounded-0"><i class="fasfa-key fa-lg fa-fw"></i></span>
</div>
<input type="password" id="password" name="password" class="form-control
rounded-0" minlength="5" placeholder="Password" required
autocomplete="off" />
</div>
<div class="form-group clearfix">
<div class="custom-control custom-checkbox float-left">
<input type="checkbox" class="custom-control-input" id="customCheck" name="rem"
/>
<label class="custom-control-label" for="customCheck">Remember me</label>
</div>
<div class="forgot float-right">
<a href="#" id="forgot-link">Forgot Password?</a>
```

```
</div>
</div>
<div class="form-group">
<input type="submit" id="login-btn" value="Sign In" class="btn btn-primary btn-lg btn-
block myBtn" />
</div>
</form>
</div>
<div class="col-lg-5 d-flex flex-column justify-content-center myColor p-4">
<h1 class="text-center font-weight-bold text-white">Welcome Friend!</h1>
<hr class="my-3 bg-light myHr" />
Start your initiative to make
your environment clean
<button class="btn btn-outline-light btn-lg align-self-center font-weight-bolder mt-4
myLinkBtn" id="register-link">Sign Up</button>
</div>
</div>
</div>
</div>
<!-- Login Form End -->
<!-- Registration Form Start -->
<div class="row justify-content-center wrapper" id="register-box" style="display:</pre>
none;">
<div class="col-lg-10 my-auto myShadow">
<div class="row">
<div class="col-lg-5 d-flex flex-column justify-content-center myColor p-4">
<h1 class="text-center font-weight-bold text-white">Welcome Back!</h1>
<hr class="my-4 bg-light myHr" />
To stay connected Please
login with your personal info.
<button class="btn btn-outline-light btn-lg font-weight-bolder mt-4 align-self-center
myLinkBtn" id="login-link">Sign In</button>
</div>
<div class="col-lg-7 bg-white p-4">
<h1 class="text-center font-weight-bold text-primary">Create Account</h1>
<hr class="my-3" />
<form action="#" method="post" class="px-3" id="register-form">
<div class="input-group input-group-lg form-group">
```

```
<div class="input-group-prepend">
<span class="input-group-text rounded-0"><i class="far fa-user fa-lg fa-</pre>
fw"></i></span> </div>
<input type="text" id="name" name="name" class="form-control rounded-0"
placeholder="Full Name" required />
</div>
<div class="input-group input-group-lg form-group">
<div class="input-group-prepend">
<span class="input-group-text rounded-0"><i class="far fa-envelope fa-lg fa-</pre>
fw"></i></span> </div>
<input type="email" id="remail" name="email" class="form-control rounded-0"
placeholder="E-Mail" required />
</div>
<div class="input-group input-group-lg form-group">
<div class="input-group-prepend">
<span class="input-group-text rounded-0"><i class="fasfa-key fa-lg fa-fw"></i></span>
</div>
<input type="password" id="rpassword" name="password" class="form-control
rounded-0" minlength="5" placeholder="Password" required />
</div>
<div class="input-group input-group-lg form-group">
<div class="input-group-prepend">
<span class="input-group-text rounded-0"><i class="fasfa-key fa-lg fa-fw"></i></span>
</div>
<input type="password" id="cpassword" name="cpassword" class="form-control
rounded-0" minlength="5" placeholder="Confirm
Password" required />
</div>
<div class="form-group">
<div id="passError" class="text-dangerfont-weight-bolder"></div>
</div>
<div class="form-group">
<input type="submit" id="register-btn" value="Sign Up" class="btn btn-primary btn-lg
btn-block myBtn" />
</div>
</form>
</div>
</div>
```

```
</div>
</div>
<!-- Registration Form End -->
<!-- Forgot Password Form Start -->
<div class="row justify-content-center wrapper" id="forgot-box" style="display: none;">
<div class="col-lg-10 my-auto myShadow">
<div class="row">
<div class="col-lg-7 bg-white p-4">
<h1 class="text-center font-weight-bold text-primary">Forgot Your Password?</h1>
<hr class="my-3" />
To reset your password, enter the
registered e-mail adddress and we will send you password reset instructions
on your e-mail!
<form action="#" method="post" class="px-3" id="forgot-form">
<div id="forgotAlert"></div>
<div class="input-group input-group-lg form-group">
<div class="input-group-prepend">
<span class="input-group-text rounded-0"><i class="far fa-envelope fa-lg"></i></span>
</div>
<input type="email" id="femail" name="email" class="form-control rounded-0"
placeholder="E-Mail" required />
</div>
<div class="form-group">
<input type="submit" id="forgot-btn" value="Reset Password" class="btn btn-primary
btn-lg btn-block myBtn" />
</div>
</form>
</div>
<div class="col-lg-5 d-flex flex-column justify-content-center myColor p-4">
<h1 class="text-center font-weight-bold text-white">Reset Password!</h1>
<hr class="my-4 bg-light myHr" />
<button class="btn btn-outline-light btn-lg font-weight-bolder myLinkBtn align-self-
center" id="back link">Back</button>
</div>
</div>
</div>
</div>
<!-- Forgot Password Form End -->
```

```
</div>
<!-- jQuery CDN -->
<script

src="https://cdnjs.cloudflare.com/ajax/libs/jquery/3.5.1/jquery.min.js"></script>
<scriptsrc="js/script.js"></script>
</body>
</html>
```

CSS CODE:

@import

```
url("https://fonts.googleapis.com/css?family=Maven+Pro:400,500,600,700,800,900&di
splay=swap");
* { margin:
0; padding:
0;
box-sizing: border-box;
font-family: "Maven Pro", sans-serif;
}
.wrapper
{ height: 100vh;}
.myColor
background-image: linear-gradient(to right, #324bf3 50%, #f9d423 150%);
.myShadow {
box-shadow: 0 10px 10px rgba(0, 0, 0, 0.5);
.myBtn { border-radius:
50px; font-weight:
bold; font-size: 20px;
background-image: linear-gradient(to right, #0acffe 0%, #495aff 100%); border:
none;
.myBtn:hover {
background-image: linear-gradient(to right, #495aff 0%, #0acffe 100%);
}
```

```
.myHr { height:
2px;
border-radius: 100px;
.myLinkBtn { border-
radius: 100px; width:
50%;
border: 2px solid #fff;
}
@media (max-width: 720px) {
.wrapper {
margin: 2px;
}
}
JS CODE:
$(function(){
$("#register-link").click(function () {
$("#login-box").hide();
$("#register-box").show();
});
$("#login-link").click(function () {
$("#login-box").show();
$("#register-box").hide();
});
$("#forgot-link").click(function () {
$("#login-box").hide();
$("#forgot-box").show();
});
$("#back-link").click(function () {
$("#login-box").show();
$("#forgot-box").hide();
});
```

CODE FOR SENSOR:

});

Code for data transmission from IBM Watson to IOT PLATFORM:

```
#include <WiFi.h> // library for wifi
#include <PubSubClient.h> // library for MQTT
#include <LiquidCrystal I2C.h>
LiquidCrystal I2C lcd(0x27, 20, 4);
//---- credentials of IBM Accounts -----
#define ORG "9gbe4w" // IBM organisation id
#define DEVICE_TYPE "SWMSMC"
                                        // Device type
mentioned in ibm watson iot platform
#define DEVICE_ID "ibmproject"
                                         // Device ID
mentioned in ibm watson iot platform
#define TOKEN "sUNA41tG6-Pq)0rk5X"
                                         // Token
//----- customise above values ______
char server[] = ORG
".messaging.internetofthings.ibmcloud.com"; // server
name
char publishTopic[] = "iot-2/evt/data/fmt/json";
// topic name and type of event perform and format in which
data to be send
char topic[] = "iot-2/cmd/led/fmt/String";
// cmd Represent type and command is test format of strings
char authMethod[] = "use-token-auth";
// authentication method char
token[] = TOKEN;
char clientId[] = "d:" ORG ":" DEVICE_TYPE ":" DEVICE_ID;
//Client id
//----
WiFiClient wifiClient;
// creating instance for wificlient
```

```
PubSubClient client(server, 1883, wifiClient);
#define ECHO_PIN 12
#define TRIG PIN 13 float
dist;
void setup()
{
  Serial.begin(115200);
  pinMode(LED BUILTIN, OUTPUT);
  pinMode(TRIG PIN, OUTPUT);
  pinMode(ECHO PIN, INPUT);
  //pir pin
  pinMode(34, INPUT);
  //ledpins
  pinMode(23, OUTPUT);
  pinMode(2, OUTPUT);
  pinMode(4, OUTPUT);
  pinMode(15, OUTPUT);
  lcd.init();
  lcd.backlight();
  lcd.setCursor(1, 0);
  lcd.print("");
  wifiConnect();
  mqttConnect();
}
float readcmCM()
{ digitalWrite(TRIG PIN, LOW);
  delayMicroseconds(2);
  digitalWrite(TRIG_PIN, HIGH);
  delayMicroseconds(10);
  digitalWrite(TRIG_PIN, LOW); int
  duration = pulseIn(ECHO PIN, HIGH);
  return duration * 0.034 / 2;
}
void loop()
 {
```

```
lcd.clear();
  publishData();
  delay(500);
  if (!client.loop())
      mqttConnect();
                                                           //
function call to connect to IBM
    }
}
                                                    retrieving
                                                      to cloud
                                                             */
void wifiConnect()
{
  Serial.print("Connecting to ");
  Serial.print("Wifi");
  WiFi.begin("Wokwi-GUEST", "", 6);
  while (WiFi.status() != WL_CONNECTED)
    { delay(500);
      Serial.print(".")
  Serial.print("WiFi connected, IP address: ");
  Serial.println(WiFi.localIP());
}
void mqttConnect()
  { if
    (!client.connected())
      {
        Serial.print("Reconnecting MQTT client to ");
        Serial.println(server);
        while (!client.connect(clientId, authMethod, token))
            Serial.print(".");
            delay(500);
        initManagedDevice();
```

```
Serial.println();
      }
  } void
initManagedDevice()
  { if
    (client.subscribe(topic))
      {
        Serial.println("IBM subscribe to cmd OK");
      }
    else
        Serial.println("subscribe to cmd FAILED");
  } void
publishData()
{ float cm = readcmCM();
  if(digitalRead(34)) //pir motion detection
  {
    Serial.println("Motion Detected");
    Serial.println("Lid Opened");
    digitalWrite(15, HIGH);
  }
  else
  { digitalWrite(15,
  LOW); }
 if(digitalRead(34)== true)
 { if(cm <=
  100)
//Bin level detection
  { digitalWrite(2,
    HIGH);
    Serial.println("High Alert!!!, Trash bin is about to be
full");
    Serial.println("Lid
    Closed"); lcd.print("Full!
    Don't use"); delay(2000);
```


```
lcd.clear(); digitalWrite(4,
    LOW); digitalWrite(23, LOW);
  }
  else if(cm > 150 \& cm < 250)
  { digitalWrite(4,
    HIGH);
    Serial.println("Warning!!, Trash is about to cross 50% of
bin level"); digitalWrite(2, LOW); digitalWrite(23, LOW);
  }
  else if(cm > 250 \&\& cm <=400)
  { digitalWrite(23,
    HIGH);
    Serial.println("Bin is available");
    digitalWrite(2,LOW);
    digitalWrite(4, LOW);
  }
    delay(10000)
    Serial.println("Lid Closed");
 }
 else
 {
   Serial.println("No motion detected");
 }
  if(cm <= 100)
{
digitalWrite(21,HIGH);
String payload = "{\"High Alert!!\":\"";
payload += cm; payload += "left\" }";
Serial.print("\n");
Serial.print("Sending payload: "); Serial.println(payload);
if (client.publish(publishTopic, (char*) payload.c_str()))
// if data is uploaded to cloud successfully, prints
publish ok else prints publish failed {
Serial.println("Publish OK");
```

```
} }
if(cm <= 250)
{
digitalWrite(22,HIGH);
String payload = "{\"Warning!!\":\"";
payload += dist; payload += "left\"
}";
Serial.print("\n");
Serial.print("Sending distance: "); Serial.println(cm);
if(client.publish(publishTopic, (char*) payload.c str()))
{
Serial.println("Publish OK");
} else
{
Serial.println("Publish FAILED");
}
}
  float inches = (cm / 2.54);
//print on lcd
  lcd.setCursor(0,0);
  lcd.print("Inches");
  lcd.setCursor(4,0);
  lcd.setCursor(12,0);
  lcd.print("cm");
  lcd.setCursor(1,1);
  lcd.print(inches, 1);
  lcd.setCursor(11,1);
  lcd.print(cm, 1);
  lcd.setCursor(14,1);
  delay(1000); lcd.clear();
}
```

OUTPUT SCREENSHOTS:

USER INTERFACE:



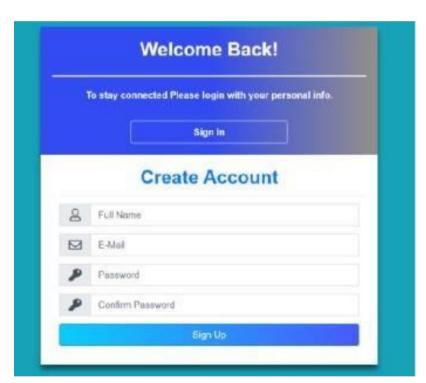

SENSOR WORKUP CONNECTION SCREENSHOT:

