


TEAM ID: PNT2022TMID44647

Dragged and dropped components into the editor

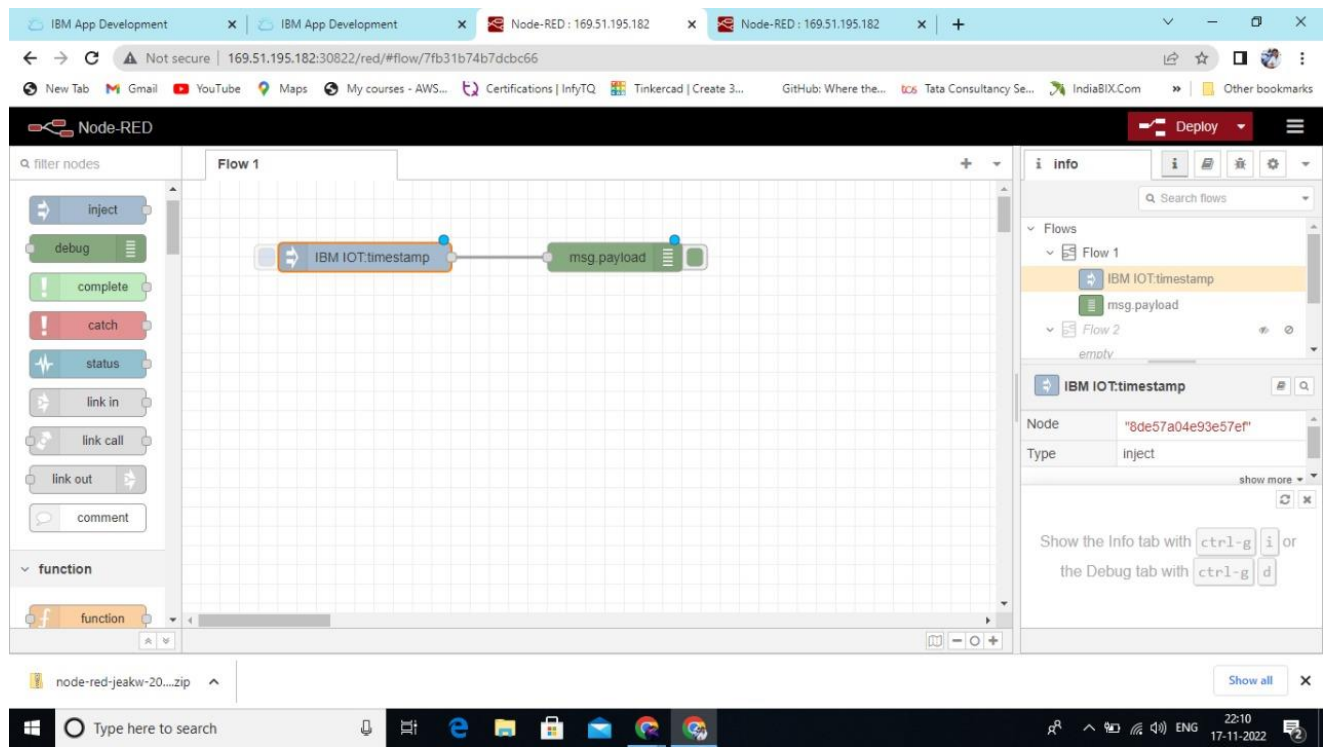

Editing some values of the properties

The screenshot displays the Node-RED web interface in a browser. The main workspace shows a flow named 'Flow 1' with a single node, 'IBM IOT:timestamp'. The left sidebar contains a 'filter nodes' search bar and a list of nodes including 'inject', 'debug', 'complete', 'catch', 'status', 'link in', 'link call', 'link out', and 'comment'. The right sidebar shows the 'info' tab with a search bar and a list of flows, including 'Flow 1' and 'Flow 2'. The 'Edit inject node' dialog is open, showing the 'Properties' section with the following settings:

- Name: Name
- msg_payload: timestamp
- msg_topic: IBM IOT
- Inject once after: 0.1 seconds, then
- Repeat: none
- Enabled: ☐

The bottom of the screen shows the Windows taskbar with the search bar and various application icons. The system clock indicates the time is 22:15 on 17-11-2022.