


# ASSIGNMENT 3

TEAM ID : PNT2022TMID50578

PROJECT NAME : CUSTOMER CARE REGISTRY


STUDENT NAME : THANGA RAMANA P

## Q1. Creating a Bucket in IBM Cloud Storage

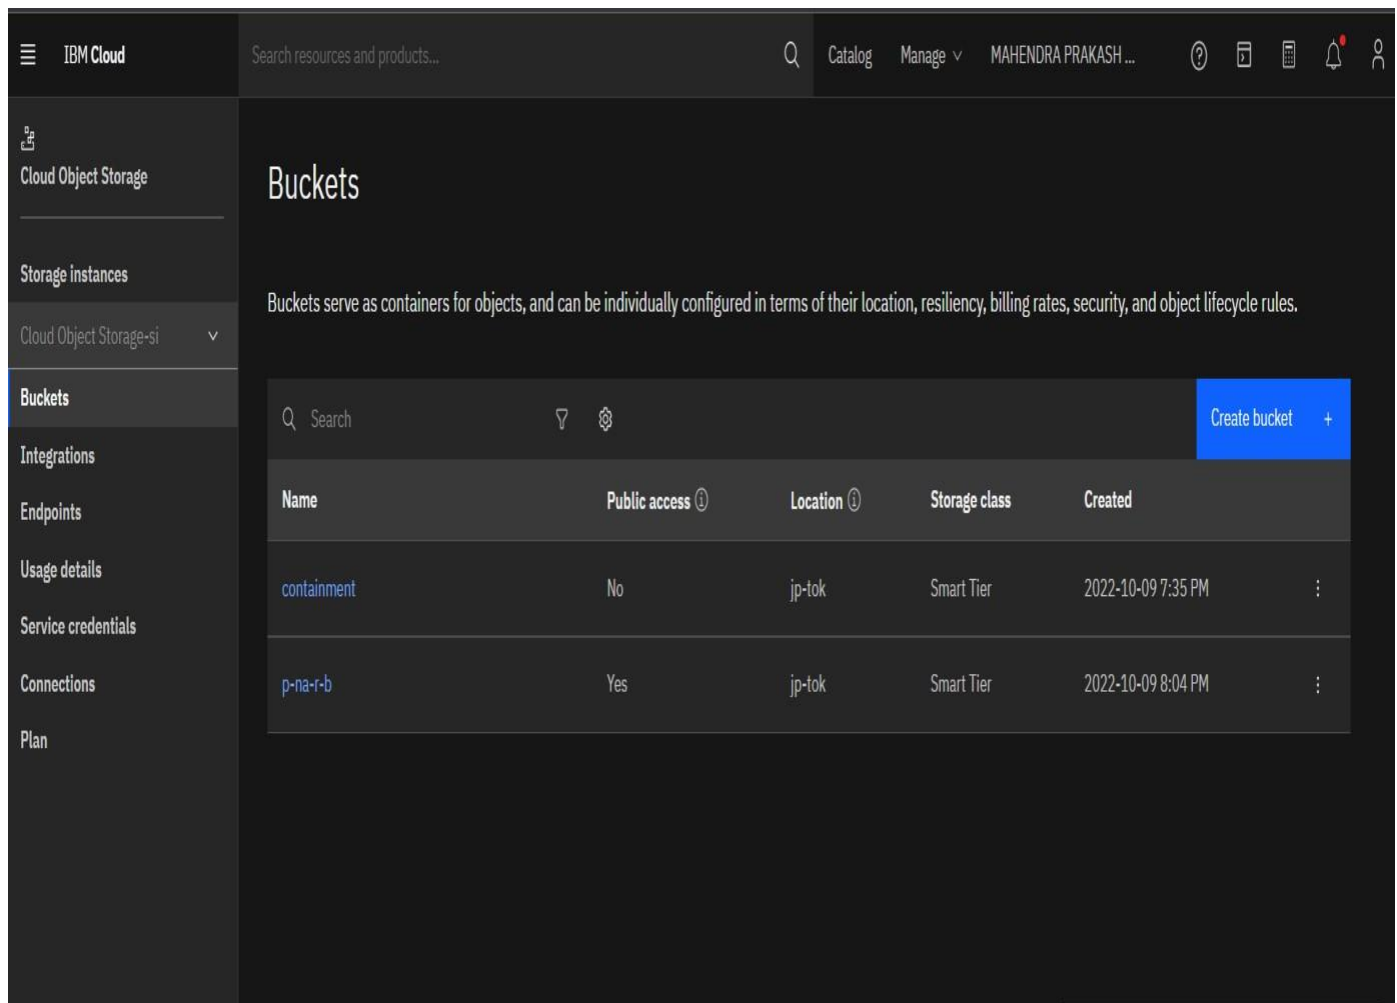

The screenshot displays the IBM Cloud Storage interface. On the left, a sidebar lists navigation options: Cloud Object Storage, Storage instances, Cloud Object Storage-si, Buckets (selected), Integrations, Endpoints, Usage details, Service credentials, Connections, and Plan. The main content area is titled 'Buckets' and includes a description: 'Buckets serve as containers for objects, and can be individually configured in terms of their location, resiliency, billing rates, security, and object lifecycle rules.' Below this is a table of existing buckets. The table has columns for Name, Public access, Location, Storage class, and Created. Two buckets are listed: 'containment' (No public access, jp-tok location, Smart Tier storage class, created 2022-10-09 7:35 PM) and 'p-na-r-b' (Yes public access, jp-tok location, Smart Tier storage class, created 2022-10-09 8:04 PM). A 'Create bucket' button is visible in the top right of the table area.

Name	Public access ⓘ	Location ⓘ	Storage class	Created
containment	No	jp-tok	Smart Tier	2022-10-09 7:35 PM
p-na-r-b	Yes	jp-tok	Smart Tier	2022-10-09 8:04 PM

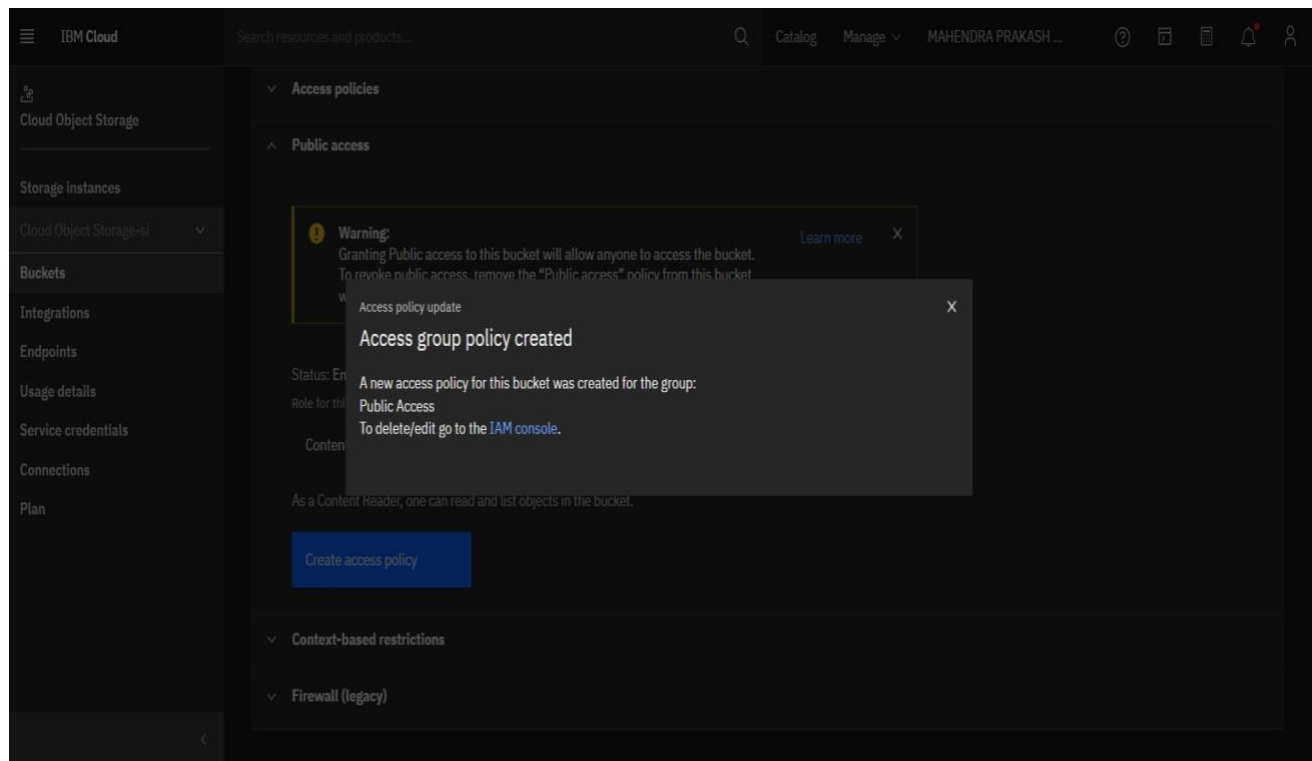

## Q2. Uploading 5 images to IBM Object storage and made it public

<!DOCTYPE html>

<html>

<head>

<title>IMAGES</title>

<link rel="stylesheet" href="https://mani07.s3.jp-tok.cloud-objectstorage.appdomain.cloud/stylenew.css">

</head>

<body>

```

<h2>GALLERY</h2>
<h3>EXPLORE THE BEAUTY ...</h3>

<div id="pic">

</div>

</body>

</html>

```

**Q3: Upload a css page to the object storage and use the same page in your HTML code.**

```

body{
    background-color:rgb(115, 82, 190);

}

#pic{
    margin-top: 10%;
    margin: 5%;
    line-height:0;
}

```

```
        column-count:5;
        column-gap:5px;    background-
image: rgb(83, 6, 134);
    }
```

```
#pic img{

    width: 100%!important;

    height: auto !important;

    margin-bottom:auto;

}
```

```
h2{
text-align: center;
font-family: sans-serif;

    font-size: 50px;

    margin-top: 3%;

    font-weight: bolder;

    color: rgb(233, 241, 234);

}
```

```
h3{
text-align:center;
font-family: sans-serif;

    font-size: 50px;

    font-weight: bolder;

    color:rgb(249, 247, 252);

}
```

## Q4:Design a chatbot using IBM Watson assistant for hospital.

```
<!Doctype html>
<html>

    <head>

        <title>Chat Boat</title>

        <style>
body{
    background-color: rgb(160, 233, 158);

    }
img{
    width: 200px;
    height: 100px;
    margin-left: 10px;

    }
h2{
    text-align:center;
    color: rgba(71, 9, 218, 0.89);
    font-size:4pc;

    }
h3{
    text-align:center;
    color:rgb(238, 6, 141);
    font-size:2.5pc;

    }

        </style>

    </head>

    <body>

        <h2>HOSPITALS</h2>
```

```
<h2></h2>  
<p><h3>WE ARE PROVIDING THE DETAILS FOR YOUR QUERIES</h3>
```

```
<h3> Click the chatbot </h3>
```

```
</p>
```

```
<script>  
window.watsonAssistantChatOptions = {  
  
    integrationID: "4f8894e3-1817-41e3-bf8b-a5d4b9b2197a", // The ID  
    of this integration.  
    region: "au-syd", // The region your integration is hosted in.  
  
    serviceInstanceID: "ba115cc6-e2d6-4d6b-beea-74977285d64c", // The  
    ID of your service instance.  
    onLoad: function(instance) { instance.render(); }  
  
};  
setTimeout(function(){  
    const t=document.createElement('script');  
  
    t.src="https://web-  
chat.global.assistant.watson.appdomain.cloud/versions/" +  
    (window.watsonAssistantChatOptions.clientVersion || 'latest') +  
    "/WatsonAssistantChatEntry.js";  
    document.head.appendChild(t);  
  
    });  
</script>  
  
</body>  
  
</html>
```

Q5.Create Watson assistant service with 10 steps and use 3 conditions in it. Load that script in HTML page.

```
<html>
```

```
<body>

<script>

    window.watsonAssistantChatOptions = {

        integrationID: "ec603862-aa33-4336-a203-961870431228", // The ID
        of this integration.
        region: "au-syd", // The region your integration is hosted in.

        serviceInstanceID: "44f5354b-4c14-4c36-bdfa-6fddf1e73eaa", // The ID
        of your service instance.
        onLoad: function(instance) { instance.render(); }

    };
    setTimeout(function(){
        const t=document.createElement('script');

        t.src="https://web-
        chat.global.assistant.watson.appdomain.cloud/versions/" +
        (window.watsonAssistantChatOptions.clientVersion || 'latest') +
        "/WatsonAssistantChatEntry.js";
        document.head.appendChild(t);

    });

</script>

</body>

</html>
```