

A NOVEL METHOD FOR HANDWRITTEN DIGITS RECOGNIZATION SYSTEM.

TEAM ID: PNT2022TMID40359

TEAM MEMBERS:

- **MOHAN KUMAR S.S**
- **RAMYA C**
- **SINDHU A**
- **SUBASH M**

Project Objectives

By the end of this project, you will:

- Know fundamental PNYconcepts and techniques of the Artificial Neural Network and Convolution Neural Networks
- Gain a broad understanding of image data.
- Work with Sequential type of modelling
- Work with Keras capabilities
- Work with image processing techniques
- know how to build a web application using the Flask framework.

Project Flow

Project Flow:

- The user interacts with the UI (User Interface) to upload the image as input
- The uploaded image is analysed by the model which is integrated
- Once the model analyses the uploaded image, the prediction is showcased on the UI


To accomplish this, we have to complete all the activities and tasks listed below

- Understanding the data.
 - Importing the required libraries

- Loading the data
 - Analysing the data
 - Reshaping the data.
 - Applying One Hot Encoding
- Model Building
 - Creating the model and adding the input, hidden and output layers to it
 - Compiling the model
 - Training the model
 - Predicting the result
 - Testing the model by taking image inputs
 - Saving the model
- Application Building
 - Create an HTML file
 - Build Python Code

Project Structure

Create a Project folder which contains files as shown below

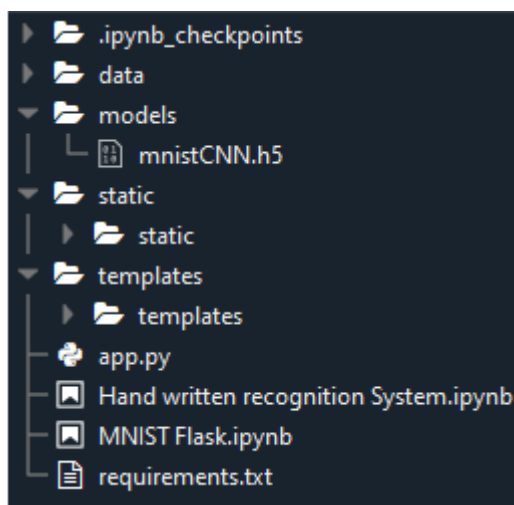

- We are building a Flask Application which needs HTML pages stored in the templates folder and a python script app.py for server-side scripting.
- The model is built in the notebook Hand written recognition system.ipynb
- We need the model which is saved and the saved model in this content is mnistCNN.h5
- The static folder will contain js and css files.

- The templates mainly used here are main.html and index6.html for showcasing the UI

Prerequisites

To complete this project, you should have the following software and packages

Anaconda Navigator:

Anaconda Navigator is a free and open-source distribution of the Python and R programming languages for data science and machine learning related applications. It can be installed on Windows, Linux, and macOS. Conda is an open-source, cross-platform, package management system. Anaconda comes with so very nice tools like JupyterLab, Jupyter Notebook, QtConsole, Spyder, Glueviz, Orange, Rstudio, Visual Studio Code. For this project, we will be using Jupyter notebook and Spyder

To install Anaconda navigator and to know how to use Jupyter Notebook a Spyder using Anaconda watch the video

To build Deep learning models you must require the following packages

Tensor flow: TensorFlow is an end-to-end open-source platform for machine learning. It has a comprehensive, flexible ecosystem of tools, libraries, and community resources that lets researchers push the state-of-the-art in ML and developers can easily build and deploy ML powered applications.

Keras: Keras leverages various optimization techniques to make high level neural network API easier and more performant. It supports the following features:

- Consistent, simple and extensible API.
- Minimal structure - easy to achieve the result without any frills.
- It supports multiple platforms and backends.
- It is user friendly framework which runs on both CPU and GPU.
- Highly scalability of computation.

Flask: Web frame work used for building Web applications

Prior Knowledge

One should have knowledge on the following Concepts:

- Supervised and unsupervised learning
- Regression Classification and Clustering
- Artificial Neural Networks
- Convolution Neural Networks
- Flask

Understanding The Data

ML depends heavily on data, without data, it is impossible for a machine to learn. It is the most crucial aspect that makes algorithm training possible. In Machine Learning projects, we need a training data set. It is the actual data set used to train the model for performing various actions.

TensorFlow already has MNIST Data set so there is no need to explicitly download or create Dataset

The MNIST dataset contains ten classes: Digits from 0-9. Each digit is taken as a class.

Importing The Required Libraries

Let's first import the libraries

Importing Necessary Libraries

```
import numpy #used for numerical analysis
import tensorflow #open source used for both ML and DL for computation
from tensorflow.keras.datasets import mnist #mnist dataset
from tensorflow.keras.models import Sequential #it is a plain stack of layers
from tensorflow.keras import layers #A layer consists of a tensor-in tensor-out computation function.
from tensorflow.keras.layers import Dense, Flatten #Dense-Dense layer is the regular, deeply connected n
#Flatten-used for flattening the input or change the dimension
from tensorflow.keras.layers import Conv2D #Convolutional layer
from keras.optimizers import Adam #optimizer
from keras.utils import np_utils #used for one-hot encoding
```

Importing the required libraries which are required for the model to run. The dataset for this model is imported from the Keras module.

The dataset contains ten classes: Digits from 0-9. Each digit is taken as a class

For a detail point of view on Keras and TensorFlow refer to the [link here](#):

Loading The Data

The dataset for this model is imported from the Keras module.

load data

```
(X_train, y_train), (X_test, y_test) = mnist.load_data() #splitting the mnist data into train and test
```

We split the data into train and test. Using the training dataset, we train the model and the testing dataset is used to predict the results.

```
print(X_train.shape)#shape is used for give the dimension values #60000-rows 28x28-pixels
print(X_test.shape)
```

```
(60000, 28, 28)
(10000, 28, 28)
```

We are finding out the shape of X_train and x_test for better understanding. It lists out the dimensions of the data present in it. in trainset, we have 60000 images, and in the test set we have 10000 images

Analysing The Data

Let's see the Information of an image lying inside the x_train variable

Understanding the data

```
X_train[0]#printing the first image
```

```
[ 0,  0,  0,  0,  0,  0,  0,  0,  0,  0,  0,  0,  0,
  0,  0,  0,  0,  0,  0,  0,  0,  0,  0,  0,  0,  0,
  0,  0],
 [ 0,  0,  0,  0,  0,  0,  0,  0,  0,  0,  0,  0,  0,  0,
  0,  0,  0,  0,  0,  0,  0,  0,  0,  0,  0,  0,  0,
  0,  0],
 [ 0,  0,  0,  0,  0,  0,  0,  0,  0,  0,  0,  0,  0,  0,
  0,  0,  0,  0,  0,  0,  0,  0,  0,  0,  0,  0,  0,
  0,  0],
 [ 0,  0,  0,  0,  0,  0,  0,  0,  0,  0,  0,  0,  0,  3,
 18, 18, 18, 126, 136, 175, 26, 166, 255, 247, 127,  0,  0,
  0,  0],
 [ 0,  0,  0,  0,  0,  0,  0,  0,  0, 30, 36, 94, 154, 170,
253, 253, 253, 253, 253, 225, 172, 253, 242, 195, 64,  0,  0,
  0,  0],
 [ 0,  0,  0,  0,  0,  0,  0,  0, 49, 238, 253, 253, 253, 253,
253, 253, 253, 253, 251, 93, 82, 82, 56, 39,  0,  0,  0,
  0,  0],
 [ 0,  0,  0,  0,  0,  0,  0,  0, 18, 219, 253, 253, 253, 253,
253, 198, 182, 247, 241,  0,  0,  0,  0,  0,  0,  0,  0,
  0,  0],
 [ 0,  0,  0,  0,  0,  0,  0,  0,  0, 80, 156, 107, 253, 253,
205, 11,  0, 43, 154,  0,  0,  0,  0,  0,  0,  0,  0,
  0,  0],
 [ 0,  0,  0,  0,  0,  0,  0,  0,  0,  0, 14,  1, 154, 253,
```

Basically, the pixel values range from 0-255. Here we are printing the first image pixel value which is index [0] of the training data. As you see it is displayed in the output.

With respect to this image, the label of this image will be stored in y_train let's see what is the label of this image by grabbing it from the y_train variable

```
y_train[0]#printing lable of first image

5
```

As we saw in the previous screenshot, we get to know that the pixel values are printed. Now here we are finding to which image the pixel values belong to. From the output displayed we get to know that the image is '5'.

Lets Plot the image on a graph using the Matplot library



Matplotlib is a comprehensive library for creating static, animated, and interactive visualizations in Python. By using the Matplotlib library we are displaying the number '5' in the form of an image for proper understanding.

Note: You can see the results by replacing the index number till 59999 as the train set has 60K images

Reshaping The Data

As we are using Deep learning neural network, the input for this network to get trained on should be of higher dimensional. Our dataset is having three-dimensional images so we have to reshape them too higher dimensions

Reshaping Dataset

```
# Reshaping to format which CNN expects (batch, height, width, channels)
X_train = X_train.reshape(60000, 28, 28, 1).astype('float32')
X_test = X_test.reshape(10000, 28, 28, 1).astype('float32')
```

We are reshaping the dataset because we are building the model using CNN. As CNN needs four attributes batch, height, width, and channels we reshape the data.

Applying One Hot Encoding

If you see our y_train variable contains Labels representing the images containing in x_train. AS these are numbers usually, they can be considered as numerical or continuous data, but with respect to this project these Numbers are representing a set of class so these are to be represented as categorical data, and we need to binaries these categorical data that's why we are applying One Hot encoding for y_train set

One-Hot Encoding

```
# one hot encode
number_of_classes = 10 #storing the no. classes in a variable
y_train = np_utils.to_categorical(y_train, number_of_classes) #converts the output in binary format
y_test = np_utils.to_categorical(y_test, number_of_classes)
```

One hot encoding is a process by which categorical variables are converted into a form that could be provided to ML algorithms to do a better job in prediction. We apply One-Hot Encoding in order to convert the values into 0's and 1's. For a detailed point of view, look at this [link](#)

Now let's see how our label 5 is index 0 of y_train is converted


```
y_train[0] #printing the new label  
  
array([0., 0., 0., 0., 0., 1., 0., 0., 0., 0.], dtype=float32)
```

As we see the new the label is printed in the form of 0's and 1's and is of type float.

Model Building

This activity includes the following steps

- Initializing the model
- Adding CNN Layers
- Training and testing the model
- Saving the model

Add CNN Layers

Creating the model and adding the input, hidden, and output layers to it

Creating the Model

```
# create model  
model = Sequential()  
# adding model layer  
model.add(Conv2D(64, (3, 3), input_shape=(28, 28, 1), activation='relu'))  
model.add(Conv2D(32, (3, 3), activation='relu'))  
#model.add(Conv2D(32, (3, 3), activation='relu'))  
#flatten the dimension of the image  
model.add(Flatten())  
#output layer with 10 neurons  
model.add(Dense(number_of_classes, activation='softmax'))
```

The Sequential model is a linear stack of layers. You can create a Sequential model by passing a list of layer instances to the constructor:

To know more about layers, watch the below video

Compiling The Model

With both the training data defined and model defined, it's time to configure the learning process. This is accomplished with a call to the compile () method of the Sequential model class. Compilation requires 3 arguments: an optimizer, a loss function, and a list of metrics.

Compiling the model

```
# Compile model
model.compile(loss='categorical_crossentropy', optimizer="Adam", metrics=['accuracy'])
```

Note: In our project, we have 2 classes in the output, so the loss is binary_crossentropy.

If you have more than two classes in output put "loss = categorical_crossentropy".

Train The Model

Now, let us train our model with our image dataset.

Fit: functions used to train a deep learning neural network

Fitting the model

```
# Fit the model
model.fit(X_train, y_train, validation_data=(X_test, y_test), epochs=5, batch_size=32)

Epoch 1/5
1875/1875 [*****] - 184s 98ms/step - loss: 0.2451 - accuracy: 0.9497 - val_loss: 0.0966 - val_accuracy: 0.9715
Epoch 2/5
1875/1875 [*****] - 183s 98ms/step - loss: 0.0694 - accuracy: 0.9785 - val_loss: 0.0971 - val_accuracy: 0.9714
Epoch 3/5
1875/1875 [*****] - 183s 98ms/step - loss: 0.0487 - accuracy: 0.9850 - val_loss: 0.0829 - val_accuracy: 0.9782
Epoch 4/5
1875/1875 [*****] - 177s 94ms/step - loss: 0.0382 - accuracy: 0.9877 - val_loss: 0.0881 - val_accuracy: 0.9769
```

Arguments:

steps_per_epoch: it specifies the total number of steps taken from the generator as soon as one epoch is finished and the next epoch has started. We can calculate the value of steps_per_epoch as the total number of samples in your dataset divided by the batch size.

Epochs: an integer and number of epochs we want to train our model for.

Validation_data:

- an inputs and targets list
- a generator
- inputs, targets, and sample_weights list which can be used to evaluate the loss and metrics for any model after any epoch has ended.

validation_steps: only if the validation_data is a generator then only this argument can be used. It specifies the total number of steps taken from the generator before it is stopped at every epoch and its value is calculated as the total number of validation data points in your dataset divided by the validation batch size.

Observing The Metrics

Observing the metrics

```
# Final evaluation of the model
metrics = model.evaluate(X_test, y_test, verbose=0)
print("Metrics(Test loss & Test Accuracy): ")
print(metrics)
```

```
Metrics(Test loss & Test Accuracy):
[0.1097492054104805, 0.9753000140190125]
```

We here are printing the metrics which lists out the Test loss and Test accuracy

- Loss value implies how poorly or well a model behaves after each iteration of optimization.
- An accuracy metric is used to measure the algorithm's performance in an interpretable way.

Test The Model

Firstly, we are slicing the x_test data until the first four images. In the next step we the printing the predicted output.

Predicting the output

```
prediction=model.predict(X_test[:4])
print(prediction)
```

```
[[5.50544734e-15 7.41999492e-20 5.00876077e-12 1.26642463e-09
 3.52252804e-21 1.54133163e-17 3.15550259e-21 1.00000000e+00
 1.32678888e-13 6.44072333e-14]
 [1.51885260e-08 8.02883537e-09 1.00000000e+00 6.44802788e-13
 6.37117113e-16 3.40490114e-15 2.15804121e-08 2.18907611e-19
 3.38496564e-10 2.07915498e-20]
 [3.14093924e-08 9.99941349e-01 2.01593957e-06 1.45100779e-10
 5.25237965e-06 1.59223120e-07 3.15299786e-08 1.53995302e-07
 5.09846941e-05 1.14552066e-07]
 [1.00000000e+00 1.35018288e-14 2.28308122e-10 1.79766094e-16
 1.28767550e-14 7.12401882e-12 2.92727509e-11 3.52439052e-13
 2.56207252e-12 2.32345068e-12]]
```

```
import numpy as np
print(np.argmax(prediction,axis=1)) #printing our labels from first 4 images
print(y_test[:4]) #printing the actual labels

[7 2 1 0]
[[0. 0. 0. 0. 0. 0. 0. 1. 0. 0.]
 [0. 0. 1. 0. 0. 0. 0. 0. 0. 0.]
 [0. 1. 0. 0. 0. 0. 0. 0. 0. 0.]
 [1. 0. 0. 0. 0. 0. 0. 0. 0. 0.]]
```

As we already predicted the input from the x_test. According to that by using argmax function here we are printing the labels with high prediction values

Observing the metrics

```
# Final evaluation of the model
metrics = model.evaluate(X_test, y_test, verbose=0)
print("Metrics(Test loss & Test Accuracy): ")
print(metrics)

Metrics(Test loss & Test Accuracy):
[0.1097492054104805, 0.9753000140190125]
```

Test The Model

Firstly, we are slicing the x_test data until the first four images. In the next step we the printing the predicted output.

Predicting the output

```
prediction=model.predict(X_test[:4])
print(prediction)

[[5.50544734e-15  7.41999492e-20  5.00876077e-12  1.26642463e-09
  3.52252804e-21  1.54133163e-17  3.15550259e-21  1.00000000e+00
  1.32678888e-13  6.44072333e-14]
 [1.51885260e-08  8.02883537e-09  1.00000000e+00  6.44802788e-13
  6.37117113e-16  3.40490114e-15  2.15804121e-08  2.18907611e-19
  3.38496564e-10  2.07915498e-20]
 [3.14093924e-08  9.99941349e-01  2.01593957e-06  1.45100779e-10
  5.25237965e-06  1.59223120e-07  3.15299786e-08  1.53995302e-07
  5.09846941e-05  1.14552066e-07]
 [1.00000000e+00  1.35018288e-14  2.28308122e-10  1.79766094e-16
  1.28767550e-14  7.12401882e-12  2.92727509e-11  3.52439052e-13
  2.56207252e-12  2.32345068e-12]]
```

```
import numpy as np
print(np.argmax(prediction,axis=1)) #printing our labels from first 4 images
print(y_test[:4]) #printing the actual labels

[7 2 1 0]
[[0.  0.  0.  0.  0.  0.  0.  1.  0.  0.]
 [0.  0.  1.  0.  0.  0.  0.  0.  0.  0.]
 [0.  1.  0.  0.  0.  0.  0.  0.  0.  0.]
 [1.  0.  0.  0.  0.  0.  0.  0.  0.  0.]]
```

As we already predicted the input from the x_test. According to that by using argmax function here we are printing the labels with high prediction values

Save The Model

Your model is to be saved for future purposes. This saved model can also be integrated with an android application or web application in order to predict something.

Saving the model

```
# Save the model
model.save('models/mnistCNN.h5')
```

The model is saved with .h5 extension as follows:
An H5 file is a data file saved in the Hierarchical Data Format (HDF). It contains multidimensional arrays of scientific data.

Test With Saved Model

Now open another jupyter file and write the below code

Taking images as input and checking results

```
# Importing the Keras libraries and packages
from tensorflow.keras.models import load_model
model = load_model(r'C:/Users/DELL/Hand written recognition System/models/mnistCNN.h5')
from PIL import Image#used for manipulating image uploaded by the user.
import numpy as np#used for numerical analysis
for index in range(4):
    img = Image.open('data/' + str(index) + '.png').convert("L")# convert image to monochrome
    img = img.resize((28,28))# resizing of input image
    im2arr = np.array(img) #converting to image
    im2arr = im2arr.reshape(1,28,28,1) #reshaping according to our requirement
    # Predicting the Test set results
    y_pred = model.predict(im2arr) #predicting the results
    print(y_pred)

[[1. 0. 0. 0. 0. 0. 0. 0. 0. 0.]]
[[0. 1. 0. 0. 0. 0. 0. 0. 0. 0.]]
[[0. 0. 1. 0. 0. 0. 0. 0. 0. 0.]]
[[0. 0. 0. 1. 0. 0. 0. 0. 0. 0.]]
```

Firstly, we are loading the model which was built. Then we are applying for a loop for the first four images and converting the image to the required format. Then we are resizing the input image, converting the image as per the CNN model and we are reshaping it according to the requirement. At last, we are predicting the result.

You can use `predict_classes` for just predicting the class of an image

Application Building

In this section, we will be building a web application that is integrated into the model we built. A UI is provided for the users where he has uploaded an image. The uploaded image is given to the saved model and prediction is showcased on the UI.

This section has the following tasks

- Building HTML Pages
- Building server-side script


Create An HTML File

- We use HTML to create the front-end part of the web page.
- Here, we created 2 html pages- `index.html`, `web.html`.
- `index.html` displays home page.
- `web.html` accepts the values from the input and displays the prediction.
- For more information regarding HTML refer the link below

Please refer to the link for HTML code files


Let's see how our `index.html` file looks like

This is the main page which describes about the project and summarizes it.

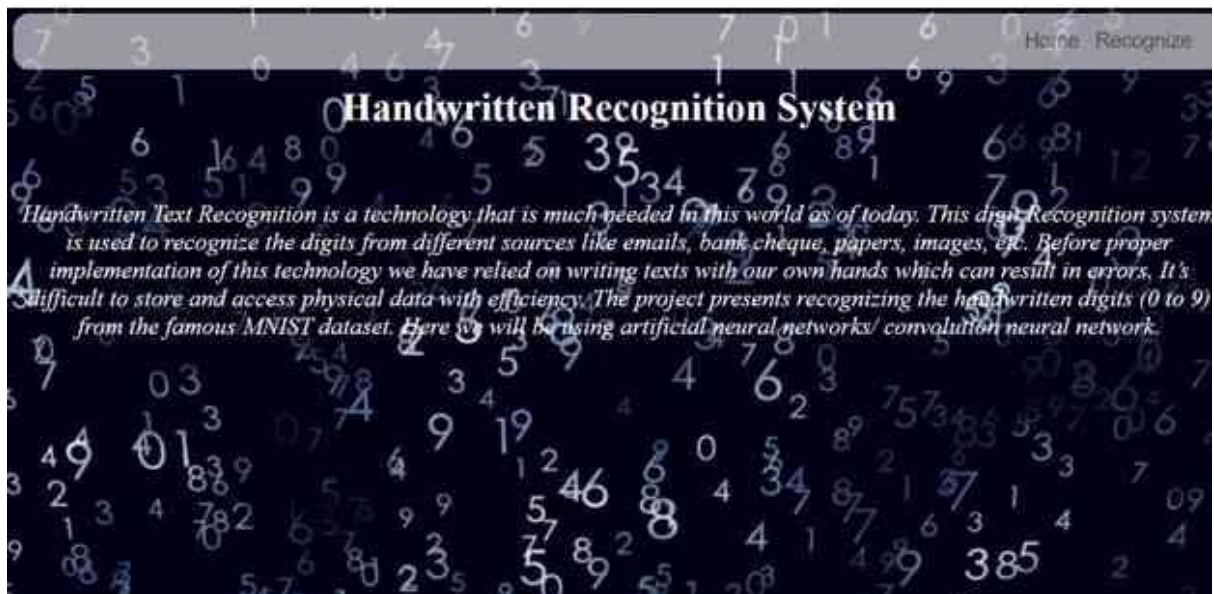

Let's see how our web.html page looks like

This is the prediction page where we get to choose the image from our local system and predict the output.

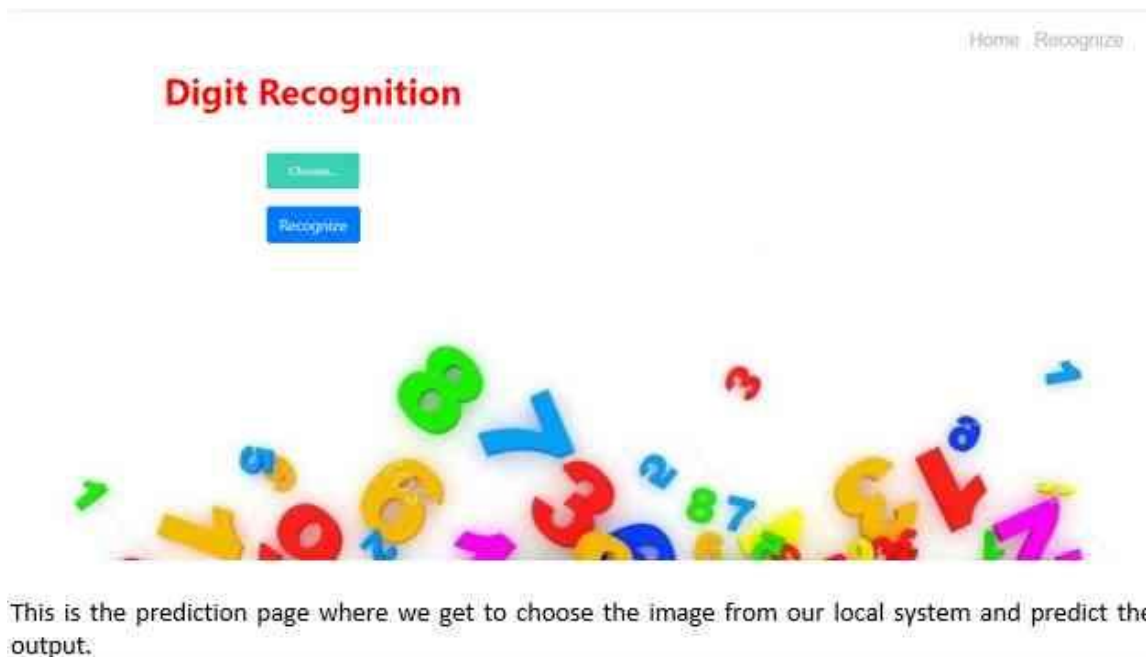

Build Python Code (Part 1)

Let us build the flask file 'app.py' which is a web framework written in python for server-side scripting. Let's see step by step procedure for building the backend application.

- App starts running when the "__name__" constructor is called in main.
- render_template is used to return HTML file.
- "GET" method is used to take input from the user.
- "POST" method is used to display the output to the user.

Import Libraries:

```
from flask import Flask, render_template, request # Flask-It is our framework which we are going to use to run/serve our application.
#request-for accessing file which was uploaded by the user on our application.

from PIL import Image #used for manipulating image uploaded by the user.
import numpy as np #used for numerical analysis
from tensorflow.keras.models import load_model #to Load our model trained with MNIST data
import tensorflow as tf #to run our model.
```

Libraries required for the app to run are to be imported.

Routing to the html Page

```
@app.route('/') #default route
def upload_file():
    return render_template('main.html') #rendering html page
@app.route('/about') #Main page route
def upload_file1():
    return render_template('main.html') #rendering html page
@app.route('/upload') #main page route
def upload_file2():
    return render_template('index6.html')
```

We are routing the app to the HTML templates which we want to render.

Firstly, we are rendering the main.html template and from there we are navigating to our prediction page that is index6.html

Returning the prediction on UI:

```
@app.route('/predict', methods = ['POST']) #route for our prediction
def upload_image_file():
    if request.method == 'POST':
        img = Image.open(request.files['file'].stream).convert("L")# convert image to monochrome
        img = img.resize((28,28))# resizing of input image
        im2arr = np.array(img)#converting to image
        im2arr = im2arr.reshape(1,28,28,1) #reshaping according to our requirement
        y_pred = model.predict_classes(im2arr) #predicting the results
        print(y_pred) #printing our result in prompt
        #return 'Predicted Number: ' + str(y_pred) #returning our output
```

Build Python Code (Part 2)

Here the route for prediction is given and necessary steps are performed in order to get the predicted output.

```
if(y_pred == 0) :
    return render_template("0.html",showcase = str(y_pred))
elif(y_pred == 1) :
    return render_template("1.html",showcase = str(y_pred))
elif(y_pred == 2) :
    return render_template("2.html",showcase = str(y_pred))
elif(y_pred == 3) :
    return render_template("3.html",showcase = str(y_pred))
elif(y_pred == 4) :
    return render_template("4.html",showcase = str(y_pred))
elif(y_pred == 5) :
    return render_template("5.html",showcase = str(y_pred))
elif(y_pred == 6) :
    return render_template("6.html",showcase = str(y_pred))
elif(y_pred == 7) :
    return render_template("7.html",showcase = str(y_pred))
elif(y_pred == 8) :
    return render_template("8.html",showcase = str(y_pred))
else :
    return render_template("9.html",showcase = str(y_pred))
else:
    return None
```

Necessary conditions are given according to the input classes and the app will be returning the templates according to that.

Main Function:

This function runs your app in a web browser

Lastly, we run our app on the localhost. Here we are running it on localhost:8000

```
else:
    return None
if __name__ == '__main__':
    app.run(host='0.0.0.0', port=8000, debug=True)
#app.run(debug = True) #running our flask app
```


Run The Application

- Open anaconda prompt from the start menu
- Navigate to the folder where your python script is.
- Now type “python app.py” command

```
(base) C:\Users\DELL>cd C:\Users\DELL\Hand_Written_Final
(base) C:\Users\DELL\Hand_Written_Final>python app.py
```

Navigate to the localhost where you can view your web page

Upload an image and see the predicted output on UI your page and output look like:

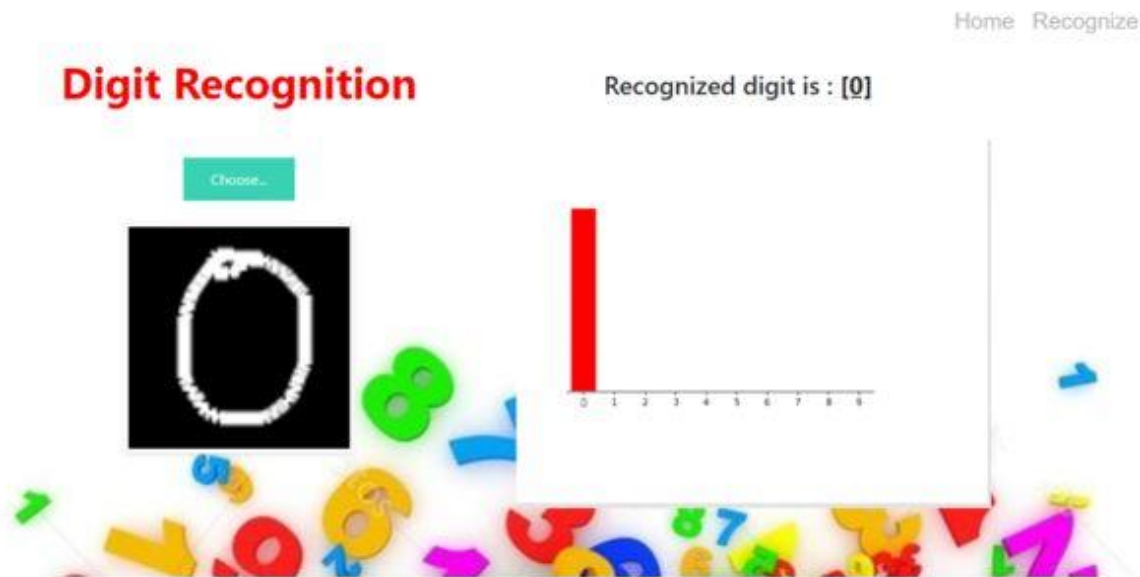

Train The Model On IBM

In this milestone, you will learn how to build Deep Learning Model Using the IBM cloud.

Register For IBM Cloud

To complete this project, you must have an IBM account

IBM Account:

- Please click [here](#) to register for IBM
- Please click [here](#) to log in to IBM Account.

Watch the below video to register and login into your IBM account

Train The Model On IBM

Please watch the below video to train the model on IBM and integrate it with the flask Application.

Ideation Phase

In this milestone you are expected to get started with the Ideation process.

<https://github.com/IBM-EPBL/IBM-Project-48243-1660805913/tree/main/PROJECT%20DESIGN%20AND%20PLANNING/IDEATION%20PHASE>

Literature Survey on The Selected Project & Information Gathering

In this activity you are expected to gather/collect the relevant information on project use case, refer the existing solutions, technical papers, research publications etc.

<https://github.com/IBM-EPBL/IBM-Project-48243-1660805913/blob/main/PROJECT%20DESIGN%20AND%20PLANNING/IDEATION%20PHASE/Literature%20survey.docx>

Prepare Empathy Map

In this activity you are expected to prepare the empathy map canvas to capture the user Pains & Gains, Prepare list of problem statements.

[https://github.com/IBM-EPBL/IBM-Project-48243-1660805913/blob/main/PROJECT%20DESIGN%20AND%20PLANNING/IDEATION%20PHASE/a%20novel%20method%20for%20hand%20written%20digit%20recognition%20\(1\).pdf](https://github.com/IBM-EPBL/IBM-Project-48243-1660805913/blob/main/PROJECT%20DESIGN%20AND%20PLANNING/IDEATION%20PHASE/a%20novel%20method%20for%20hand%20written%20digit%20recognition%20(1).pdf)

Ideation

In this activity you are expected to list the ideas (at least 4 per each team member) by organizing the brainstorming session and prioritize the top 3 ideas based on the feasibility & importance.

<https://github.com/IBM-EPBL/IBM-Project-48243-1660805913/blob/main/PROJECT%20DESIGN%20AND%20PLANNING/IDEATION%20PHASE/Brainstorm%20and%20Ideation.pdf>

Project Design Phase – I

From this milestone you will be starting the project design phase. You are expected to cover the activities given.

<https://github.com/IBM-EPBL/IBM-Project-48243-1660805913/tree/main/PROJECT%20DESIGN%20AND%20PLANNING/PROJECT%20DESIGN%20PHASE%20I>

Proposed Solution

In this activity you are expected to prepare the proposed solution document, which includes the novelty, feasibility of idea, business model, social impact, scalability of solution, etc.

<https://github.com/IBM-EPBL/IBM-Project-48243-1660805913/blob/main/PROJECT%20DESIGN%20AND%20PLANNING/PROJECT%20DESIGN%20PHASE%20I/Proposed%20Solution.pdf>

Problem Solution Fit

In this activity you are expected to prepare problem - solution fit document and submit for review.

[https://github.com/IBM-EPBL/IBM-Project-48243-1660805913/blob/main/PROJECT%20DESIGN%20AND%20PLANNING/PROJECT%20DESIGN%20PHASE%20I/Problem_solution_fit%20Sample%20Template%20\(4\).pdf](https://github.com/IBM-EPBL/IBM-Project-48243-1660805913/blob/main/PROJECT%20DESIGN%20AND%20PLANNING/PROJECT%20DESIGN%20PHASE%20I/Problem_solution_fit%20Sample%20Template%20(4).pdf)

Solution Architecture

In this activity you are expected to prepare solution architecture document and submit for review.

<https://github.com/IBM-EPBL/IBM-Project-48243-1660805913/blob/main/PROJECT%20DESIGN%20AND%20PLANNING/PROJECT%20DESIGN%20PHASE%20I/solution%20archi%20I.pdf>

Project Design Phase -II

From this milestone you will be continue working on the project design phase. You are expected to cover the activities given.

<https://github.com/IBM-EPBL/IBM-Project-48243-1660805913/tree/main/PROJECT%20DESIGN%20AND%20PLANNING/project%20design%20phase%202>

Customer Journey

Prepare the customer journey maps to understand the user interactions & experiences with the application (entry to exit).

<https://github.com/IBM-EPBL/IBM-Project-48243-1660805913/blob/main/PROJECT%20DESIGN%20AND%20PLANNING/project%20design%20phase%202/customer%20experience%20journey.pdf>

Functional Requirement

In this activity you are expected to prepare the functional requirement document.

<https://github.com/IBM-EPBL/IBM-Project-48243-1660805913/blob/main/PROJECT%20DESIGN%20AND%20PLANNING/project%20design%20phase%202/solution%20requirements.docx>

Data Flow Diagrams

In this activity you are expected to prepare the data flow diagrams and submit for review.

<https://github.com/IBM-EPBL/IBM-Project-48243-1660805913/blob/main/PROJECT%20DESIGN%20AND%20PLANNING/project%20design%20phase%202/Data%20Flow%20Diagram%20.docx>

Technology Architecture

In this activity you are expected to draw the technology architecture diagram.

<https://github.com/IBM-EPBL/IBM-Project-48243-1660805913/blob/main/PROJECT%20DESIGN%20AND%20PLANNING/project%20design%20phase%202/Technology%20Stack%20%26%20architecture.docx>

Project Planning Phase

In this milestone you are expected to prepare milestones & tasks, sprint schedules.

<https://github.com/IBM-EPBL/IBM-Project-48243-1660805913/blob/main/project%20planning%20phase/Project%20Planning%20Template-1.pdf>

Prepare Milestone & Activity List

In this activity you are expected to prepare the milestones & activity list of the project.

<https://github.com/IBM-EPBL/IBM-Project-48243-1660805913/blob/main/project%20planning%20phase/Project%20Planning%20Template-1.pdf>

Sprint Delivery Plan

In this activity you are expected to prepare the sprint delivery plan.

<https://github.com/IBM-EPBL/IBM-Project-48243-1660805913/blob/main/project%20planning%20phase/Project%20Planning%20Template-1.pdf>

Project Development Phase

In this milestone you will start the project development and expected to perform the coding & solutioning, acceptance testing, performance testing based as per the sprint and submit them.

<https://github.com/IBM-EPBL/IBM-Project-48243-1660805913/tree/main/project%20development%20phase>

Project Development - Delivery of Sprint-1

In this activity you are expected to develop & submit the developed code by testing it.

https://github.com/IBM-EPBL/IBM-Project-48243-1660805913/tree/main/project%20development%20phase/Sprint_1

Project Development - Delivery of Sprint-2

In this activity you are expected to develop & submit the developed code by testing it.

https://github.com/IBM-EPBL/IBM-Project-48243-1660805913/tree/main/project%20development%20phase/Sprint_2

Project Development - Delivery of Sprint-3

In this activity you are expected to develop & submit the developed code by testing it.

https://github.com/IBM-EPBL/IBM-Project-48243-1660805913/tree/main/project%20development%20phase/Sprint_3

Project Development - Delivery of Sprint-4

In this activity you are expected to develop & submit the developed code by testing it.

https://github.com/IBM-EPBL/IBM-Project-48243-1660805913/tree/main/project%20development%20phase/Sprint_4/dataset