Assignment-3

Team id	PNT2022TMID49642
PROJECT NAME	NUTRITION ASSISTANT APPLICATION
NAME	MOHAMED HAMTHAAN S
ROLL NO	950019106703

1.Create a Bucket in IBM object storage.

1.Upload an 5 images to ibm object storage and make it public. write htmlcode to displaying all the 5 images.

web.html:

```
<html>
<head>
<title> Images
</title>
<link rel="stylesheet" href="style.css">
</head>
<body>
<div class="box">
<div class="img1">
<h1 class="word">Sea</h1>
<img src="https://hamthaan.s3.jp-tok.cloud-object-storage.appdomain.cloud/Image1.jpg"
alt="lion" width="200" height="200">
</div>
<div class="img2">
<h1 class="word">Picture</h1>
<img src="https://hamthaan.s3.jp-tok.cloud-object-storage.appdomain.cloud/Image2.jpg"
width="200" height="200">
</div>
<div class="img3">
<h1 class="word">Sky</h1>
<img src="https://hamthaan.s3.jp-tok.cloud-object-storage.appdomain.cloud/Image3.jpg"
alt="monkey" width="200" height="200">
</div>
<div class="img4">
<h1 class="word">Earth</h1>
<img src="https://hamthaan.s3.jp-tok.cloud-object-storage.appdomain.cloud/Image4.jpg"
alt="elephant" width="200" height="200">
</div>
<div class="img5">
<h1 class="word">Mountain</h1>
<img src="https://hamthaan.s3.jp-tok.cloud-object-storage.appdomain.cloud/Image5.jpg"
width="200" height="200">
</div>
</div>
</body>
</html>
```
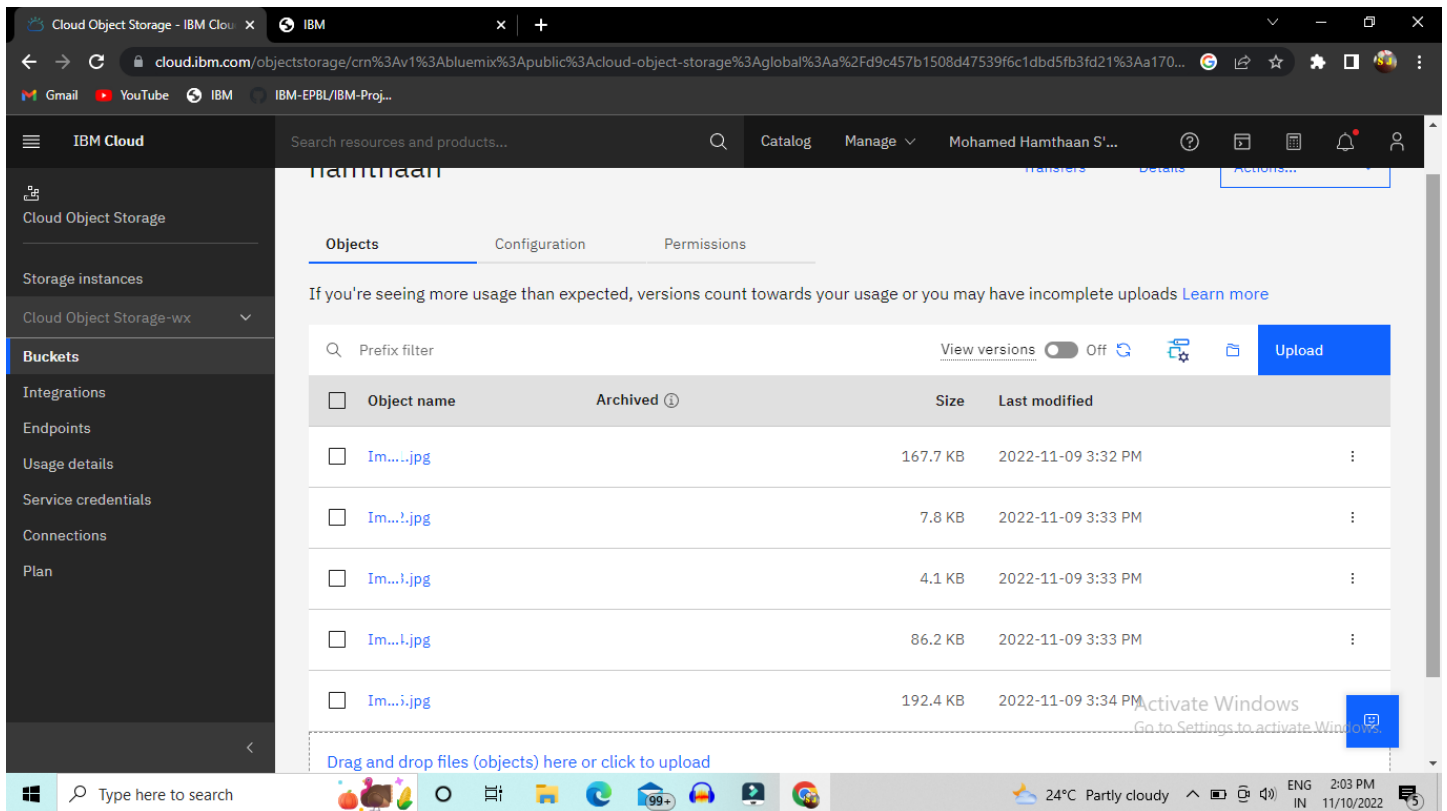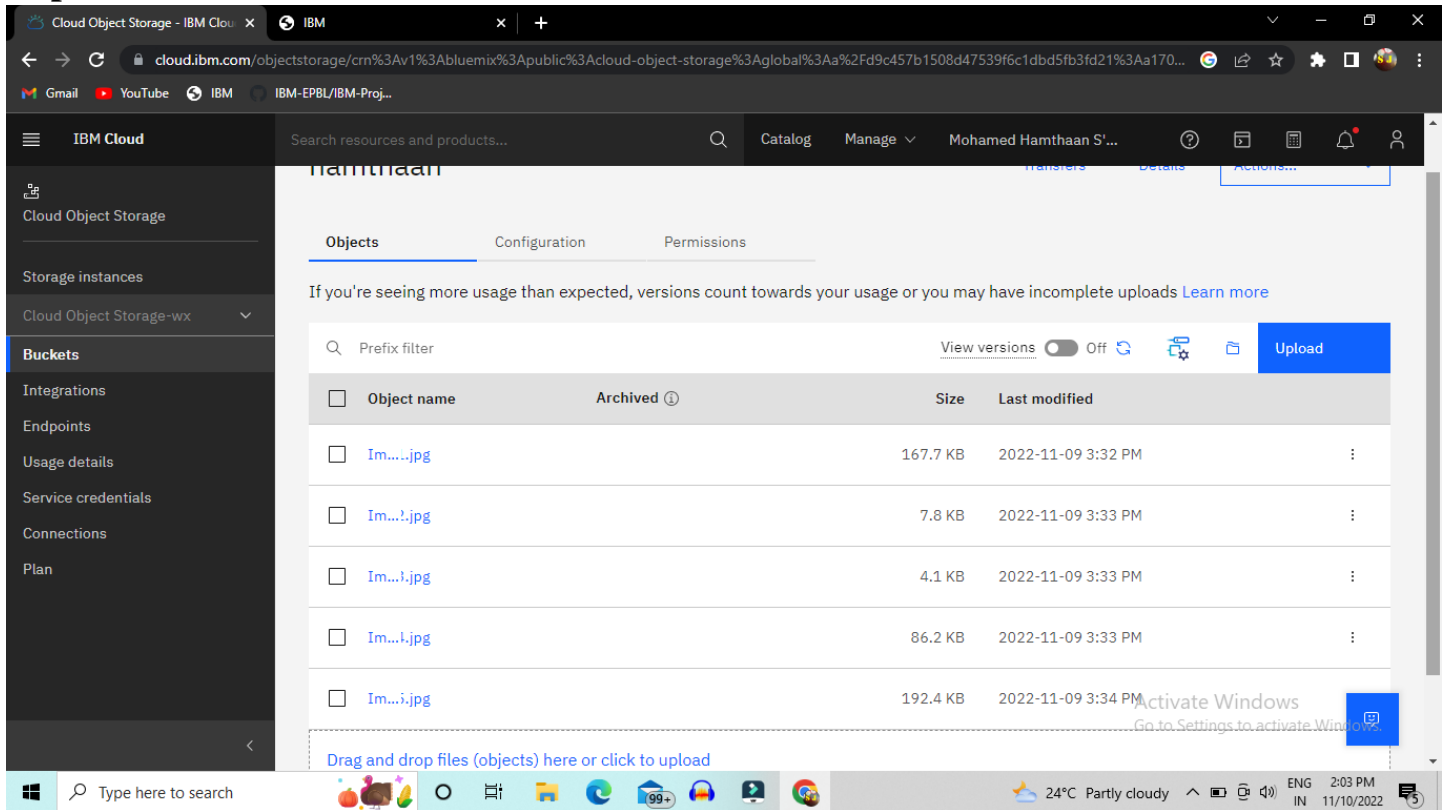
Output:

1. **Upload a css page to the object storage and use the same page in your HTML code.**

@import url('https://fonts.googleapis.com/css2?family=Alkalami&display=swap'); body{
top: 0;
left: 0;
width: 100vw; height: 100vh; margin: 0;
padding: 0;
font-size: 1vmin;
font-family: 'Times new roman', serif; color: white;
background: linear-gradient(90deg, #fc027f 0%, #faf7fa 100%);
}
.word{
text-align: center;
font-size: 11px;
text-transform: uppercase; color: rgb(0, 0, 0);
}
img{
border-radius: 3px; position: relative; top: 34%;
left: 50%;
transform: translate(-50%, -50%);
width: 99%;
height: 70%;
}
.box{
border-radius: 3px; height: 500px; width: 800px;
background: linear-gradient(90deg, #f163a6 0%, #fd0395 100%); display: flex;
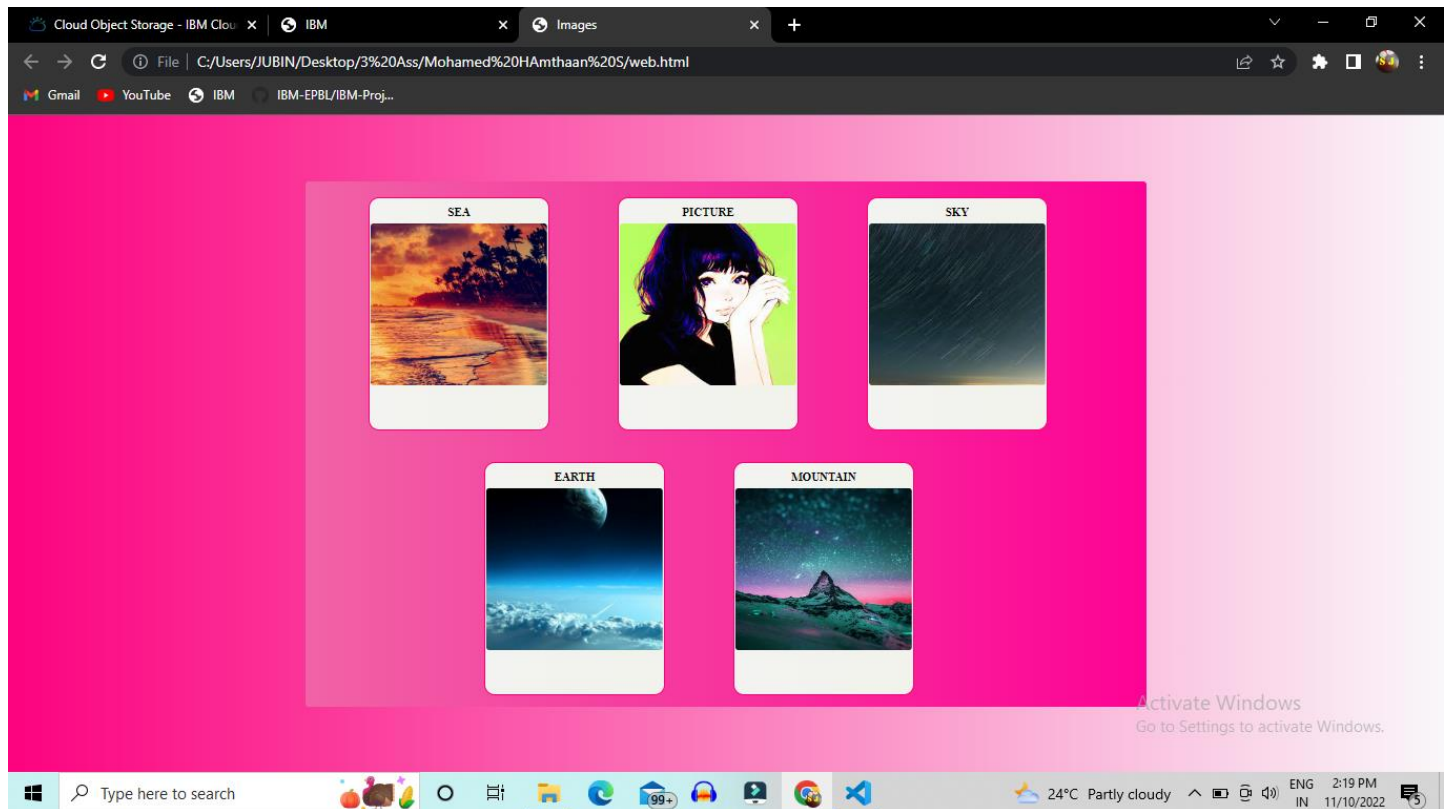
```css
flex-wrap: wrap; flex-direction: row; position: relative; top: 50%;
left: 50%;
transform: translate(-50%, -50%);
}
.img1 ,.img2 ,.img3, .img4, .img5{ border-radius: 10px;
height: 220px; width: 170px; margin: 15px;
border: 1px solid rgb(255, 0, 119);
background: linear-gradient(90deg, #f3f3f0 0%, #f2f3ec 100%);
}
.img1{
margin-left: 60px;
}
.img2{
margin-left: 50px;
}
.img3{
margin-left: 50px;
}
.img4{
margin-left: 170px;
}
.img5{
margin-left: 50px;
}
```

Output:

2. Design a chatbot using IBM Watson assistant for hospital. Ex: User comes with query to know the branches for that hospital in your city. Submit the web URL of that chat bot as a assignment.

https://web-chat.global.assistant.watson.appdomain.cloud/preview.html?backgroundImageURL=https%3A%2F%2Fus-south.assistant.watson.cloud.ibm.com%2Fpublic%2Fimages%2Fupx-b4c45dbe-c544-4044-a749-1cbbcbf1f778%3A%3Af38abe62-9864-4e79-82b1-19b242c9bfdb&integrationID=106e3ff0-0283-403b-92cc-1a71631eb9e2&region=us-south&serviceInstanceID=b4c45dbe-c544-4044-a749-1cbbcbf1f778

3. Create Watson assistant service with 10 steps and use 3 conditions in it. Load that script in HTML page.

Index.html:

```
<html>
       <head>
              <script>
                     window.watsonAssistantChatOptions = {
                       integrationID: " 106e3ff0-0283-403b-92cc-1a71631eb9e2", // The ID of thisintegration.

                      region: " us-south ",
                           // The region your integration is hosted in. service
InstanceID: " b4c45dbe-c544-4044-a749-1cbbcbf1f778", //


     The ID of your service instance.

                       onLoad: function(instance) { instance.render(); }
                       };
                       setTimeout(function(){
                        const t=document.createElement('script');
                        t.src="https://web-chat.global.assistant.watson.appdomain.cloud/versions/" + (window.watsonAssistantChatOptions.clientVersion || 'latest') + "/WatsonAssistantChatEntry.js";
                        document.head.appendChild(t);
```

```html
            });
        </script>
        <meta charset="UTF-8">
        <title> Index </title>
        <link rel="stylesheet" href="style.css">
</head>
<body></br></br></br></br></br>
        <img src="" alt="">
        <div align="center">
        <div align="center" class="border">
            <div class="header">
                <h1 class="word">Index</h1>
            </div></br></br></br>
                <h1 class="bottom">
                    Hi I am Hamthaan</br></br> Welcome to Our page...
            </h1></br></br></br>
          <a href="login.html" class="btn">Logout</a>

        </div>
        </div>
</body>
</html>
```
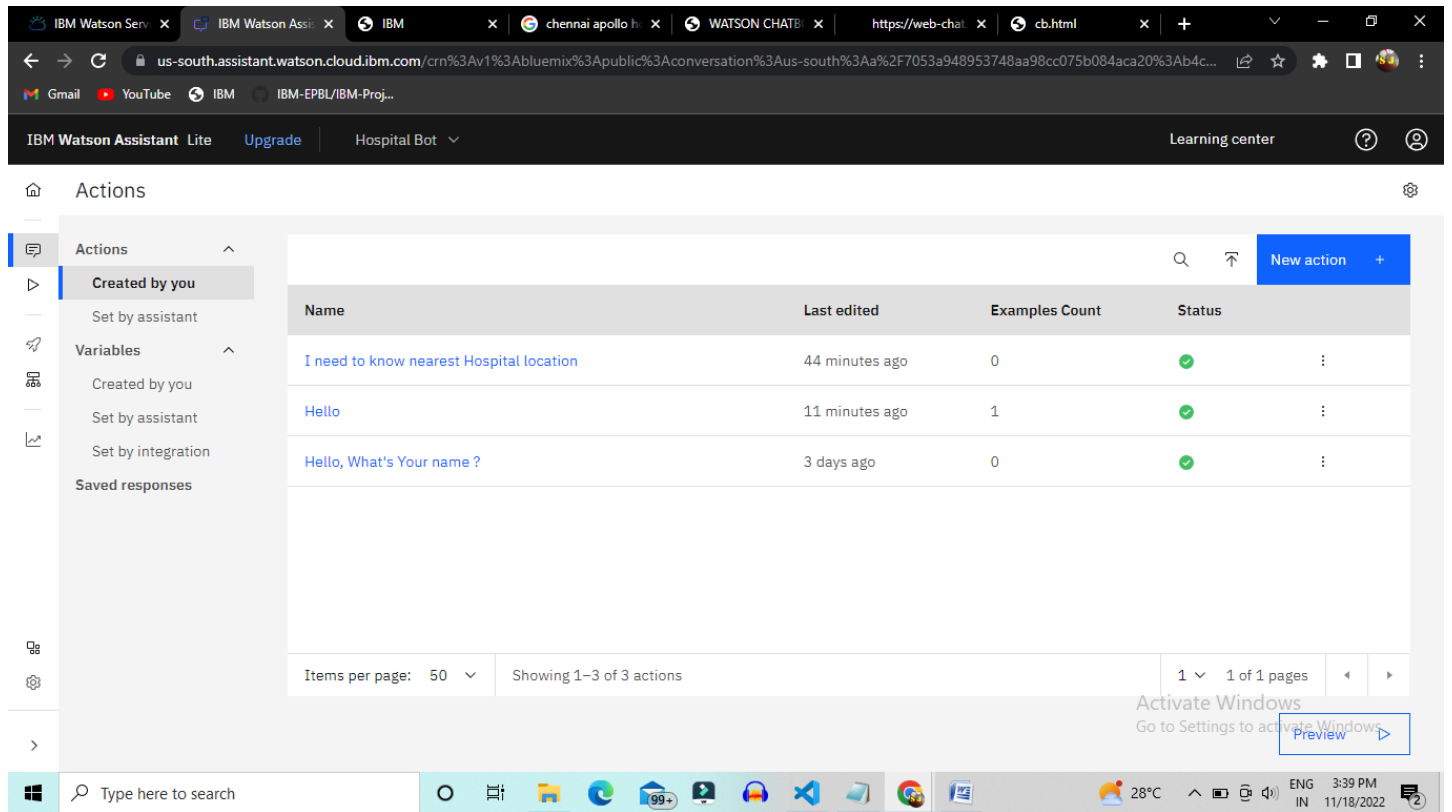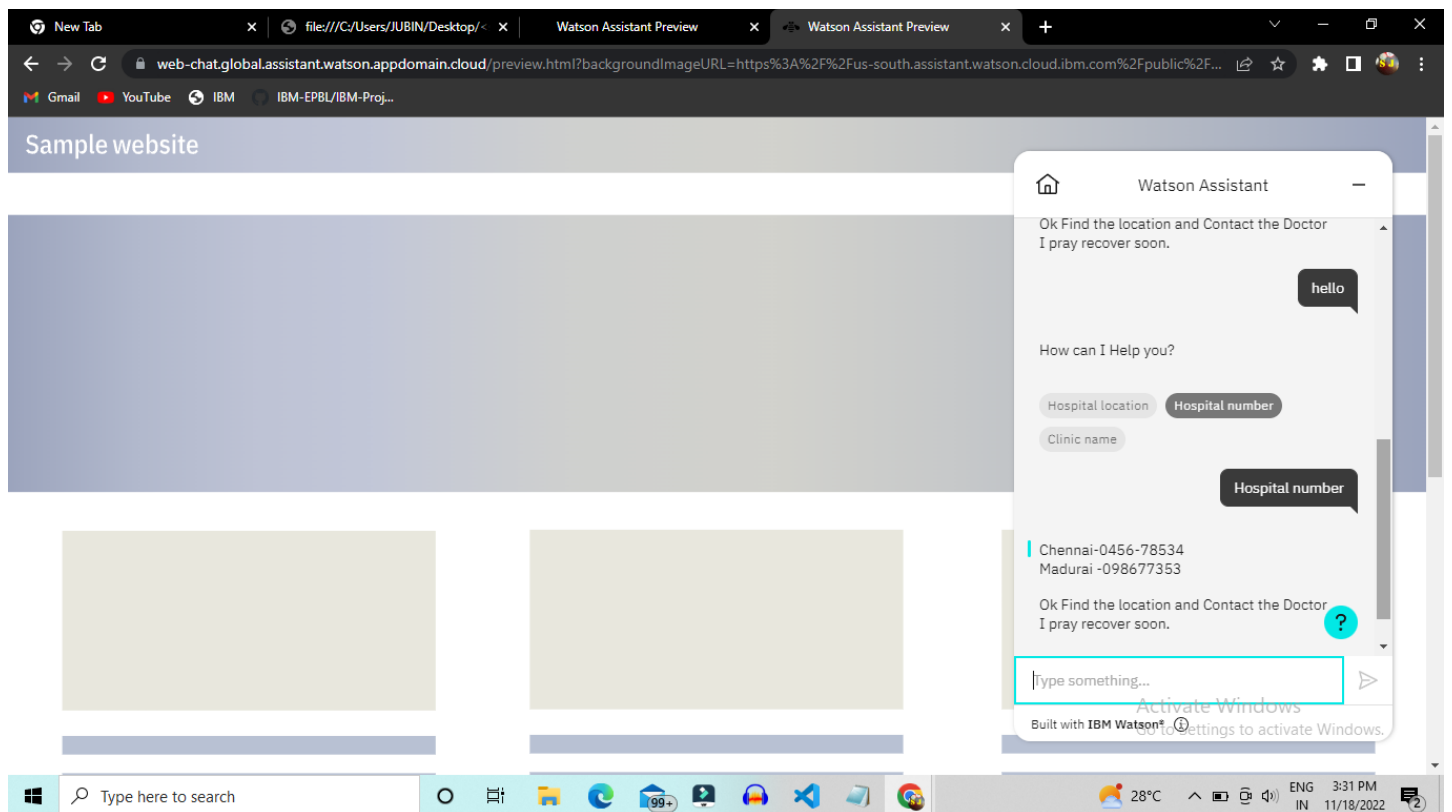
Output: