

<b>TEAM ID</b>	PNT2022TMID50938
<b>PROJECT NAME</b>	AI-POWERED NUTRITION ANALYZER FOR FITNESS

## Python

```
print("Hello World")
```

Hello World

```
print('Hello World')
```

Hello World

```
1+2
```

3

```
print(1+2)
```

3

```
1/2
```

0.5

```
5*5
```

25

## Keywords

```
import keyword
```

```
print(keyword.kwlist)
```

```
['False', 'None', 'True', 'and', 'as', 'assert', 'async', 'await',  
'break', 'class', 'continue', 'def', 'del', 'elif', 'else', 'except',  
'finally', 'for', 'from', 'global', 'if', 'import', 'in', 'is',  
'lambda', 'nonlocal', 'not', 'or', 'pass', 'raise', 'return', 'try',  
'while', 'with', 'yield']
```

## Identifier

```
anna_unv = 5
```

```
anna_unv
```

```
5
```

```
assert = 5
```

```
File "<ipython-input-12-afa64a788a4a>", line 1
    assert = 5
          ^
```

```
SyntaxError: invalid syntax
```

```
1anna_unv = 5
```

```
File "<ipython-input-13-9b81eb200c00>", line 1
    1anna_unv = 5
      ^
```

```
SyntaxError: invalid syntax
```

```
anna_unv_1 = 5
```

```
anna_unv1 = 5
```

```
anna_unv@ = 5
```

```
File "<ipython-input-16-e0f83a281de9>", line 1
    anna_unv@ = 5
              ^
```

```
SyntaxError: invalid syntax
```

## Comments

```
# Age is stored in variable 'a'
```

```
a = 10
```

```
'''Age is stored in
variable a'''
```

```
a = 10
```

```
"""Age is stored in
variable a"""
```

```
a = 10
```

## Statements

*# Single line statement*

```
a = 10+  
3
```

```
print(a)
```

```
File "<ipython-input-24-097d3e8c692a>", line 2  
    a = 10+  
      ^
```

```
SyntaxError: invalid syntax
```

*# multi line statement*

```
a = 10+3\  
+24
```

```
print(a)
```

```
37
```

## Variable assignment

```
int_var = 6
```

```
int_var
```

```
6
```

```
float_var = 6.12  
float_var
```

```
6.12
```

```
str_var = 'Hari'  
str_var
```

```
{"type": "string"}
```

```
a,b,c = 6,6.12,'Hari'
```

```
c
```

```
{"type": "string"}
```

## Data Type

### 1. Numeric Type

```
num = 10  
num
```

```

type(num)

int

num = 10.12
num

10.12

type(num)

float

num = 10+20j
num

(10+20j)

type(num)

complex

```

## 2. Sequence Type

### String

```

str1 = "Welcome to AI"

str1

{"type": "string"}

type(str1)

str

```

### String indexing

```

"""

0 1 2 3 4 5 6 7 8 9 10 11 12

W e l c o m e           t o           A I

-5 -4 -3 -2 -1

"""

{"type": "string"}

str1[7]

{"type": "string"}

str1[-4]

{"type": "string"}

```

## String Slicing

```
str1[0:7]

{"type": "string"}

str1[3:7]

{"type": "string"}

str1

{"type": "string"}

str1[-5:-3]

{"type": "string"}

a = "Anna University"
a

{"type": "string"}

a[0:4]

{"type": "string"}

a[-15:-9]

{"type": "string"}
```

## String Concatenation

```
fname = 'Hari'
lname = 'Prabu'

fname+lname

{"type": "string"}

fname, lname

('Hari', 'Prabu')

print(fname+' '+lname)

Hari Prabu
```

## String function

```
str1 = "    Hello Students    "
str1

{"type": "string"}
```

```
str1.strip()
{"type":"string"}
str1.lstrip()
{"type":"string"}
str1.rstrip()
{"type":"string"}
# HELLO, Hello, hello
str1
{"type":"string"}
str1.lower()
{"type":"string"}
str1.upper()
{"type":"string"}
str1.replace('Hello', 'Welcome')
{"type":"string"}
str1.replace(' ', '')
{"type":"string"}
str1.split()
['Hello', 'Students']
```

## List

```
list1 = []
list1
[]
type(list1)
list
list1 = [1,2,3]
list1
[1, 2, 3]
```

```
type(list1)

list

list1 = [1.11, 2.12, 3.75]
list1

[1.11, 2.12, 3.75]

list1 = ['AI', 'DL', 'ML']
list1

['AI', 'DL', 'ML']

list1 = [1, 2.12, 'Hari']
list1

[1, 2.12, 'Hari']

# List indexing

list1[2]

{"type": "string"}

list1[-1]

{"type": "string"} # List

Slicing list1[1:]

[2.12, 'Hari']

list1[-2:]

[2.12, 'Hari']

list1[1:3]

[2.12, 'Hari']

list1 = [1, 2.12, ['Hari', 'Prabu']]
list1

[1, 2.12, ['Hari', 'Prabu']]

list1[2][1]

{"type": "string"}

list1[-2:]

[2.12, ['Hari', 'Prabu']]
```

```
list1
[1, 2.12, ['Hari', 'Prabu']]
list1.append('Srikanth')
list1
[1, 2.12, ['Hari', 'Prabu'], 'Srikanth']
list1.insert(1, 'Hello')
list1
[1, 'Hello', 2.12, ['Hari', 'Prabu'], 'Srikanth']
list1.remove('Hello')
list1
[1, 2.12, ['Hari', 'Prabu'], 'Srikanth']
list1.remove(2.12)
list1
[1, ['Hari', 'Prabu'], 'Srikanth']
l2 = [1, 2, 3]
list1+l2
[1, ['Hari', 'Prabu'], 'Srikanth', 1, 2, 3]
list1 = [25, 45, 1, 32, 12, 11]
list1
[25, 45, 1, 32, 12, 11]
list1.sort()
list1
[1, 11, 12, 25, 32, 45]
list1.sort(reverse=True)
list1
[45, 32, 25, 12, 11, 1]
sorted(list1)
[1, 11, 12, 25, 32, 45]
```



```
list1
[45, 32, 25, 12, 11, 1]
list1[2]='Hi'
list1
[45, 32, 'Hi', 12, 11, 1]
```

## Tuples

```
tup1 = ()
tup1

()

type(tup1)

tuple

tup1 = (1,2,'Hi','Hey',15.28)
tup1

(1, 2, 'Hi', 'Hey', 15.28)

tup1[1]

2

tup1[-1]

15.28

tup1[1:3]

(2, 'Hi')

tup1[-4:-2]

(2, 'Hi')

tup1[-1]=21
```

```
-----
-----
TypeError                                Traceback (most recent call
last)
<ipython-input-112-c585bc529734> in <module>
----> 1 tup1[-1]=21
```

```
TypeError: 'tuple' object does not support item assignment
```

## Set

```
set1 = {1,2,3}
```

```
type(set1)
```

```
set
```

```
set1={'Hari','IBM','Hyd','Hyd'}
```

```
set1
```

```
{'Hari', 'Hyd', 'IBM'}
```

```
set1[1]
```

```
-----  
-----
```

```
TypeError                                Traceback (most recent call  
last)
```

```
<ipython-input-120-d27c0eee2e56> in <module>
```

```
----> 1 set1[1]
```

```
TypeError: 'set' object is not subscriptable
```

```
set1
```

```
{'Hari', 'Hyd', 'IBM'}
```

```
set1.add('Kovai','Chennai')
```

```
-----  
-----
```

```
TypeError                                Traceback (most recent call  
last)
```

```
<ipython-input-124-18cbef330b02> in <module>
```

```
----> 1 set1.add('Kovai','Chennai')
```

```
TypeError: add() takes exactly one argument (2 given)
```

```
set1
```

```
{'Hari', 'Hyd', 'IBM', 'Kovai'}
```

```
set1.update(['Chennai','TN'])
```

```
set1
```

```
{'Chennai', 'Hari', 'Hyd', 'IBM', 'Kovai', 'TN'}
```

```
set1.remove('TN')
```

```
set1
```

```
{'Chennai', 'Hari', 'Hyd', 'IBM', 'Kovai'}
```

```
set1.clear()
```

```
set1
```

```
set() del
```

```
set1set1
```

```
=====
NameError                                Traceback (most recent call
last)
<ipython-input-132-d18f5a84d934> in <module>
----> 1 set1
```

```
NameError: name 'set1' is not defined
```

## Dictionary

```
dict1 = {}
```

```
type(dict1)
```

```
dict
```

```
dict1 = {'Name': 'Hari', 'Org': 'IBM', 'Loc': 'cbe'}
```

```
dict1
```

```
{'Name': 'Hari', 'Org': 'IBM', 'Loc': 'cbe'}
```

```
dict1.keys()
```

```
dict_keys(['Name', 'Org', 'Loc'])
```

```
dict1.values()
```

```
dict_values(['Hari', 'IBM', 'cbe'])
```

```
dict1.items()
```

```
dict_items([('Name', 'Hari'), ('Org', 'IBM'), ('Loc', 'cbe')])
```

```
dict1 = {'Name': ['Hari', 'Srikanth'], 'Org': 'IBM', 'Loc': 'cbe'}
```

```
dict1
```

```
{'Name': ['Hari', 'Srikanth'], 'Org': 'IBM', 'Loc': 'cbe'}
```

```
dict1['Name'][1]
```

```
{"type": "string"}
```

```
dict1.pop('Loc')
{"type": "string"}
dict1
{'Name': ['Hari', 'Srikanth'], 'Org': 'IBM'}
dict1.clear()
dict1
{}
```

```
del dict1
```

```
dict1
```

```
-----
```

```
-----
NameError                                Traceback (most recent call
last)
<ipython-input-152-e36219336d90> in <module>
----> 1 dict1
```

```
NameError: name 'dict1' is not defined
```

## Statements/Condition

```
num = input('Enter int values ')
num
```

```
Enter int values 45.214
```

```
{"type": "string"}
```

```
type(num)
```

```
str
```

```
num = int(input('Enter int values '))
num
```

```
Enter int values 21
```

```
21
```

```
type(num)
```

```
int
```

```
# If statement
```

```
num = int(input('Enter int values '))
```

```
if num%2 == 0:
    print("Number is even")
```

Enter int values 3

*# If & else statement*

```
num = int(input('Enter int values '))
```

```
if num%2 == 0:
    print("Number is even")
else:
    print("Number is odd")
```

Enter int values 21  
Number is odd

*# If, elif & else statement*

```
x = int(input('Enter int values X = '))
y = int(input('Enter int values Y = '))
```

```
if x>y:
    print("X is greater than Y")
elif x==y:
    print("X is equal to Y")
else:
    print("X is lesser than Y")
```

Enter int values X = 12  
Enter int values Y = 40  
X is lesser than Y

*# If, elif & else statement*

```
x = int(input('Enter int values X = '))
y = int(input('Enter int values Y = '))
```

```
if x>y:
    print("{} is greater than {}".format(x,y))
elif x==y:
    print("{} is equal to {}".format(x,y))
else:
    print("{} is lesser than {}".format(x,y))
```

Enter int values X = 21  
Enter int values Y = 12  
21 is greater than 12

```
My name is Hari  
print("My name is Srikanth")  
My name is Srikanth  
name = input("Enter your name: ")  
print("My name is {}".format(name))  
Enter your name: Hari  
My name is Hari
```

## For loop

```
range(10)  
range(0, 10)  
for i in range(10):  
    print(i, end=" ")  
0 1 2 3 4 5 6 7 8 9
```

```
for i in range(10):print(i)
```

```
0  
1  
2  
3  
4  
5  
6  
7  
8  
9
```

```
for i in 'Hari Prabu':print(i)
```

```
H  
a  
r  
i
```

```
P  
r  
a  
b  
u
```

```
for i in enumerate('Hari Prabu'):
    print(i)

(0, 'H')
(1, 'a')
(2, 'r')
(3, 'i')
(4, ' ')
(5, 'P')
(6, 'r')
(7, 'a')
(8, 'b')
(9, 'u')
```

## While loop

```
i = 0
while i<7: print(i)
    i+=1 # i=i+1
```

```
0
1
2
3
4
5
6
```

```
i = 0
while i<7:
    print(i)i=i+1
```

```
0
1
2
3
4
5
6
```

## Functions

```
def func():
    print('Hari')
```

```
func()
```

```
Hari
```

```
def user_details(name,userid,country):
    print('Name: ',name)
    print('UserID: ',userid)
    print('Country: ',country)
```

```
user_details('Hari',1234,'India')
```

```
Name: Hari
UserID: 1234
Country: India
```

```
user_details('Srikanth',1235,'India')
```

```
Name: Srikanth
UserID: 1235
Country: India
```

## Lambda

*# Lambda arg:exp*

```
add = lambda num:num+10
```

```
-----
TypeError: Traceback (most recent call
last)
<ipython-input-9-d5d29de3ed94> in <module>
----> 1 add()
```

```
TypeError: <lambda>() missing 1 required positional argument: 'num'
```

```
add(5)
```

```
15
```

```
mul = lambda x,y,z:x*y*z
```

```
mul(12.56,45.278,2)
```

```
1137.38336
```

```
n = lambda name:name+' Prabu'
```

```
n('Hari')
```

```
{"type":"string"}
```

## Numpy

```
import numpy as np
```



```
list1 = [2,5,6]
arr = np.array(list1)

list1,arr

([2, 5, 6], array([2, 5, 6]))

arr[1]

5

dir(arr)

['T',
 '__abs__',
 '__add__',
 '__and__',
 '__array__',
 '__array_finalize__',
 '__array_function__',
 '__array_interface__',
 '__array_prepare__',
 '__array_priority__',
 '__array_struct__',
 '__array_ufunc__',
 '__array_wrap__',
 '__bool__',
 '__class__',
 '__complex__',
 '__contains__',
 '__copy__',
 '__deepcopy__',
 '__delattr__',
 '__delitem__',
 '__dir__',
 '__divmod__',
 '__doc__',
 '__eq__',
 '__float__',
 '__floordiv__',
 '__format__',
 '__ge__',
 '__getattr__',
 '__getitem__',
 '__gt__',
 '__hash__',
 '__iadd__',
 '__iand__',
 '__ifloordiv__',
 '__ilshift__',
 '__imatmul__',
```

```
'__imod__',
'__imul__',
'__index__',
'__init__',
'__init_subclass__',
'__int__',
'__invert__',
'__ior__',
'__ipow__',
'__irshift__',
'__isub__',
'__iter__',
'__itruediv__',
'__ixor__',
'__le__',
'__len__',
'__lshift__',
'__lt__',
'__matmul__',
'__mod__',
'__mul__',
'__ne__',
'__neg__',
'__new__',
'__or__',
'__pos__',
'__pow__',
'__radd__',
'__rand__',
'__rdivmod__',
'__reduce__',
'__reduce_ex__',
'__repr__',
'__rfloordiv__',
'__rlshift__',
'__rmatmul__',
'__rmod__',
'__rmul__',
'__ror__',
'__rpow__',
'__rrshift__',
'__rshift__',
'__rsub__',
'__rtruediv__',
'__rxor__',
'__setattr__',
'__setitem__',
'__setstate__',
'__sizeof__',
'__str__',
```

```
'__sub__',  
'__subclasshook__',  
'__truediv__',  
'__xor__',  
'all',  
'any',  
'argmax',  
'argmin',  
'argpartition',  
'argsort',  
'astype',  
'base',  
'byteswap',  
'choose',  
'clip',  
'compress',  
'conj',  
'conjugate',  
'copy',  
'ctypes',  
'cumprod',  
'cumsum',  
'data',  
'diagonal',  
'dot',  
'dtype',  
'dump',  
'dumps',  
'fill',  
'flags',  
'flat',  
'flatten',  
'getfield',  
'imag',  
'item',  
'itemset',  
'itemsizes',  
'max',  
'mean',  
'min',  
'nbytes',  
'ndim',  
'newbyteorder',  
'nonzero',  
'partition',  
'prod',  
'ptp',  
'put',  
'ravel',  
'real',
```

```
'repeat',
'reshape',
'resize',
'round',
'searchsorted',
'setfield',
'setflags',
'shape',
'size',
'sort',
'squeeze',
'std',
'strides',
'sum',
'swapaxes',
'take',
'tobytes',
'tofile',
'tolist',
'tostring',
'trace',
'transpose',
'var',
'view']
```

```
type(arr)
```

```
numpy.ndarray
```

```
arr.ndim
```

```
1
```

```
arr
```

```
array([2, 5, 6])
```

```
a = np.array([[2,4,5],[7,8,9]])
```

```
a
```

```
array([[2, 4, 5],
       [7, 8, 9]])
```

```
a.ndim
```

```
2
```

```
# arange
```

```
np.arange(10)
```

```
array([0, 1, 2, 3, 4, 5, 6, 7, 8, 9])
```

```
range(10)
```

```
range(0, 10)
```

```
for i in range(10):print(i)
```

```
0
```

```
1
```

```
2
```

```
3
```

```
4
```

```
5
```

```
6
```

```
7
```

```
8
```

```
9
```

```
a = np.arange(5,11)
```

```
a
```

```
array([ 5, 6, 7, 8, 9, 10])
```

```
a[1:3]
```

```
array([6, 7])
```

```
np.arange(5,11,3)
```

```
array([5, 8])
```

```
np.arange(0,50,7)
```

```
array([ 0,  7, 14, 21, 28, 35, 42, 49])
```

```
#Zeros and ones
```

```
np.zeros(3,dtype='int')array([0, 0,
```

```
0]) np.zeros(3)
```

```
array([0., 0., 0.])
```

```
a= np.zeros((4,4))
```

```
a.ndim
```

```
2
```

```
a
```

```
array([[0., 0., 0., 0.],  
       [0., 0., 0., 0.]
```

```

        [0., 0., 0., 0.],
        [0., 0., 0., 0.]])

np.ones((4,4),dtype='int')*15

array([[15, 15, 15, 15],
       [15, 15, 15, 15],
       [15, 15, 15, 15],
       [15, 15, 15, 15]])

# Line space

np.linspace(0,10,5)

array([ 0. ,  2.5,  5. ,  7.5, 10. ])

# Argmax & argmin

a = np.array([15,2,17,86,1])
a

array([15,  2, 17, 86,  1])

a.argmax()

3

a.argmin()

4

a[-1]

1

a[1:3]

array([ 2, 17])

a[-3:-1]

array([17, 86])

a.max(),a.min()

(86, 1)

a

array([15, 2, 17, 86, 1])

a[3]=24

a[5]=11

```

```
-----  
-----  
IndexError                                Traceback (most recent call  
last)
```

```
<ipython-input-71-1ff844d9e8bc> in <module>  
----> 1 a[5]=11
```

```
IndexError: index 5 is out of bounds for axis 0 with size 5
```

```
# Reshape
```

```
a= np.array([15,  2, 17, 86,  1, 2])  
a
```

```
array([15,  2, 17, 86,  1,  2])
```

```
a.reshape(3,2)
```

```
array([[15,  2],  
       [17, 86],  
       [ 1,  2]])
```

```
# Creating random values
```

```
np.random.rand(2)
```

```
array([0.83648364, 0.43309337])
```

```
np.random.rand(2,5)
```

```
array([[0.623721  , 0.51200912, 0.36777632, 0.39831869, 0.52220845],  
       [0.87711185, 0.457721  , 0.84865154, 0.25295241, 0.81176368]])
```

```
np.random.randn(2,5)
```

```
array([[ 1.82202334, -0.63501578, -1.83936146, -0.34769198,  
        1.75778546],  
       [ 0.45184492,  1.17532952, -0.67522199,  0.07392674,  
        1.63503973]])
```

```
np.random.randint(2,5)
```

```
4
```

```
a = np.random.randint(2,5,6)  
a
```

```
array([2, 2, 4, 3, 2, 3])
```

```
np.sqrt(a)
```

```
array([1.41421356, 1.41421356, 2.          , 1.73205081, 1.41421356,  
       1.73205081])
```

```
np.log(a)

array([0.69314718, 0.69314718, 1.38629436, 1.09861229, 0.69314718,
       1.09861229])

sorted(a)

[2, 2, 2, 3, 3, 4]
```

## Pandas

```
import pandas as pd

np.random.rand(5)

array([0.89801474, 0.62738781, 0.28027938, 0.54479857, 0.31833287])

dir(s)

['T',
 '_AXIS_LEN',
 '_AXIS_ORDERS',
 '_AXIS_REVERSED',
 '_AXIS_TO_AXIS_NUMBER',
 '_HANDLED_TYPES',
 '__abs__',
 '__add__',
 '__and__',
 '__annotations__',
 '__array__',
 '__array_priority__',
 '__array_ufunc__',
 '__array_wrap__',
 '__bool__',
 '__class__',
 '__contains__',
 '__copy__',
 '__deepcopy__',
 '__delattr__',
 '__delitem__',
 '__dict__',
 '__dir__',
 '__divmod__',
 '__doc__',
 '__eq__',
 '__finalize__',
 '__float__',
 '__floordiv__',
 '__format__',
 '__ge__',
 '__getattr__',
```



```
'__getattribute__',
'__getitem__',
'__getstate__',
'__gt__',
'__hash__',
'__iadd__',
'__iand__',
'__ifloordiv__',
'__imod__',
'__imul__',
'__init__',
'__init_subclass__',
'__int__',
'__invert__',
'__ior__',
'__ipow__',
'__isub__',
'__iter__',
'__itruediv__',
'__ixor__',
'__le__',
'__len__',
'__long__',
'__lt__',
'__matmul__',
'__mod__',
'__module__',
'__mul__',
'__ne__',
'__neg__',
'__new__',
'__nonzero__',
'__or__',
'__pos__',
'__pow__',
'__radd__',
'__rand__',
'__rdivmod__',
'__reduce__',
'__reduce_ex__',
'__repr__',
'__rfloordiv__',
'__rmatmul__',
'__rmod__',
'__rmul__',
'__ror__',
'__round__',
'__rpow__',
'__rsub__',
'__rtruediv__',
```

```
'__rxor__',
'__setattr__',
'__setitem__',
'__setstate__',
'__sizeof__',
'__str__',
'__sub__',
'__subclasshook__',
'truediv__',
'weakref__',
'xor__',
'accessors',
'accum_func',
'add_numeric_operations',
'agg_by_level',
'agg_examples_doc',
'agg_see_also_doc',
'align_frame',
'align_series',
'arith_method',
'as_manager',
'attrs',
'binop',
'can_hold_na',
'check_inplace_and_allows_duplicate_labels',
'check_inplace_setting',
'check_is_chained_assignment_possible',
'check_label_or_level_ambiguity',
'check_setitem_copy',
'clear_item_cache',
'clip_with_one_bound',
'clip_with_scalar',
'cmp_method',
'consolidate',
'consolidate_inplace',
'construct_axes_dict',
'construct_axes_from_arguments',
'construct_result',
'constructor',
'constructor_expanddim',
'convert',
'convert_dtypes',
'data',
'dir_additions',
'dir_deletions',
'drop_axis',
'drop_labels_or_levels',
'duplicated',
'find_valid_index',
'flags',
```

```
'_from_mgr',
'_get_axis',
'_get_axis_name',
'_get_axis_number',
'_get_axis_resolvers',
'_get_block_manager_axis',
'_get_bool_data',
'_get_cacher',
'_get_cleaned_column_resolvers',
'_get_index_resolvers',
'_get_label_or_level_values',
'_get_numeric_data',
'_get_value',
'_get_values',
'_get_values_tuple',
'_get_with',
'_getitem',
'_hidden_attrs',
'_index',
'_indexed_same',
'_info_axis',
'_info_axis_name',
'_info_axis_number',
'_init_dict',
'_init_mgr',
'_inplace_method',
'_internal_names',
'_internal_names_set',
'_is_cached',
'_is_copy',
'_is_label_or_level_reference',
'_is_label_reference',
'_is_level_reference',
'_is_mixed_type',
'_is_view',
'_item_cache',
'_ixs',
'_logical_func',
'_logical_method',
'_map_values',
'_maybe_update_cacher',
'_memory_usage',
'_metadata',
'_mgr',
'_min_count_stat_function',
'_name',
'_needs_reindex_multi',
'_protect_consolidate',
'_reduce',
'_reindex_axes',
```

```
'_reindex_indexer',
'_reindex_multi',
'_reindex_with_indexers',
'_replace_single',
'_repr_data_resource_',
'_repr_latex_',
'_reset_cache',
'_reset_cacher',
'_set_as_cached',
'_set_axis',
'_set_axis_name',
'_set_axis_nocheck',
'_set_is_copy',
'_set_labels',
'_set_name',
'_set_value',
'_set_values',
'_set_with',
'_set_with_engine',
'_slice',
'_stat_axis',
'_stat_axis_name',
'_stat_axis_number',
'_stat_function',
'_stat_function_ddof',
'_take_with_is_copy',
'_typ',
'_update_inplace',
'_validate_dtype',
'_values',
'_where',
'abs',
'add',
'add_prefix',
'add_suffix',
'agg',
'aggregate',
'align',
'all',
'any',
'append',
'apply',
'argmax',
'argmin',
'argsort',
'array',
'asfreq',
'asof',
'astype',
'at',
```

'at\_time',  
'attrs',  
'autocorr',  
'axes',  
'backfill',  
'between',  
'between\_time',  
'bfill',  
'bool',  
'clip',  
'combine',  
'combine\_first',  
'compare',  
'convert\_dtypes',  
'copy',  
'corr',  
'count',  
'cov',  
'cummax',  
'cummin',  
'cumprod',  
'cumsum',  
'describe',  
'diff',  
'div',  
'divide',  
'divmod',  
'dot',  
'drop',  
'drop\_duplicates',  
'droplevel',  
'dropna',  
'dtype',  
'dtypes',  
'duplicated',  
'empty',  
'eq',  
'equals',  
'ewm',  
'expanding',  
'explode',  
'factorize',  
'ffill',  
'fillna',  
'filter',  
'first',  
'first\_valid\_index',  
'flags',  
'floordiv',  
'ge',

'get',  
'groupby',  
'gt',  
'hasnans',  
'head',  
'hist',  
'iat',  
'idxmax',  
'idxmin',  
'iloc',  
'index',  
'infer\_objects',  
'interpolate',  
'is\_monotonic',  
'is\_monotonic\_decreasing',  
'is\_monotonic\_increasing',  
'is\_unique',  
'isin',  
'isna',  
'isnull',  
'item',  
'items',  
'iteritems',  
'keys',  
'kurt',  
'kurtosis',  
'last',  
'last\_valid\_index',  
'le',  
'loc',  
'lt',  
'mad',  
'map',  
'mask',  
'max',  
'mean',  
'median',  
'memory\_usage',  
'min',  
'mod',  
'mode',  
'mul',  
'multiply',  
'name',  
'nbytes',  
'ndim',  
'ne',  
'nlargest',  
'notna',  
'notnull',

'nsmallest',  
'nunique',  
'pad',  
'pct\_change',  
'pipe',  
'plot',  
'pop',  
'pow',  
'prod',  
'product',  
'quantile',  
'radd',  
'rank',  
'ravel',  
'rdiv',  
'rdivmod',  
'reindex',  
'reindex\_like',  
'rename',  
'rename\_axis',  
'reorder\_levels',  
'repeat',  
'replace',  
'resample',  
'reset\_index',  
'rfloordiv',  
'rmod',  
'rmul',  
'rolling',  
'round',  
'rpow',  
'rsub',  
'rtruediv',  
'sample',  
'searchsorted',  
'sem',  
'set\_axis',  
'set\_flags',  
'shape',  
'shift',  
'size',  
'skew',  
'slice\_shift',  
'sort\_index',  
'sort\_values',  
'squeeze',  
'std',  
'sub',  
'subtract',  
'sum',

```
'swapaxes',
'swaplevel',
'tail',
'take',
'to_clipboard',
'to_csv',
'to_dict',
'to_excel',
'to_frame',
'to_hdf',
'to_json',
'to_latex',
'to_list',
'to_markdown',
'to_numpy',
'to_period',
'to_pickle',
'to_sql',
'to_string',
'to_timestamp',
'to_xarray',
'transform',
'transpose',
'truediv',
'truncate',
'tz_convert',
'tz_localize',
'unique',
'unstack',
'update',
'value_counts',
'values',
'var',
'view',
'where',
'xs']
```

```
s=pd.Series(np.random.rand(5))
```

```
s
```

```
0    0.015646
1    0.977334
2    0.152281
3    0.914101
4    0.669473
```

```
dtype: float64
```

```
s[2:4]
```



```
2    0.152281
3    0.914101
dtype: float64
```

```
s.index = ['a', 'b', 'c', 'd', 'e']
```

```
s
```

```
a    0.015646
b    0.977334
c    0.152281
d    0.914101
e    0.669473
dtype: float64
```

```
s['e']
```

```
0.6694728328999546
```

### *# DataFrame*

```
s1=pd.Series(np.random.rand(5))
s2=pd.Series(np.random.rand(5))
s3=pd.Series(np.random.rand(5))
s4=pd.Series(np.random.rand(5))
```

```
s1
```

```
0    0.985379
1    0.670913
2    0.071290
3    0.029618
4    0.737482
dtype: float64
```

```
df = pd.DataFrame([s1,s2,s3,s4])
df
```

	0	1	2	3	4
0	0.985379	0.670913	0.071290	0.029618	0.737482
1	0.399835	0.018559	0.093672	0.713750	0.654045
2	0.454438	0.073028	0.164785	0.184355	0.768255
3	0.924023	0.570724	0.234560	0.960752	0.765374

```
df = df.T
df
```

	0	1	2	3
0	0.985379	0.399835	0.454438	0.924023
1	0.670913	0.018559	0.073028	0.570724
2	0.071290	0.093672	0.164785	0.234560
3	0.029618	0.713750	0.184355	0.960752
4	0.737482	0.654045	0.768255	0.765374

```
label = ['S1', 'S2', 'S3', 'S4']
label
```

```
['S1', 'S2', 'S3', 'S4']
```

```
df.columns=label
```

```
df
```

	S1	S2	S3	S4
0	0.985379	0.399835	0.454438	0.924023
1	0.670913	0.018559	0.073028	0.570724
2	0.071290	0.093672	0.164785	0.234560
3	0.029618	0.713750	0.184355	0.960752
4	0.737482	0.654045	0.768255	0.765374

```
df[['S1', 'S2']]
```

	S1	S2
0	0.985379	0.399835
1	0.670913	0.018559
2	0.071290	0.093672
3	0.029618	0.713750
4	0.737482	0.654045

```
df
```

	S1	S2	S3	S4
0	0.985379	0.399835	0.454438	0.924023
1	0.670913	0.018559	0.073028	0.570724
2	0.071290	0.093672	0.164785	0.234560
3	0.029618	0.713750	0.184355	0.960752
4	0.737482	0.654045	0.768255	0.765374

```
#LOC & ILOC[:,:]
```

```
df.iloc[0:2,0:3]
```

	S1	S2	S3
0	0.985379	0.399835	0.454438
1	0.670913	0.018559	0.073028

```
df.loc[0:1, 'S1': 'S3']
```

	S1	S2	S3
0	0.985379	0.399835	0.454438
1	0.670913	0.018559	0.073028

```
import numpy as np
import pandas as pd
```

```
d = {'Name': ['Hari', 'Srikanth', 'Navya', 'Mahi'],
      'Age': [29, 37, 23, 41],
```

```
'Gender': ['M', 'M', 'F', 'M'],  
'Salary': [np.NaN, 45000, 30000, 35000]}
```

d

```
{'Name': ['Hari', 'Srikanth', 'Navya', 'Mahi'],  
 'Age': [29, 37, 23, 41],  
 'Gender': ['M', 'M', 'F', 'M'],  
 'Salary': [nan, 45000, 30000, 35000]}
```

```
df = pd.DataFrame(d)  
df
```

	Name	Age	Gender	Salary
0	Hari	29	M	NaN
1	Srikanth	37	M	45000.0
2	Navya	23	F	30000.0
3	Mahi	41	M	35000.0

```
df.isnull()
```

	Name	Age	Gender	Salary
0	False	False	False	True
1	False	False	False	False
2	False	False	False	False
3	False	False	False	False

```
df.isnull().sum()
```

```
Name      0  
Age        0  
Gender     0  
Salary     1  
dtype: int64
```

```
df['Salary'].mean()
```

```
36666.666666666664
```

```
df['Salary']=df['Salary'].fillna(df['Salary'].mean())
```

```
df
```

	Name	Age	Gender	Salary
0	Hari	29	M	36666.666667
1	Srikanth	37	M	45000.000000
2	Navya	23	F	30000.000000
3	Mahi	41	M	35000.000000

```
df1 = df.copy()
```

```
df1
```

	Name	Age	Gender	Salary
0	Hari	29	M	36666.666667
1	Srikanth	37	M	45000.000000
2	Navya	23	F	30000.000000
3	Mahi	41	M	35000.000000

```
dir(df)
```

```
['Age',
 'Gender',
 'Name',
 'Salary',
 'T',
 '_AXIS_LEN',
 '_AXIS_ORDERS',
 '_AXIS_REVERSED',
 '_AXIS_TO_AXIS_NUMBER',
 '_HANDLED_TYPES',
 '__abs__',
 '__add__',
 '__and__',
 '__annotations__',
 '__array__',
 '__array_priority__',
 '__array_ufunc__',
 '__array_wrap__',
 '__bool__',
 '__class__',
 '__contains__',
 '__copy__',
 '__deepcopy__',
 '__delattr__',
 '__delitem__',
 '__dict__',
 '__dir__',
 '__divmod__',
 '__doc__',
 '__eq__',
 '__finalize__',
 '__floordiv__',
 '__format__',
 '__ge__',
 '__getattr__',
 '__getattribute__',
 '__getitem__',
 '__getstate__',
 '__gt__',
 '__hash__',
 '__iadd__',
 '__iand__',
 '__ifloordiv__',
```

```
'__imod__',
'__imul__',
'__init__',
'__init_subclass__',
'__invert__',
'__ior__',
'__ipow__',
'__isub__',
'__iter__',
'__itruediv__',
'__ixor__',
'__le__',
'__len__',
'__lt__',
'__matmul__',
'__mod__',
'__module__',
'__mul__',
'__ne__',
'__neg__',
'__new__',
'__nonzero__',
'__or__',
'__pos__',
'__pow__',
'__radd__',
'__rand__',
'__rdivmod__',
'__reduce__',
'__reduce_ex__',
'__repr__',
'__rfloordiv__',
'__rmatmul__',
'__rmod__',
'__rmul__',
'__ror__',
'__round__',
'__rpow__',
'__rsub__',
'__rtruediv__',
'__rxor__',
'__setattr__',
'__setitem__',
'__setstate__',
'__sizeof__',
'__str__',
'__sub__',
'__subclasshook__',
'__truediv__',
'__weakref__',
```

```
'_xor_',
'_accessors',
'_accum_func',
'_add_numeric_operations',
'_agg_by_level',
'_agg_examples_doc',
'_agg_summary_and_see_also_doc',
'_align_frame',
'_align_series',
'_arith_method',
'_as_manager',
'_attrs',
'_box_col_values',
'_can_fast_transpose',
'_check_inplace_and_allows_duplicate_labels',
'_check_inplace_setting',
'_check_is_chained_assignment_possible',
'_check_label_or_level_ambiguity',
'_check_setitem_copy',
'_clear_item_cache',
'_clip_with_one_bound',
'_clip_with_scalar',
'_cmp_method',
'_combine_frame',
'_consolidate',
'_consolidate_inplace',
'_construct_axes_dict',
'_construct_axes_from_arguments',
'_construct_result',
'_constructor',
'_constructor_sliced',
'_convert',
'_count_level',
'_data',
'_dir_additions',
'_dir_deletions',
'_dispatch_frame_op',
'_drop_axis',
'_drop_labels_or_levels',
'_ensure_valid_index',
'_find_valid_index',
'_flags',
'_from_arrays',
'_from_mgr',
'_get_agg_axis',
'_get_axis',
'_get_axis_name',
'_get_axis_number',
'_get_axis_resolvers',
'_get_block_manager_axis',
```

```
'_get_bool_data',
'_get_cleaned_column_resolvers',
'_get_column_array',
'_get_index_resolvers',
'_get_item_cache',
'_get_label_or_level_values',
'_get_numeric_data',
'_get_value',
'_getitem_bool_array',
'_getitem_multilevel',
'_gotitem',
'_hidden_attrs',
'_indexed_same',
'_info_axis',
'_info_axis_name',
'_info_axis_number',
'_info_repr',
'_init_mgr',
'_inplace_method',
'_internal_names',
'_internal_names_set',
'_is_copy',
'_is_homogeneous_type',
'_is_label_or_level_reference',
'_is_label_reference',
'_is_level_reference',
'_is_mixed_type',
'_is_view',
'_iset_item',
'_iset_item_mgr',
'_iset_not_inplace',
'_item_cache',
'_iter_column_arrays',
'_ixs',
'_join_compat',
'_logical_func',
'_logical_method',
'_maybe_cache_changed',
'_maybe_update_cacher',
'_metadata',
'_mgr',
'_min_count_stat_function',
'_needs_reindex_multi',
'_protect_consolidate',
'_reduce',
'_reindex_axes',
'_reindex_columns',
'_reindex_index',
'_reindex_multi',
'_reindex_with_indexers',
```

```
'_replace_columnwise',
'_repr_data_resource_',
'_repr_fits_horizontal_',
'_repr_fits_vertical_',
'_repr_html_',
'_repr_latex_',
'_reset_cache',
'_reset_cacher',
'_sanitize_column',
'_series',
'_set_axis',
'_set_axis_name',
'_set_axis_nocheck',
'_set_is_copy',
'_set_item',
'_set_item_frame_value',
'_set_item_mgr',
'_set_value',
'_setitem_array',
'_setitem_frame',
'_setitem_slice',
'_slice',
'_stat_axis',
'_stat_axis_name',
'_stat_axis_number',
'_stat_function',
'_stat_function_ddof',
'_take_with_is_copy',
'_to_dict_of_blocks',
'_typ',
'_update_inplace',
'_validate_dtype',
'_values',
'_where',
'abs',
'add',
'add_prefix',
'add_suffix',
'agg',
'aggregate',
'align',
'all',
'any',
'append',
'apply',
'applymap',
'asfreq',
'asof',
'assign',
'astype',
```



'at',  
'at\_time',  
'attrs',  
'axes',  
'backfill',  
'between\_time',  
'bfill',  
'bool',  
'boxplot',  
'clip',  
'columns',  
'combine',  
'combine\_first',  
'compare',  
'convert\_dtypes',  
'copy',  
'corr',  
'corrwith',  
'count',  
'cov',  
'cummax',  
'cummin',  
'cumprod',  
'cumsum',  
'describe',  
'diff',  
'div',  
'divide',  
'dot',  
'drop',  
'drop\_duplicates',  
'droplevel',  
'dropna',  
'dtypes',  
'duplicated',  
'empty',  
'eq',  
'equals',  
'eval',  
'ewm',  
'expanding',  
'explode',  
'ffill',  
'fillna',  
'filter',  
'first',  
'first\_valid\_index',  
'flags',  
'floordiv',  
'from\_dict',

```
'from_records',
'ge',
'get',
'groupby',
'gt',
'head',
'hist',
'iat',
'idxmax',
'idxmin',
'iloc',
'index',
'infer_objects',
'info',
'insert',
'interpolate',
'isin',
'isna',
'isnull',
'items',
'iteritems',
'iterrows',
'itertuples',
'join',
'keys',
'kurt',
'kurtosis',
'last',
'last_valid_index',
'le',
'loc',
'lookup',
'lt',
'mad',
'mask',
'max',
'mean',
'median',
'melt',
'memory_usage',
'merge',
'min',
'mod',
'mode',
'mul',
'multiply',
'ndim',
'ne',
'nlargest',
'notna',
```

'notnull',  
'nsmallest',  
'nunique',  
'pad',  
'pct\_change',  
'pipe',  
'pivot',  
'pivot\_table',  
'plot',  
'pop',  
'pow',  
'prod',  
'product',  
'quantile',  
'query',  
'radd',  
'rank',  
'rdiv',  
'reindex',  
'reindex\_like',  
'rename',  
'rename\_axis',  
'reorder\_levels',  
'replace',  
'resample',  
'reset\_index',  
'rfloordiv',  
'rmod',  
'rmul',  
'rolling',  
'round',  
'rpow',  
'rsub',  
'rtruediv',  
'sample',  
'select\_dtypes',  
'sem',  
'set\_axis',  
'set\_flags',  
'set\_index',  
'shape',  
'shift',  
'size',  
'skew',  
'slice\_shift',  
'sort\_index',  
'sort\_values',  
'squeeze',  
'stack',  
'std',

```

'style',
'sub',
'subtract',
'sum',
'swapaxes',
'swaplevel',
'tail',
'take',
'to_clipboard',
'to_csv',
'to_dict',
'to_excel',
'to_feather',
'to_gbk',
'to_hdf',
'to_html',
'to_json',
'to_latex',
'to_markdown',
'to_numpy',
'to_parquet',
'to_period',
'to_pickle',
'to_records',
'to_sql',
'to_stata',
'to_string',
'to_timestamp',
'to_xarray',
'to_xml',
'transform',
'transpose',
'truediv',
'truncate',
'tz_convert',
'tz_localize',
'unstack',
'update',
'value_counts',
'values',
'var',
'where',
'xs']

```

```

df2=pd.concat([df,df1])
df2

```

	Name	Age	Gender	Salary
0	Hari	29	M	36666.666667
1	Srikanth	37	M	45000.000000
2	Navya	23	F	30000.000000

```

3      Mahi    41      M  35000.000000
0      Hari    29      M  36666.666667
1  Srikanth    37      M  45000.000000
2     Navya    23      F  30000.000000
3      Mahi    41      M  35000.000000

```

```
df2.reset_index(drop=True)
```

```

      Name  Age  Gender      Salary
0     Hari   29      M  36666.666667
1  Srikanth   37      M  45000.000000
2     Navya   23      F  30000.000000
3      Mahi   41      M  35000.000000
4     Hari   29      M  36666.666667
5  Srikanth   37      M  45000.000000
6     Navya   23      F  30000.000000
7      Mahi   41      M  35000.000000

```

```
df2.drop_duplicates()
```

```

      Name  Age  Gender      Salary
0     Hari   29      M  36666.666667
1  Srikanth   37      M  45000.000000
2     Navya   23      F  30000.000000
3      Mahi   41      M  35000.000000

```

```
pd.DataFrame()
```

```
df['Salary'].astype('int')
```

```

0      36666
1      45000
2      30000
3      35000
Name: Salary, dtype: int64

```

## Data Visualization

```
import matplotlib.pyplot as plt
import seaborn as sns
```

```
x = np.array([1,2,3,4,5,6])
```

```
x
```

```
array([1, 2, 3, 4, 5, 6])
```


```
y = np.power(x,3)
```

```
y
```

```
array([ 1,   8,  27,  64, 125, 216])
```

```
plt.plot(x,y)
```


```
[<matplotlib.lines.Line2D at 0x7fe44b403450>]
```

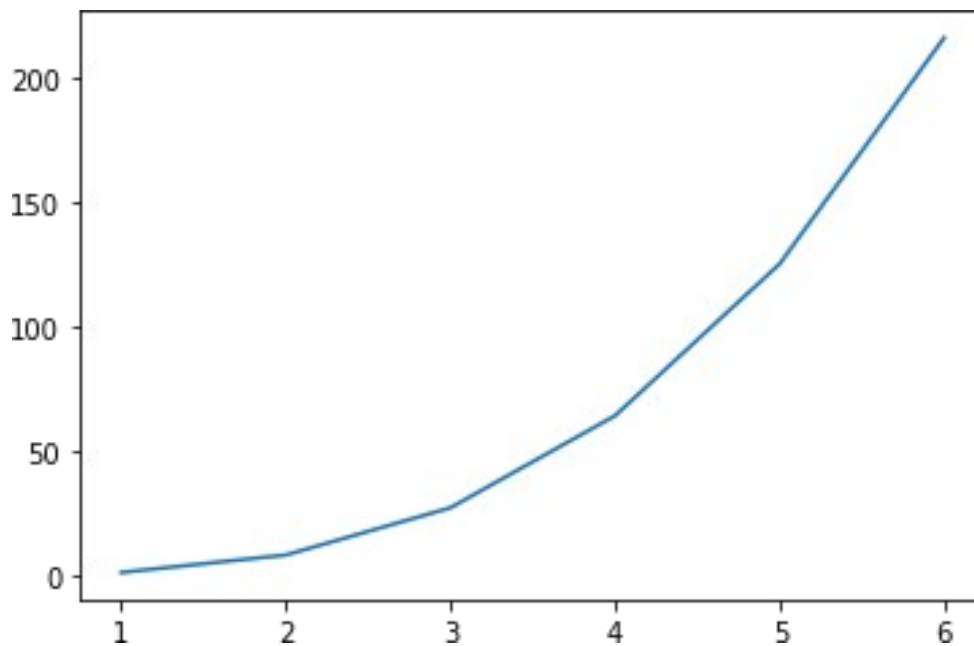


```
plt.style.available
```

```
['Solarize_Light2',  
 '_classic_test_patch',  
 'bmh',  
 'classic',  
 'dark_background',  
 'fast',  
 'fivethirtyeight',  
 'ggplot',  
 'grayscale',  
 'seaborn',  
 'seaborn-bright',  
 'seaborn-colorblind',  
 'seaborn-dark',  
 'seaborn-dark-palette',  
 'seaborn-darkgrid',  
 'seaborn-deep',  
 'seaborn-muted',  
 'seaborn-notebook',  
 'seaborn-paper',  
 'seaborn-pastel',  
 'seaborn-poster',  
 'seaborn-talk',  
 'seaborn-ticks',  
 'seaborn-white',
```

```
'seaborn-whitegrid',  
'tableau-colorblind10']  
  
plt.style.use('fivethirtyeight')  
  
plt.plot(x,y)  
  
[<matplotlib.lines.Line2D at 0x7fe44ae48e50>]
```

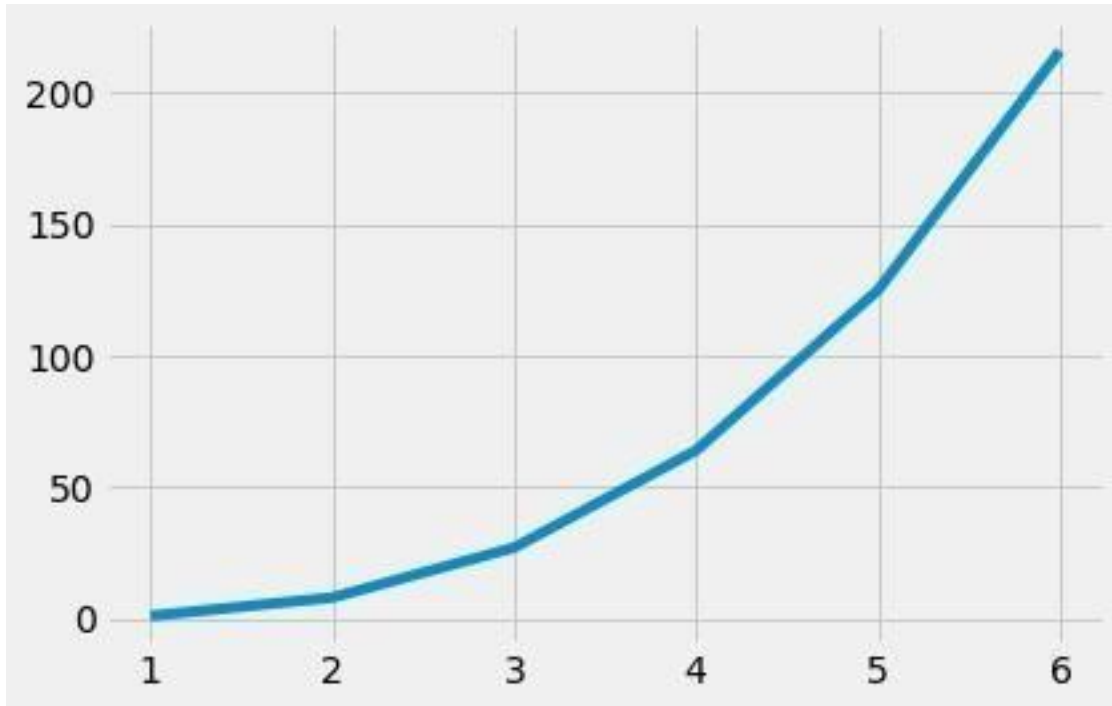

```
x = np.linspace(0,10,1000)  
y = np.sin(x)  
  
plt.plot(x,y)  
  
[<matplotlib.lines.Line2D at 0x7fe44ae3bc50>]
```

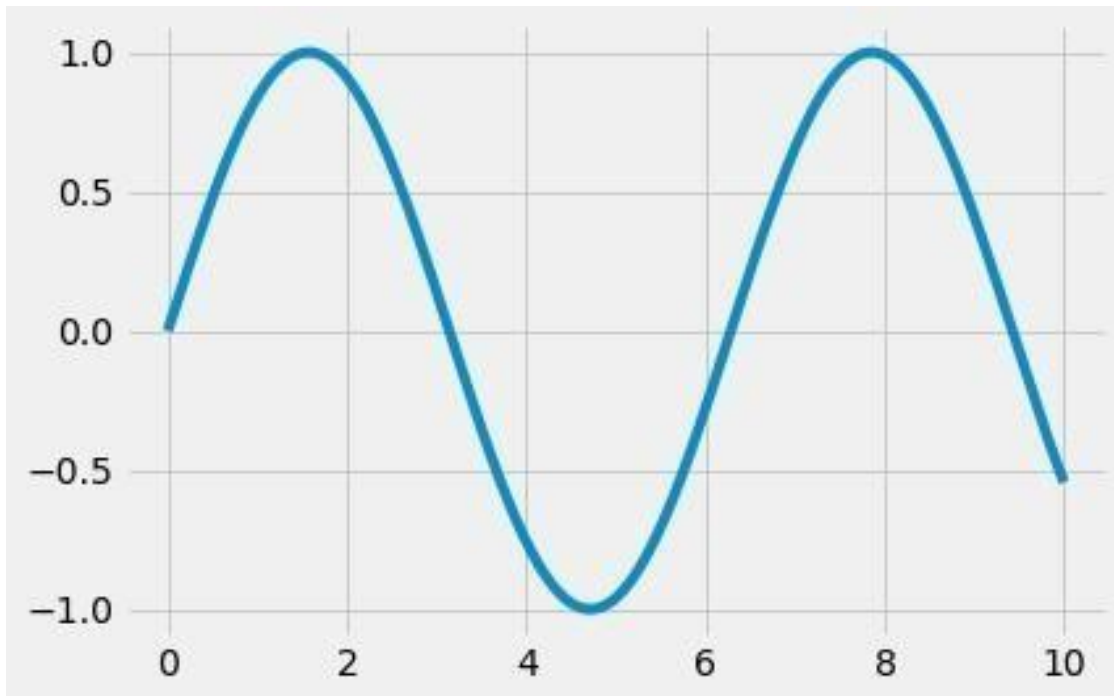

```
plt.plot(x,y,color='r',marker='o')
```

```
[<matplotlib.lines.Line2D at 0x7fe44acc4490>]
```




```
x = np.linspace(0,10,40)  
y = np.sin(x)
```



```
plt.plot(x,y,color='r',marker='+',markersize=12)
plt.xlabel('X-Axis')
plt.ylabel('Y-Axis')


Text(0, 0.5, 'Y-Axis')
```

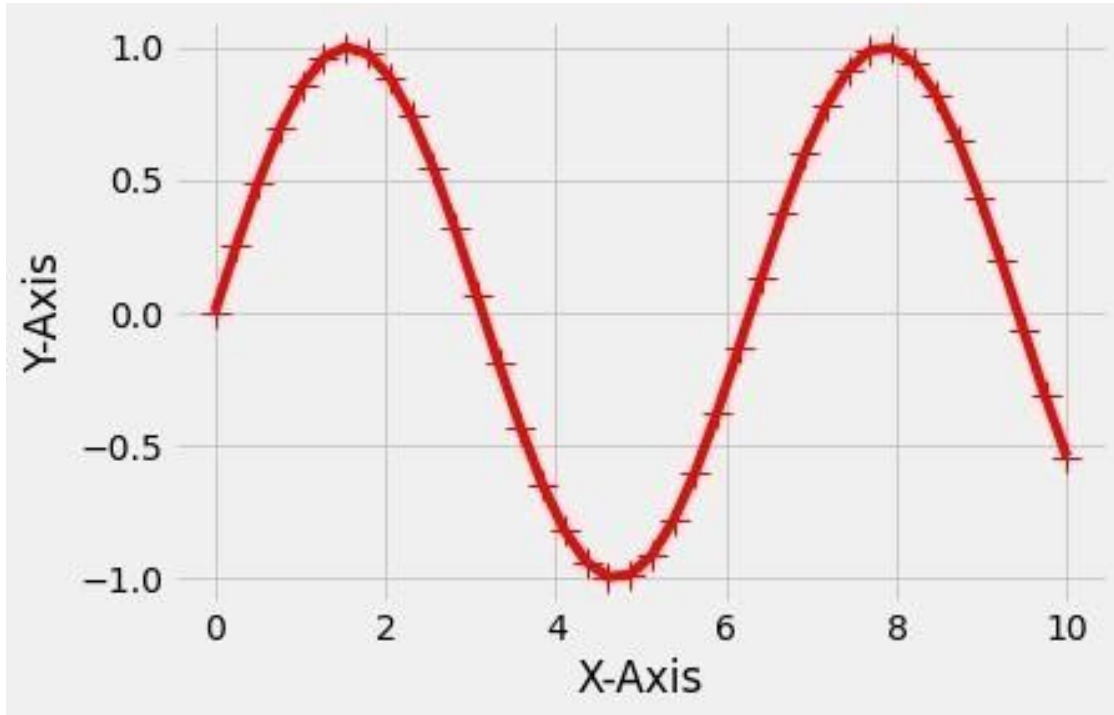

```
x = np.array([1,2,3,4,5,6])
y1 = np.power(x,2)
y2 = np.power(x,3)

plt.figure(figsize=(12,5))
plt.plot(x,y1,label='Square')
plt.plot(x,y2,label='Cube')
plt.xlabel('X-Axis')
plt.ylabel('Y-Axis')
plt.legend()


<matplotlib.legend.Legend at 0x7fe44a8e7a10>
```

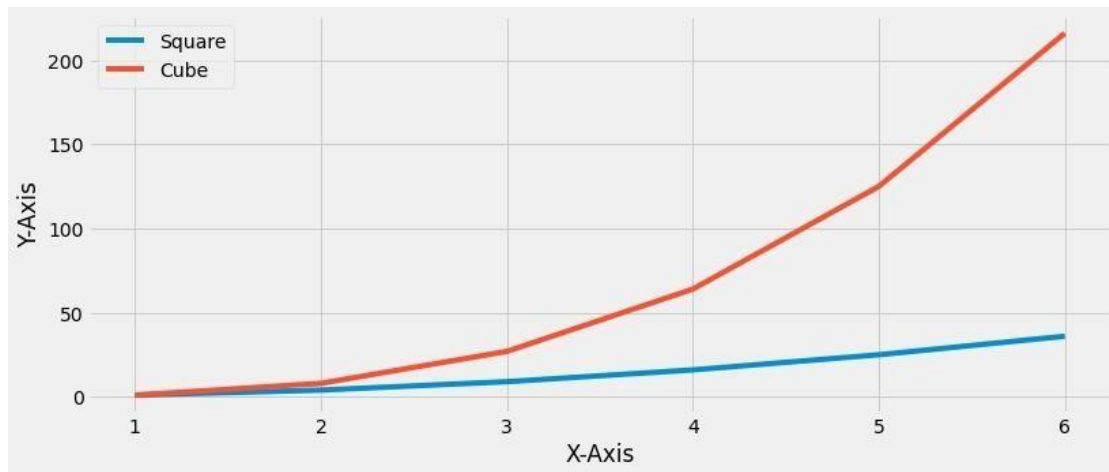

```
x = np.linspace(0,10,40)
y = np.sin(x)
```

```
plt.scatter(x,y)
```

```
<matplotlib.collections.PathCollection at 0x7fe44a854e90>
```

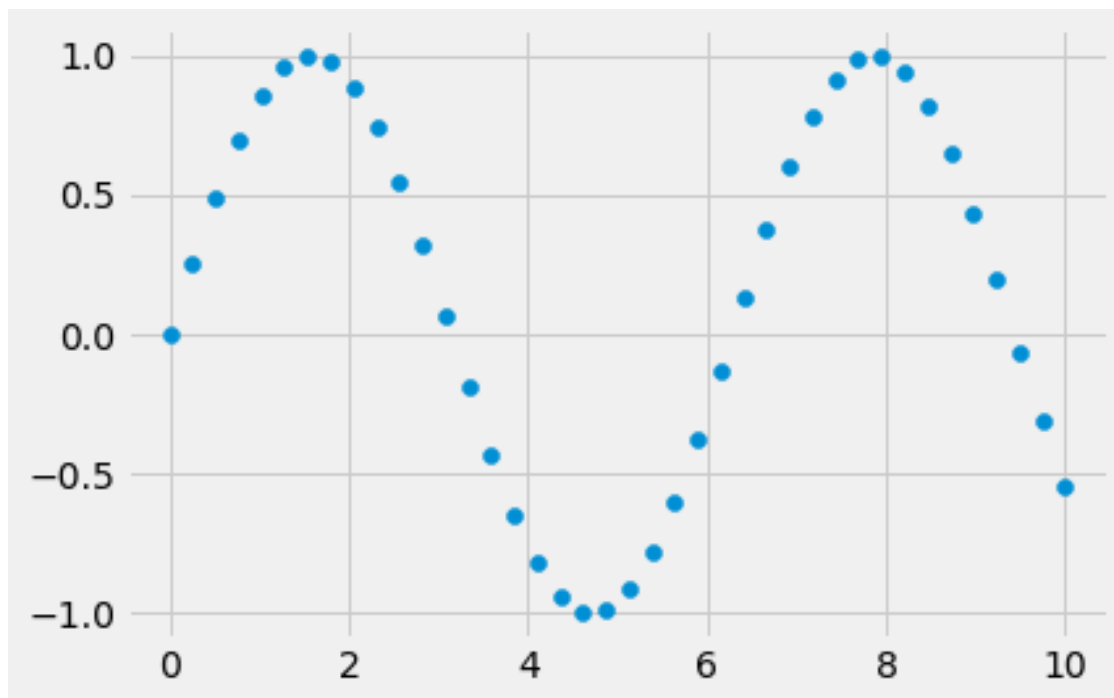


```
df
```

	Name	Age	Gender	Salary
0	Hari	29	M	36666.666667
1	Srikanth	37	M	45000.000000
2	Navya	23	F	30000.000000
3	Mahi	41	M	35000.000000


```
plt.scatter(df['Age'],df['Salary'])
```

```
<matplotlib.collections.PathCollection at 0x7fe44a815b50>
```

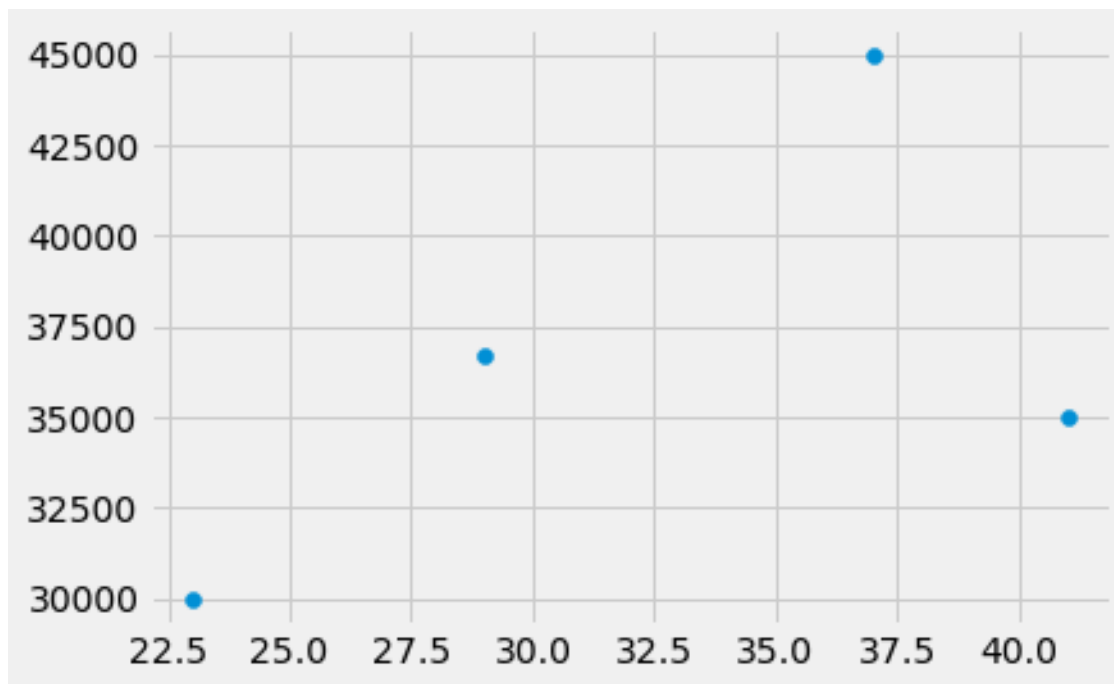


```
plt.plot(df['Age'],df['Salary'])
```

```
[<matplotlib.lines.Line2D at 0x7fe44abad750>]
```

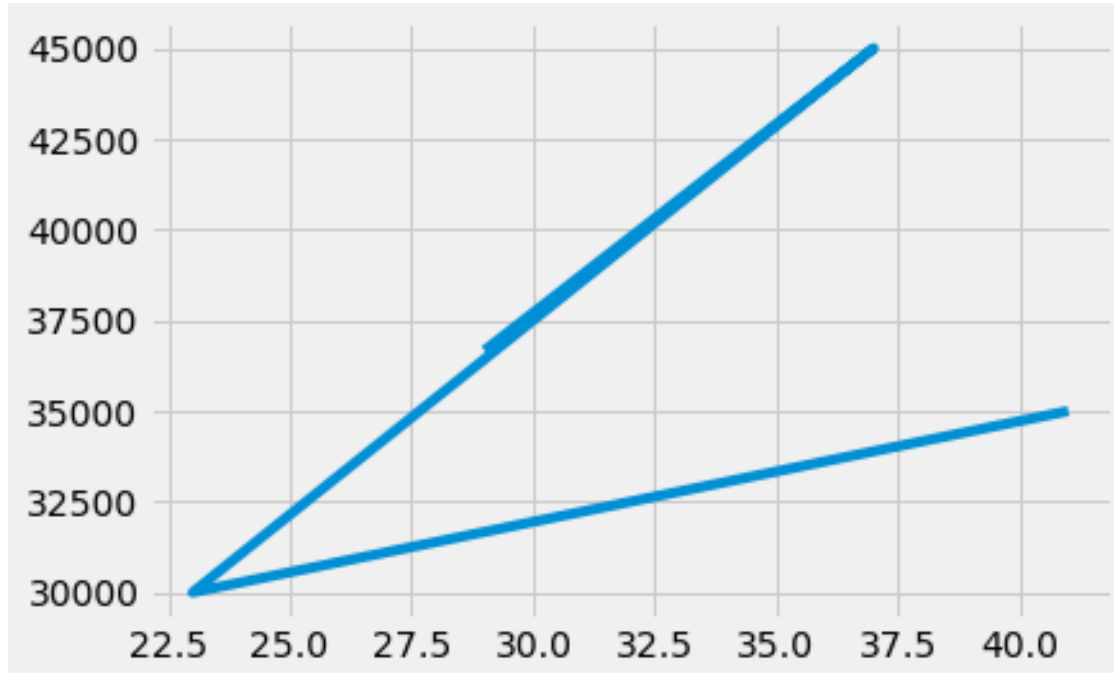

```
plt.bar(df['Gender'],df['Age'])
```

```
<BarContainer object of 4 artists>
```

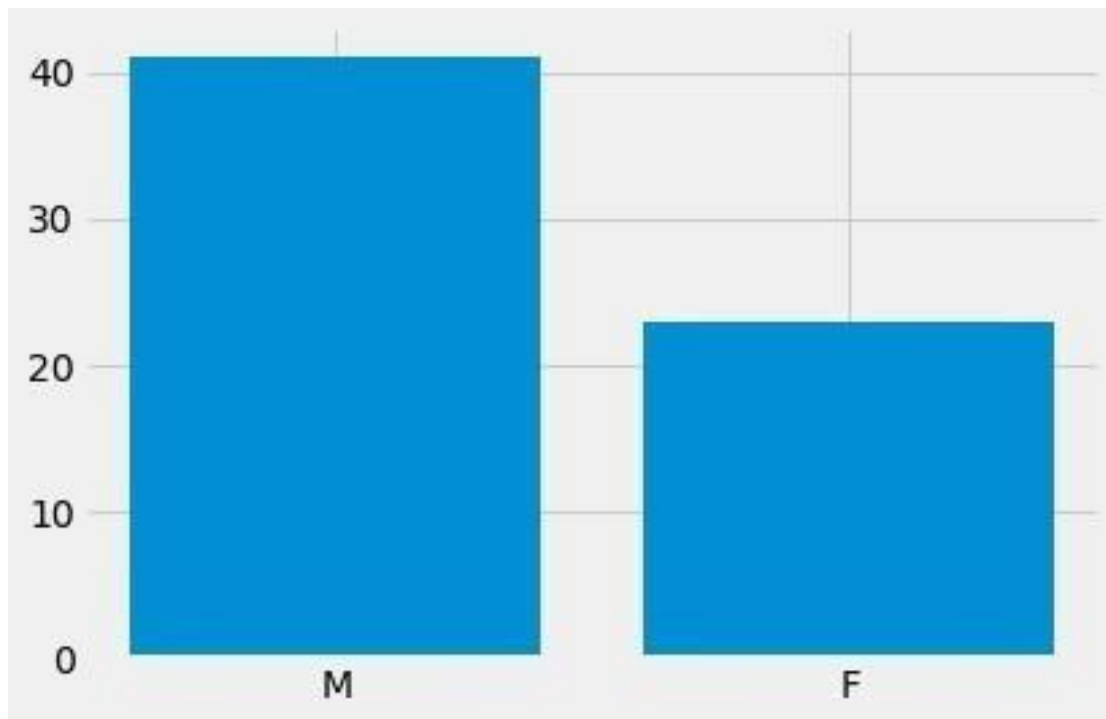


```
sns.countplot(df['Gender'])
```

```
/usr/local/lib/python3.7/dist-packages/seaborn/_decorators.py:43:  
FutureWarning: Pass the following variable as a keyword arg: x. From  
version 0.12, the only valid positional argument will be `data`, and  
passing other arguments without an explicit keyword will result in an  
error or misinterpretation.
```

```
FutureWarning
```

```
<matplotlib.axes._subplots.AxesSubplot at 0x7fe44a50f450>
```

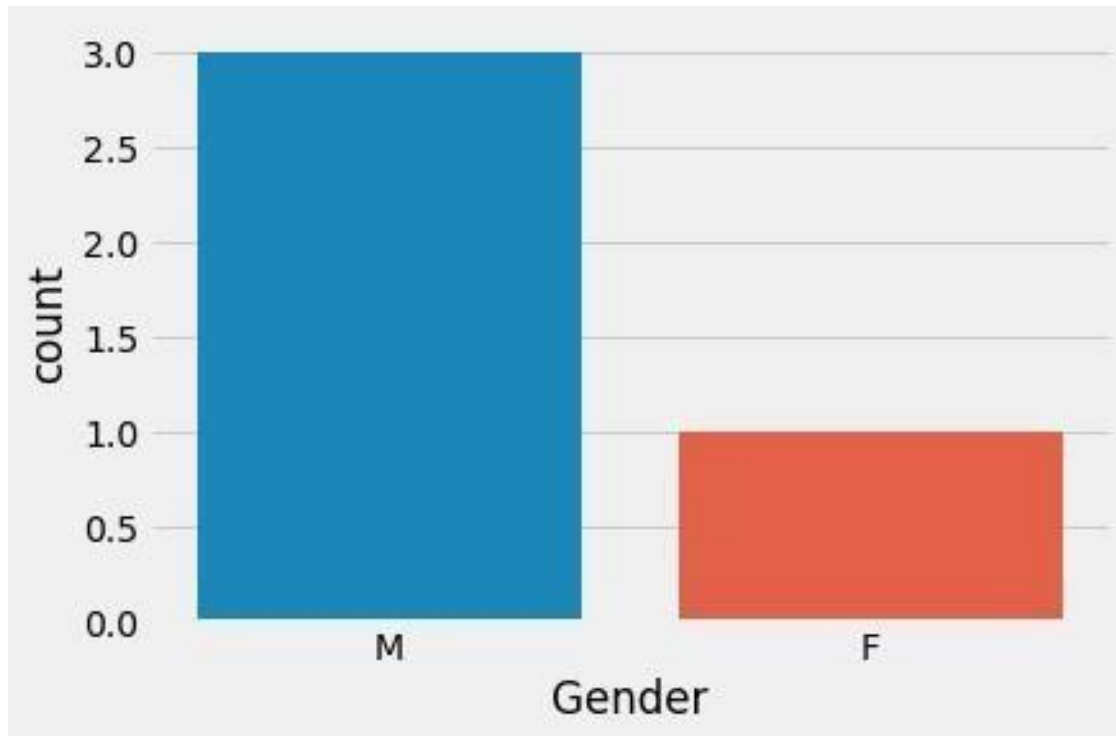


```
sns.countplot(df['Age'],hue=df['Gender'])
```

```
/usr/local/lib/python3.7/dist-packages/seaborn/_decorators.py:43:  
FutureWarning: Pass the following variable as a keyword arg: x. From  
version 0.12, the only valid positional argument will be `data`, and  
passing other arguments without an explicit keyword will result in an  
error or misinterpretation.
```

```
FutureWarning
```

```
<matplotlib.axes._subplots.AxesSubplot at 0x7fe44a4dd250>
```

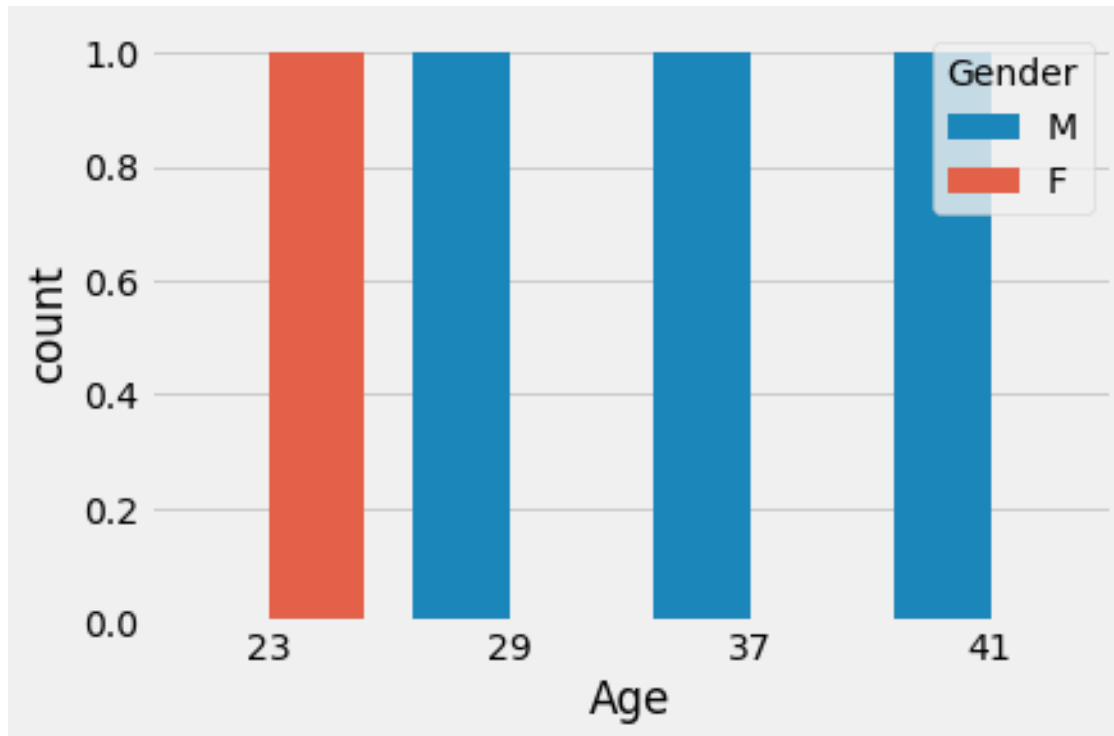


```
sns.boxplot(np.random.randn(6))
```

```
/usr/local/lib/python3.7/dist-packages/seaborn/_decorators.py:43:  
FutureWarning: Pass the following variable as a keyword arg: x. From  
version 0.12, the only valid positional argument will be `data`, and  
passing other arguments without an explicit keyword will result in an  
error or misinterpretation.
```

```
FutureWarning
```

```
<matplotlib.axes._subplots.AxesSubplot at 0x7fe44a45df10>
```

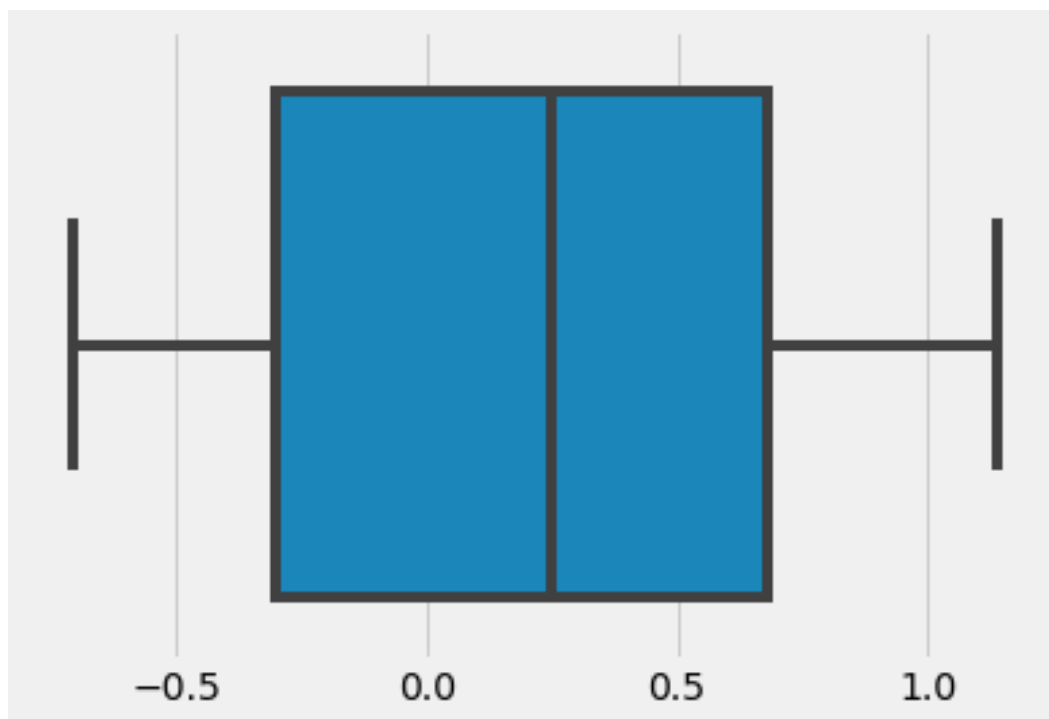

## Data Wrangling & Data Pre-Processing

```
df = pd.read_csv('/content/Data1.csv')
```

```
df.head(6)
```

	Country	Age	Salary	Purchased
0	France	44.0	72000.0	No
1	Spain	27.0	48000.0	Yes
2	Germany	30.0	54000.0	No
3	Spain	38.0	61000.0	No
4	Germany	40.0	NaN	Yes
5	France	35.0	58000.0	Yes

```
df.tail(3)
```

	Country	Age	Salary	Purchased
7	France	48.0	79000.0	Yes
8	Germany	50.0	83000.0	No
9	France	37.0	67000.0	Yes


```
sns.boxplot(df['Age'])
```

```
/usr/local/lib/python3.7/dist-packages/seaborn/_decorators.py:43:  
FutureWarning: Pass the following variable as a keyword arg: x. From  
version 0.12, the only valid positional argument will be `data`, and  
passing other arguments without an explicit keyword will result in an
```

error or misinterpretation.

FutureWarning

<matplotlib.axes.\_subplots.AxesSubplot at 0x7fe44a45de90>

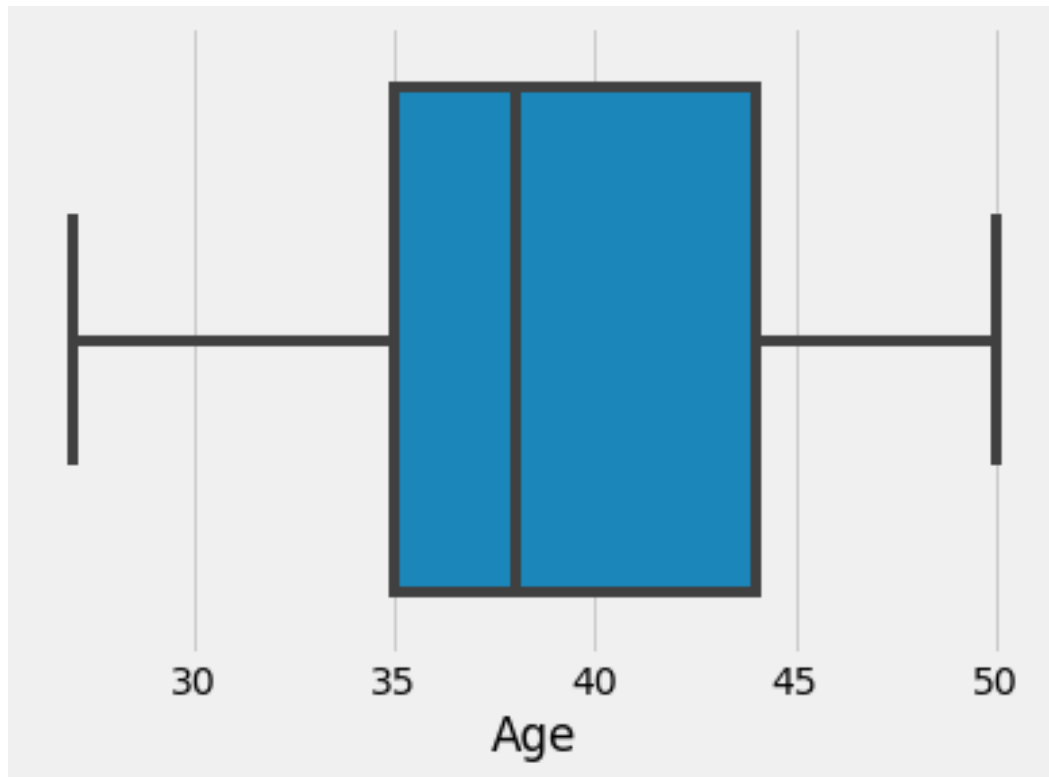

```
df.describe()
```

	Age	Salary
count	9.000000	9.000000
mean	38.777778	63777.777778
std	7.693793	12265.579662
min	27.000000	48000.000000
25%	35.000000	54000.000000
50%	38.000000	61000.000000
75%	44.000000	72000.000000
max	50.000000	83000.000000

```
df.describe(include='all')
```

	Country	Age	Salary	Purchased
count	10	9.000000	9.000000	10
unique	3	NaN	NaN	2
top	France	NaN	NaN	No
freq	4	NaN	NaN	5
mean	NaN	38.777778	63777.777778	NaN
std	NaN	7.693793	12265.579662	NaN
min	NaN	27.000000	48000.000000	NaN
25%	NaN	35.000000	54000.000000	NaN



50%	NaN	38.000000	61000.000000	NaN
75%	NaN	44.000000	72000.000000	NaN
max	NaN	50.000000	83000.000000	NaN

```
df.info()
```

```
<class 'pandas.core.frame.DataFrame'>
```

```
RangeIndex: 10 entries, 0 to 9
```

```
Data columns (total 4 columns):
```

#	Column	Non-Null Count	Dtype
0	Country	10 non-null	object
1	Age	9 non-null	float64
2	Salary	9 non-null	float64
3	Purchased	10 non-null	object

```
dtypes: float64(2), object(2)
```

```
memory usage: 448.0+ bytes
```

```
df.isnull().sum()
```

```
Country      0
```

```
Age           1
```

```
Salary        1
```

```
Purchased     0
```

```
dtype: int64
```

```
df.head(7)
```

	Country	Age	Salary	Purchased
0	France	44.0	72000.0	No
1	Spain	27.0	48000.0	Yes
2	Germany	30.0	54000.0	No
3	Spain	38.0	61000.0	No
4	Germany	40.0	NaN	Yes
5	France	35.0	58000.0	Yes
6	Spain	NaN	52000.0	No

```
df['Salary'].mean()
```

```
63777.77777777778
```

```
df['Age'].median()
```

```
38.0
```

```
df['Salary']=df['Salary'].fillna(df['Salary'].mean())
```

```
df['Age']=df['Age'].fillna(df['Age'].median())
```

```
df
```

	Country	Age	Salary	Purchased
0	France	44.0	72000.000000	No

1	Spain	27.0	48000.000000	Yes
2	Germany	30.0	54000.000000	No
3	Spain	38.0	61000.000000	No
4	Germany	40.0	63777.777778	Yes
5	France	35.0	58000.000000	Yes
6	Spain	38.0	52000.000000	No
7	France	48.0	79000.000000	Yes
8	Germany	50.0	83000.000000	No
9	France	37.0	67000.000000	Yes

```
df['Age']>40
```

0	True
1	False
2	False
3	False
4	False
5	False
6	False
7	True
8	True
9	False

```
Name: Age, dtype: bool
```

```
df[df['Age']>40]
```

	Country	Age	Salary	Purchased
0	France	44.0	72000.0	No
7	France	48.0	79000.0	Yes
8	Germany	50.0	83000.0	No

```
df.loc[df['Age']>40]
```

	Country	Age	Salary	Purchased
0	France	44.0	72000.0	No
7	France	48.0	79000.0	Yes
8	Germany	50.0	83000.0	No

```
df[df['Salary']>70000]
```

	Country	Age	Salary	Purchased
0	France	44.0	72000.0	No
7	France	48.0	79000.0	Yes
8	Germany	50.0	83000.0	No

## Encoding

*# Method 1 (One Hot Encoding)*

```
country = pd.get_dummies(df['Country'])
country
```

	France	Germany	Spain
0	1	0	0
1	0	0	1
2	0	1	0
3	0	0	1
4	0	1	0
5	1	0	0
6	0	0	1
7	1	0	0
8	0	1	0
9	1	0	0

```
df.join(country)
```

	Country	Age	Salary	Purchased	France	Germany	Spain
0	France	44.0	72000.000000	No	1	0	0
1	Spain	27.0	48000.000000	Yes	0	0	1
2	Germany	30.0	54000.000000	No	0	1	0
3	Spain	38.0	61000.000000	No	0	0	1
4	Germany	40.0	63777.777778	Yes	0	1	0
5	France	35.0	58000.000000	Yes	1	0	0
6	Spain	38.0	52000.000000	No	0	0	1
7	France	48.0	79000.000000	Yes	1	0	0
8	Germany	50.0	83000.000000	No	0	1	0
9	France	37.0	67000.000000	Yes	1	0	0

```
#pd.concat([df,country])
```

```
# Method 2 (Label Encoding)
```

```
from sklearn.preprocessing import LabelEncoder
from collections import Counter as count
```

```
count(df['Country'])
```

```
Counter({'France': 4, 'Spain': 3, 'Germany': 3})
```

```
le = LabelEncoder()
```

```
df['Country'] = le.fit_transform(df['Country'])
```

```
count(df['Country'])
```

```
Counter({0: 4, 2: 3, 1: 3})
```

```
df
```

	Country	Age	Salary	Purchased
0	0	44.0	72000.000000	No
1	2	27.0	48000.000000	Yes
2	1	30.0	54000.000000	No
3	2	38.0	61000.000000	No
4	1	40.0	63777.777778	Yes

5	0	35.0	58000.000000	Yes
6	2	38.0	52000.000000	No
7	0	48.0	79000.000000	Yes
8	1	50.0	83000.000000	No
9	0	37.0	67000.000000	Yes

*# method 3 (feature map)* `df['Purchased']=df['Purchased'].replace(['No','Yes'],[0,1])df`

	Country	Age	Salary	Purchased
0	0	44.0	72000.000000	0
1	2	27.0	48000.000000	1
2	1	30.0	54000.000000	0
3	2	38.0	61000.000000	0
4	1	40.0	63777.777778	1
5	0	35.0	58000.000000	1
6	2	38.0	52000.000000	0
7	0	48.0	79000.000000	1
8	1	50.0	83000.000000	0
9	0	37.0	67000.000000	1

### Splitting the data

```
x = df.iloc[:,0:3]
x
```

	Country	Age	Salary
0	0	44.0	72000.000000
1	2	27.0	48000.000000
2	1	30.0	54000.000000
3	2	38.0	61000.000000
4	1	40.0	63777.777778
5	0	35.0	58000.000000
6	2	38.0	52000.000000
7	0	48.0	79000.000000
8	1	50.0	83000.000000
9	0	37.0	67000.000000

```
y = df['Purchased']
y
```

0	0
1	1
2	0
3	0
4	1
5	1
6	0
7	1
8	0

```

9      1
Name: Purchased, dtype: int64

from sklearn.model_selection import train_test_split

xtrain,xtest,ytrain,ytest =
train_test_split(x,y,test_size=0.3,random_state=11)

xtrain

```

	Country	Age	Salary
6	2	38.0	52000.000000
4	1	40.0	63777.777778
5	0	35.0	58000.000000
1	2	27.0	48000.000000
3	2	38.0	61000.000000
0	0	44.0	72000.000000
9	0	37.0	67000.000000

```

xtest

```

	Country	Age	Salary
7	0	48.0	79000.0
8	1	50.0	83000.0
2	1	30.0	54000.0

## Scaling

*# Normalization ---> output(0 to 1)*

```

from sklearn.preprocessing import MinMaxScaler

nm = MinMaxScaler()

n_xtrain = nm.fit_transform(xtrain)
n_xtrain

array([[1.          , 0.64705882, 0.16666667],
       [0.5        , 0.76470588, 0.65740741],
       [0.          , 0.47058824, 0.41666667],
       [1.          , 0.          , 0.          ],
       [1.          , 0.64705882, 0.54166667],
       [0.          , 1.          , 1.          ],
       [0.          , 0.58823529, 0.79166667]])

n_xtest = nm.transform(xtest)
n_xtest

```

```
array([[0.          , 1.23529412, 1.29166667],
       [0.5        , 1.35294118, 1.45833333],
       [0.5        , 0.17647059, 0.25        ]])
```

