


**Project Development Phase**

|                     |                                       |
|---------------------|---------------------------------------|
| <b>Date</b>         | 08 November 2022                      |
| <b>Team ID</b>      | PNT2022TMID43960                      |
| <b>Project Name</b> | Smart Fashion Recommender Application |

**INTEGRATING CHATBOT WITH HTML PAGE (SOURCE CODE):**

```
<script>
window.watsonAssistantChatOptions = {
  integrationID: "614a4315-ff80-4187-8fe4-2fd9b506b723", // The ID of this integration.
  region: "au-syd", // The region your integration is hosted in.
  serviceInstanceID: "9670dcf8-789f-4609-8d7a-6e25c412a9ec", // The ID of your service instance.
  onLoad: function(instance) { instance.render(); }
};
setTimeout(function(){
  const t=document.createElement('script');
  t.src="https://web-chat.global.assistant.watson.appdomain.cloud/versions/" + (window.watsonAssistantChatOptions.clientVersion || 'latest') +
"/WatsonAssistantChatEntry.js";
  document.head.appendChild(t);
});
</script>
```


## INTEGRATING CHATBOT WITH HTML PAGE:

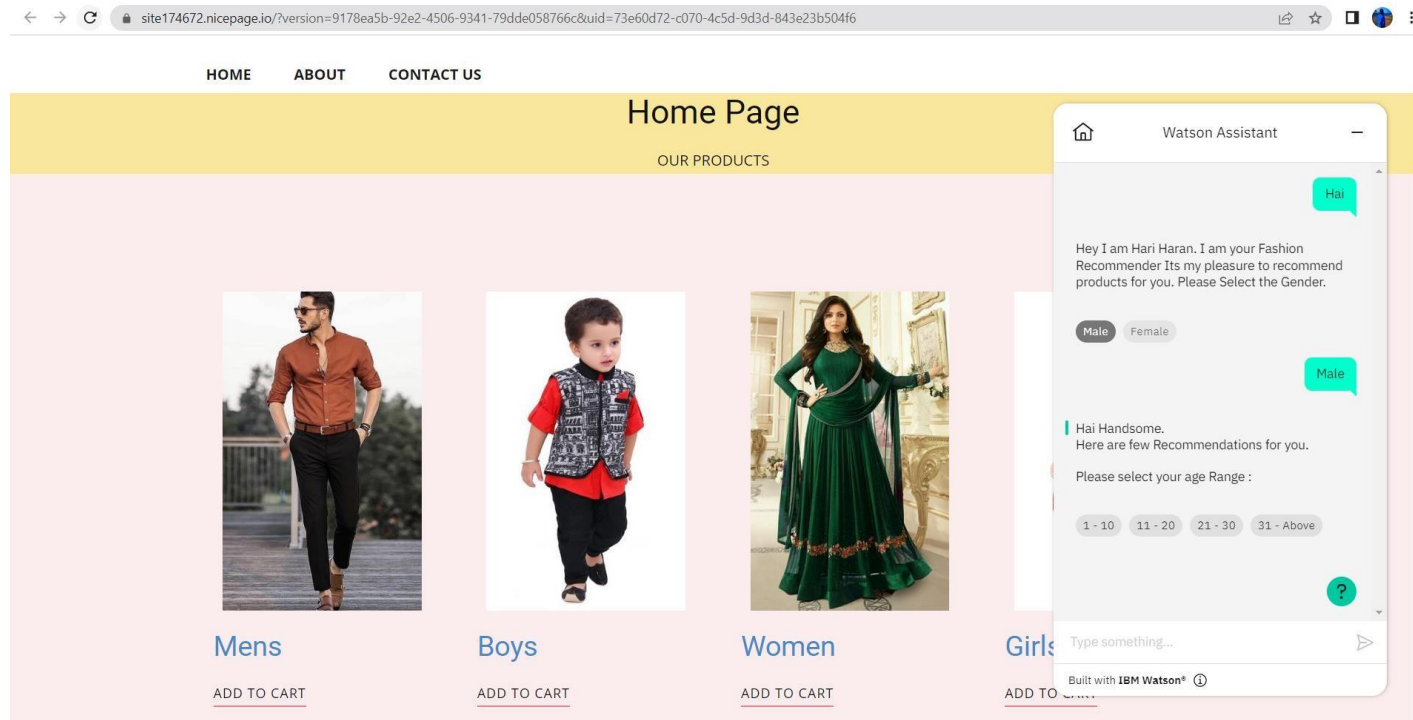

## DOCKER PUSH:

```
#####  
#                               #  
#      WARNING!!!!             #  
# This is a sandbox environment. Using personal credentials   #  
# is HIGHLY! discouraged. Any consequences of doing so are    #  
# completely the user's responsibilites.                       #  
#                               #  
# The PWD team.                                                 #  
#####  
[node1] (local) root@192.168.0.28 ~  
$ docker pull uifd/ui-for-docker  
Using default tag: latest  
latest: Pulling from uifd/ui-for-docker  
841194d080c8: Pull complete  
Digest: sha256:fe371ff5a69549269b24073a5ab1244dd4c0b834cbadf244870572150b1cb749  
Status: Downloaded newer image for uifd/ui-for-docker:latest  
docker.io/uifd/ui-for-docker:latest  
[node1] (local) root@192.168.0.28 ~  
$ docker run uifd/ui-for-docker  
2022/11/08 09:13:47 Unix socket /var/run/docker.sock does not exist  
[node1] (local) root@192.168.0.28 ~  
$ docker run -d -p 9000:9000 --privileged -v /var/run/docker.sock:/var/run/docker.sock uifd/ui-for-docker  
b8bddb08bb99652d924c9bcca447ad1bcd1f4de7c625d20ca5dbc5e4c70cd2a00  
[node1] (local) root@192.168.0.28 ~  
$
```

## CONTAINERIZING THE APPLICATION:

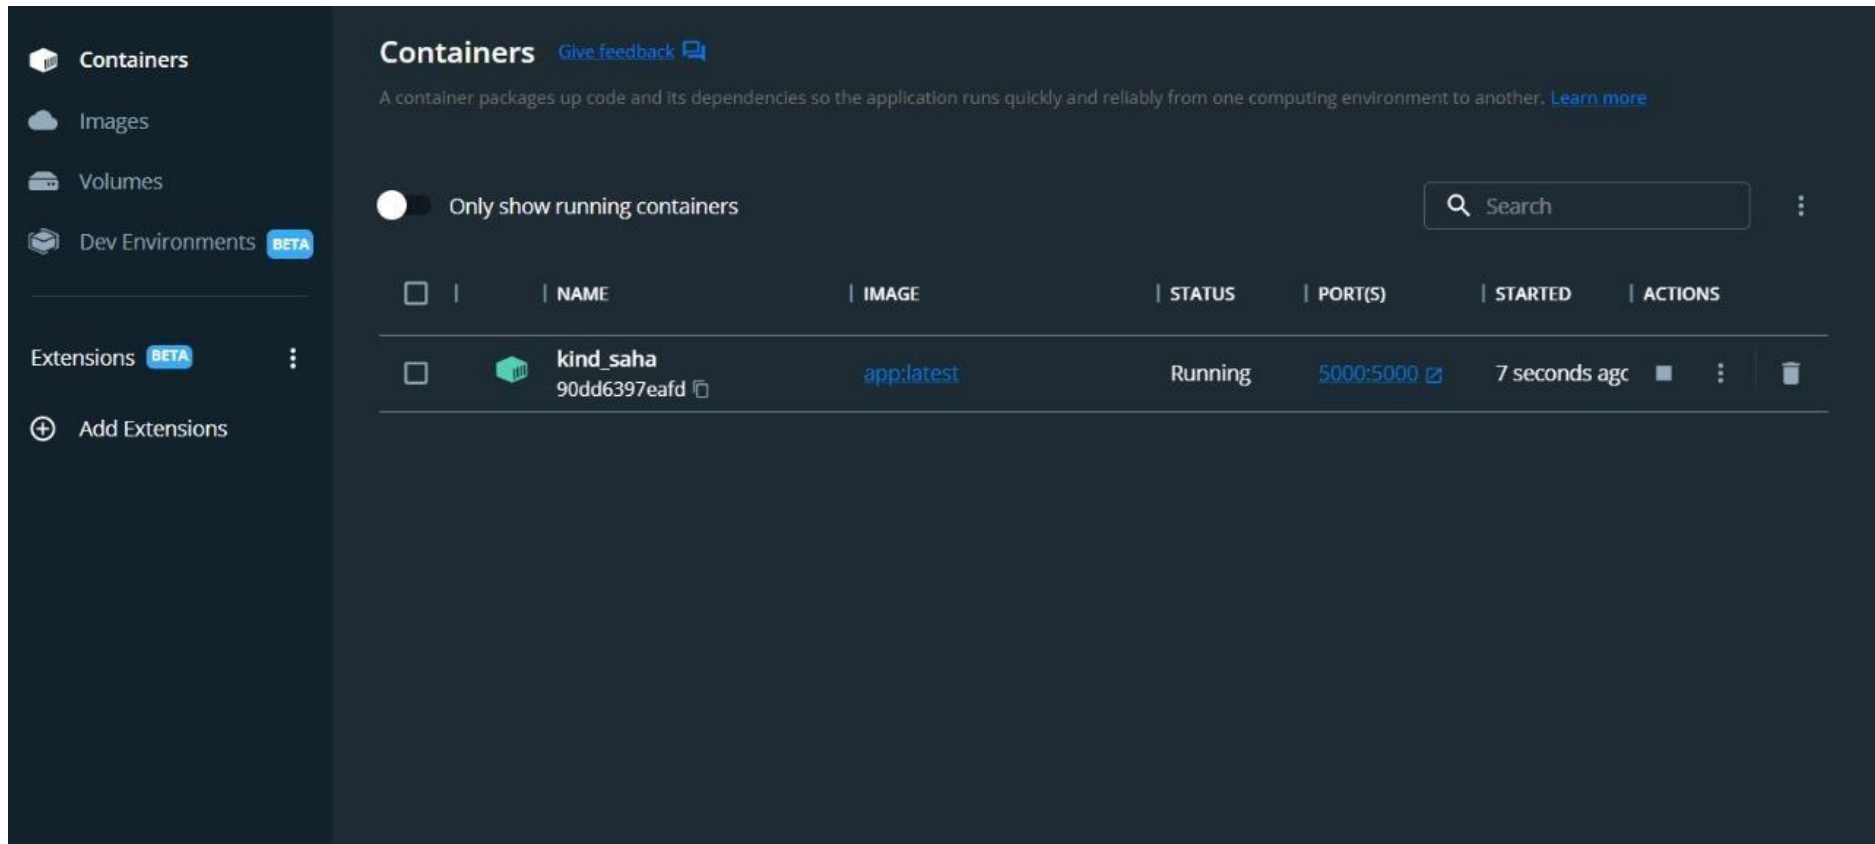

The screenshot displays the Docker Desktop application interface. On the left sidebar, the 'Containers' tab is selected, with other options like 'Images', 'Volumes', 'Dev Environments', and 'Extensions' visible. The main panel shows the 'Containers' section with a toggle for 'Only show running containers' and a search bar. A table lists the running containers, with one container named 'kind\_saha' (ID: 90dd6397eafd) running on the 'app:latest' image. The container is mapped to port 5000 and was started 7 seconds ago.

|                          | NAME                      | IMAGE      | STATUS  | PORT(S)   | STARTED       | ACTIONS |
|--------------------------|---------------------------|------------|---------|-----------|---------------|---------|
| <input type="checkbox"/> | kind_saha<br>90dd6397eafd | app:latest | Running | 5000:5000 | 7 seconds ago |         |