

PROJECT REPORT

A NOVEL METHOD FOR HANDWRITTEN DIGIT RECOGNITION

submitted by

PNT2022TMID25091

ANAND XAVIER A	-	210519205005
ARAVIND S	-	210519205008
BALA SUBRAMANIAN A	-	210519205011
THANGA TAMIL SELVAN S	-	210519205052

TABLE OF CONTENTS

1 INTRODUCTION	4
PROJECT OVERVIEW	4
PURPOSE	4
2 LITERATURE SURVEY	5
EXISTING PROBLEM	5
2.1 REFERENCES	5
2.2 PROBLEM STATEMENT DEFINITION	8
3 IDEATION AND PROPOSED SOLUTION	9
EMPATHY MAP CANVAS	9
3.1 IDEATION & BRAINSTORMING	10
3.2 PROPOSED SOLUTION	11
3.3 PROBLEM SOLUTION FIT	12
4 REQUIREMENT ANALYSIS	13
FUNCTIONAL REQUIREMENTS	13
4.1 NON FUNCTIONAL REQUIREMENTS	14
5 PROJECT DESIGN	15
DATA FLOW DIAGRAM	15
5.1 SOLUTION & TECHNICAL ARCHITECTURE	18
5.2 USER STORIES	18
6 PROJECT PLANNING AND SCHEDULING	19
SPRINT PLANNING AND ESTIMATION	19

6.1 SPRINT DELIVERY SCHEDULE	20
7 CODING & SOLUTIONING	21
8 TESTING	23
TEST CASES	23
8.1 USER ACCEPTANCE TESTING	25
DEFECT ANALYSIS	25
TEST CASE ANALYSIS	25
9 RESULTS	26
PERFORMANCE METRICS	26
10 ADVANTAGES & DISADVANTAGES	31
ADVANTAGES	32
DISADVANTAGES	32
CONCLUSION	33
11FUTURE SCOPE	34
APPENDIX	35
SOURCE CODE	35
GITHUB	54
PROJECT DEMO	54

CHAPTER 1

INTRODUCTION

Digit recognition systems are capable of recognizing the digits from different sources like emails, bank cheque, papers, images, etc. and in different real-world scenarios for online handwriting recognition on computer tablets or system, recognize number plates of vehicles, processing bank cheque amounts, numeric entries in forms filled up by hand (tax forms) and so on.

Handwriting recognition is one of the compelling research works going on because every individual in this world has their own style of writing. It is the capability of the computer to identify and understand handwritten digits or characters automatically. Because of the progress in the field of science and technology, everything is being digitalized to reduce human effort.

CHAPTER 2

LITERATURE SURVEY

2.1 EXISTING PROBLEM

The fundamental problem with handwritten digit recognition is that handwritten digits do not always have the same size, width, orientation, and margins since they vary from person to person. Additionally, there would be issues with identifying the numbers because of similarities between numerals like 1 and 7, 5 and 6, 3 and 8, 2 and 5, 2 and 7, etc. Finally, the individuality and variation of each individual's handwriting influence the structure and appearance of the digits.

2.2 REFERENCES

Improved Handwritten Digit Recognition Using Convolutional Neural Networks (CNN) (2020)

Ahlawat, Savita and Choudhary, Amit and Nayyar, Anand and Singh, Saurabh and Yoon, Byungun

This paper's primary goal was to enhance handwritten digit recognition ability. To avoid difficult pre-processing, expensive feature extraction, and a complex ensemble (classifier combination) method of a standard recognition system, they examined different convolutional neural network variations. Their current work makes suggestions on the function of several hyper-parameters through thorough evaluation utilizing an MNIST dataset. They also confirmed that optimizing hyper-parameters is crucial for enhancing CNN architecture performance. With the Adam optimizer for the MNIST database, they were able to surpass many previously published results with a recognition rate of 99.89%. Through the trials, it is made

abundantly evident how the performance of handwritten digit recognition is affected by the number of convolutional layers in CNN architecture. According to the paper, evolutionary algorithms can be explored for optimizing convolutional filter kernel sizes, CNN learning parameters, and the quantity of layers and learning rates.

An Efficient And Improved Scheme For Handwritten Digit Recognition Based On Convolutional Neural Network (2019)

Ali, Saqib and Shaukat, Zeeshan and Azeem, Muhammad and Sakawat, Zareen and Mahmood, Tariq and others

This study uses rectified linear units (ReLU) activation and a convolutional neural network (CNN) that incorporates the Deeplearning4j (DL4J) architecture to recognize handwritten digits. The proposed CNN framework has all the necessary parameters for a high level of MNIST digit classification accuracy. The system's training takes into account the time factor as well. The system is also tested by altering the number of CNN layers for additional accuracy verification. It is important to note that the CNN architecture consists of two convolutional layers, the first with 32 filters and a 5x5 window size and the second with 64 filters and a 7x7 window size. In comparison to earlier proposed systems, the experimental findings show that the proposed CNN architecture for the MNIST dataset demonstrates great performance in terms of time and accuracy. As a result, handwritten numbers are detected with a recognition rate of 99.89% and high precision (99.21%) in a short amount of time.

Improved Handwritten Digit Recognition Using Quantum K-Nearest Neighbor Algorithm (2019)

Wang, Yuxiang and Wang, Ruijin and Li, Dongfen and Adu-Gyamfi, Daniel and Tian, Kaibin and Zhu, Yixin

The KNN classical machine learning technique is used in this research to enable quantum parallel computing and superposition. They used the KNN algorithm with quantum acceleration to enhance handwritten digit recognition. When dealing with more complicated and sizable handwritten digital data sets, their suggested method considerably lowered the computational time complexity of the traditional KNN algorithm. The paper offered a theoretical investigation of how quantum concepts can be applied to machine learning. Finally, they established a fundamental operational concept and procedure for machine learning with quantum acceleration.

Handwritten Digit Recognition Using Machine And Deep Learning Algorithms (2021)

Pashine, Samay and Dixit, Ritik and Kushwah, Rishika

In this study, they developed three deep and machine learning-based models for handwritten digit recognition using MNIST datasets. To determine which model was the most accurate, they compared them based on their individual properties.

Support vector machines are among the simplest classifiers, making them faster than other algorithms and providing the highest training accuracy rate in this situation. However, due to their simplicity, SVMs cannot categorize complicated and ambiguous images as accurately as MLP and CNN algorithms can. In their research, they discovered that CNN produced the most precise outcomes for handwritten digit recognition. This led them to the conclusion that CNN is the most effective

solution for all types of prediction issues, including those using picture data. Next, by comparing the execution times of the algorithms, they determined that increasing the number of epochs without changing the configuration of the algorithm is pointless due to the limitation of a certain model, and they discovered that beyond a certain number of epochs, the model begins over-fitting the dataset and provides biased predictions.


2.3 PROBLEM STATEMENT DEFINITION

For years, the traffic department has been combating traffic law violators. These offenders endanger not only their own lives, but also the lives of other individuals. Punishing these offenders is critical to ensuring that others do not become like them. Identification of these offenders is next to impossible because it is impossible for the average individual to write down the license plate of a reckless driver. Therefore, the goal of this project is to help the traffic department identify these offenders and reduce traffic violations as a result.


CHAPTER 3

IDEATION AND PROPOSED SOLUTION

3.1 EMPATHY MAP CANVAS

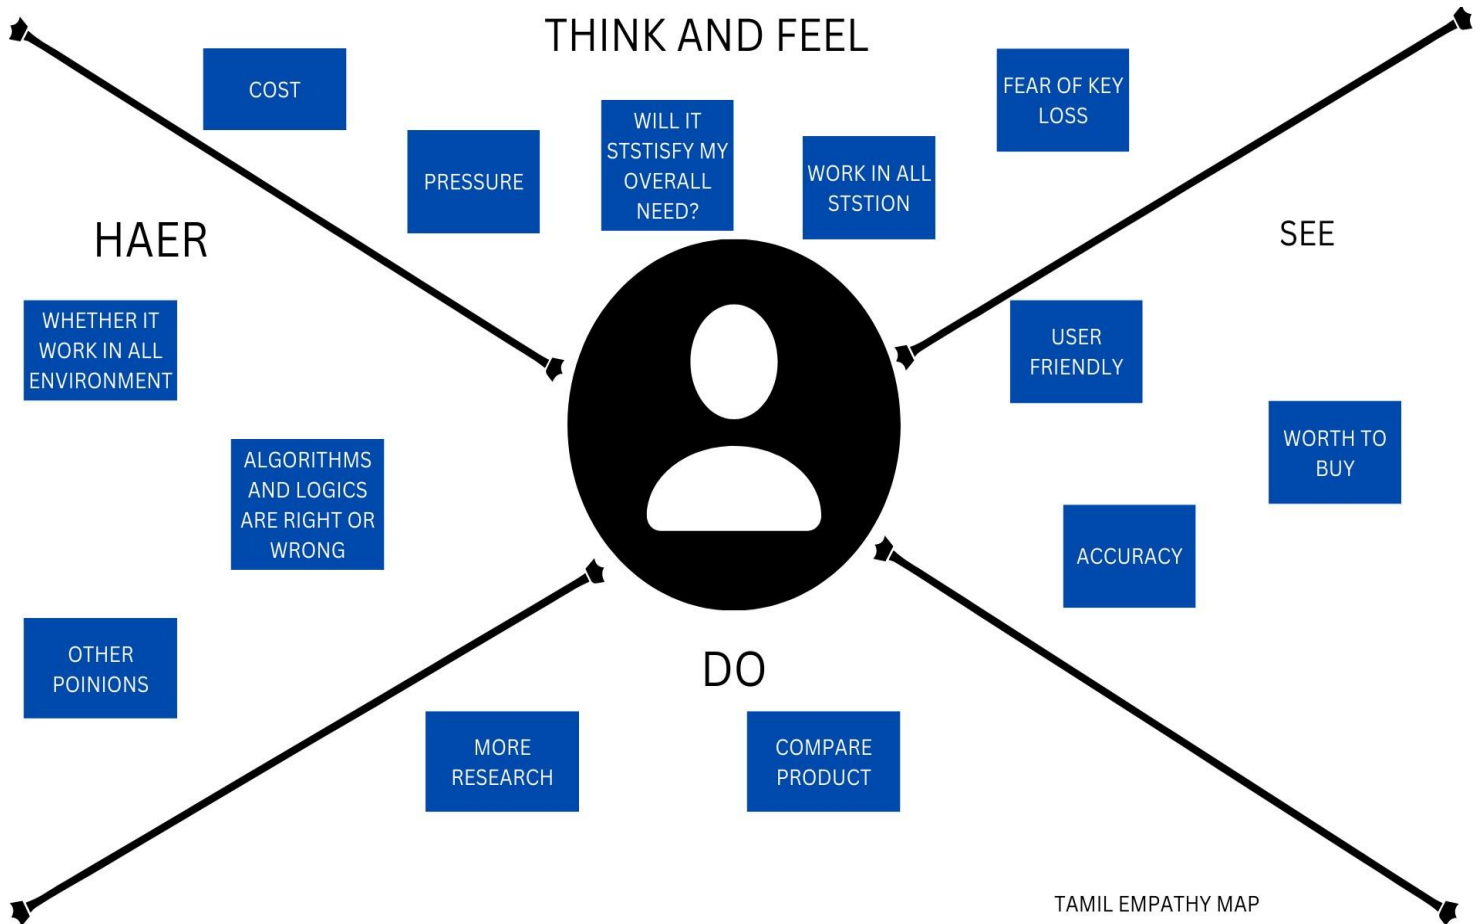

3.2 IDEATION & BRAINSTORMING



Brainstorm & idea prioritization

Use this template in your own brainstorming sessions so your team can unleash their imagination and start shaping concepts even if you're not sitting in the same room.

12 minutes to prepare
1 hour to collaborate
2-8 people recommended

Before you collaborate
A little bit of preparation goes a long way with this session. Here's what you need to do to get going.

10 minutes

- Team gathering**
Define who should participate in the session and send an invite. Share relevant information or pre-work ahead.
- Set the goal**
Think about the problem you'll be focusing on solving in the brainstorming session.
- Learn how to use the facilitation tools**
Use the Facilitation Superpowers to run a happy and productive session.

[Open article](#)

1 Define your problem statement
To develop a Novel Method For Handwritten Digit Recognition System?

5 minutes

Problem
How might we develop a Novel Method For Handwritten Digit Recognition System?

Key rules of brainstorming
To run a smooth and productive session:

- Stay in topic.
- Encourage wild ideas.
- Defer judgments.
- Listen to others.
- Go for volume.
- If possible, be visual.

2 Brainstorm
Write down any ideas that come to mind that address your problem statement.

10 minutes

THANGATAMILSELVAN S

- Recognize Text
- Identification of language in the given text
- Acquisition of input from the user
- Create GUI to predict the digit
- Identification of Stroke classification
- Training of models

ARAVIND S

- Pixel Detection
- Time Interval
- Pixel Size
- Classification of digit
- Text Classification
- Symbol Classification

ANAND XAVIER A

- Identification
- Capital letters identification
- Color identification
- Grabbing character to a grid
- Predict/sense the image
- Acquisition
- Number of lines to be counted
- Space detection
- Paragraph Spacing
- Learning Modules
- Pixel Detection
- Re-Sampling

BALA SUBRAMANIAN

3 Group Ideas
Take turns sharing your ideas while clustering similar or related notes as you go. In the last 10 minutes, give each cluster a sentence-like label. If a cluster is bigger than six sticky notes, try and see if you can break it up into smaller sub-groups.

20 minutes

IDENTIFICATION

- Recognize Text
- Space detection
- Text Classification
- Capital letters identification
- Classification of digit

MODULE


- Acquisition of input from the user
- Create GUI to predict the digit
- Learning Modules
- Training of models
- Re-Sampling

4 Prioritize
Your brain should all be on the same page about what's important moving forward. Place your ideas on this grid to determine which ideas are important and which are feasible.

20 minutes

Importance
If high on this axis, ideas could get better. If low, they are less likely to be successful.

Feasibility
Regardless of their importance, which ideas are more feasible (simpler, less time, effort, complexity, etc.)

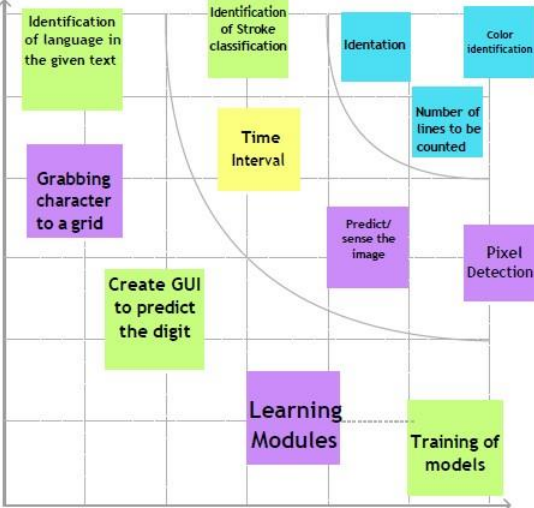

After you collaborate
You can export the mural as an image or pdf to share with members of your company who might find it helpful.

Quick add-ons

- Share the mural**
Share a view link to the mural with stakeholders to keep them in the loop about the outcome of the session.
- Export the mural**
Export a copy of the mural as a PNG or PDF to attach to emails, include in slides, or save in your drive.

Keep moving forward

- Strategy blueprint**
Define the components of a new idea or strategy.
- Customer experience journey map**
Understand customer needs, motivations, and obstacles for an experience.
- Strengths, weaknesses, opportunities & threats**
Identify strengths, weaknesses, opportunities & threats to develop a plan.

[Share template feedback](#)

3.3 PROPOSED SOLUTION

S.NO	PARAMETER	DESCRIPTION
1	Problem Statement	To create an application that recognizes handwritten digits
2	Idea / Solution Description	The application takes an image as the input and accurately detects the digits in it.
3	Novelty / Uniqueness	Instead of recognizing every text, the application accurately recognizes only the digits
4	Social Impact / Customer Satisfaction	This application reduces the manual tasks that need to be performed. This improves productivity in the workplace.
5	Business Model	<p>The application can be integrated with traffic surveillance cameras to recognize vehicle number plates</p> <p>The application can be integrated with Postal systems to recognize the pin codes effectively</p>
6	Scalability of the Solution	The application can easily be scaled to accept multiple inputs and process them parallelly to further increase efficiency

3.4 PROBLEM SOLUTION FIT

Problem Statement: A Novel Method for Handwritten Digit Recognition

MNIST (“Modified National Institute of Standards and Technology”) is considered an unofficial computer vision “hello-world” dataset. This is a collection of thousands of handwritten pictures used to train classification models using Machine Learning techniques.

As a part of this problem statement, we will train a multi-layer perceptron using TensorFlow to recognize the handwritten digits.

SOLUTION:

MNIST Dataset Description

Handwriting recognition is one of the compelling research works going on because every individual in this world has their own style of writing. It is the capability of the computer to identify and understand handwritten digits or characters automatically. Because of the progress in the field of science and technology, everything is being digitalized to reduce human effort. Hence, there comes a need for handwritten digit recognition in many real-time applications. MNIST data set is widely used for this recognition process and it has 70000 handwritten digits. We use Artificial neural networks to train these images and build a deep learning model. Web application is created where the user can upload an image of a handwritten digit. this image is analysed by the model and the detected result is returned on to UI

The MNIST Handwritten Digit Recognition Dataset contains 60,000 training and 10,000 testing labelled handwritten digit pictures.

Each picture is 28 pixels in height and 28 pixels wide, for a total of 784 (28×28) pixels. Each pixel has a single pixel value associated with it. It indicates how bright or dark that pixel is (larger numbers indicates darker pixel). This pixel value is an integer ranging from 0 to 255.

CHAPTER 4

REQUIREMENT ANALYSIS

4.1 FUNCTIONAL REQUIREMENTS

FR.NO	FUNCTIONAL REQUIREMENTS	SUB REQUIREMENTS
FR-1	Model Creation	Get access the MNIST dataset
		Analyze the dataset
		Define a CNN model
		Train and Test the Model
FR-2	Application Development	Create a website to let the user recognize handwritten digits.
		Create a home page to upload images
		Create a result page to display the results
		Host the website to let the users use it from anywhere
FR-3	Input Image Upload	Let users upload images of various formats.
		Let users upload images of various size
		Prevent users from uploading unsupported image formats
		Pre-Process the image to use it on the model

		Create a database to store all the input images
FR-4	Display Results	Display the result from the model
		Display input image
		Display accuracy the result
		Display other possible predictions with their respective accuracy

4.2 NON FUNCTIONAL REQUIREMENTS


NFR	NON-FUNCTIONAL REQUIREMENTS	DESCRIPTION
NFR-1	Usability	The application must be usable in all devices
NFR-2	Security	The application must protect user uploaded image
NFR-3	Reliability	The application must give an accurate result as much as possible
NFR-4	Performance	The application must be fast and quick to load up
NFR-5	Availability	The application must be available to use all the time

NFR-6	Scalability	The application must scale along with the user base
-------	-------------	---


CHAPTER 5


PROJECT DESIGN

5.1 DATA FLOW DIAGRAM

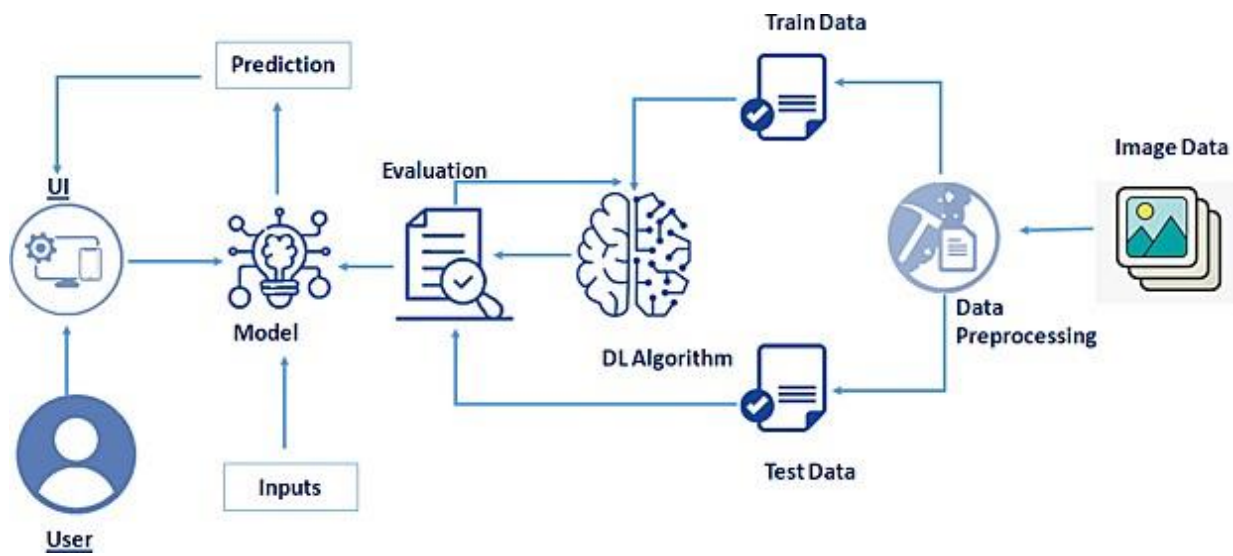

5.2 SOLUTION & TECHNICAL ARCHITECTURE

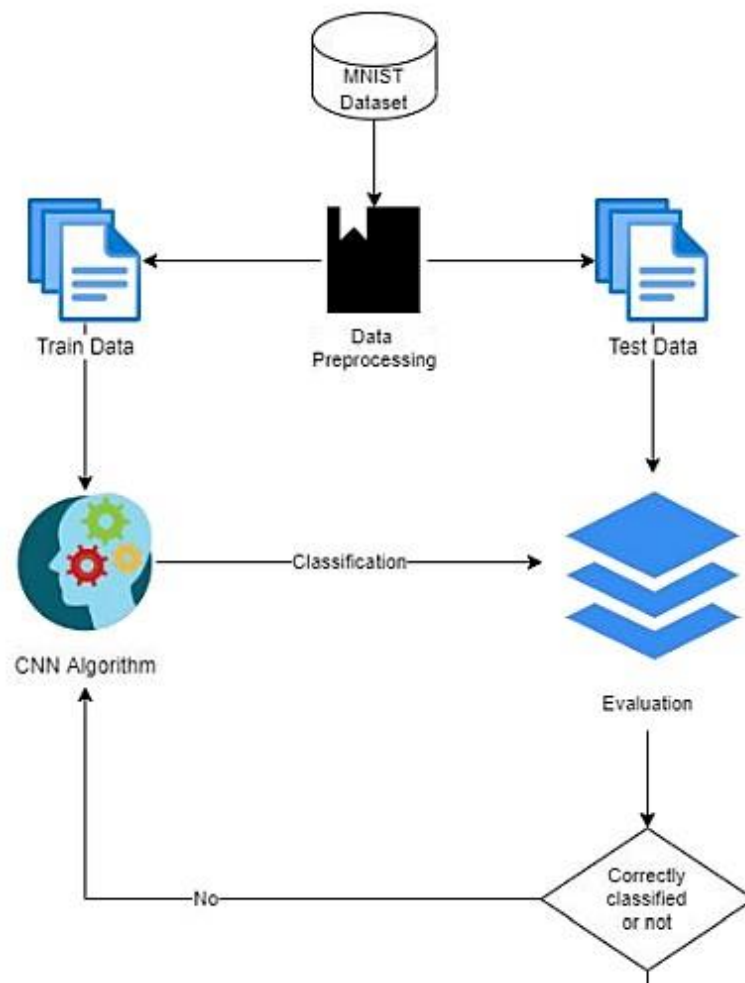

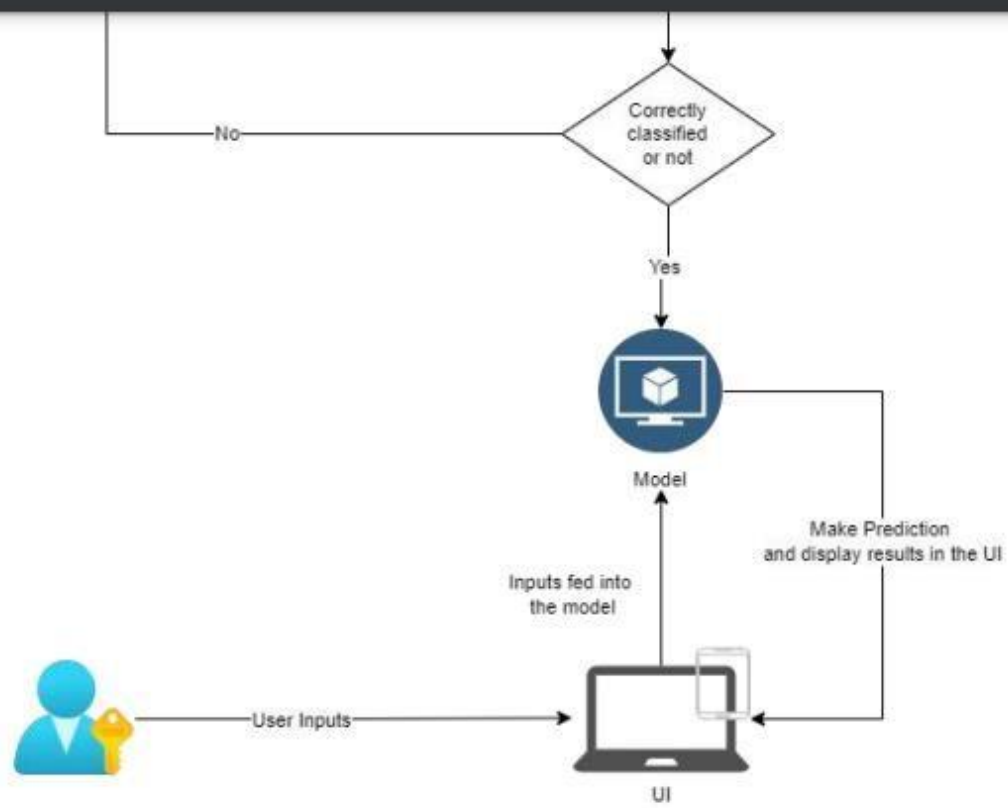

User Type	Functional Requirements	User Story Number	User Story / Task	Acceptance Criteria	Priority	Release
Customer	Accessing the Application	USN-1	As a user, I should be able to access the application from anywhere and use on any devices	User can access the application using the browser on any device	High	Sprint-4
	Uploading Image	USN-2	As a user, I should be able to upload images to predict the digits	User can upload images	High	Sprint-3
	Viewing the Results	USN-3	As a user, I should be able to view the results	The result of the prediction is displayed	High	Sprint-3
	Viewing Other Prediction	USN-4	As a user, I should be able to see other close predictions	The accuracy of other values must be displayed	Medium	Sprint-4
	Usage Instruction	USN-5	As a user, I should have a usage instruction to know how to use the application	The usage instruction is displayed on the home page	Medium	Sprint-4

5.3 USER STORIES

CHAPTER 6

PROJECT PLANNING AND SCHEDULING

6.1 SPRINT PLANNING AND ESTIMATION

SPRINT	USER STORY / TASK	STORY POINTS	PRIORITY	TEAM MEMBERS
Sprint - I	Get the dataset	3	High	Aravind S
	Explore the data	2	Medium	Anand xavier A Bala subaramanian A
	Data Pre-Processing	3	High	Thanga tamil selvan S Anand xavier A
	Prepare training and testing data	3	High	Aravind S Thanga tamil selvan S Bala subaramanian A
Sprint - II	Create the model	3	High	Thanga tamil selvan S
	Train the model	3	High	Aravind S
	Test the model	3	High	Bala subaramanian A
Sprint - III	Improve the model	2	Medium	Anand xavier A Aravind S Thanga tamil selvan S
	Save the model	3	High	Bala subaramanian A
	Build the Home Page	3	High	Aravind S Thanga tamil selvan S
	Setup a database to store input images	2	Medium	Anand xavier A

Sprint - IV	Build the results page	3	High	Aravind S Thanga tamil selvan S
	Integrate the model with the application	3	High	
	Test the application	3	High	Hari Haran S Dinesh Kumar E

6.1 SPRINT DELIVERY SCHEDULE

SPRINT	TOTAL STORY POINT S	DURATION	SPRINT START DATE	SPRINT END DATE (PLANNED)	STORY POINTS COMPLETED (AS ON PLANNED DATE)	SPRINT RELEASE DATE (ACTUAL)
Sprint - I	11	6 Days	24 Oct 2022	29 Oct 2022	11	29 Oct 2022
Sprint - II	9	6 Days	31 Oct 2022	05 Nov 2022	9	05 Nov 2022
Sprint - III	10	6 Days	07 Oct 2022	12 Nov 2022	10	12 Nov 2022
Sprint - IV	9	6 Days	14 Nov 2022	19 Nov 2022	9	19 Nov 2022

CHAPTER 7

CODING & SOLUTIONING

```
# Import necessary packages
import os
import random
import string
from pathlib import Path
import numpy as np
from tensorflow.keras.models import load_model
from PIL import Image, ImageOps
```

```
def random_name_generator(n: int) -> str:
    """
    Generates a random file name.

    Args:
        n (int): Length the of the file name.

    Returns:
        str: The file name.
    """
    return ''.join(random.choices(string.ascii_uppercase + string.digits, k=n))
```

```

def recognize(image: bytes) -> tuple:
    """
    Predicts the digit in the image.

    Args:
        image (bytes): The image data.

    Returns:
        tuple: The best prediction, other predictions and file name
    """

    model=load_model(Path("./model/model.h5"))

    img = Image.open(image).convert("L")

    # Generate a random name to save the image file.
    img_name = random_name_generator(10) + '.jpg'
    if not os.path.exists(f"./static/data/"):
        os.mkdir(os.path.join('./static/', 'data'))
    img.save(Path(f"./static/data/{img_name}"))

    # Convert the Image to Grayscale, Invert it and Resize to get better prediction.
    img = ImageOps.grayscale(img)
    img = ImageOps.invert(img)
    img = img.resize((28, 28))

    # Convert the image to an array and reshape the data to make prediction.
    img2arr = np.array(img)
    img2arr = img2arr / 255.0
    img2arr = img2arr.reshape(1, 28, 28, 1)

    results = model.predict(img2arr)
    best = np.argmax(results,axis = 1)[0]

    # Get all the predictions and it's respective accuracy.
    pred = List(map(lambda x: round(x*100, 2), results[0]))

    values = [0, 1, 2, 3, 4, 5, 6, 7, 8, 9]
    others = List(zip(values, pred))

    # Get the value with the highest accuracy
    best = others.pop(best)

    return best, others, img_name

```


CHAPTER 8

TESTING

8.1 TEST CASES

Test case ID	Feature Type	Component	Test Scenario	Expected Result	Actual Result	Status
HP_TC_001	UI	Home Page	Verify UI elements in the Home Page	The Home page must be displayed properly	Working as expected	PASS
HP_TC_002	UI	Home Page	Check if the UI elements are displayed properly in different screen sizes	The Home page must be displayed properly in all sizes	The UI is not displayed properly in screen size 2560 x 1801 and 768 x 630	FAIL
HP_TC_003	Functional	Home Page	Check if user can upload their file	The input image should be uploaded to the application successfully	Working as expected	PASS
HP_TC_004	Functional	Home Page	Check if user cannot upload unsupported files	The application should not allow user to select a non image file	User is able to upload any file	FAIL
HP_TC_005	Functional	Home Page	Check if the page redirects to the result page once the input is given	The page should redirect to the results page	Working as expected	PASS

BE_TC_001	Functional	Backend	Check if all the routes are working properly	All the routes should properly work	Working as expected	PASS
M_TC_001	Functional	Model	Check if the model can handle various image sizes	The model should rescale the image and predict the results	Working as expected	PASS
M_TC_002	Functional	Model	Check if the model predicts the digit	The model should predict the number	Working as expected	PASS
M_TC_003	Functional	Model	Check if the model can handle complex input image	The model should predict the number in the complex image	The model fails to identify the digit since the model is not built to handle such data	FAIL
RP_TC_001	UI	Result Page	Verify UI elements in the Result Page	The Result page must be displayed properly	Working as expected	PASS
RP_TC_002	UI	Result Page	Check if the input image is displayed properly	The input image should be displayed properly	The size of the input image exceeds the display container	FAIL
RP_TC_003	UI	Result Page	Check if the result is displayed properly	The result should be displayed properly	Working as expected	PASS
RP_TC_004	UI	Result Page	Check if the other predictions are displayed properly	The other predictions should be displayed properly	Working as expected	PASS

8.1 USER ACCEPTANCE TESTING

8.1.1 DEFECT ANALYSIS

Resolution	Severity 1	Severity 2	Severity 3	Severity 4	Total
By Design	1	0	1	0	2
Duplicate	0	0	0	0	0
External	0	0	2	0	2
Fixed	4	1	0	1	6
Not Reproduced	0	0	0	1	1
Skipped	0	0	0	1	1
Won't Fix	1	0	1	0	2
Total	6	1	4	3	14

8.2USER ACCEPTANCE TESTING

8.2.1 DEFECT ANALYSIS

8.2.2 TEST CASE ANALYSIS

Section	Total Cases	Not Tested	Fail	Pass
Client Application	10	0	3	7
Security	2	0	1	1
Performance	3	0	1	2
Exception Reporting	2	0	0	2

CHAPTER 9

RESULTS

9 PERFORMANCE METRICS

9.1.1 MODEL SUMMARY


Model: "sequential"


Layer (type)	Output Shape	Param #
conv2d (Conv2D)	(None, 26, 26, 64)	640
conv2d_1 (Conv2D)	(None, 24, 24, 32)	18464
flatten (Flatten)	(None, 18432)	0
dense (Dense)	(None, 10)	184330

Total params: 203,434

Trainable params: 203,434

Non-trainable params: 0

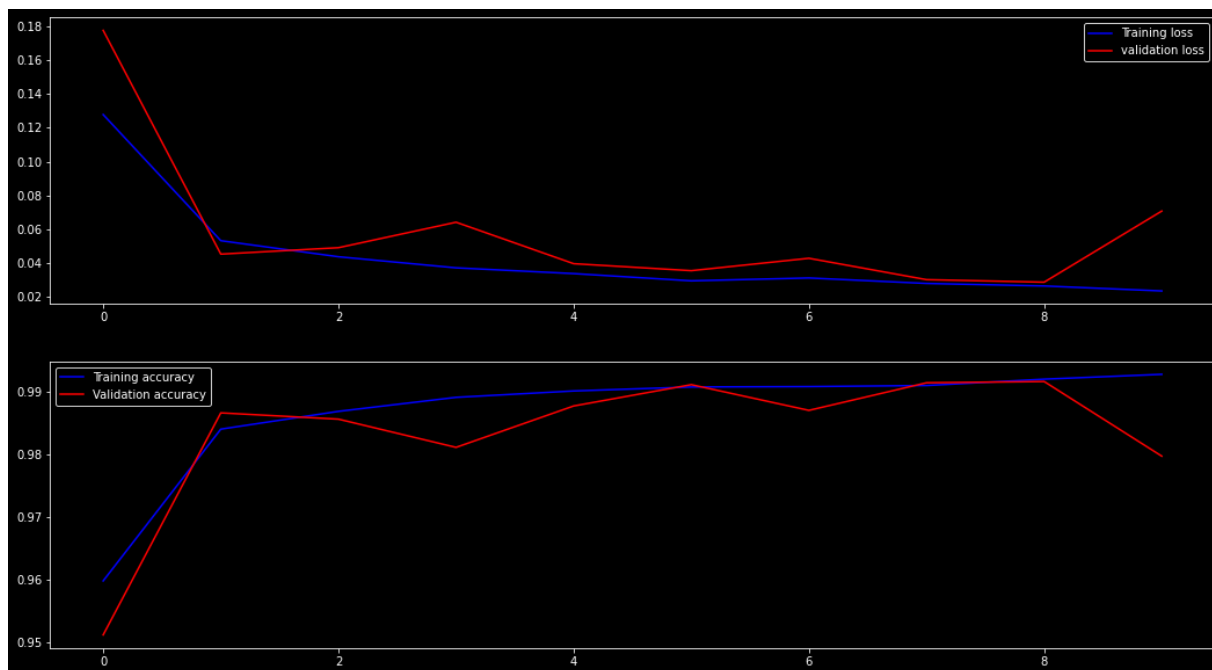

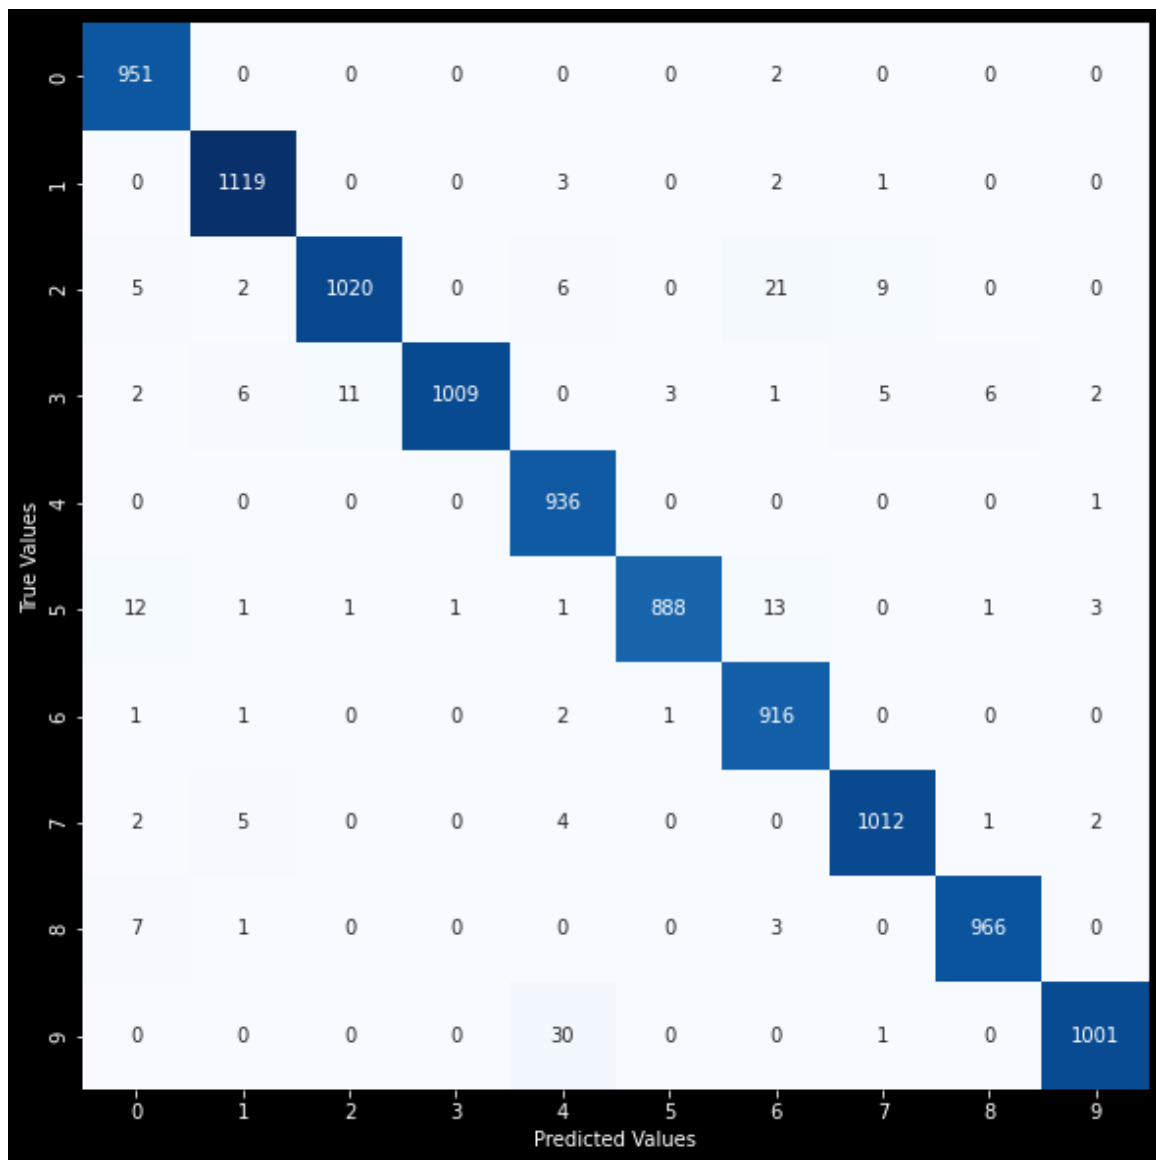

9.1.1 APPLICATION TEST REPORT

Locust Test Report

During: 11/12/2022, 7:05:40 AM - 11/12/2022, 7:14:47 AM

Target Host: http://127.0.0.1:5000/

Script: locust.py

Request Statistics

Method	Name	# Requests	# Fails	Average (ms)	Min (ms)	Max (ms)	Average size (bytes)	RPS	Failures/s
GET	/	1043	0	13	4	290	1079	1.9	0.0
GET	/predict	1005	0	39648	385	59814	2670	1.8	0.0
Aggregated		2048	0	19462	4	59814	1859	3.7	0.0

Response Time Statistics


Method	Name	50%ile (ms)	60%ile (ms)	70%ile (ms)	80%ile (ms)	90%ile (ms)	95%ile (ms)	99%ile (ms)	100%ile (ms)
GET	/	10	11	13	15	19	22	62	290
GET	/predict	44000	46000	47000	48000	50000	52000	55000	60000
Aggregated		36	36000	43000	45000	48000	50000	54000	60000

Charts


Total Requests per Second



Response Times (ms)

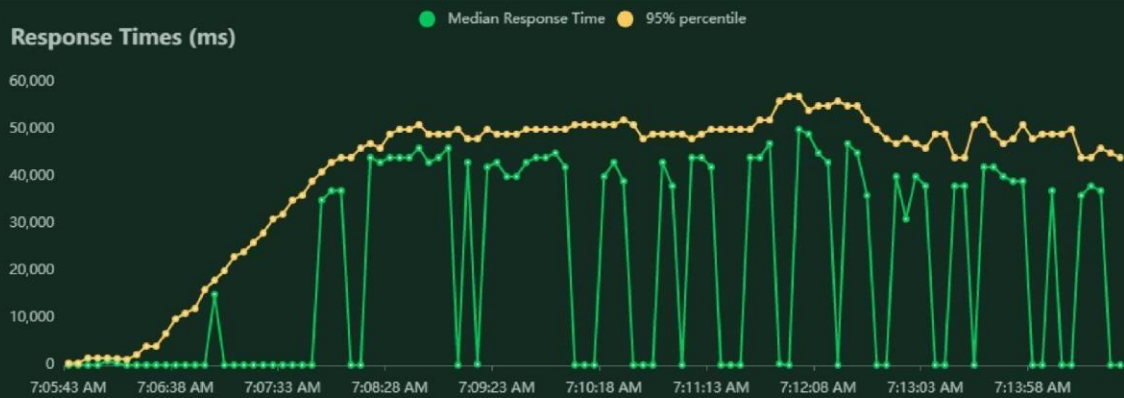

Number of Users

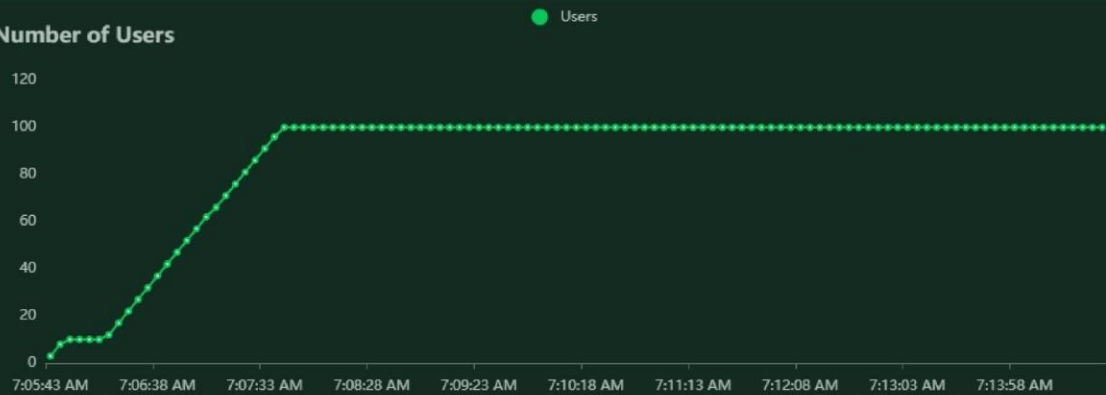

CHAPTER 10

ADVANTAGES & DISADVANTAGES

ADVANTAGES

- Reduces manual work
- More accurate than average human
- Capable of handling a lot of data
- Can be used anywhere from any device

DISADVANTAGES

- Cannot handle complex data
- All the data must be in digital format
- Requires a high performance server for faster predictions
- Prone to occasional errors

CHAPTER 11

CONCLUSION

This project demonstrated a web application that uses machine learning to recognise handwritten numbers. Flask, HTML, CSS, JavaScript, and a few other technologies were used to create this project. The model predicts the handwritten digit using a CNN network. During testing, the model achieved a 99.61% recognition rate. The proposed project is scalable and can easily handle a huge number of users. Since it is a web application, it is compatible with any device that can run a browser. This project is extremely useful in real-world scenarios such as recognizing number plates of vehicles, processing bank cheque amounts, numeric entries in forms filled up by hand (tax forms) and so on. There is so much room for improvement, which can be implemented in subsequent versions.

CHAPTER 12

FUTURE SCOPE

This project is far from complete and there is a lot of room for improvement.

Some of the improvements that can be made to this project are as follows:

- Add support to detect from digits multiple images and save the results
- Add support to detect multiple digits
- Improve model to detect digits from complex images
- Add support to different languages to help users from all over the world

This project has endless potential and can always be enhanced to become better. Implementing this concept in the real world will benefit several industries and reduce the workload on many workers, enhancing overall work efficiency.

APPENDIX

SOURCE CODE

MODEL CREATION

```
# Load the necessary packages
import numpy as np
import pandas as pd
import matplotlib.pyplot as plt
from keras.utils import np_utils
from tensorflow.keras.datasets import mnist
from tensorflow.keras.models import Sequential
from tensorflow.keras.layers import Conv2D, Dense, Flatten
from tensorflow.keras.optimizers import Adam
from tensorflow.keras.models import load_model
from PIL import Image, ImageOps

# Load the data
(X_train, y_train), (X_test, y_test) = mnist.load_data()

# Data pre-processing
X_train = X_train.reshape(60000, 28, 28, 1).astype('float32')
X_test = X_test.reshape(10000, 28, 28, 1).astype('float32')

number_of_classes = 10
Y_train = np_utils.to_categorical(y_train, number_of_classes)
Y_test = np_utils.to_categorical(y_test, number_of_classes)
```

```
# Create the model
model = Sequential()
model.add(Conv2D(64, (3, 3), input_shape=(28, 28, 1), activation="relu"))
model.add(Conv2D(32, (3, 3), activation="relu"))
model.add(Flatten())
model.add(Dense(number_of_classes, activation="softmax"))

model.compile(loss='categorical_crossentropy', optimizer="Adam", metrics=["accuracy"])

# Train the model
model.fit(X_train, Y_train, batch_size=32, epochs=5, validation_data=(X_test, Y_test))

# Evaluate the model
metrics = model.evaluate(X_test, Y_test, verbose=0)
print("Metrics (Test Loss & Test Accuracy): ")
print(metrics)

# Save the model
model.save("model.h5")
```

```

# Test the saved model
model=load_model("model.h5")

img = Image.open("sample.png").convert("L")
img = img.resize((28, 28))
img2arr = np.array(img)
img2arr = img2arr.reshape(1, 28, 28, 1)
results = model.predict(img2arr)
results = np.argmax(results,axis = 1)
results = pd.Series(results,name="Label")
print(results)

```

FLASK APP

```

from flask import Flask,render_template,request
from recognizer import recognize

app=Flask(__name__)

@app.route('/')
def main():
    return render_template("home.html")

@app.route('/predict',methods=['POST'])
def predict():
    if request.method=='POST':
        image = request.files.get('photo', '')
        best, others, img_name = recognize(image)
        return render_template("predict.html", best=best, others=others, img_name=img_name)

if __name__=="__main__":
    app.run()

```

RECOGNIZER

```

# Import necessary packages
import os
import random
import string
from pathlib import Path
import numpy as np
from tensorflow.keras.models import load_model
from PIL import Image, ImageOps

```



```

def random_name_generator(n: int) -> str:
    """
    Generates a random file name.

    Args:
        n (int): Length the of the file name.

    Returns:
        str: The file name.
    """
    return ''.join(random.choices(string.ascii_uppercase + string.digits, k=n))


def recognize(image: bytes) -> tuple:
    """
    Predicts the digit in the image.

    Args:
        image (bytes): The image data.

    Returns:
        tuple: The best prediction, other predictions and file name
    """

    model=load_model(Path("./model/model.h5"))

    img = Image.open(image).convert("L")

    # Generate a random name to save the image file.
    img_name = random_name_generator(10) + '.jpg'
    if not os.path.exists(f"./static/data/"):
        os.mkdir(os.path.join('./static/', 'data'))
    img.save(Path(f"./static/data/{img_name}"))

    # Convert the Image to Grayscale, Invert it and Resize to get better prediction.
    img = ImageOps.grayscale(img)
    img = ImageOps.invert(img)
    img = img.resize((28, 28))

    # Convert the image to an array and reshape the data to make prediction.
    img2arr = np.array(img)
    img2arr = img2arr / 255.0
    img2arr = img2arr.reshape(1, 28, 28, 1)

    results = model.predict(img2arr)
    best = np.argmax(results,axis = 1)[0]

    # Get all the predictions and it's respective accuracy.
    pred = list(map(lambda x: round(x*100, 2), results[0]))

    values = [0, 1, 2, 3, 4, 5, 6, 7, 8, 9]
    others = list(zip(values, pred))

    # Get the value with the highest accuracy
    best = others.pop(best)

    return best, others, img_name

```


HOME PAGE (HTML)

```
<html>
  <head>
    <meta name="viewport" content="width=device-width, initial-scale=1.0" />
    <title>Handwritten Digit Recognition</title>
    <link rel="icon" type="image/svg" sizes="32x32" href="{{url_for('static',filename='images/icon.svg')}}"/>
  />
  <link rel="stylesheet" href="{{url_for('static',filename='css/main.css')}}"/> />
  <script src="https://unpkg.com/feather-icons"></script>
  <script defer src="{{url_for('static',filename='js/script.js')}}"></script>
</head>
<body>
  <div class="container">
    <div class="heading">
      <h1 class="heading__main">Handwritten Digit Recognizer</h1>
      <h2 class="heading__sub">Easily analyze and detect handwritten digits</h2>
    </div>
    <div class="upload-container">
      <div class="form-wrapper">
        <form class="upload" action="/predict" method="post" enctype="multipart/form-data">
          <label id="Label" for="upload-image"><i data-feather="file-plus"></i>Select File</label>
          <input type="file" name="photo" id="upload-image" hidden />
          <button type="submit" id="up_btn"></button>
        </form>
        
      </div>
    </div>
  </div>
</body>
</html>
```

HOME PAGE (CSS)

```
@import url("https://fonts.googleapis.com/css2?family=Overpass:wght@200;300;400;500;600;700;900&display=swap");

* {
  padding: 0;
  margin: 0;
}

body {
  color: black;
  font-family: "Overpass", sans-serif;
}
```



```

.container {
  width: 100%;
  height: 100%;
  display: flex;
  flex-direction: column;
  justify-content: center;
  align-items: center;
  background-color: white;
}

.heading {
  margin-top: -2rem;
  padding-bottom: 2rem;
  width: fit-content;
  text-align: center;
}

.heading .heading__main {
  font-size: 3rem;
  font-weight: 550;
}

.heading .heading__sub {
  font-size: 1rem;
  color: rgb(90, 88, 88);
}

.upload-container {
  box-shadow: 0 0 20px rgb(172, 170, 170);
  width: 40rem;
  height: 25rem;
  padding: 1.5rem;
}

.form-wrapper {
  background-color: rgba(190, 190, 190, 0.5);
  width: 100%;
  height: 100%;
  display: flex;
  border: 1px dashed black;
  justify-content: center;
  align-items: center;
}

.form-wrapper #Loading {
  display: none;
  position: absolute;
}

```



```

.form-wrapper .upload {
  display: flex;
  justify-content: center;
  align-items: center;
  width: 8rem;
  height: -webkit-fit-content;
  height: -moz-fit-content;
  height: fit-content;
  border-radius: 6px;
  color: white;
  background-color: rgb(114, 96, 182);
  box-shadow: 0 5px 10px rgb(146, 135, 247);
}

.form-wrapper .upload #up_btn {
  display: none;
}

.form-wrapper .upload label {
  font-size: 1rem;
  font-weight: 600;
  color: white;
  height: 100%;
  width: 100%;
  padding: 10px;
  display: block;
}

.form-wrapper .upload svg {
  height: 15px;
  width: auto;
  padding-right: 8px;
  margin-bottom: -2px;
}

@media screen and (max-width: 700px) {
  .upload-container {
    height: 20rem;
    width: 18rem;
    margin-top: 3.5rem;
    margin-bottom: -8rem;
  }

  .heading .heading__main {
    margin-top: -6rem;
    font-size: 2rem;
    padding-bottom: 1rem;
  }
}

```

HOME PAGE (JS)

```
feather.replace(); // Load feather icons

form = document.querySelector('.upload')
loading = document.querySelector("#Loading")
select = document.querySelector("#upload-image");

select.addEventListener("change", (e) => {
  e.preventDefault();

  form.submit()
  form.style.visibility = "hidden";
  loading.style.display = 'flex';
});
```

PREDICT PAGE (HTML)

```
<html>
  <head>
    <title>Prediction | Handwritten Digit Recognition</title>
    <link rel="stylesheet" href="{{url_for('static',filename='css/predict.css')}}" />
    <link rel="icon" type="image/svg" sizes="32x32" href="{{url_for('static',filename='images/icon.svg')}}" />
    <meta name="viewport" content="width=device-width, initial-scale=1.0" />
  </head>
  <body>
    <div class="container">
      <h1>Prediction</h1>
      <div class="result-wrapper">
        <div class="input-image-container">
          
        </div>
        <div class="result-container">
          <div class="value">{{best.0}}</div>
          <div class="accuracy">{{best.1}}%</div>
        </div>
      </div>
      <h1>Other Predictions</h1>
      <div class="other_predictions">
        {% for x in others %}
          <div class="value">
            <h2>{{x.0}}</h2>
            <div class="accuracy">{{x.1}}%</div>
          </div>
        {% endfor %}
      </div>
    </div>
  </body>
</html>
```

```

@import url("https://fonts.googleapis.com/css2?family=Overpass:wght@200;300;400;500;600;700;900&display=swap");

body {
  color: black;
  font-family: "Overpass", sans-serif;
}

h1 {
  padding-top: 2rem;
}

.container {
  display: flex;
  justify-content: center;
  align-items: center;
  flex-direction: column;
}

.result-wrapper {
  width: -webkit-fit-content;
  width: -moz-fit-content;
  width: fit-content;
  height: -webkit-fit-content;
  height: -moz-fit-content;
  height: fit-content;
  box-shadow: 0 0 10px rgb(126, 125, 125);
  padding: 1.5rem;
  display: flex;
  justify-content: center;
  align-items: center;
  -moz-column-gap: 1rem;
  column-gap: 1rem;
}

.result-wrapper .input-image-container,
.result-wrapper .result-container {
  width: 15rem;
  height: 15rem;
  border: 1px dashed black;
  justify-content: center;
  display: flex;
  align-items: center;
  flex-direction: column;
  background-color: rgb(209, 206, 206);
}

```

```
def random_name_generator(n: int) -> str:
    """
    Generates a random file name.

    Args:
        n (int): Length the of the file name.

    Returns:
        str: The file name.
    """
    return ''.join(random.choices(string.ascii_uppercase + string.digits, k=n))
```

```
def recognize(image: bytes) -> tuple:
    """
    Predicts the digit in the image.

    Args:
        image (bytes): The image data.

    Returns:
        tuple: The best prediction, other predictions and file name
    """

    model=load_model(Path("./model/model.h5"))

    img = Image.open(image).convert("L")

    # Generate a random name to save the image file.
    img_name = random_name_generator(10) + '.jpg'
    if not os.path.exists(f"./static/data/"):
        os.mkdir(os.path.join('./static/', 'data'))
    img.save(Path(f"./static/data/{img_name}"))

    # Convert the Image to Grayscale, Invert it and Resize to get better prediction.
    img = ImageOps.grayscale(img)
    img = ImageOps.invert(img)
    img = img.resize((28, 28))

    # Convert the image to an array and reshape the data to make prediction.
    img2arr = np.array(img)
    img2arr = img2arr / 255.0
    img2arr = img2arr.reshape(1, 28, 28, 1)

    results = model.predict(img2arr)
    best = np.argmax(results,axis = 1)[0]

    # Get all the predictions and it's respective accuracy.
    pred = List(map(Lambda x: round(x*100, 2), results[0]))

    values = [0, 1, 2, 3, 4, 5, 6, 7, 8, 9]
    others = List(zip(values, pred))

    # Get the value with the highest accuracy
    best = others.pop(best)

    return best, others, img_name
```


HOME PAGE (HTML)

```
<html>
  <head>
    <meta name="viewport" content="width=device-width, initial-scale=1.0" />
    <title>Handwritten Digit Recognition</title>
    <link rel="icon" type="image/svg" sizes="32x32" href="{{url_for('static',filename='images/icon.svg')}}"
  />
    <link rel="stylesheet" href="{{url_for('static',filename='css/main.css')}}" />
    <script src="https://unpkg.com/feather-icons"></script>
    <script defer src="{{url_for('static',filename='js/script.js')}}"></script>
  </head>
  <body>
    <div class="container">
      <div class="heading">
        <h1 class="heading__main">Handwritten Digit Recognizer</h1>
        <h2 class="heading__sub">Easily analyze and detect handwritten digits</h2>
      </div>
      <div class="upload-container">
        <div class="form-wrapper">
          <form class="upload" action="/predict" method="post" enctype="multipart/form-data">
            <label id="label" for="upload-image"><i data-feather="file-plus"></i>Select File</label>
            <input type="file" name="photo" id="upload-image" hidden />
            <button type="submit" id="up_btn"></button>
          </form>
          
        </div>
      </div>
    </div>
  </body>
</html>
```

HOME PAGE (CSS)

```
@import url("https://fonts.googleapis.com/css2?family=Overpass:wght@200;300;400;500;600;700;900&display=swap");

* {
  padding: 0;
  margin: 0;
}

body {
  color: black;
  font-family: "Overpass", sans-serif;
}
```

```

.container {
  width: 100%;
  height: 100%;
  display: flex;
  flex-direction: column;
  justify-content: center;
  align-items: center;
  background-color: white;
}

.heading {
  margin-top: -2rem;
  padding-bottom: 2rem;
  width: fit-content;
  text-align: center;
}

.heading .heading__main {
  font-size: 3rem;
  font-weight: 550;
}

.heading .heading__sub {
  font-size: 1rem;
  color: rgb(90, 88, 88);
}

.upload-container {
  box-shadow: 0 0 20px rgb(172, 170, 170);
  width: 40rem;
  height: 25rem;
  padding: 1.5rem;
}

.form-wrapper {
  background-color: rgba(190, 190, 190, 0.5);
  width: 100%;
  height: 100%;
  display: flex;
  border: 1px dashed black;
  justify-content: center;
  align-items: center;
}

.form-wrapper #Loading {
  display: none;
  position: absolute;
}

```

```

.form-wrapper .upload {
  display: flex;
  justify-content: center;
  align-items: center;
  width: 8rem;
  height: -webkit-fit-content;
  height: -moz-fit-content;
  height: fit-content;
  border-radius: 6px;
  color: white;
  background-color: rgb(114, 96, 182);
  box-shadow: 0 5px 10px rgb(146, 135, 247);
}

.form-wrapper .upload #up_btn {
  display: none;
}

.form-wrapper .upload label {
  font-size: 1rem;
  font-weight: 600;
  color: white;
  height: 100%;
  width: 100%;
  padding: 10px;
  display: block;
}

.form-wrapper .upload svg {
  height: 15px;
  width: auto;
  padding-right: 8px;
  margin-bottom: -2px;
}


@media screen and (max-width: 700px) {
  .upload-container {
    height: 20rem;
    width: 18rem;
    margin-top: 3.5rem;
    margin-bottom: -8rem;
  }

  .heading .heading__main {
    margin-top: -6rem;
    font-size: 2rem;
    padding-bottom: 1rem;
  }
}


```

OUTPUT


HOME PAGE

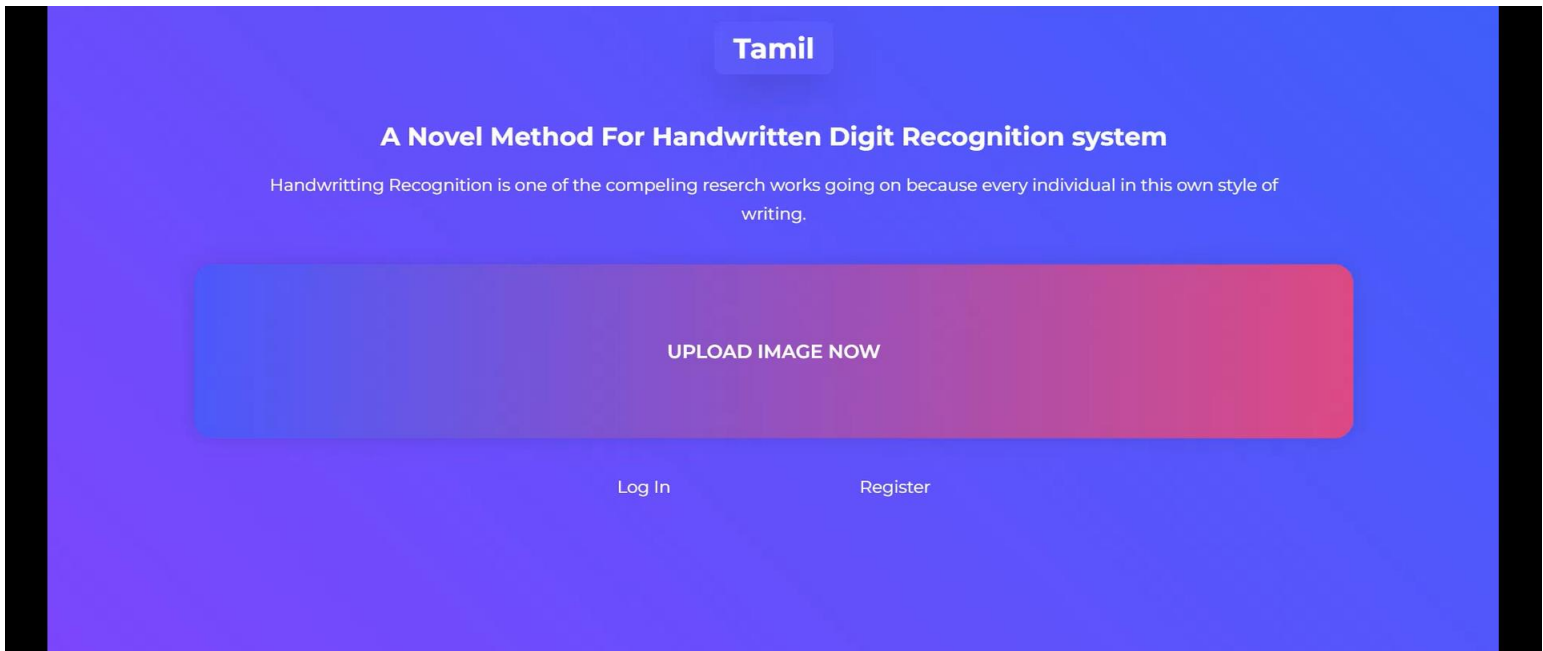

LOG IN PAGE

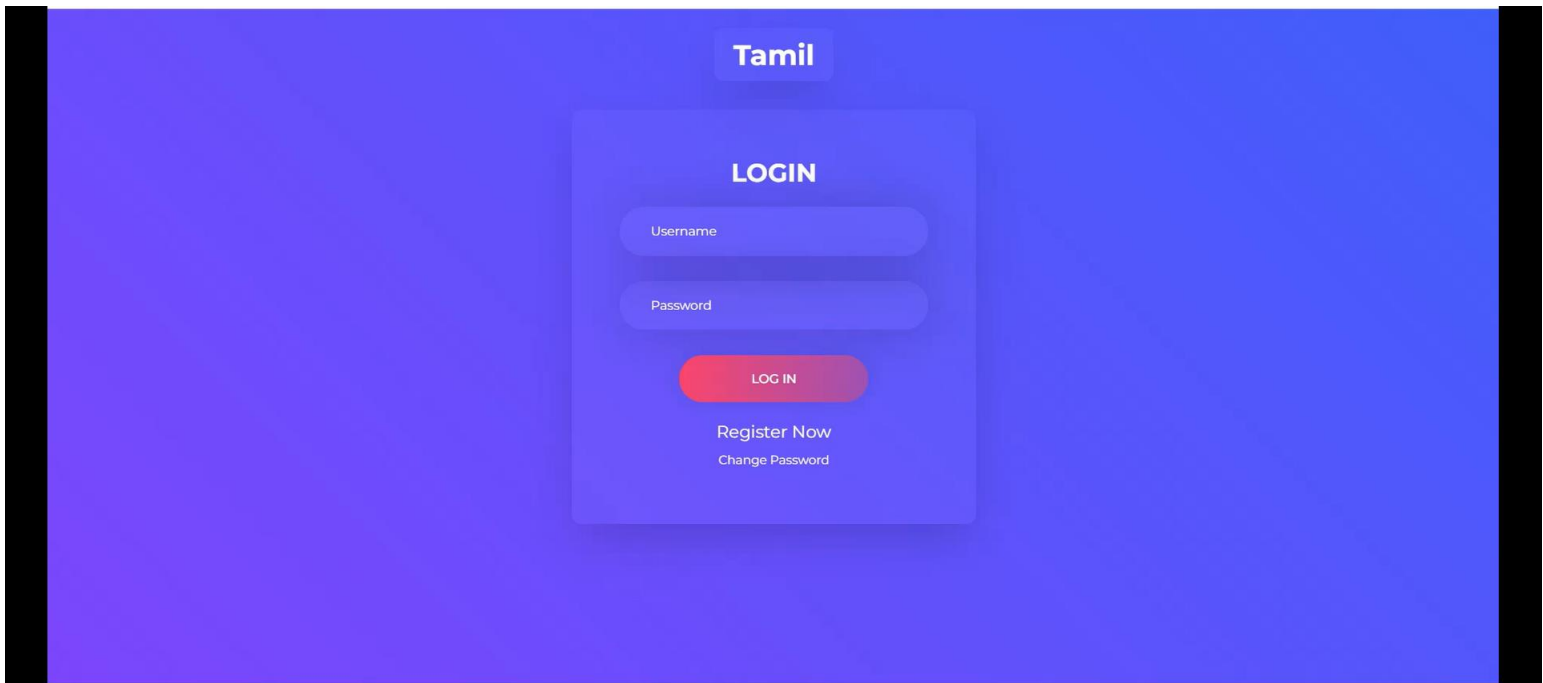

SIGN UP PAGE

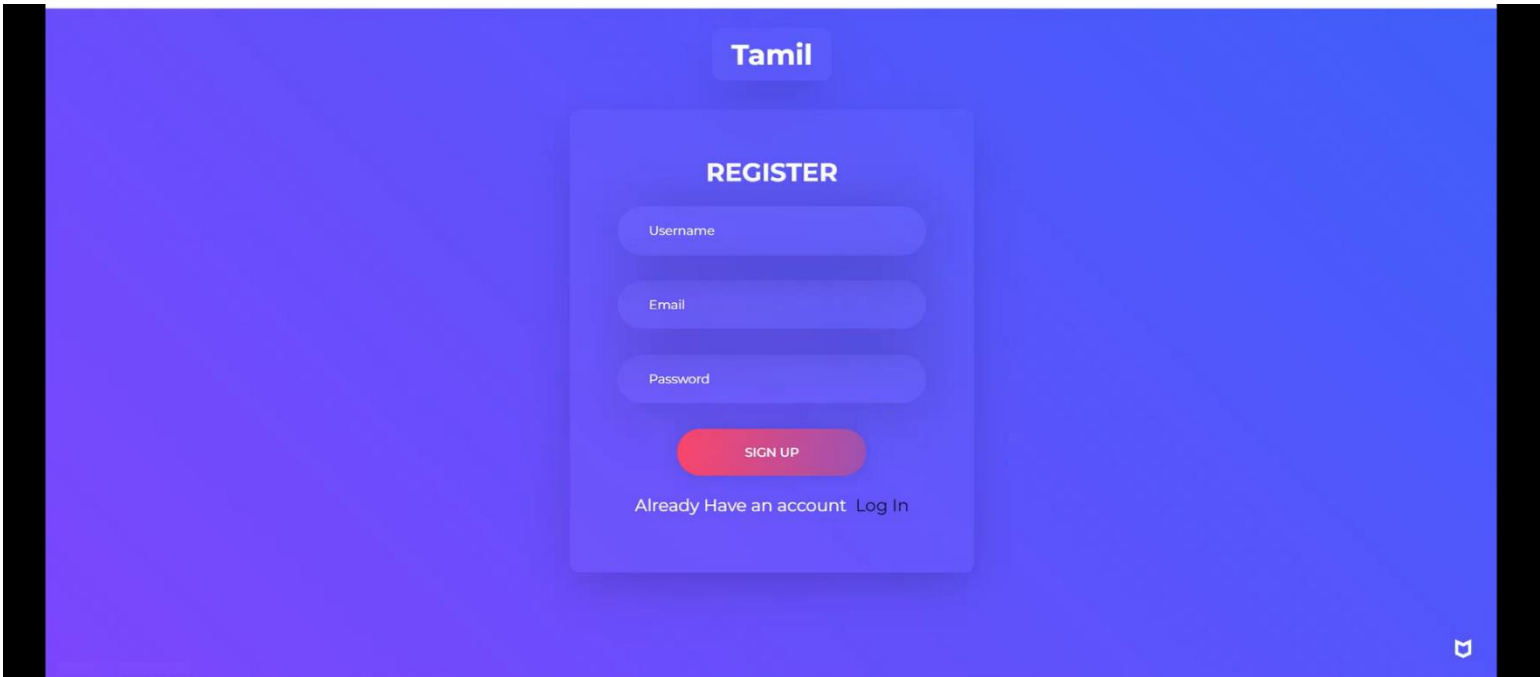



GITHUB

<https://github.com/IBM-EPBL/IBM-Project-50177-1660897684>



PROJECT DEMO

https://drive.google.com/file/d/1ANvmnG98yYGwPGUP_JTCUhE8cXFHE64G/view?usp=drive_sdk