Assignment - 4

Kubernetes / Docker

Assignment Date	11 November 2022
Student Name	DHANAVEL R
Student Register Number	822719104013
Maximum Marks	2 Marks

Question-1:

Pull an Image from docker hub and run it in docker playground.

Solution:

docker pull uifd/ui-for-docker - command is used to pull an image form docker hub using command prompt.

```
C:\Users\Dhana Pragathish>docker pull nginx
Using default tag: latest
latest: Pulling from library/nginx
a603fa5e3b41: Pull complete
c39e1cda007e: Pull complete
90cfefba34d7: Pull complete
a38226fb7aba: Pull complete
62583498bae6: Pull complete
9802a2cfdb8d: Pull complete
Digest: sha256:e209ac2f37c70c1e0e9873a5f7231e91dcd83fdf1178d8ed36c2ec09974210ba
Status: Downloaded newer image for nginx:latest
docker.io/library/nginx:latest

C:\Users\Dhana Pragathish>docker images
REPOSITORY                                TAG       IMAGE ID       CREATED         SIZE
nginx                                     latest    88736fe82739   6 days ago      142MB
dailycodebuffer/docker/getting-started    latest    cb90f98fd791   7 months ago    28.8MB
docker/getting-started                    latest    cb90f98fd791   7 months ago    28.8MB

C:\Users\Dhana Pragathish>
```

Image has been pulled for docker hub

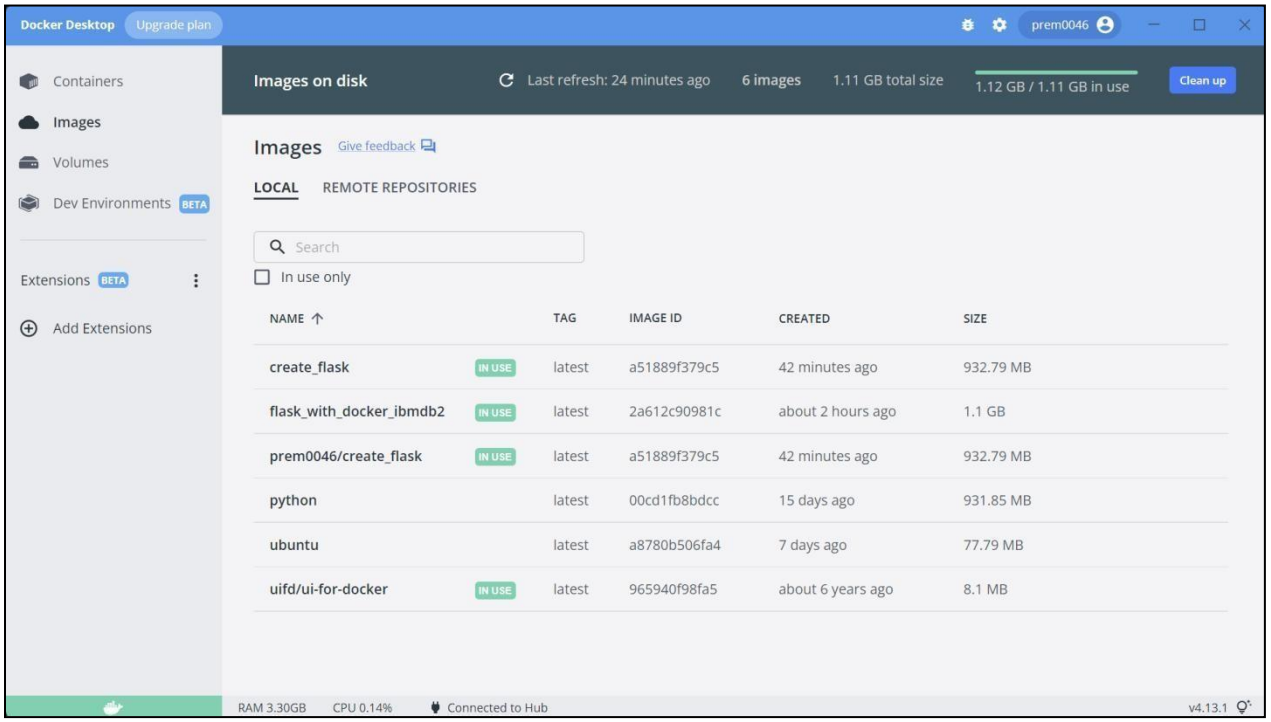

docker run -d -p 9000:9000 --privileged -v /var/run/docker.sock:/var/run/docker.sock uifd/ui-for-docker - command is used to run an image form docker hub using command prompt.

Docker playground:

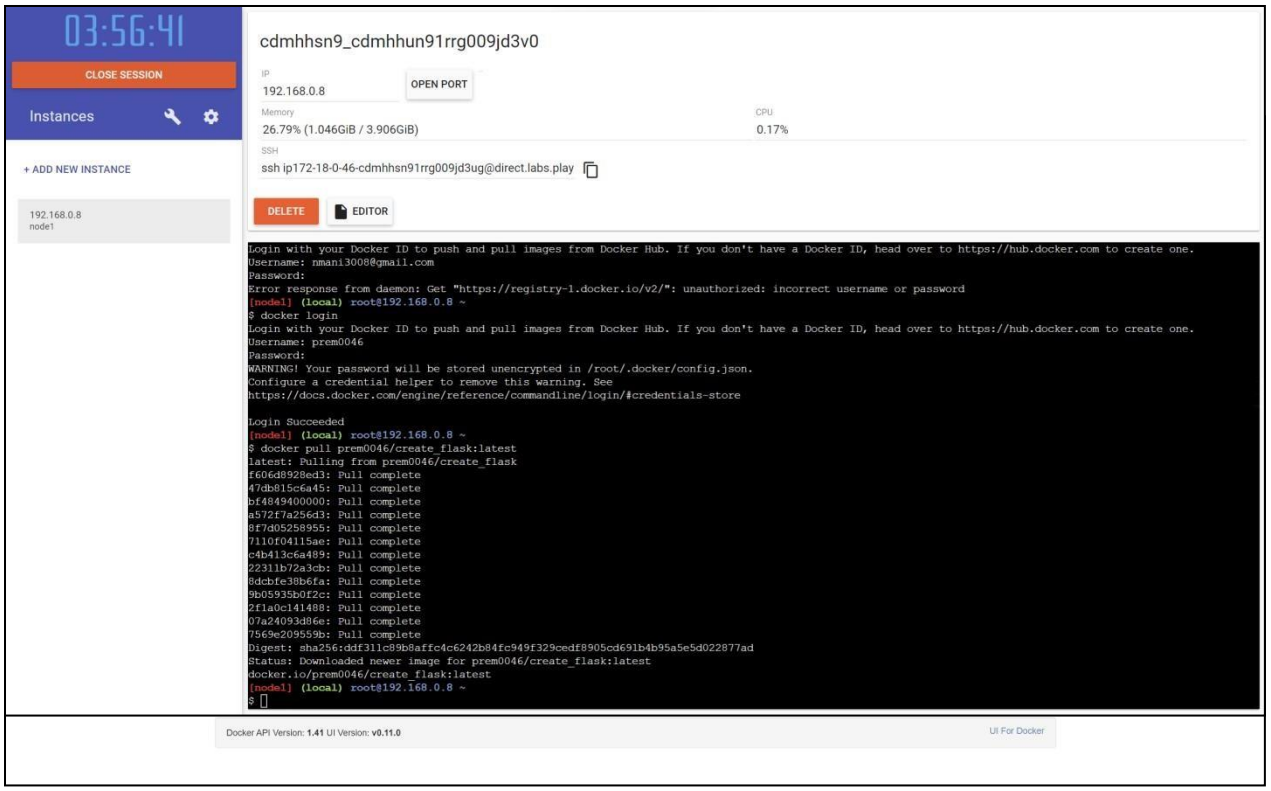

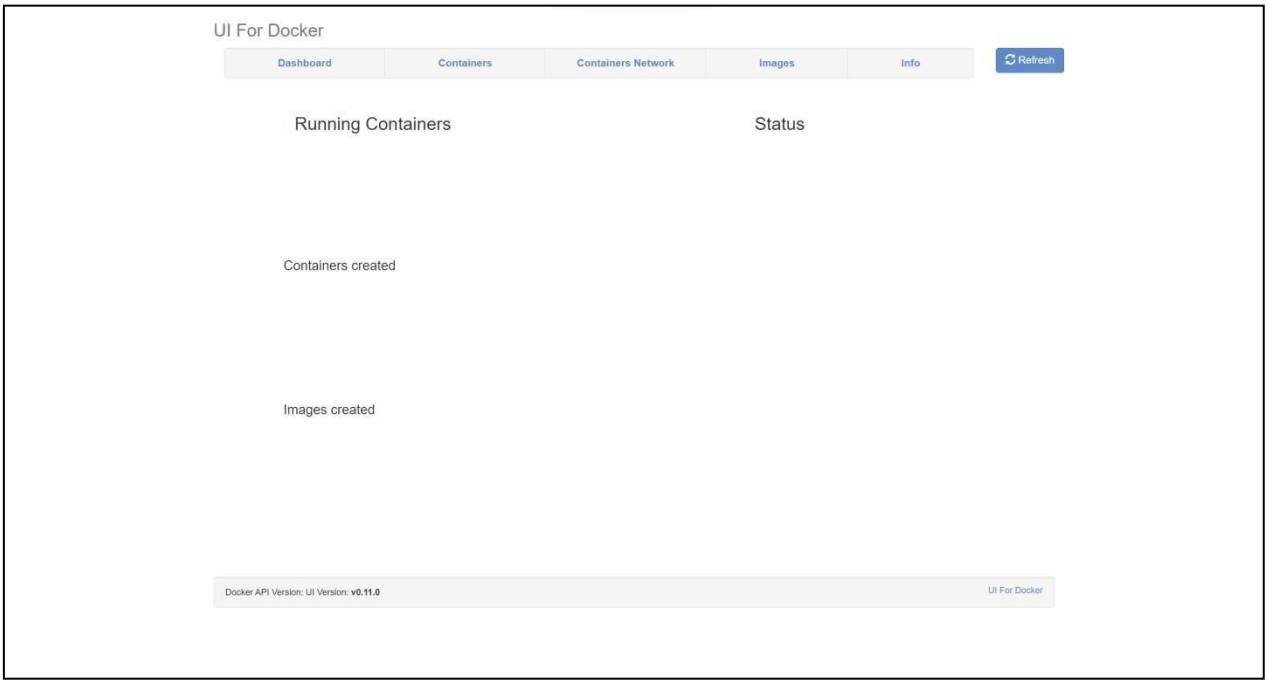

Question-2:

Create a docker file for the job portal application or helloworld app and deploy it in Docker desktop application.

Building docker image: hello_world

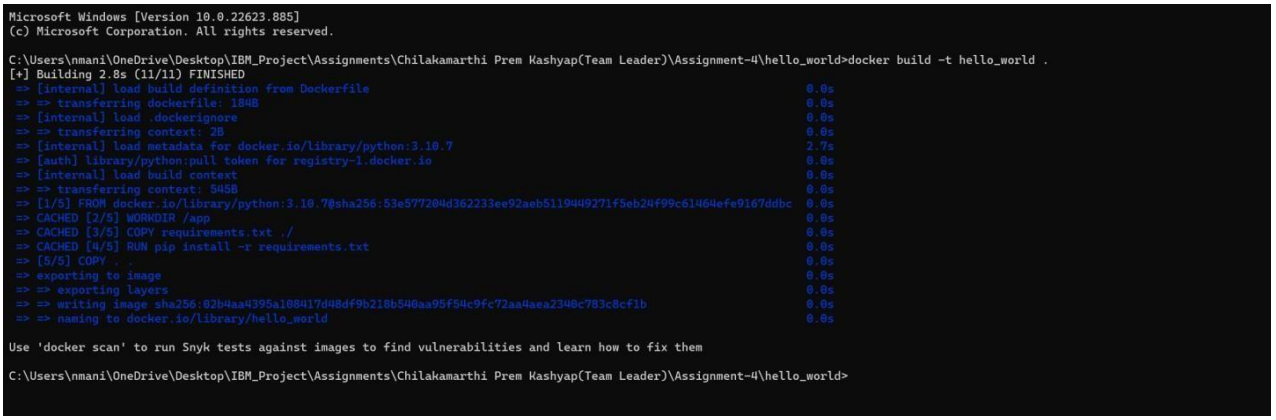

Pushing the image into repository in docker hub:

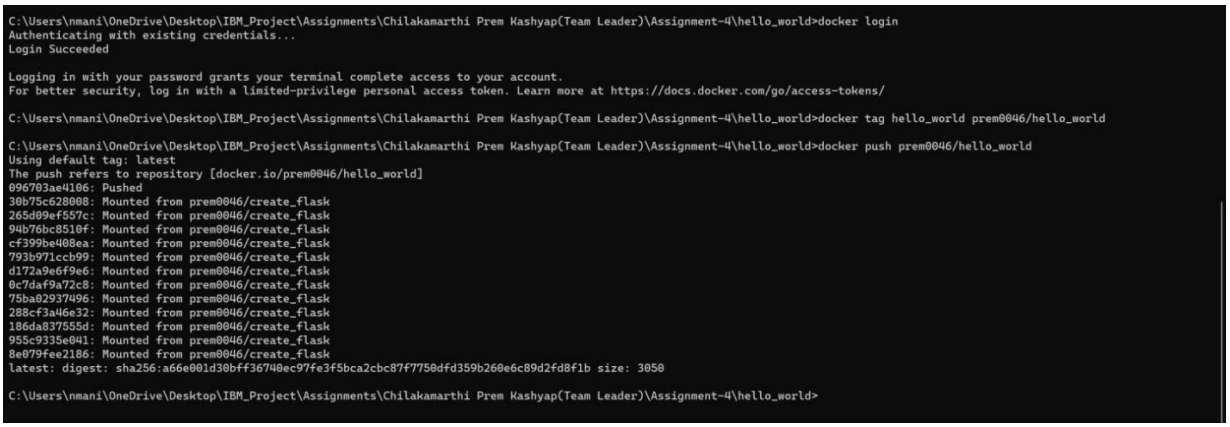

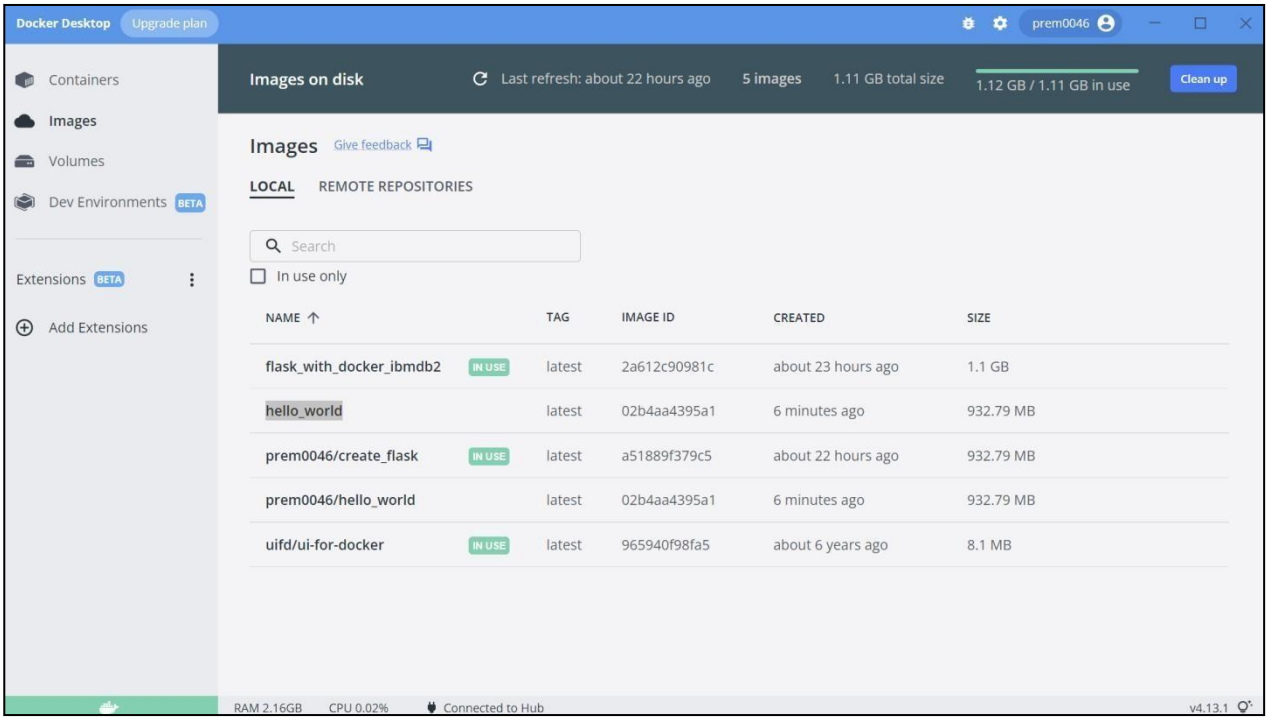

Testing it using docker playground:

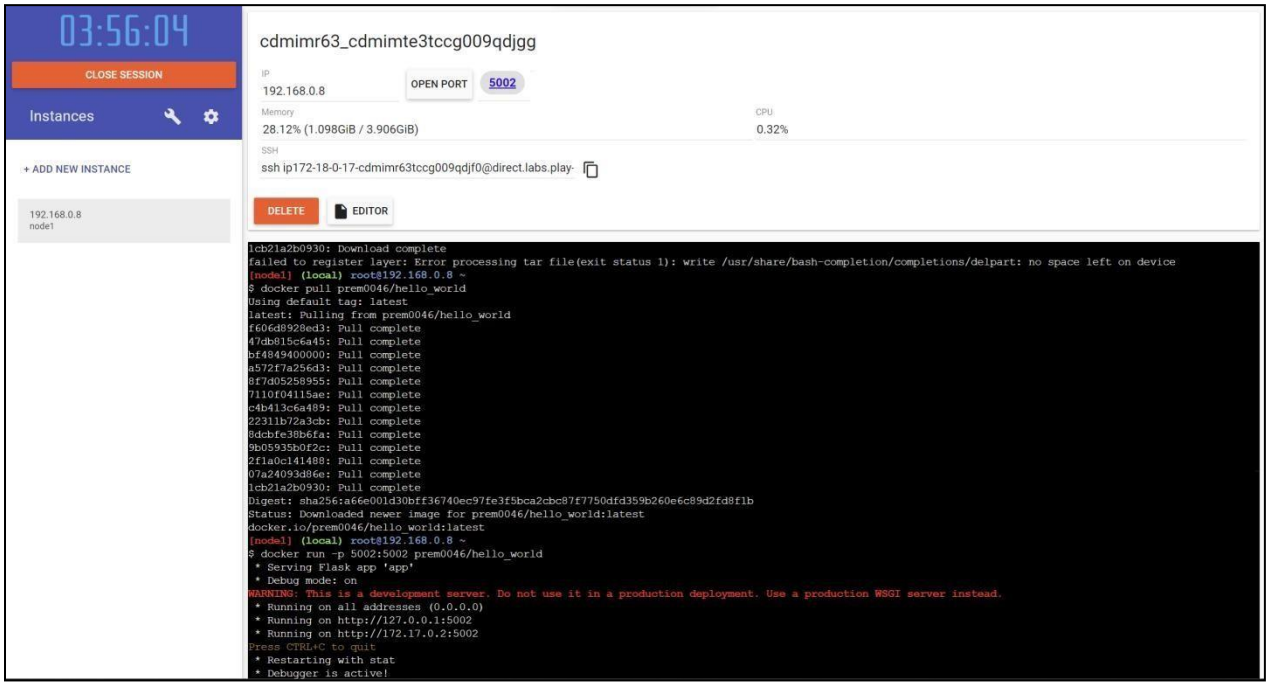

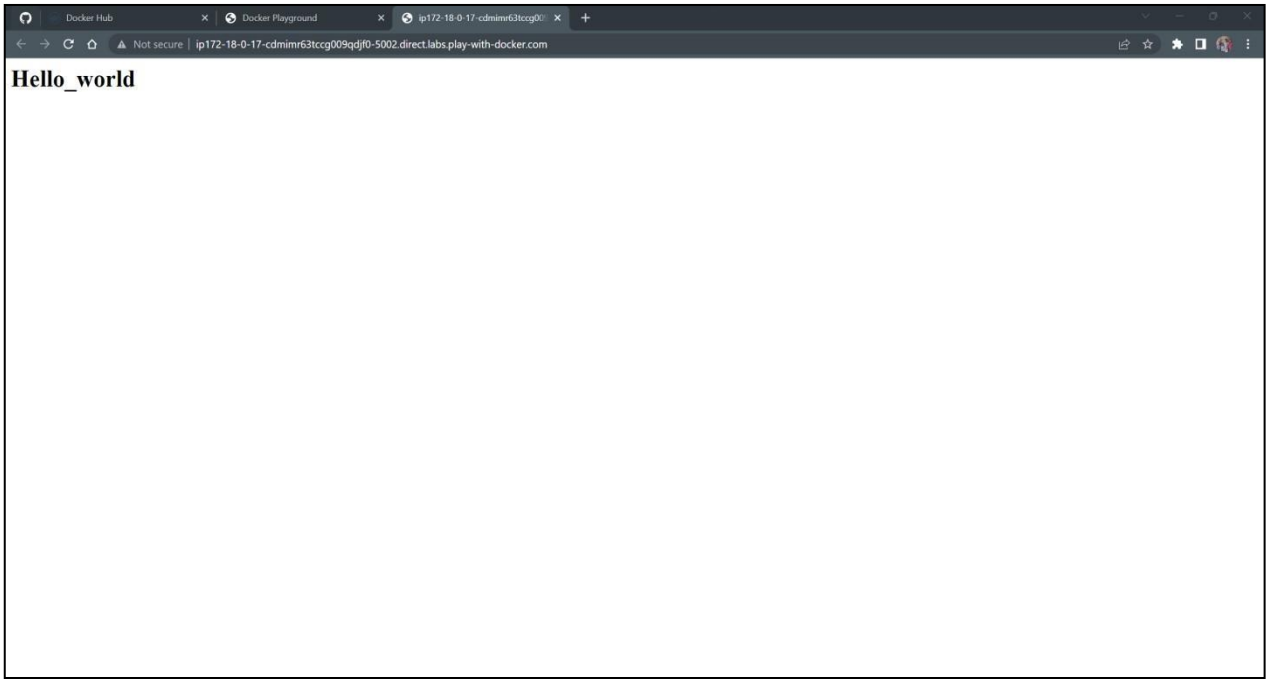

Question- 3:

Create a IBM container registry and deploy hello world app or job portal app.

Hello_world Image link: icr.io/create_flask/hello_world

```
C:\Users\nmani>ibmcloud login
API endpoint: https://cloud.ibm.com
Region: jp-tok

Email> sec19cs095@sairamtap.edu.in

Password>
Authenticating...
OK

Targeted account Prem Kashyap Chilakamarthi's Account (c50714902c8f4427b45032b104b525a1)


API endpoint:      https://cloud.ibm.com
Region:            jp-tok
User:              sec19cs095@sairamtap.edu.in
Account:           Prem Kashyap Chilakamarthi's Account (c50714902c8f4427b45032b104b525a1)
Resource group:    No resource group targeted, use 'ibmcloud target -g RESOURCE_GROUP'
CF API endpoint:
Org:
Space:

C:\Users\nmani>ibmcloud plugin install container-service
Looking up 'container-service' from repository 'IBM Cloud'...
Plug-in 'container-service[kubernetes-service/ks] 1.0.459' found in repository 'IBM Cloud'
Attempting to download the binary file...
 26.86 MiB / 26.86 MiB [================================================================================] 100.00% 1s
28168192 bytes downloaded
Installing binary...
OK
Plug-in 'container-service 1.0.459' was successfully installed into C:\Users\nmani\.bluemix\plugins\container-service. Use 'ibmcloud plugin show container-service' to show its det
ails.

C:\Users\nmani>ibmcloud plugin install container-registry
Looking up 'container-registry' from repository 'IBM Cloud'...
Plug-in 'container-registry[cr] 1.0.2' found in repository 'IBM Cloud'
Attempting to download the binary file...
 11.90 MiB / 11.90 MiB [================================================================================] 100.00% 0s
12476416 bytes downloaded
Installing binary...
OK
Plug-in 'container-registry 1.0.2' was successfully installed into C:\Users\nmani\.bluemix\plugins\container-registry. Use 'ibmcloud plugin show container-registry' to show its de
tails.
```

```
C:\Users\nmani>ibmcloud plugin install observe-service
Looking up 'observe-service' from repository 'IBM Cloud'...
Plug-in 'observe-service 1.0.82' found in repository 'IBM Cloud'
Attempting to download the binary file...
 13.38 MiB / 13.38 MiB [================================================================================] 100.00% 0s
14024704 bytes downloaded
Installing binary...
OK
Plug-in 'observe-service 1.0.82' was successfully installed into C:\Users\nmani\.bluemix\plugins\observe-service. Use 'ibmcloud plugin show observe-service' to show its details.

C:\Users\nmani>ibmcloud plugin list
Listing installed plug-ins...

Plugin Name                          Version   Status   Private endpoints supported
container-registry                   1.0.2             true
container-service[kubernetes-service/ks]   1.0.459           false
observe-service[ob]                  1.0.82            false
```

```
C:\Users\nmani>docker tag hello_world icr.io/create_flask/hello_world:latest

C:\Users\nmani>docker push icr.io/create_flask/hello_world:latest
The push refers to repository [icr.io/create_flask/hello_world]
096703ae4106: Pushed
30b75c628008: Pushed
265d09ef557c: Pushed
94b76bc8510f: Pushed
cf399be408ea: Pushed
793b971ccb99: Pushed
d172a9e6f9e6: Pushed
0c7daf9a72c8: Pushed
75ba02937496: Pushed
288cf3a46e32: Pushed
186da837555d: Pushed
955c9335e041: Pushed
8e079fee2186: Pushed
latest: digest: sha256:a66e001d30bff36740ec97fe3f5bca2cbc87f7750dfd359b260e6c89d2fd8f1b size: 3050

C:\Users\nmani>ibmcloud cr image-list
Listing images...

Repository                       Tag      Digest         Namespace
    Created        Size     Security status
icr.io/create_flask/hello_world   latest   a66e001d30bf   create_flask   19 hours ago   356 MB   -

OK
```

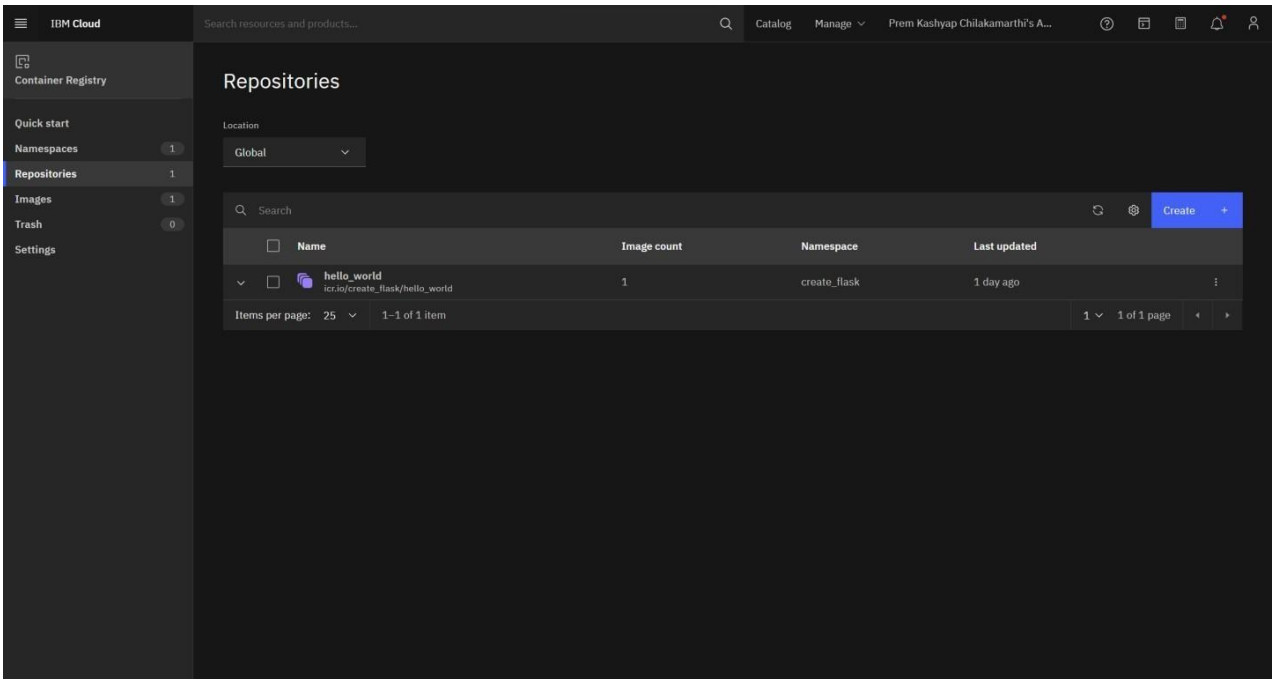


```
PS C:\Users\nmani> docker run -p 5002:5002 icr.io/create_flask/hello_world
 * Serving Flask app 'app'
 * Debug mode: on
WARNING: This is a development server. Do not use it in a production deployment. Use a production WSGI server instead.
 * Running on all addresses (0.0.0.0)
 * Running on http://127.0.0.1:5002
 * Running on http://172.17.0.2:5002
Press CTRL+C to quit
 * Restarting with stat
 * Debugger is active!
 * Debugger PIN: 166-878-257
172.17.0.1 - - [11/Nov/2022 12:09:17] "GET / HTTP/1.1" 200 -
```

Question -4:

Create a Kubernetes cluster in IBM cloud and deploy helloworld image or jobportal image and also expose the same app to run in node port.

Creating a Kubernetes cluster in IBM cloud

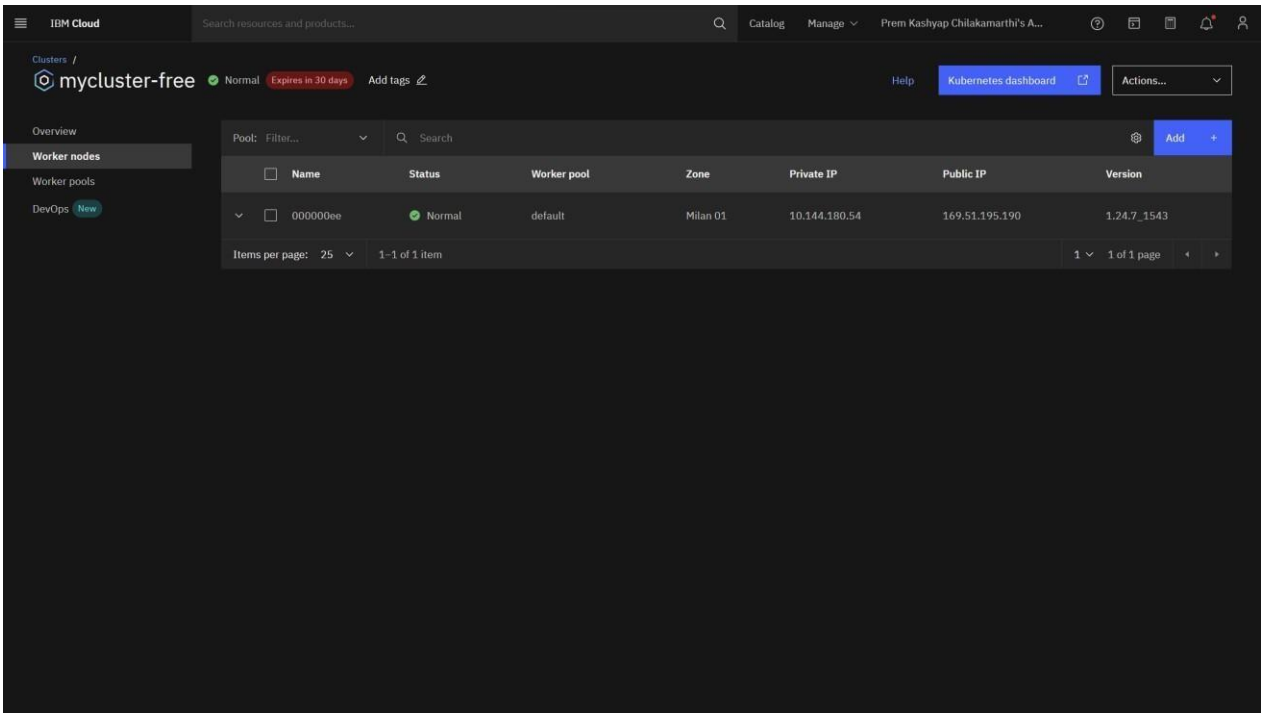


```
C:\Users\gani\Desktop>cd deploy
The system cannot find the path specified.

C:\Users\gani\Desktop>kubectl apply -f kubernetes/depoly.yaml
error: the path "kubernetes/depoly.yaml" does not exist

C:\Users\gani\Desktop>kubectl apply -f depoly.yaml
error: the path "depoly.yaml" does not exist

C:\Users\gani\Desktop>kubectl apply -f C:\Users\gani\Desktop\deploy.yaml
deployment.apps/flask-app created

C:\Users\gani\Desktop>
```

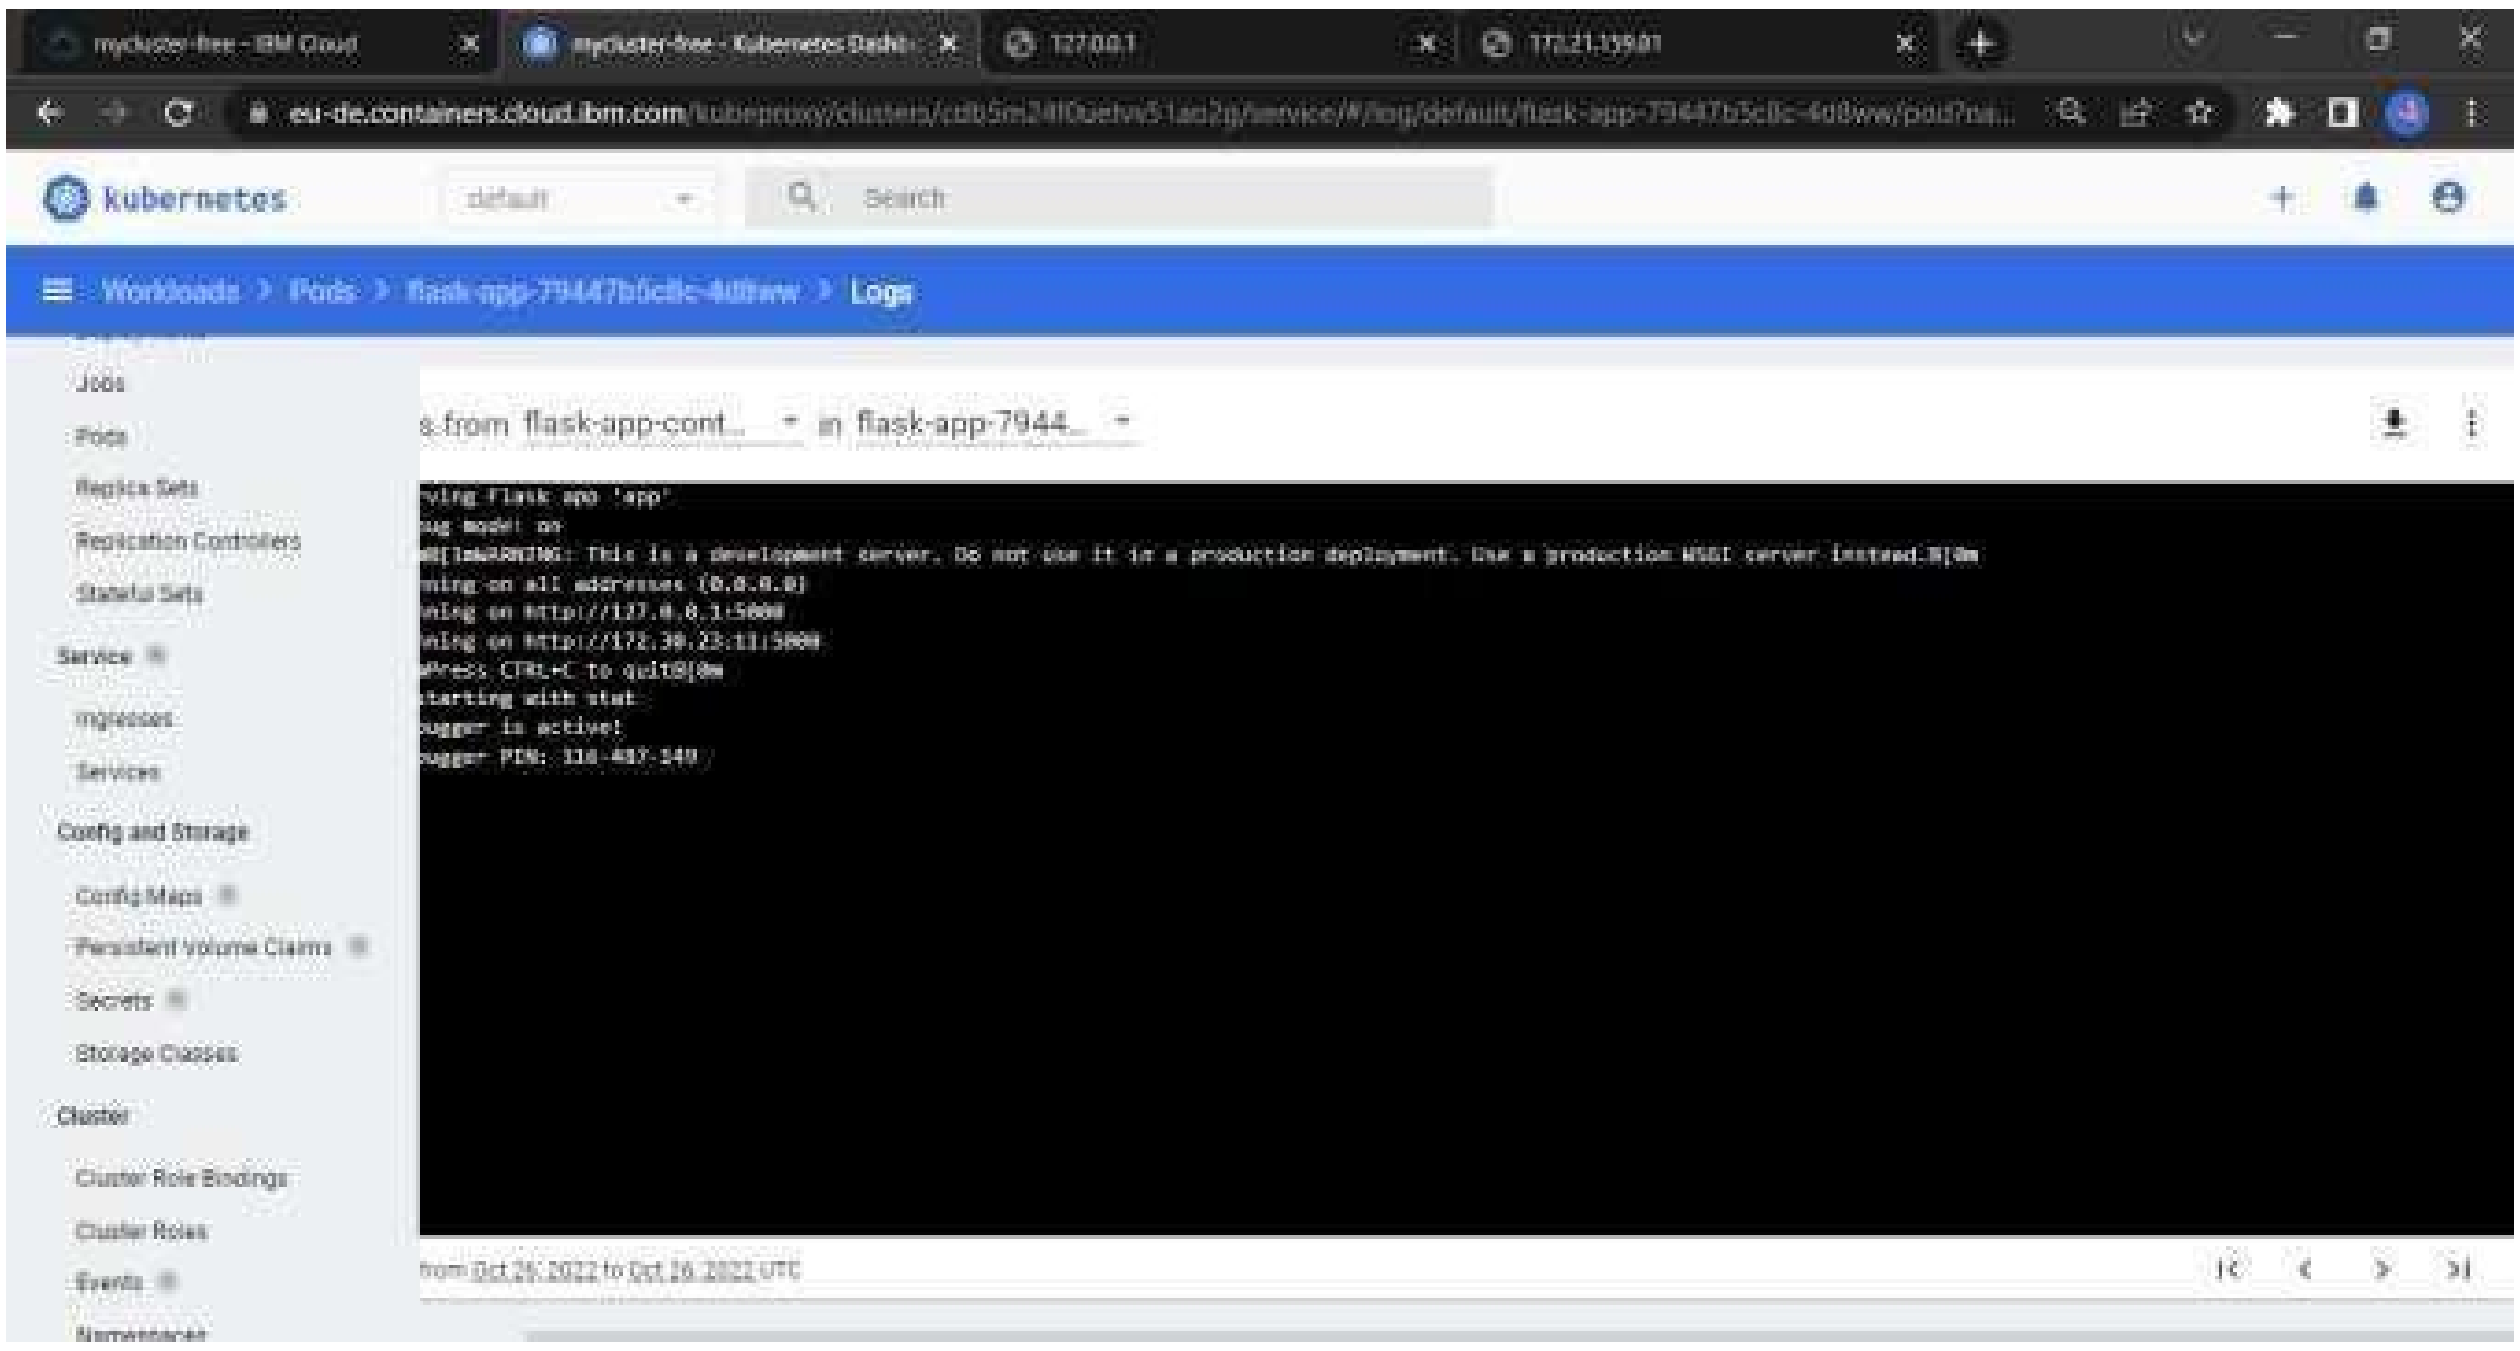

mycluster-free - IBM Cloud
mycluster-free - Kubernetes Dashb
127.0.0.1
172.21.159.81
kubernetes
default
Search
Workloads > Pods > flask-app-79447b5c8c-4d8ww > Logs
Jobs
Pods
Replica Sets
Replication Controllers
Stateful Sets
Service
Ingresses
Services
Config and Storage
Config Maps
Persistent Volume Claims
Secrets
Storage Classes
Cluster
Cluster Role Bindings
Cluster Roles
Events
s from flask-app-cont... in flask-app-7944...
rving Flask app 'app'
ug mode: on
WARNING: This is a development server. Do not use it in a production deployment. Use a production WSGI server instead.
ning on all addresses (0.0.0.0)
ning on http://127.0.0.1:5000
ning on http://172.30.23.11:5000
Press CTRL+C to quit
tarting with stat
bugger is active!
bugger PIN: 116-487-149

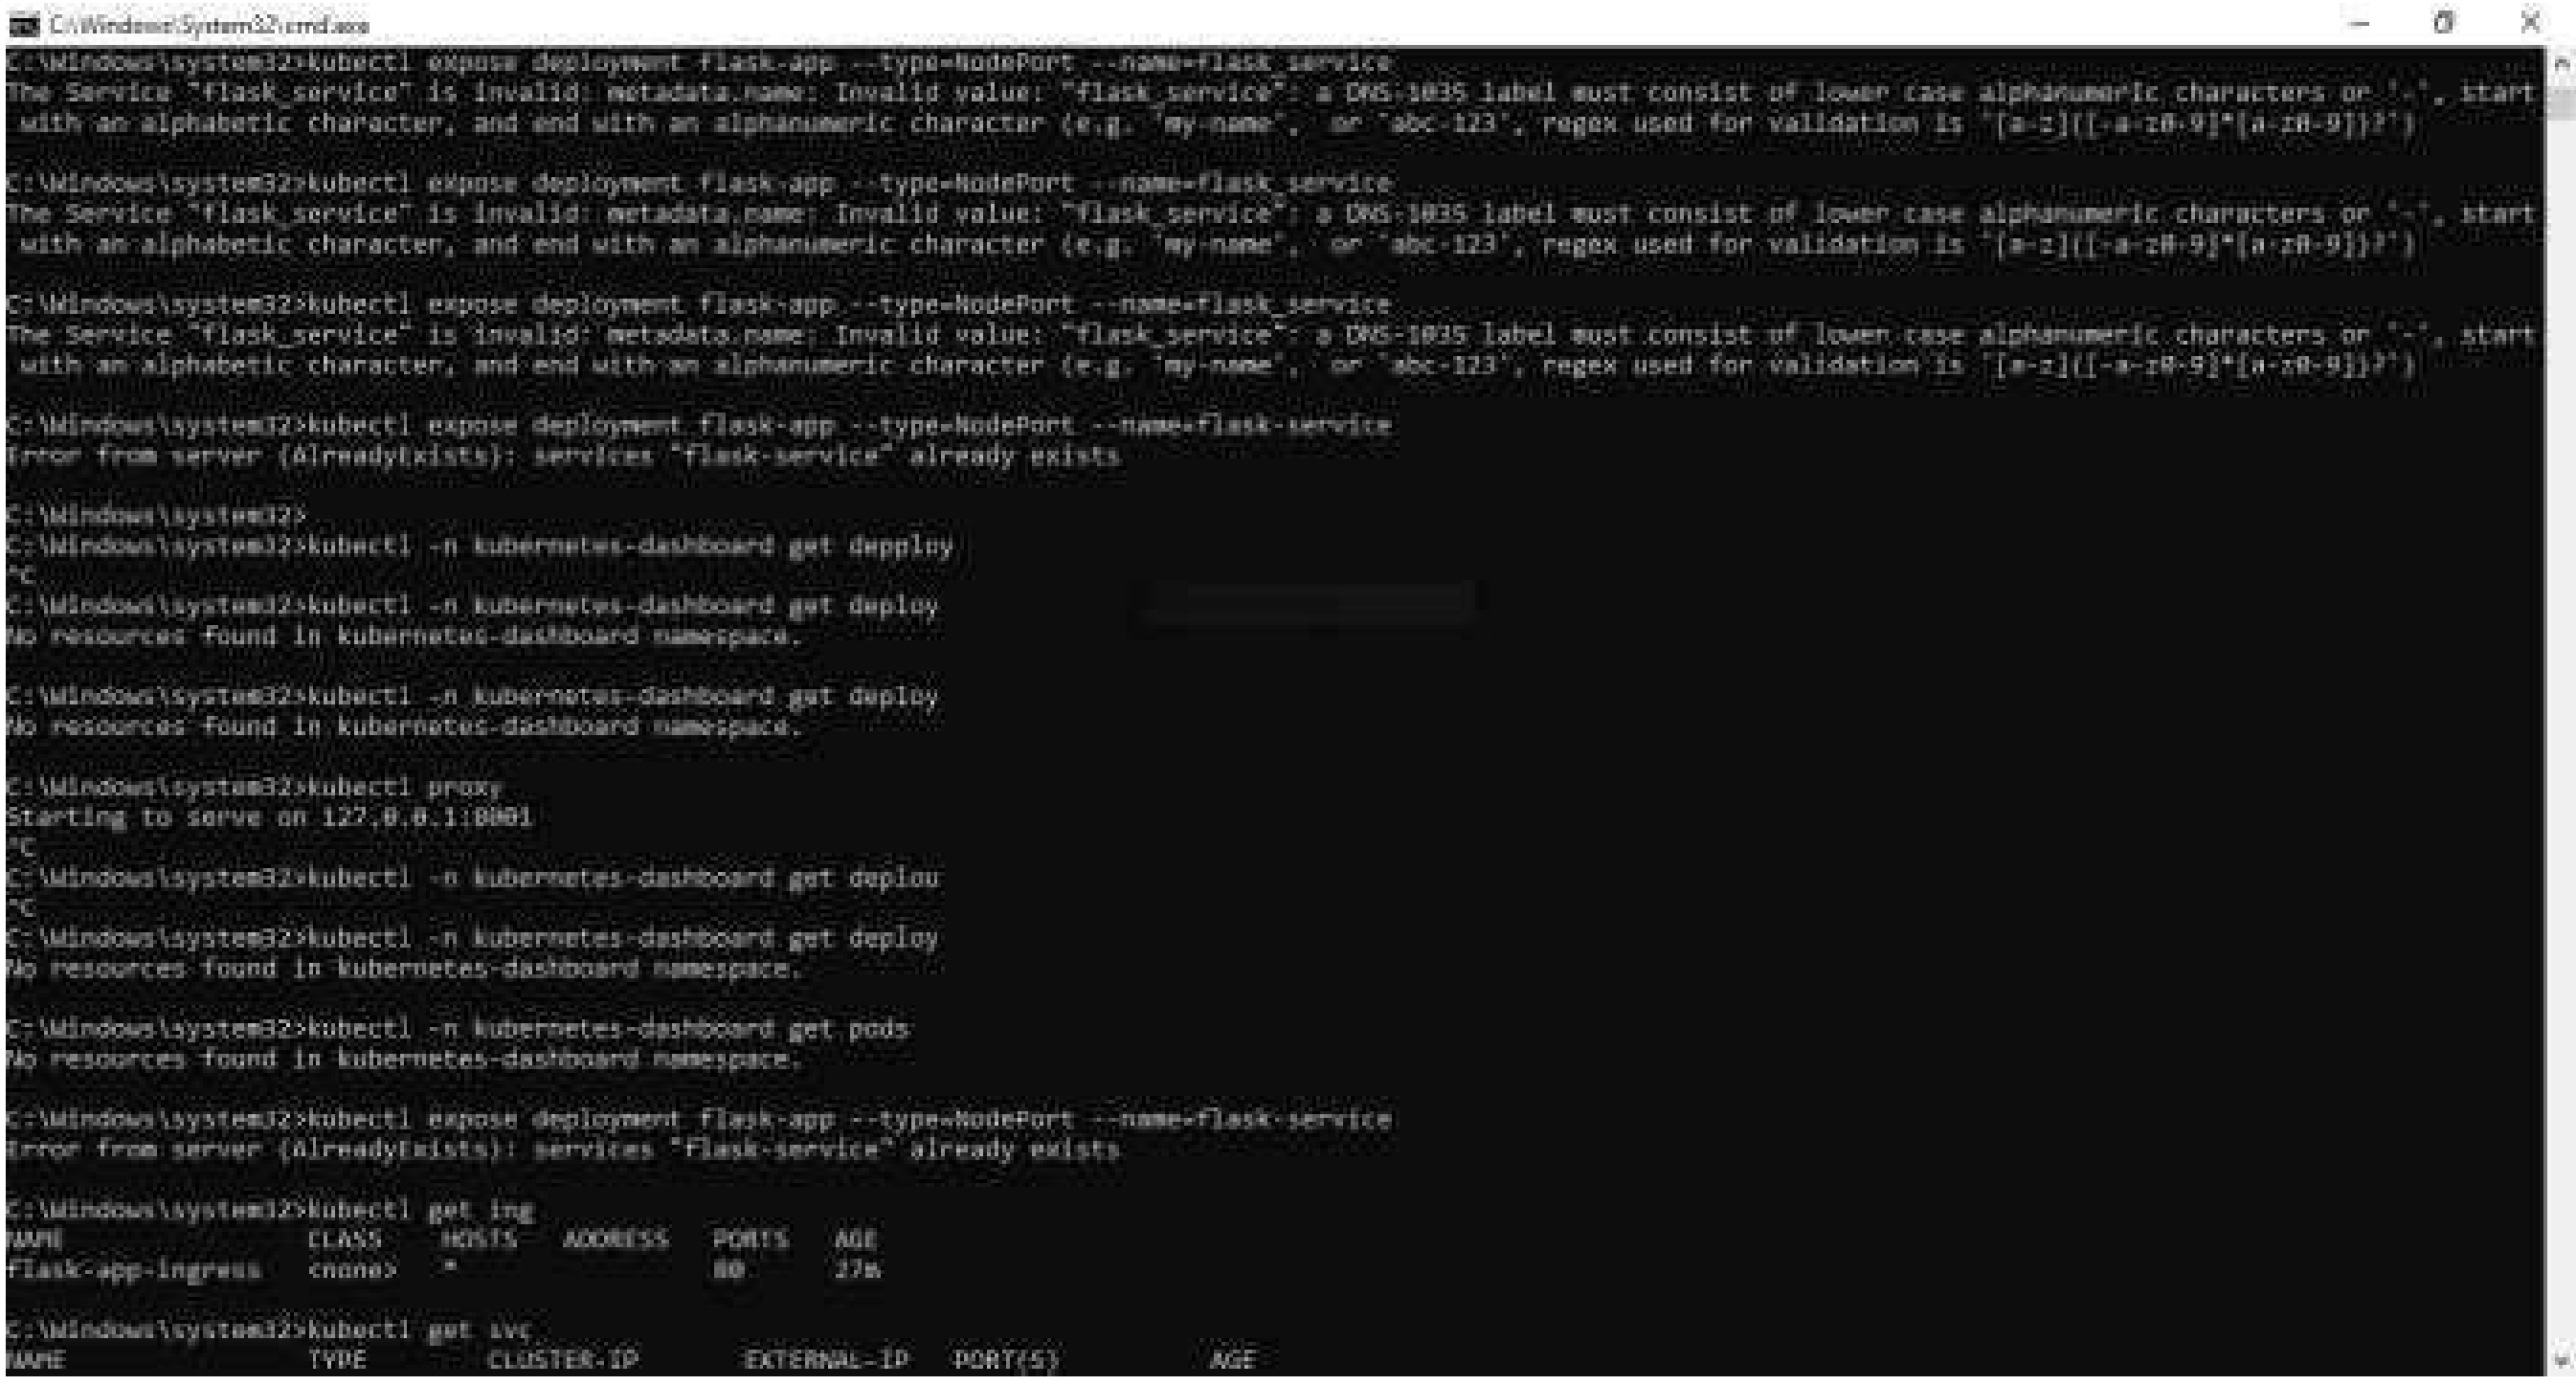

C:\Windows\System32\cmd.exe
C:\Windows\system32>kubectl expose deployment flask-app --type=NodePort --name=flask_service
The Service "flask_service" is invalid: metadata.name: Invalid value: "flask_service": a DNS-1035 label must consist of lower case alphanumeric characters or '-', start with an alphabetic character, and end with an alphanumeric character (e.g. 'my-name', or 'abc-123', regex used for validation is '[a-z]([-a-z0-9]*[a-z0-9])?')
C:\Windows\system32>kubectl expose deployment flask-app --type=NodePort --name=flask_service
The Service "flask_service" is invalid: metadata.name: Invalid value: "flask_service": a DNS-1035 label must consist of lower case alphanumeric characters or '-', start with an alphabetic character, and end with an alphanumeric character (e.g. 'my-name', or 'abc-123', regex used for validation is '[a-z]([-a-z0-9]*[a-z0-9])?')
C:\Windows\system32>kubectl expose deployment flask-app --type=NodePort --name=flask_service
The Service "flask_service" is invalid: metadata.name: Invalid value: "flask_service": a DNS-1035 label must consist of lower case alphanumeric characters or '-', start with an alphabetic character, and end with an alphanumeric character (e.g. 'my-name', or 'abc-123', regex used for validation is '[a-z]([-a-z0-9]*[a-z0-9])?')
C:\Windows\system32>kubectl expose deployment flask-app --type=NodePort --name=flask-service
Error from server (AlreadyExists): services "flask-service" already exists
C:\Windows\system32>
C:\Windows\system32>kubectl -n kubernetes-dashboard get depploy
^C
C:\Windows\system32>kubectl -n kubernetes-dashboard get deploy
No resources found in kubernetes-dashboard namespace.
C:\Windows\system32>kubectl -n kubernetes-dashboard get deploy
No resources found in kubernetes-dashboard namespace.
C:\Windows\system32>kubectl proxy
Starting to serve on 127.0.0.1:8001
^C
C:\Windows\system32>kubectl -n kubernetes-dashboard get deplou
^C
C:\Windows\system32>kubectl -n kubernetes-dashboard get deploy
No resources found in kubernetes-dashboard namespace.
C:\Windows\system32>kubectl -n kubernetes-dashboard get pods
No resources found in kubernetes-dashboard namespace.
C:\Windows\system32>kubectl expose deployment flask-app --type=NodePort --name=flask-service
Error from server (AlreadyExists): services "flask-service" already exists
C:\Windows\system32>kubectl get ing
NAME CLASS HOSTS ADDRESS PORTS AGE
flask-app-ingress <none> * 80 27m
C:\Windows\system32>kubectl get svc
NAME TYPE CLUSTER-IP EXTERNAL-IP PORT(S) AGE