

```
#Importing Libraries
```

```
import pandas as pd
import numpy as np
import matplotlib.pyplot as plt
import seaborn as sns
df=pd.read_csv('/content/Churn_Modelling.csv')
df
```

	RowNumber	CustomerId	Surname	CreditScore	Geography	Gender
Age \						
0	1	15634602	Hargrave	619	France	Female
42						
1	2	15647311	Hill	608	Spain	Female
41						
2	3	15619304	Onio	502	France	Female
42						
3	4	15701354	Boni	699	France	Female
39						
4	5	15737888	Mitchell	850	Spain	Female
43						
...
...						
9995	9996	15606229	Obijiaku	771	France	Male
39						
9996	9997	15569892	Johnstone	516	France	Male
35						
9997	9998	15584532	Liu	709	France	Female
36						
9998	9999	15682355	Sabbatini	772	Germany	Male
42						
9999	10000	15628319	Walker	792	France	Female
28						

	Tenure	Balance	NumOfProducts	HasCrCard	IsActiveMember	\
0	2	0.00	1	1		1
1	1	83807.86	1	0		1
2	8	159660.80	3	1		0
3	1	0.00	2	0		0
4	2	125510.82	1	1		1
...
9995	5	0.00	2	1		0
9996	10	57369.61	1	1		1
9997	7	0.00	1	0		1
9998	3	75075.31	2	1		0
9999	4	130142.79	1	1		0

	EstimatedSalary	Exited
0	101348.88	1
1	112542.58	0

```

2          113931.57      1
3          93826.63      0
4          79084.10      0
...
9995       96270.64      0
9996      101699.77      0
9997       42085.58      1
9998       92888.52      1
9999       38190.78      0

```

```
[10000 rows x 14 columns]
```

```
df.head()
```

	RowNumber	CustomerId	Surname	CreditScore	Geography	Gender	Age
0	1	15634602	Hargrave	619	France	Female	42
1	2	15647311	Hill	608	Spain	Female	41
2	3	15619304	Onio	502	France	Female	42
3	4	15701354	Boni	699	France	Female	39
4	5	15737888	Mitchell	850	Spain	Female	43

	Tenure	Balance	NumOfProducts	HasCrCard	IsActiveMember	\
0	2	0.00	1	1	1	
1	1	83807.86	1	0	1	
2	8	159660.80	3	1	0	
3	1	0.00	2	0	0	
4	2	125510.82	1	1	1	

	EstimatedSalary	Exited
0	101348.88	1
1	112542.58	0
2	113931.57	1
3	93826.63	0
4	79084.10	0

```
df.shape
```


```
(10000, 14)
```

Univariate , Bivariate and Multivariate analysis

Univariate analysis

```
df_france=df.loc[df['Geography']=='France']
df_spain=df.loc[df['Geography']=='Spain']
df_germany=df.loc[df['Geography']=='Germany']


plt.plot(df_france['Balance'],np.zeros_like(df_france['Balance']),'o')
plt.plot(df_spain['Balance'],np.zeros_like(df_spain['Balance']),'o')
plt.plot(df_germany['Balance'],np.zeros_like(df_germany['Balance']),'o')
plt.xlabel('Age')
plt.show()
```

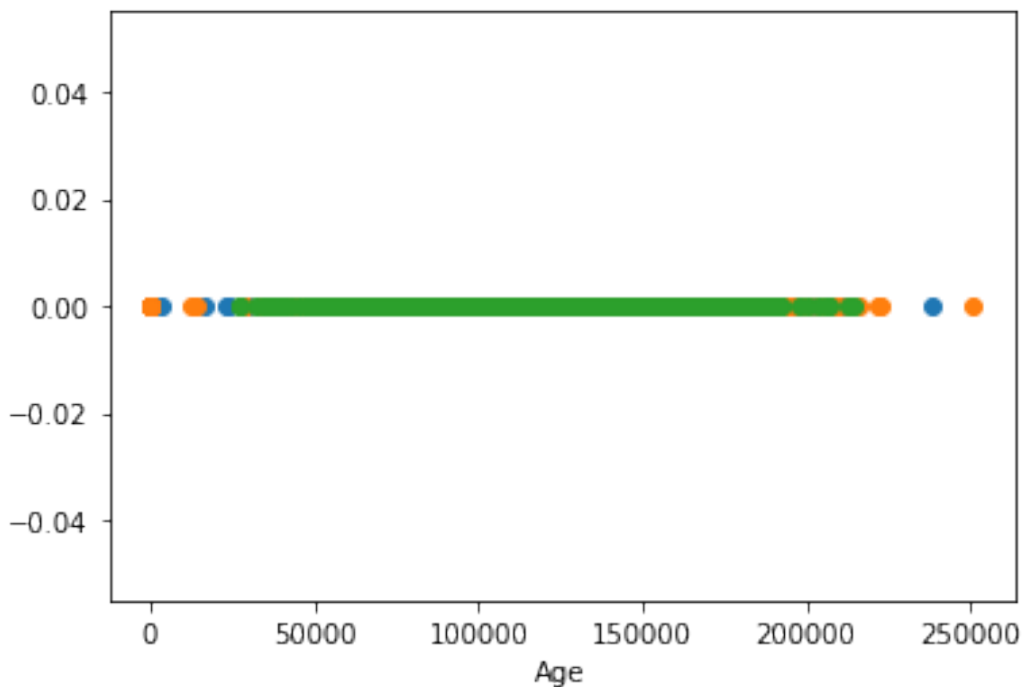

Bivariate Analysis

```
sns.FacetGrid(df,hue="Geography",size=5).map(plt.scatter,"Age","Balance").add_legend();
plt.show()
```

```
/usr/local/lib/python3.7/dist-packages/seaborn/axisgrid.py:337:
UserWarning: The `size` parameter has been renamed to `height`; please
update your code.
  warnings.warn(msg, UserWarning)
```

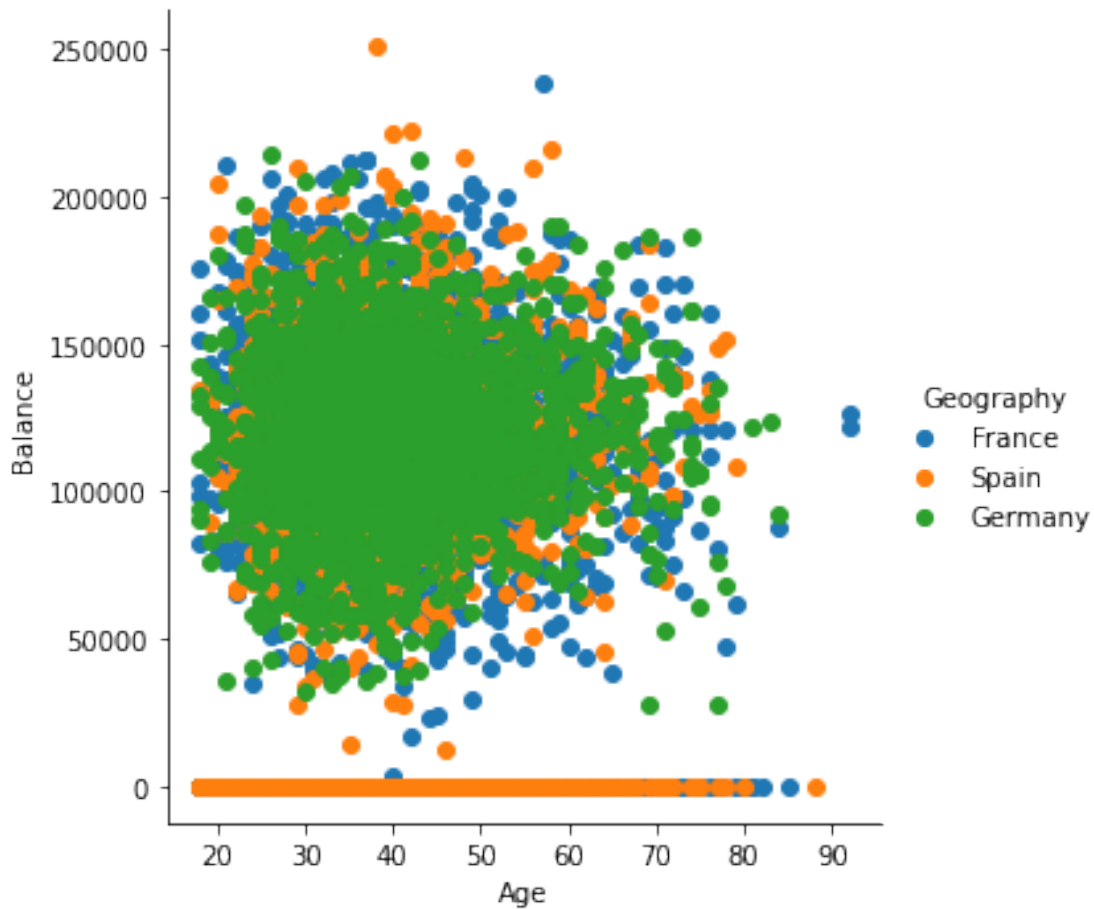


Multivariate Analysis

```
sns.pairplot(df, hue="Gender", size=3)
```

```
/usr/local/lib/python3.7/dist-packages/seaborn/axisgrid.py:2076:  
UserWarning: The `size` parameter has been renamed to `height`; please  
update your code.
```

```
warnings.warn(msg, UserWarning)
```

```
<seaborn.axisgrid.PairGrid at 0x7fc904178f10>
```

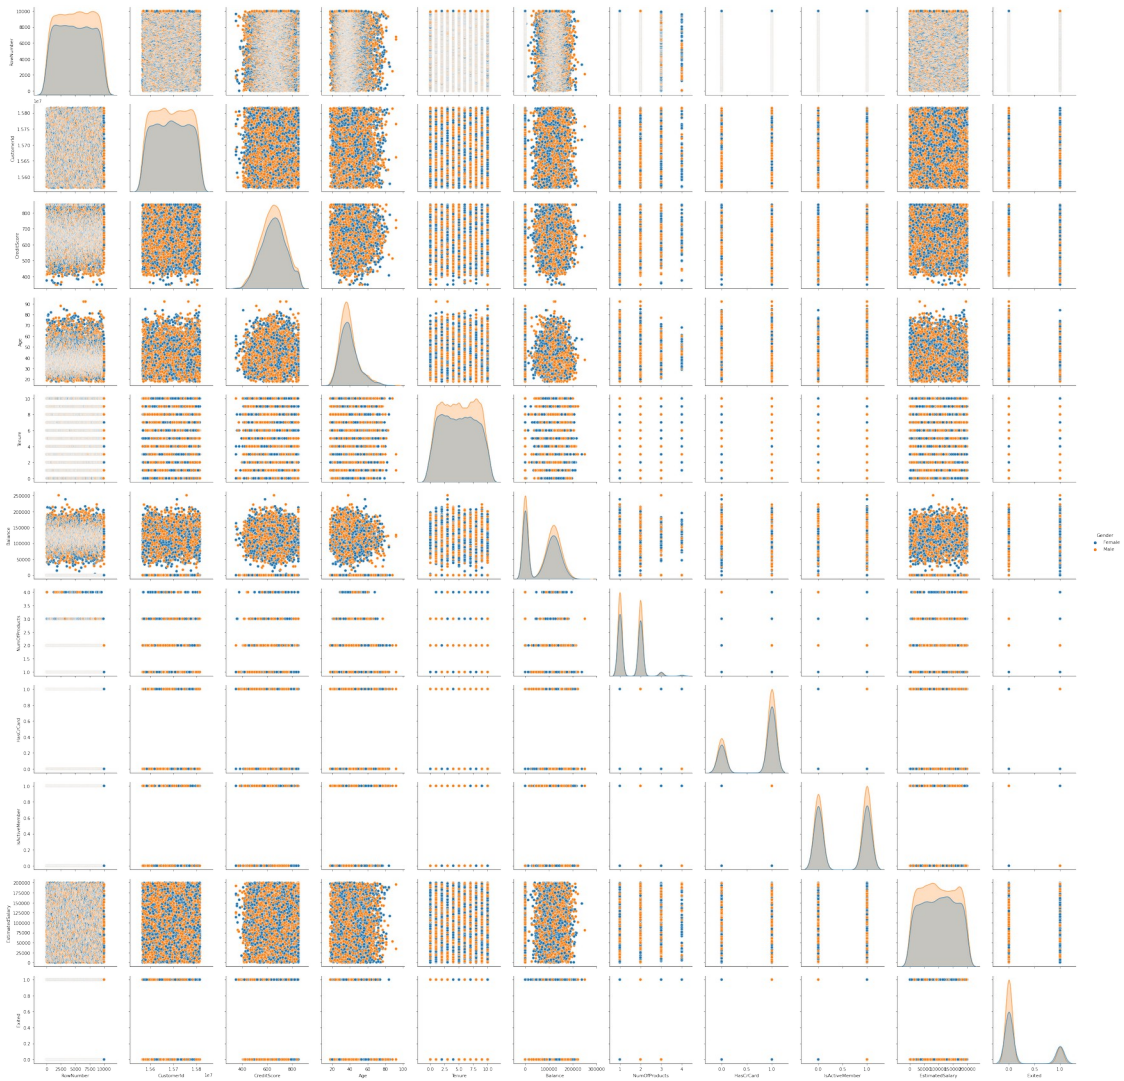

Descriptive Statistics

df.head()

	RowNumber	CustomerId	Surname	CreditScore	Geography	Gender	Age
0	1	15634602	Hargrave	619	France	Female	42
1	2	15647311	Hill	608	Spain	Female	41
2	3	15619304	Onio	502	France	Female	42
3	4	15701354	Boni	699	France	Female	39
4	5	15737888	Mitchell	850	Spain	Female	43

	Tenure	Balance	NumOfProducts	HasCrCard	IsActiveMember	\
0	2	0.00	1	1	1	
1	1	83807.86	1	0	1	
2	8	159660.80	3	1	0	
3	1	0.00	2	0	0	
4	2	125510.82	1	1	1	

	EstimatedSalary	Exited
0	101348.88	1
1	112542.58	0
2	113931.57	1
3	93826.63	0
4	79084.10	0

```
df.mean() # Get the mean of each column
```

```
/usr/local/lib/python3.7/dist-packages/ipykernel_launcher.py:1:
FutureWarning: Dropping of nuisance columns in DataFrame reductions
(with 'numeric_only=None') is deprecated; in a future version this
will raise TypeError. Select only valid columns before calling the
reduction.
```

```
"""Entry point for launching an IPython kernel.
```

```
RowNumber      5.000500e+03
CustomerId     1.569094e+07
CreditScore    6.505288e+02
Age            3.892180e+01
Tenure         5.012800e+00
Balance        7.648589e+04
NumOfProducts  1.530200e+00
HasCrCard      7.055000e-01
IsActiveMember 5.151000e-01
EstimatedSalary 1.000902e+05
Exited         2.037000e-01
dtype: float64
```

```
df.mean(axis=1) # Get the mean of each row
```

```
/usr/local/lib/python3.7/dist-packages/ipykernel_launcher.py:1:
FutureWarning: Dropping of nuisance columns in DataFrame reductions
(with 'numeric_only=None') is deprecated; in a future version this
will raise TypeError. Select only valid columns before calling the
reduction.
```

```
"""Entry point for launching an IPython kernel.
```

```
0      1.430602e+06
1      1.440392e+06
2      1.444860e+06
3      1.435993e+06
4      1.449399e+06
```

```
...
```

```
9995    1.428483e+06
9996    1.430866e+06
9997    1.421579e+06
9998    1.441922e+06
9999    1.437044e+06
Length: 10000, dtype: float64
```

```
df.median() # Get the median of each column
```

```
/usr/local/lib/python3.7/dist-packages/ipykernel_launcher.py:1:
FutureWarning: Dropping of nuisance columns in DataFrame reductions
(with 'numeric_only=None') is deprecated; in a future version this
will raise TypeError. Select only valid columns before calling the
reduction.
```


```
"""Entry point for launching an IPython kernel.
```

```
RowNumber      5.000500e+03
CustomerId     1.569074e+07
CreditScore    6.520000e+02
Age            3.700000e+01
Tenure         5.000000e+00
Balance        9.719854e+04
NumOfProducts  1.000000e+00
HasCrCard      1.000000e+00
IsActiveMember 1.000000e+00
EstimatedSalary 1.001939e+05
Exited         0.000000e+00
dtype: float64
```

```
norm_data = pd.DataFrame(np.random.normal(size=100000))
```

```
norm_data.plot(kind="density",
               figsize=(10,10));
plt.vlines(norm_data.mean(), # Plot black line at mean
           ymin=0,
           ymax=0.4,
           linewidth=5.0);

plt.vlines(norm_data.median(), # Plot red line at median
           ymin=0,
           ymax=0.4,
           linewidth=2.0,
           color="red");
```

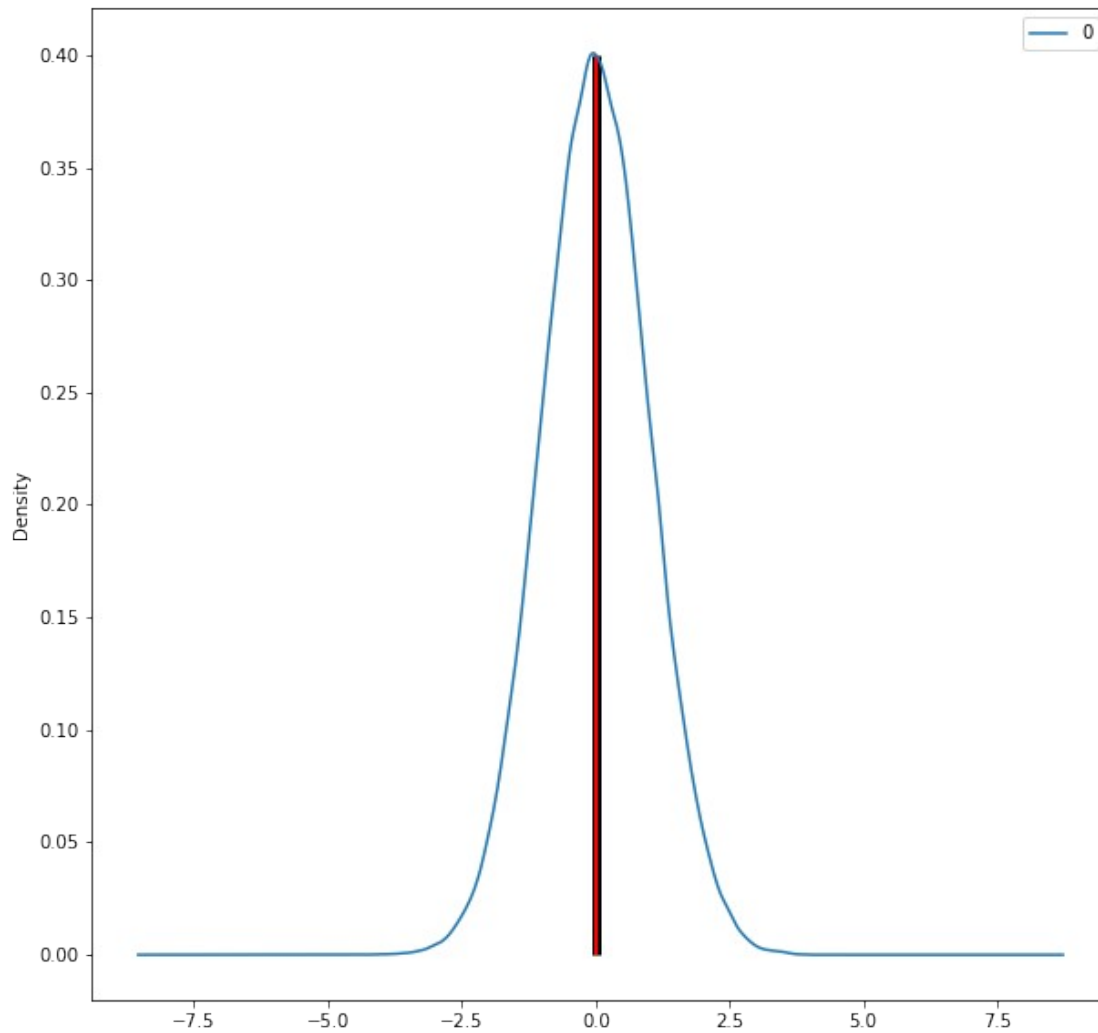


```
skewed_data = pd.DataFrame(np.random.exponential(size=100000))
```

```
skewed_data.plot(kind="density",  
                 figsize=(10,10),  
                 xlim=(-1,5));
```

```
plt.vlines(skewed_data.mean(),      # Plot black line at mean  
           ymin=0,  
           ymax=0.8,  
           linewidth=5.0);
```

```
plt.vlines(skewed_data.median(),    # Plot red line at median  
           ymin=0,  
           ymax=0.8,  
           linewidth=2.0,  
           color="red");
```

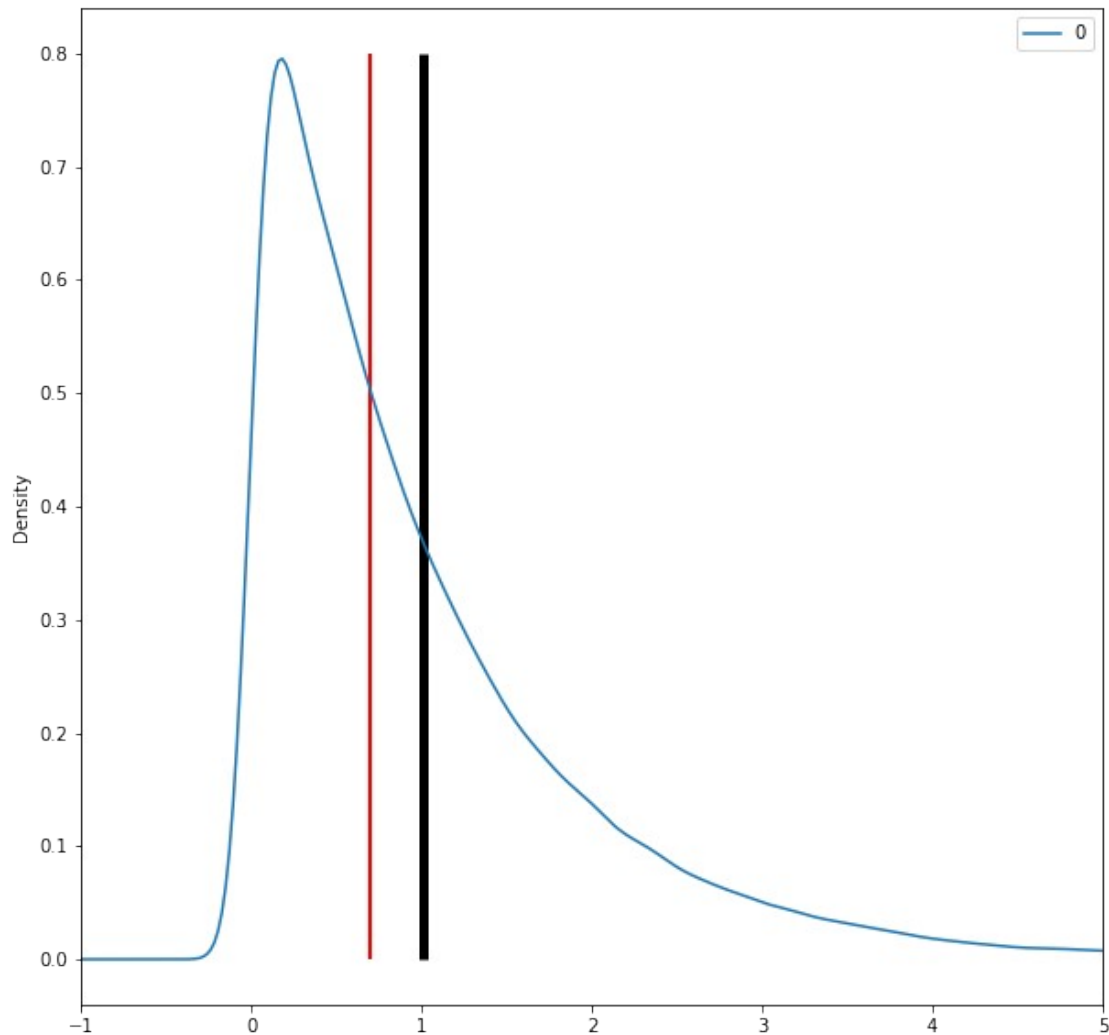
```
norm_data = np.random.normal(size=50)
outliers = np.random.normal(15, size=3)
combined_data = pd.DataFrame(np.concatenate((norm_data, outliers),
axis=0))
```

```
combined_data.plot(kind="density",
    figsize=(10,10),
    xlim=(-5,20));
```

```
plt.vlines(combined_data.mean(),      # Plot black line at mean
    ymin=0,
    ymax=0.2,
    linewidth=5.0);
```

```
plt.vlines(combined_data.median(),    # Plot red line at median
    ymin=0,
    ymax=0.2,
```

```
linewidth=2.0,
color="red");
```

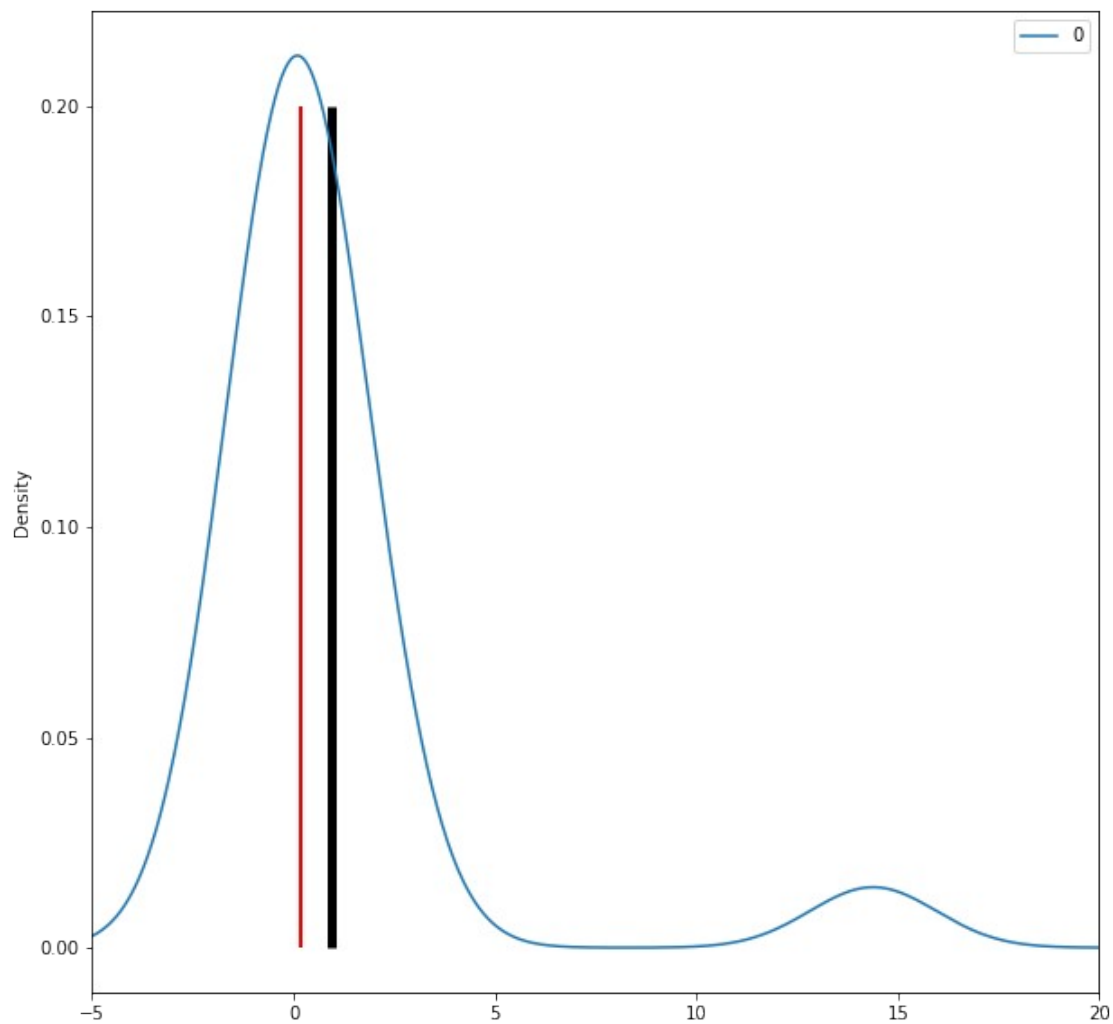

```
df.mode()
```

	RowNumber	CustomerId	Surname	CreditScore	Geography	Gender
Age \						
0	1	15565701	Smith	850.0	France	Male
37.0	2	15565706	NaN	NaN	NaN	NaN
NaN	3	15565714	NaN	NaN	NaN	NaN
2	4	15565779	NaN	NaN	NaN	NaN
NaN	5	15565796	NaN	NaN	NaN	NaN
3						
NaN						
4						
NaN						
...
.						

9995	9996	15815628	NaN	NaN	NaN	NaN
NaN						
9996	9997	15815645	NaN	NaN	NaN	NaN
NaN						
9997	9998	15815656	NaN	NaN	NaN	NaN
NaN						
9998	9999	15815660	NaN	NaN	NaN	NaN
NaN						
9999	10000	15815690	NaN	NaN	NaN	NaN
NaN						

	Tenure	Balance	NumOfProducts	HasCrCard	IsActiveMember	\
0	2.0	0.0	1.0	1.0	1.0	
1	NaN	NaN	NaN	NaN	NaN	NaN
2	NaN	NaN	NaN	NaN	NaN	NaN
3	NaN	NaN	NaN	NaN	NaN	NaN
4	NaN	NaN	NaN	NaN	NaN	NaN
...
9995	NaN	NaN	NaN	NaN	NaN	NaN
9996	NaN	NaN	NaN	NaN	NaN	NaN
9997	NaN	NaN	NaN	NaN	NaN	NaN
9998	NaN	NaN	NaN	NaN	NaN	NaN
9999	NaN	NaN	NaN	NaN	NaN	NaN

	EstimatedSalary	Exited
0	24924.92	0.0
1	NaN	NaN
2	NaN	NaN
3	NaN	NaN
4	NaN	NaN
...
9995	NaN	NaN
9996	NaN	NaN
9997	NaN	NaN
9998	NaN	NaN
9999	NaN	NaN

[10000 rows x 14 columns]

Measures of Spread

```
max(df["Age"]) - min(df["Age"])
```

74

```
five_num = [df["Age"].quantile(0),
            df["Age"].quantile(0.25),
            df["Age"].quantile(0.50),
            df["Age"].quantile(0.75),
            df["Age"].quantile(1)]
```

```

five_num
[18.0, 32.0, 37.0, 44.0, 92.0]

df["Age"].describe()

count      10000.000000
mean        38.921800
std         10.487806
min         18.000000
25%         32.000000
50%         37.000000
75%         44.000000
max         92.000000
Name: Age, dtype: float64


df["Age"].quantile(0.75) - df["Age"].quantile(0.25)

12.0

df.boxplot(column="Age",
            return_type='axes',
            figsize=(8,8))

plt.text(x=0.74, y=22.25, s="3rd Quartile")
plt.text(x=0.8, y=18.75, s="Median")
plt.text(x=0.75, y=15.5, s="1st Quartile")
plt.text(x=0.9, y=10, s="Min")
plt.text(x=0.9, y=33.5, s="Max")
plt.text(x=0.7, y=19.5, s="IQR", rotation=90, size=25);

```

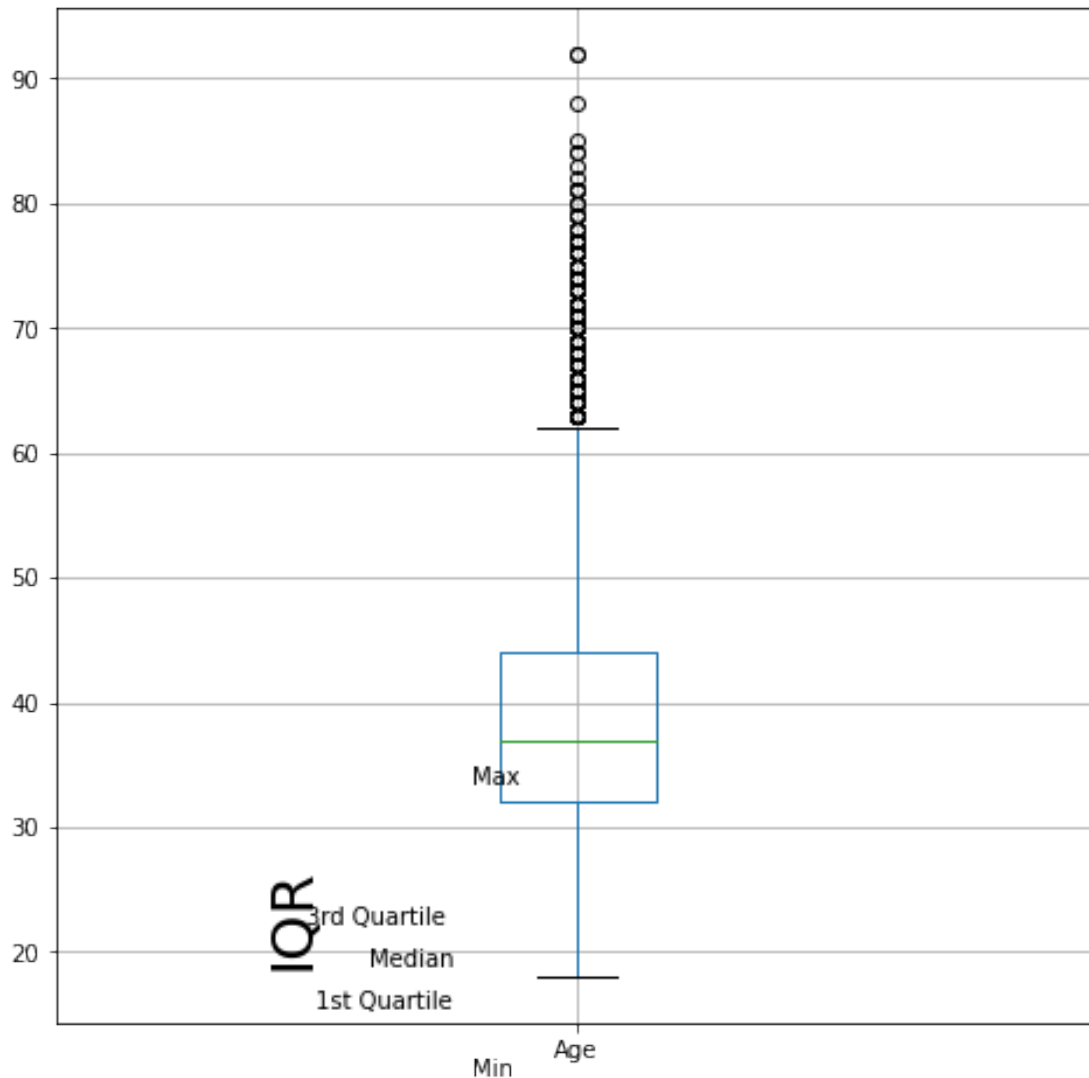

```
df["Age"].var()
```

```
109.99408416841683
```

```
df["Age"].std()
```

```
10.487806451704609
```

```
abs_median_devs = abs(df["Age"] - df["Age"].median())
```

```
abs_median_devs.median() * 1.4826
```

```
8.8956
```

Skewness and Kurtosis

```
df["Age"].skew() # Check skewness
```


```
1.0113202630234552
```

```
df["Age"].kurt() # Check kurtosis
```

```
1.3953470615086956
```

```
norm_data = np.random.normal(size=100000)
skewed_data = np.concatenate((np.random.normal(size=35000)+2,
                                np.random.exponential(size=65000)),
                                axis=0)
uniform_data = np.random.uniform(0,2, size=100000)
peaked_data = np.concatenate((np.random.exponential(size=50000),
                                np.random.exponential(size=50000)*(-1)),
                                axis=0)

data_df = pd.DataFrame({"norm":norm_data,
                        "skewed":skewed_data,
                        "uniform":uniform_data,
                        "peaked":peaked_data})
data_df.plot(kind="density",
             figsize=(10,10),
             xlim=(-5,5));
```

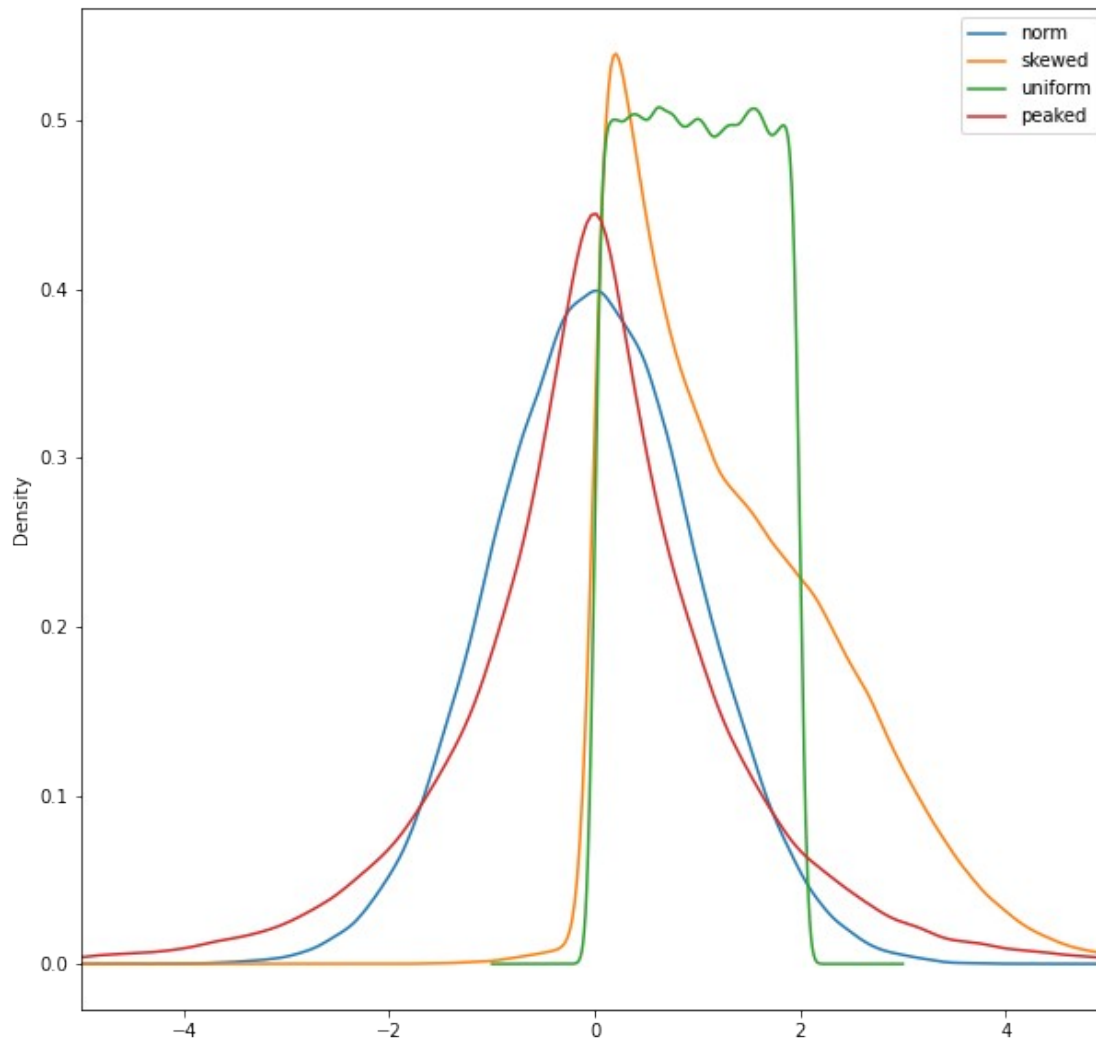

```
data_df.skew()
```

```
norm      0.011454
skewed    0.982778
uniform   0.005179
peaked    0.014117
dtype: float64
```

```
data_df.kurt()
```

```
norm      0.028265
skewed    1.178798
uniform   -1.202042
peaked    3.024614
dtype: float64
```

Handle the Missing values

```
df=pd.read_csv('/content/Churn_Modelling.csv')
```

```
df.head()
```

	RowNumber	CustomerId	Surname	CreditScore	Geography	Gender	Age
0	1	15634602	Hargrave	619	France	Female	42
1	2	15647311	Hill	608	Spain	Female	41
2	3	15619304	Onio	502	France	Female	42
3	4	15701354	Boni	699	France	Female	39
4	5	15737888	Mitchell	850	Spain	Female	43

	Tenure	Balance	NumOfProducts	HasCrCard	IsActiveMember	\
0	2	0.00	1	1	1	
1	1	83807.86	1	0	1	
2	8	159660.80	3	1	0	
3	1	0.00	2	0	0	
4	2	125510.82	1	1	1	

	EstimatedSalary	Exited
0	101348.88	1
1	112542.58	0
2	113931.57	1
3	93826.63	0
4	79084.10	0

```
df.isnull()
```

	RowNumber	CustomerId	Surname	CreditScore	Geography	Gender
Age \						
0	False	False	False	False	False	False
False						
1	False	False	False	False	False	False
False						
2	False	False	False	False	False	False
False						
3	False	False	False	False	False	False
False						
4	False	False	False	False	False	False
False						
...
...						
9995	False	False	False	False	False	False
False						
9996	False	False	False	False	False	False
False						
9997	False	False	False	False	False	False

False						
9998	False	False	False	False	False	False
False						
9999	False	False	False	False	False	False
False						


	Tenure	Balance	NumOfProducts	HasCrCard	IsActiveMember	\
0	False	False	False	False	False	
1	False	False	False	False	False	
2	False	False	False	False	False	
3	False	False	False	False	False	
4	False	False	False	False	False	
...	
9995	False	False	False	False	False	
9996	False	False	False	False	False	
9997	False	False	False	False	False	
9998	False	False	False	False	False	
9999	False	False	False	False	False	

	EstimatedSalary	Exited
0	False	False
1	False	False
2	False	False
3	False	False
4	False	False
...
9995	False	False
9996	False	False
9997	False	False
9998	False	False
9999	False	False


[10000 rows x 14 columns]

```
sns.heatmap(df.isnull(),yticklabels=False,cbar=False,cmap='viridis')
```


```
<matplotlib.axes._subplots.AxesSubplot at 0x7fc8fcc65390>
```

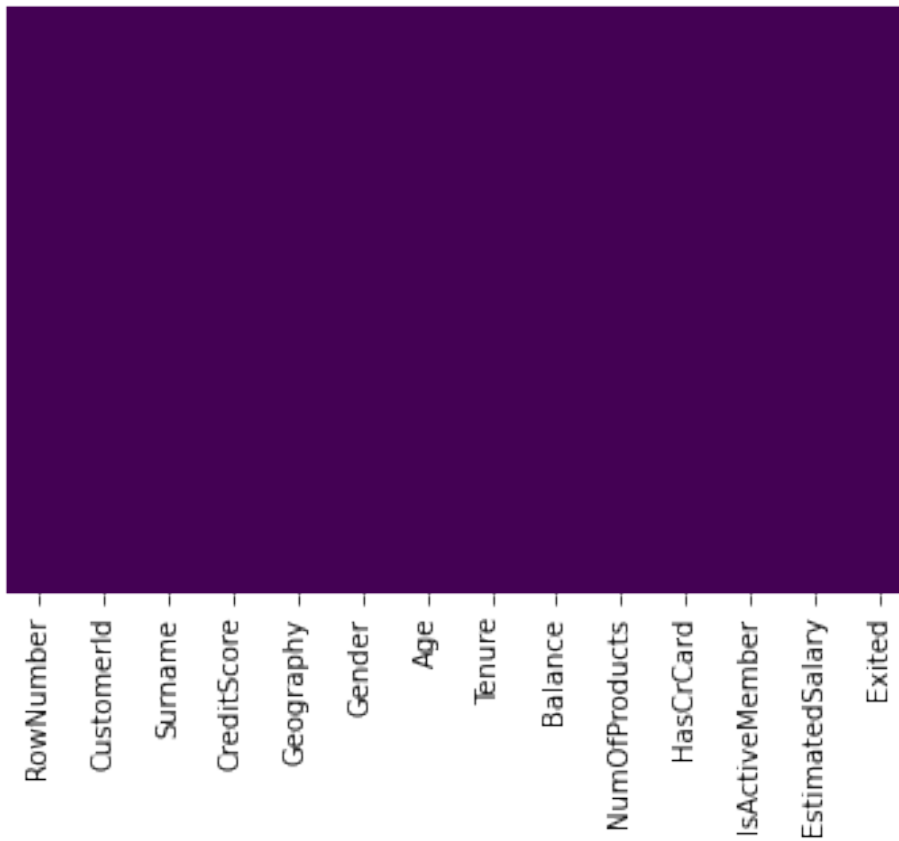

```
sns.set_style('whitegrid')
sns.countplot(x='Geography',data=df)
<matplotlib.axes._subplots.AxesSubplot at 0x7fc8fcc464d0>
```

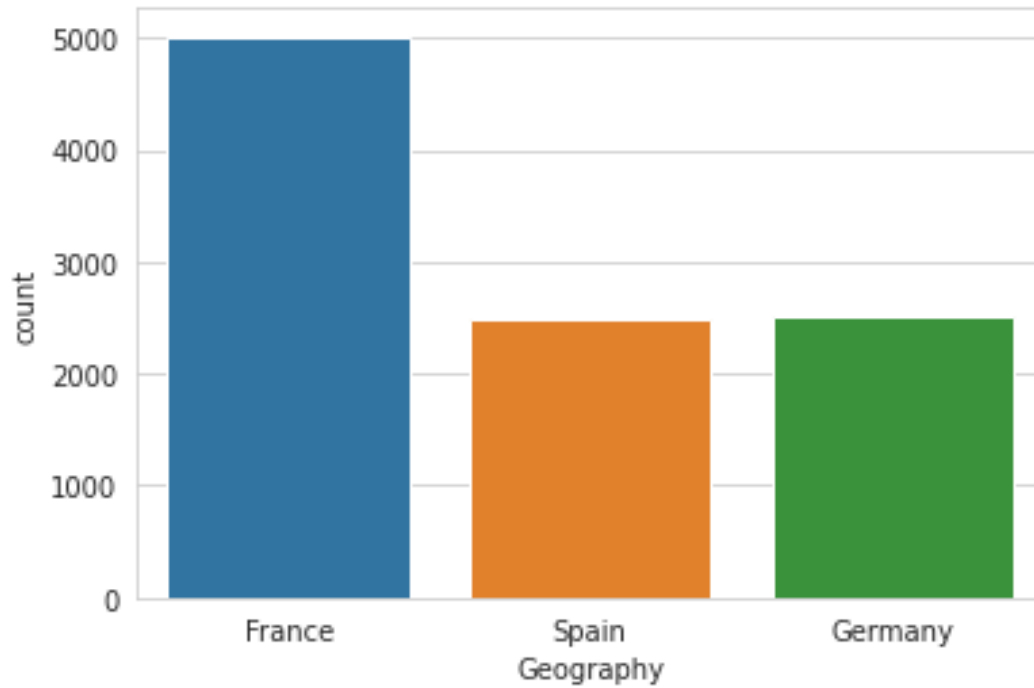


```
sns.set_style('whitegrid')
sns.countplot(x='Geography', hue='Gender', data=df, palette='RdBu_r')
<matplotlib.axes._subplots.AxesSubplot at 0x7fc8fcc09290>
```

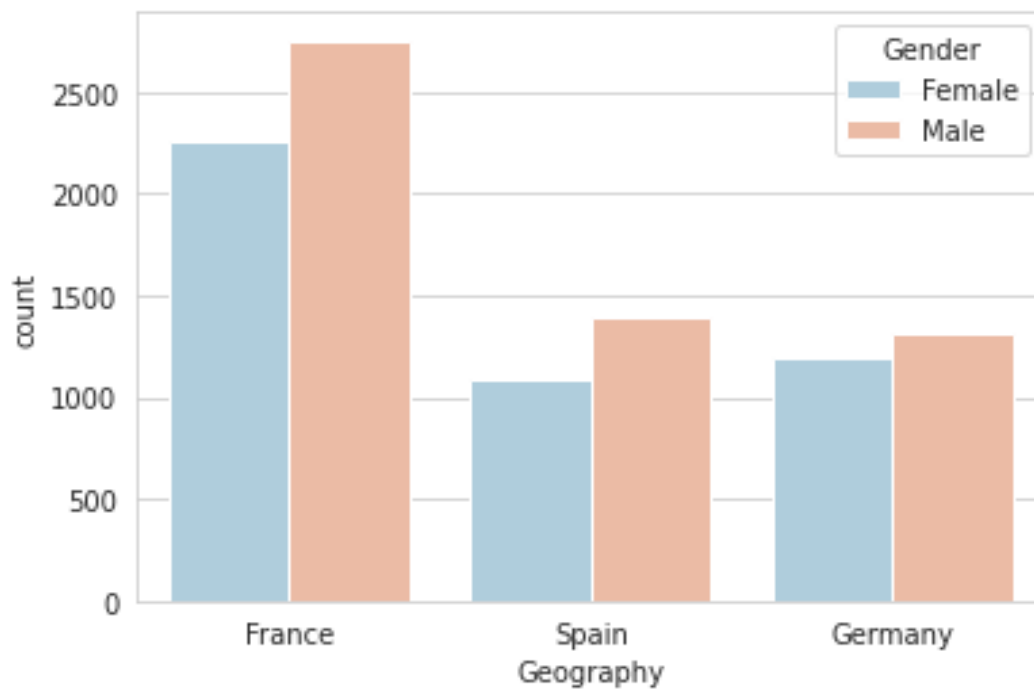

```
sns.set_style('whitegrid')
sns.countplot(x='Geography', hue='Gender', data=df, palette='rainbow')
```


<matplotlib.axes._subplots.AxesSubplot at 0x7fc8fcc27050>

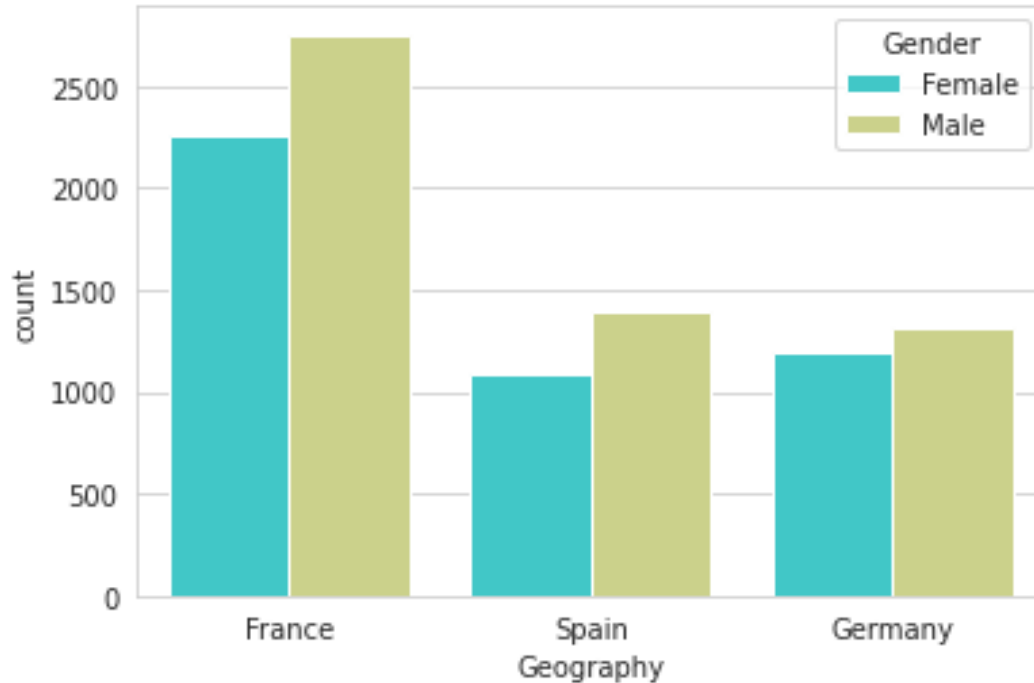


```
sns.distplot(df['Age'].dropna(),kde=False,color='darkred',bins=40)
```

```
/usr/local/lib/python3.7/dist-packages/seaborn/distributions.py:2619:  
FutureWarning: `distplot` is a deprecated function and will be removed  
in a future version. Please adapt your code to use either `displot` (a  
figure-level function with similar flexibility) or `histplot` (an  
axes-level function for histograms).  
warnings.warn(msg, FutureWarning)
```


<matplotlib.axes._subplots.AxesSubplot at 0x7fc8fcab7510>

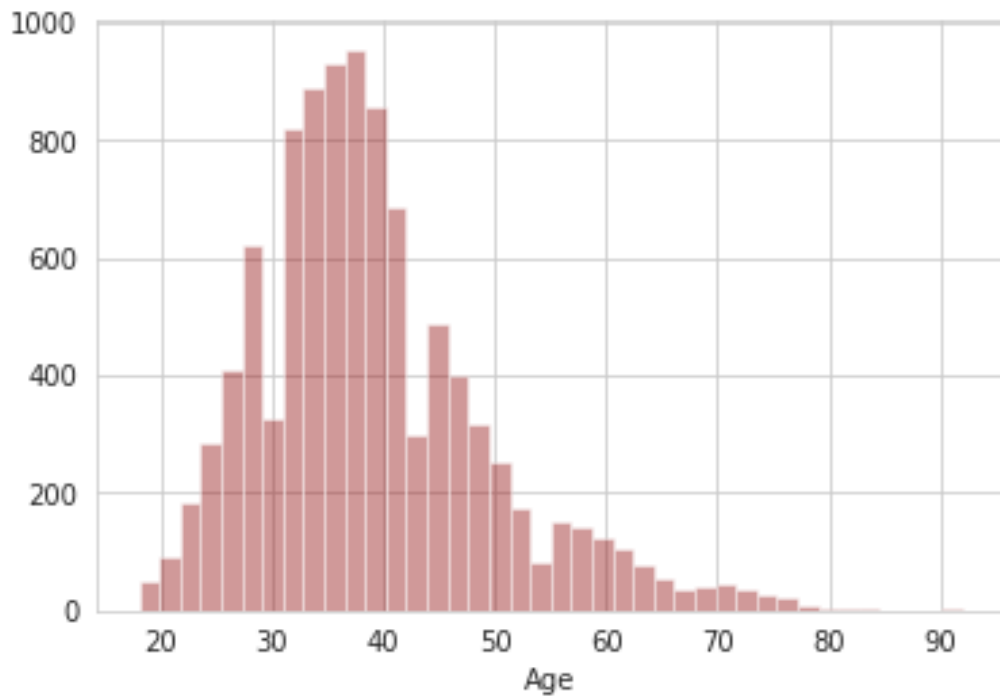


```
df['Age'].hist(bins=30,color='darkred',alpha=0.3)  
<matplotlib.axes._subplots.AxesSubplot at 0x7fc8fc9f41d0>
```

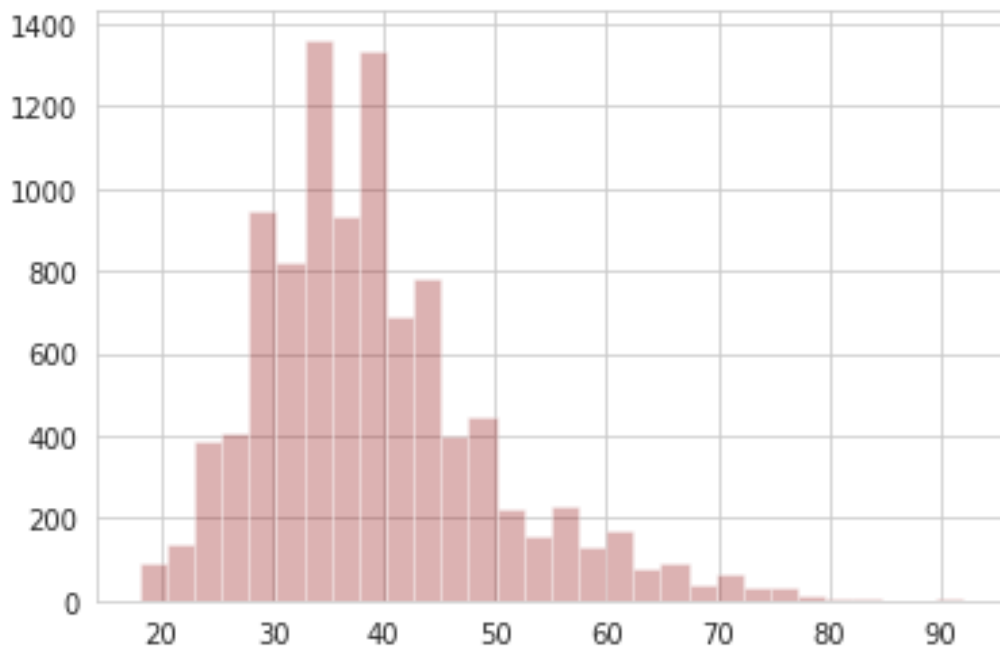

```
sns.countplot(x='NumOfProducts',data=df)  
<matplotlib.axes._subplots.AxesSubplot at 0x7fc8fca04090>
```

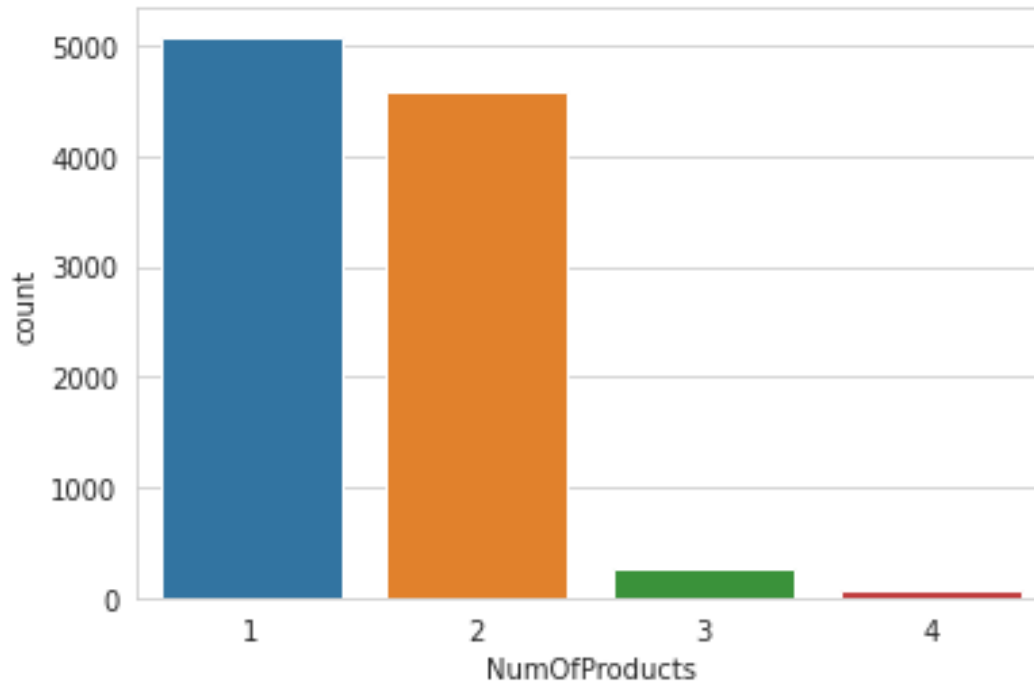

```
df['Age'].hist(color='green',bins=40,figsize=(8,4))
<matplotlib.axes._subplots.AxesSubplot at 0x7fc8fcd5d150>
```

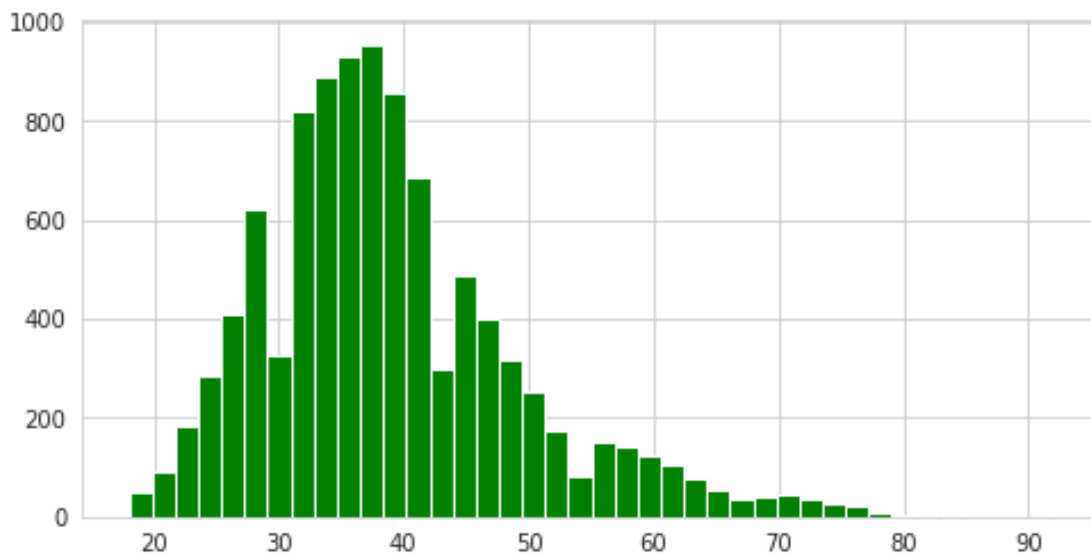


Cufflinks for plots

```
import cufflinks as cf
cf.go_offline()
```

```
df['Age'].iplot(kind='hist',bins=30,color='green')
```

Data Cleaning

```
plt.figure(figsize=(12, 7))
sns.boxplot(x='Gender',y='Age',data=df,palette='winter')
<matplotlib.axes._subplots.AxesSubplot at 0x7fc8f66f6590>
```

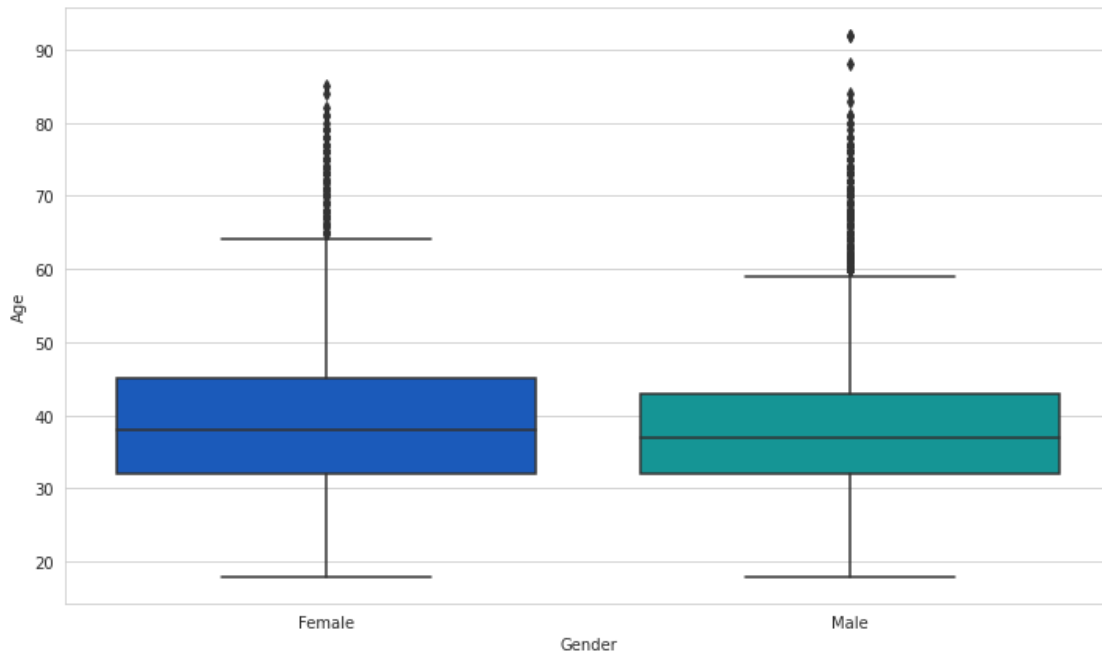

```
def impute_age(cols):
    Age = cols[0]
    Pclass = cols[1]

    if pd.isnull(Age):

        if Pclass == 1:
            return 37

        elif Pclass == 2:
            return 29

        else:
            return 24

    else:
        return Age

sns.heatmap(df.isnull(),yticklabels=False,cbar=False,cmap='viridis')
<matplotlib.axes._subplots.AxesSubplot at 0x7fc8f5fafad0>
```



RowNumber
CustomerId
Surname
CreditScore
Geography
Gender
Age
Tenure
Balance
NumOfProducts
HasCrCard
IsActiveMember
EstimatedSalary
Exited

```
df.drop('Gender',axis=1,inplace=True)
```

```
df.head()
```

	RowNumber	CustomerId	Surname	CreditScore	Geography	Age	Tenure
0	1	15634602	Hargrave	619	France	42	2
1	2	15647311	Hill	608	Spain	41	1
2	3	15619304	Onio	502	France	42	8
3	4	15701354	Boni	699	France	39	1
4	5	15737888	Mitchell	850	Spain	43	2

	Balance	NumOfProducts	HasCrCard	IsActiveMember
0	0.00	1	1	1
1	83807.86	1	0	1
2	159660.80	3	1	0


```

113931.57
3      0.00      2      0      0
93826.63
4 125510.82      1      1      1
79084.10

```

```

      Exited
0         1
1         0
2         1
3         0
4         0

```

Converting Categorical Features

```
df.info()
```

```

<class 'pandas.core.frame.DataFrame'>
RangeIndex: 10000 entries, 0 to 9999
Data columns (total 13 columns):
#   Column                Non-Null Count  Dtype
---  -
0   RowNumber              10000 non-null  int64
1   CustomerId             10000 non-null  int64
2   Surname                10000 non-null  object
3   CreditScore             10000 non-null  int64
4   Geography              10000 non-null  object
5   Age                    10000 non-null  int64
6   Tenure                 10000 non-null  int64
7   Balance                10000 non-null  float64
8   NumOfProducts          10000 non-null  int64
9   HasCrCard              10000 non-null  int64
10  IsActiveMember         10000 non-null  int64
11  EstimatedSalary        10000 non-null  float64
12  Exited                  10000 non-null  int64
dtypes: float64(2), int64(9), object(2)
memory usage: 1015.8+ KB

```

```
pd.get_dummies(df['Geography'],drop_first=True).head()
```

```

      Germany  Spain
0          0      0
1          0      1
2          0      0
3          0      0
4          0      1

```

```
df.info
```

```

<bound method DataFrame.info of      RowNumber  CustomerId  Surname
CreditScore Geography  Age  Tenure  \

```

0	1	15634602	Hargrave	619	France	42
2						
1	2	15647311	Hill	608	Spain	41
1						
2	3	15619304	Onio	502	France	42
8						
3	4	15701354	Boni	699	France	39
1						
4	5	15737888	Mitchell	850	Spain	43
2						
...
...						
9995	9996	15606229	Obijiaku	771	France	39
5						
9996	9997	15569892	Johnstone	516	France	35
10						
9997	9998	15584532	Liu	709	France	36
7						
9998	9999	15682355	Sabbatini	772	Germany	42
3						
9999	10000	15628319	Walker	792	France	28
4						

	Balance	NumOfProducts	HasCrCard	IsActiveMember
EstimatedSalary	\			
0	0.00	1	1	1
101348.88				
1	83807.86	1	0	1
112542.58				
2	159660.80	3	1	0
113931.57				
3	0.00	2	0	0
93826.63				
4	125510.82	1	1	1
79084.10				
...
...				
9995	0.00	2	1	0
96270.64				
9996	57369.61	1	1	1
101699.77				
9997	0.00	1	0	1
42085.58				
9998	75075.31	2	1	0
92888.52				
9999	130142.79	1	1	0
38190.78				

Exited
0
1

```

1          0
2          1
3          0
4          0
...      ...
9995       0
9996       0
9997       1
9998       1
9999       0

```

```
[10000 rows x 13 columns]>
```

```

sex = pd.get_dummies(df['Age'],drop_first=True)
embark = pd.get_dummies(df['Balance'],drop_first=True)

df.drop(['Age','HasCrCard','Surname','CustomerId'],axis=1,inplace=True)

```

```
df.head()
```

	RowNumber	CreditScore	Geography	Tenure	Balance	NumOfProducts
0	1	619	France	2	0.00	1
1	2	608	Spain	1	83807.86	1
2	3	502	France	8	159660.80	3
3	4	699	France	1	0.00	2
4	5	850	Spain	2	125510.82	1

	IsActiveMember	EstimatedSalary	Exited
0	1	101348.88	1
1	1	112542.58	0
2	0	113931.57	1
3	0	93826.63	0
4	1	79084.10	0

```
train = pd.concat([df,sex,embark],axis=1)
```

```
train.head()
```

	RowNumber	CreditScore	Geography	Tenure	Balance	NumOfProducts
0	1	619	France	2	0.00	1
1	2	608	Spain	1	83807.86	1

2	3	502	France	8	159660.80	3
3	4	699	France	1	0.00	2
4	5	850	Spain	2	125510.82	1

	IsActiveMember	EstimatedSalary	Exited	19	...	212692.97
212696.32	\					
0	1	101348.88	1	0	...	0
0						
1	1	112542.58	0	0	...	0
0						
2	0	113931.57	1	0	...	0
0						
3	0	93826.63	0	0	...	0
0						
4	1	79084.10	0	0	...	0
0						

	212778.2	213146.2	214346.96	216109.88	221532.8	222267.63
238387.56	\					
0	0	0	0	0	0	0
0						
1	0	0	0	0	0	0
0						
2	0	0	0	0	0	0
0						
3	0	0	0	0	0	0
0						
4	0	0	0	0	0	0
0						

	250898.09
0	0
1	0
2	0
3	0
4	0

[5 rows x 6459 columns]

Find the outliers and replace the outliers

dataset= [11,10,12,14,12,15,14,13,15,102,12,14,17,19,107,
10,13,12,14,12,108,12,11,14,13,15,10,15,12,10,14,13,15,10]

Detecting outlier using Z score

Using Z score

```
outliers=[]
def detect_outliers(data):

    threshold=3
    mean = np.mean(data)
    std =np.std(data)

    for i in data:
        z_score= (i - mean)/std
        if np.abs(z_score) > threshold:
            outliers.append(y)
    return outliers
```

```
## Perform all the steps of IQR
sorted(dataset)
```

```
[10,
 10,
 10,
 10,
 10,
 11,
 11,
 12,
 12,
 12,
 12,
 12,
 12,
 12,
 12,
 13,
 13,
 13,
 13,
 14,
 14,
 14,
 14,
 14,
 15,
 15,
 15,
 15,
 15,
```

```
17,  
19,  
102,  
107,  
108]
```

```
quantile1, quantile3= np.percentile(dataset,[25,75])  
print(quantile1,quantile3)
```

```
12.0 15.0
```

```
## Find the IQR
```

```
iqr_value=quantile3-quantile1  
print(iqr_value)
```

```
3.0
```

```
## Find the lower bound value and the higher bound value
```

```
lower_bound_val = quantile1 -(1.5 * iqr_value)  
upper_bound_val = quantile3 +(1.5 * iqr_value)  
print(lower_bound_val,upper_bound_val)
```

```
7.5 19.5
```

Check for Categorical columns and perform encoding

```
df=pd.read_csv('/content/Churn_Modelling.csv')  
df.head()
```

	RowNumber	CustomerId	Surname	CreditScore	Geography	Gender	Age
0	1	15634602	Hargrave	619	France	Female	42
1	2	15647311	Hill	608	Spain	Female	41
2	3	15619304	Onio	502	France	Female	42
3	4	15701354	Boni	699	France	Female	39
4	5	15737888	Mitchell	850	Spain	Female	43

	Tenure	Balance	NumOfProducts	HasCrCard	IsActiveMember	\
0	2	0.00	1	1	1	
1	1	83807.86	1	0	1	
2	8	159660.80	3	1	0	
3	1	0.00	2	0	0	
4	2	125510.82	1	1	1	

	EstimatedSalary	Exited
0	101348.88	1
1	112542.58	0
2	113931.57	1
3	93826.63	0
4	79084.10	0

```
df_numeric = df[['RowNumber', 'CustomerId', 'CreditScore', 'Age',
'Tenure', 'Balance',
'NumOfProducts', 'HasCrCard', 'IsActiveMember', 'EstimatedSalary', 'Exited']]
```

```
df_categorical = df[['Surname', 'Geography', 'Gender']]
df_numeric.head()
```

	RowNumber	CustomerId	CreditScore	Age	Tenure	Balance
0	1	15634602	619	42	2	0.00
1	2	15647311	608	41	1	83807.86
1	3	15619304	502	42	8	159660.80
2	4	15701354	699	39	1	0.00
3	5	15737888	850	43	2	125510.82

	HasCrCard	IsActiveMember	EstimatedSalary	Exited
0	1	1	101348.88	1
1	0	1	112542.58	0
2	1	0	113931.57	1
3	0	0	93826.63	0
4	1	1	79084.10	0

```
df_categorical.head()
```

	Surname	Geography	Gender
0	Hargrave	France	Female
1	Hill	Spain	Female
2	Onio	France	Female
3	Boni	France	Female
4	Mitchell	Spain	Female

```
print(df['Surname'].unique())
print(df['Geography'].unique())
print(df['Gender'].unique())
```

```
['Hargrave' 'Hill' 'Onio' ... 'Kashiwagi' 'Aldridge' 'Burbidge']
['France' 'Spain' 'Germany']
['Female' 'Male']
```

```

from sklearn.preprocessing import LabelEncoder

marry_encoder = LabelEncoder()
marry_encoder.fit(df_categorical['Gender'])

LabelEncoder()

marry_values = marry_encoder.transform(df_categorical['Gender'])

print("Before Encoding:", list(df_categorical['Gender'][-10:]))
print("After Encoding:", marry_values[-10:])
print("The inverse from the encoding result:",
marry_encoder.inverse_transform(marry_values[-10:]))

Before Encoding: ['Male', 'Female', 'Male', 'Male', 'Female', 'Male',
'Male', 'Female', 'Male', 'Female']
After Encoding: [1 0 1 1 0 1 1 0 1 0]
The inverse from the encoding result: ['Male' 'Female' 'Male' 'Male'
'Female' 'Male' 'Male' 'Female' 'Male'
'Female']

residence_encoder = LabelEncoder()
residence_values =
residence_encoder.fit_transform(df_categorical['Geography'])

print("Before Encoding:", list(df_categorical['Geography'][:5]))
print("After Encoding:", residence_values[:5])
print("The inverse from the encoding result:",
residence_encoder.inverse_transform(residence_values[:5]))

Before Encoding: ['France', 'Spain', 'France', 'France', 'Spain']
After Encoding: [0 2 0 0 2]
The inverse from the encoding result: ['France' 'Spain' 'France'
'France' 'Spain']

from sklearn.preprocessing import OneHotEncoder

gender_encoder = OneHotEncoder()

from sklearn.preprocessing import OneHotEncoder
import numpy as np

gender_encoder = OneHotEncoder()
gender_resaped = np.array(df_categorical['Gender']).reshape(-1, 1)
gender_values = gender_encoder.fit_transform(gender_resaped)

print(df_categorical['Gender'][:5])
print()
print(gender_values.toarray()[:5])
print()
print(gender_encoder.inverse_transform(gender_values)[:5])

```



```
0    Female
1    Female
2    Female
3    Female
4    Female
Name: Gender, dtype: object
```

```
[[1. 0.]
 [1. 0.]
 [1. 0.]
 [1. 0.]
 [1. 0.]]
```

```
[['Female']
 ['Female']
 ['Female']
 ['Female']
 ['Female']]
```

```
smoke_encoder = OneHotEncoder()
smoke_resaped = np.array(df_categorical['Surname']).reshape(-1, 1)
smoke_values = smoke_encoder.fit_transform(smoke_resaped)
```

```
print(df_categorical['Surname'][:5])
print()
print(smoke_values.toarray()[:5])
print()
print(smoke_encoder.inverse_transform(smoke_values)[:5])
```

```
0    Hargrave
1      Hill
2      Onio
3      Boni
4    Mitchell
Name: Surname, dtype: object
```

```
[[0. 0. 0. ... 0. 0. 0.]
 [0. 0. 0. ... 0. 0. 0.]
 [0. 0. 0. ... 0. 0. 0.]
 [0. 0. 0. ... 0. 0. 0.]
 [0. 0. 0. ... 0. 0. 0.]]
```

```
[['Hargrave']
 ['Hill']
 ['Onio']
 ['Boni']
 ['Mitchell']]
```

```
work_encoder = OneHotEncoder()
work_resaped = np.array(df_categorical['Geography']).reshape(-1, 1)
```

```
work_values = work_encoder.fit_transform(work_resaped)
```

```
print(df_categorical['Geography'][:5])
```

```
print()
```

```
print(work_values.toarray()[:5])
```

```
print()
```

```
print(work_encoder.inverse_transform(work_values)[:5])
```

```
0    France
```

```
1     Spain
```

```
2    France
```

```
3    France
```

```
4     Spain
```

```
Name: Geography, dtype: object
```

```
[[1. 0. 0.]
```

```
 [0. 0. 1.]
```

```
 [1. 0. 0.]
```

```
 [1. 0. 0.]
```

```
 [0. 0. 1.]]
```

```
[['France']
```

```
 ['Spain']
```

```
 ['France']
```

```
 ['France']
```

```
 ['Spain']]
```

```
df_categorical_encoded = pd.get_dummies(df_categorical,
```

```
drop_first=True)
```

```
df_categorical_encoded.head()
```

	Surname_Abbie	Surname_Abbott	Surname_Abdullah	Surname_Abdulov	\
0	0	0	0	0	
1	0	0	0	0	
2	0	0	0	0	
3	0	0	0	0	
4	0	0	0	0	

	Surname_Abel	Surname_Abernathy	Surname_Abramov	Surname_Abramova	\
0	0	0	0	0	
1	0	0	0	0	
2	0	0	0	0	
3	0	0	0	0	
4	0	0	0	0	

	Surname_Abramovich	Surname_Abramowitz	...	Surname_Zotova
Surname_Zox \				
0	0	0	...	0
0				
1	0	0	...	0
0				
2	0	0	...	0
0				
3	0	0	...	0
0				
4	0	0	...	0
0				

	Surname_Zubarev	Surname_Zubareva	Surname_Zuev	Surname_Zuyev	\
0	0	0	0	0	
1	0	0	0	0	
2	0	0	0	0	
3	0	0	0	0	
4	0	0	0	0	

	Surname_Zuyeva	Geography_Germany	Geography_Spain	Gender_Male
0	0	0	0	0
1	0	0	1	0
2	0	0	0	0
3	0	0	0	0
4	0	0	1	0

[5 rows x 2934 columns]

```
df_new = pd.concat([df_numeric, df_categorical_encoded], axis=1)
df_new.head()
```

	RowNumber	CustomerId	CreditScore	Age	Tenure	Balance
NumOfProducts \						
0	1	15634602	619	42	2	0.00
1						
1	2	15647311	608	41	1	83807.86
1						
2	3	15619304	502	42	8	159660.80
3						
3	4	15701354	699	39	1	0.00
2						
4	5	15737888	850	43	2	125510.82
1						

	HasCrCard	IsActiveMember	EstimatedSalary	...	Surname_Zotova	\
0	1	1	101348.88	...	0	
1	0	1	112542.58	...	0	
2	1	0	113931.57	...	0	

3	0	0	93826.63	...	0
4	1	1	79084.10	...	0

	Surname_Zox	Surname_Zubarev	Surname_Zubareva	Surname_Zuev	\
0	0	0	0	0	
1	0	0	0	0	
2	0	0	0	0	
3	0	0	0	0	
4	0	0	0	0	

	Surname_Zuyev	Surname_Zuyeva	Geography_Germany	
Geography_Spain	\			
0	0	0	0	0
1	0	0	0	1
2	0	0	0	0
3	0	0	0	0
4	0	0	0	1

	Gender_Male
0	0
1	0
2	0
3	0
4	0

[5 rows x 2945 columns]

Split the data into dependent and independent variables.

```
df=pd.read_csv('/content/Churn_Modelling.csv')
```

```
print(df["Balance"].min())
print(df["Balance"].max())
print(df["Balance"].mean())
```

```
0.0
250898.09
76485.889288
```

```
print(df.count(0))
```

```
RowNumber      10000
CustomerId     10000
Surname         10000
```

```

CreditScore      10000
Geography        10000
Gender           10000
Age              10000
Tenure           10000
Balance          10000
NumOfProducts   10000
HasCrCard        10000
IsActiveMember   10000
EstimatedSalary  10000
Exited           10000
dtype: int64

print(df.shape)

(10000, 14)

print(df.size)

140000

X = df.iloc[:, :-1].values
print(X)

[[1 15634602 'Hargrave' ... 1 1 101348.88]
 [2 15647311 'Hill' ... 0 1 112542.58]
 [3 15619304 'Onio' ... 1 0 113931.57]
 ...
 [9998 15584532 'Liu' ... 0 1 42085.58]
 [9999 15682355 'Sabbatini' ... 1 0 92888.52]
 [10000 15628319 'Walker' ... 1 0 38190.78]]

Y = df.iloc[:, -1].values
print(Y)

[1 0 1 ... 1 1 0]

```

Scale the independent variables

```

df = pd.read_csv('/content/Churn_Modelling.csv')


x = df[['Age', 'Tenure']].values
y = df['Gender'].values

fig, ax = plt.subplots(ncols=2, figsize=(12, 4))

ax[0].scatter(x[:,0], y)
ax[1].scatter(x[:,1], y)

plt.show()


```

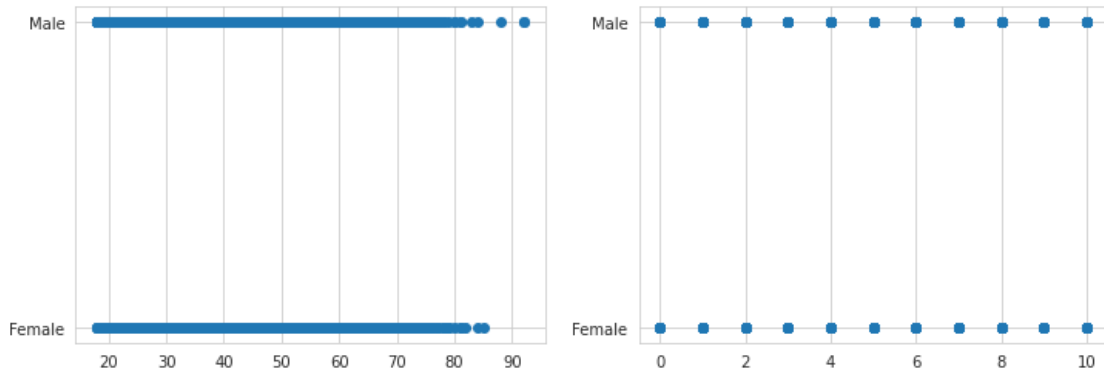

```
fig, ax = plt.subplots(figsize=(12, 4))
```

```
ax.scatter(x[:,0], y)
ax.scatter(x[:,1], y)
```


```
<matplotlib.collections.PathCollection at 0x7fc8f55dbf50>
```

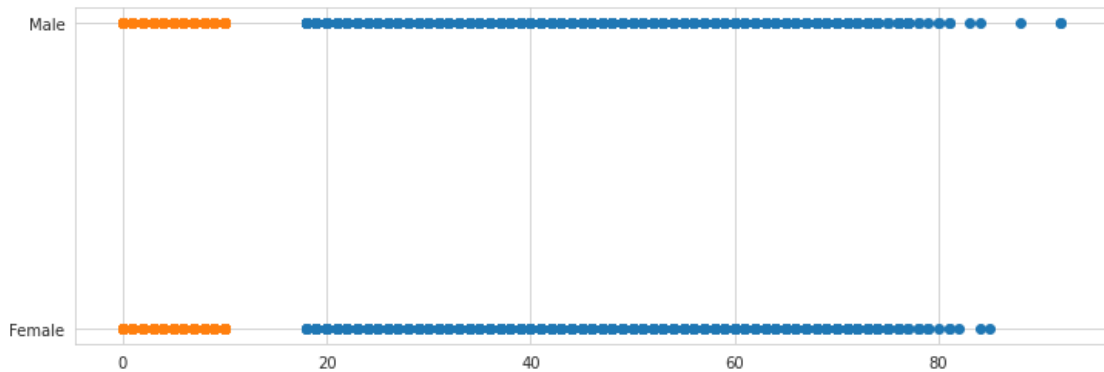

```
fig, ax = plt.subplots(figsize=(12, 4))
```

```
ax.hist(x[:,0])
ax.hist(x[:,1])
```

```
(array([ 413., 1035., 1048., 1009.,  989., 1012.,  967., 1028., 1025.,
        1474.]),
 array([ 0.,  1.,  2.,  3.,  4.,  5.,  6.,  7.,  8.,  9., 10.]),
 <a list of 10 Patch objects>)
```

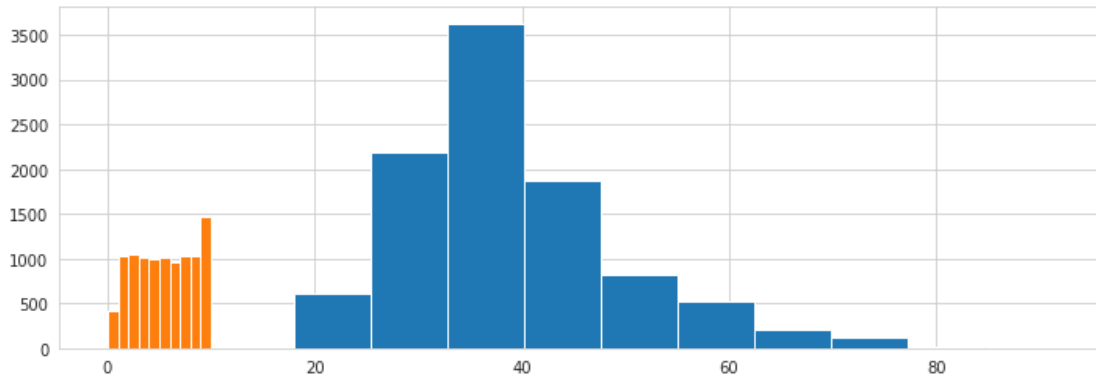


```
from sklearn.preprocessing import StandardScaler
from sklearn.preprocessing import MinMaxScaler
fig, ax = plt.subplots(figsize=(12, 4))
```

```
scaler = StandardScaler()
x_std = scaler.fit_transform(x)
```

```
ax.hist(x_std[:,0])
ax.hist(x_std[:,1])
```

```
(array([ 413., 1035., 1048., 1009., 2001.,    0., 1995.,    0., 1025.,
        1474.]),
 array([-1.73331549, -1.38753759, -1.04175968, -0.69598177, -
0.35020386,
        -0.00442596,  0.34135195,  0.68712986,  1.03290776,
        1.37868567,
        1.72446358]),
 <a list of 10 Patch objects>)
```

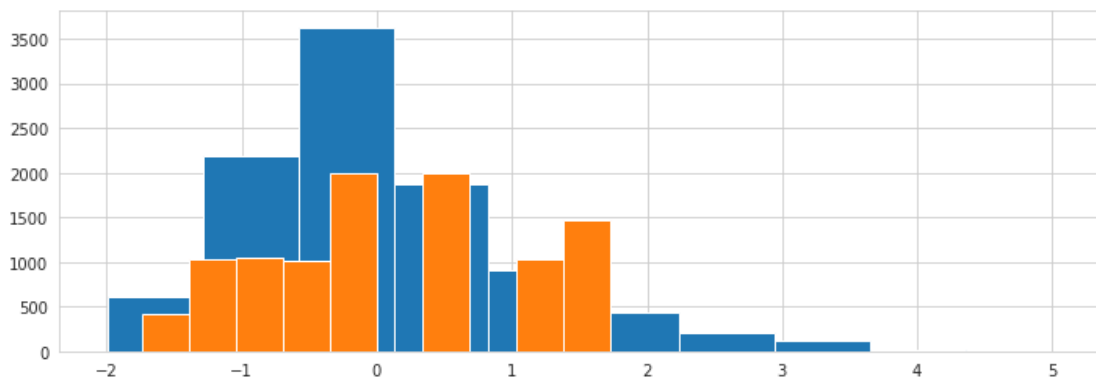


```
fig, ax = plt.subplots(figsize=(12, 4))
```

```
scaler = StandardScaler()
x_std = scaler.fit_transform(x)
```

```
ax.scatter(x_std[:,0], y)
ax.scatter(x_std[:,1], y)
```

<matplotlib.collections.PathCollection at 0x7fc8f550ce50>

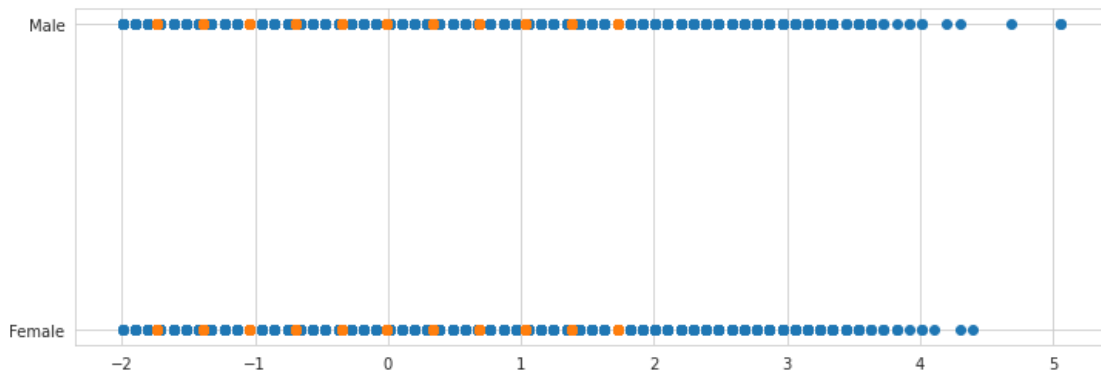


```
fig, ax = plt.subplots(figsize=(12, 4))
```

```
scaler = MinMaxScaler()  
x_minmax = scaler.fit_transform(x)
```

```
ax.hist(x_minmax[:,0])  
ax.hist(x_minmax[:,1])
```

```
(array([ 413., 1035., 1048., 1009.,  989., 1012.,  967., 1028., 1025.,  
        1474.]),  
 array([0. , 0.1, 0.2, 0.3, 0.4, 0.5, 0.6, 0.7, 0.8, 0.9, 1. ]),  
 <a list of 10 Patch objects>)
```

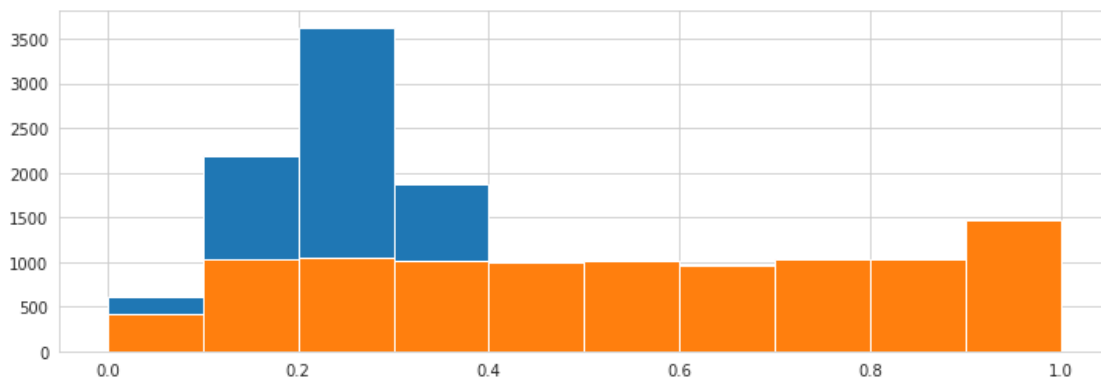


```
fig, ax = plt.subplots(figsize=(12, 4))
```

```
scaler = MinMaxScaler()  
x_minmax = scaler.fit_transform(x)
```

```
ax.scatter(x_minmax[:,0], y)  
ax.scatter(x_minmax[:,1], y)
```

<matplotlib.collections.PathCollection at 0x7fc8f541c7d0>

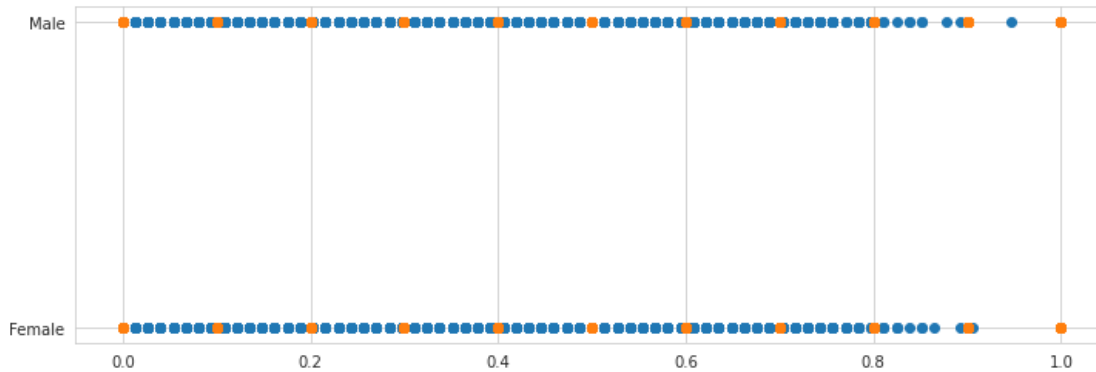


```
fig, ax = plt.subplots(figsize=(12, 4))
```

```
scaler = MinMaxScaler()
```

```
x_minmax = scaler.fit_transform(x)
```

```
ax.scatter(x_minmax[:,0], y)
```

```
<matplotlib.collections.PathCollection at 0x7fc8f5378050>
```

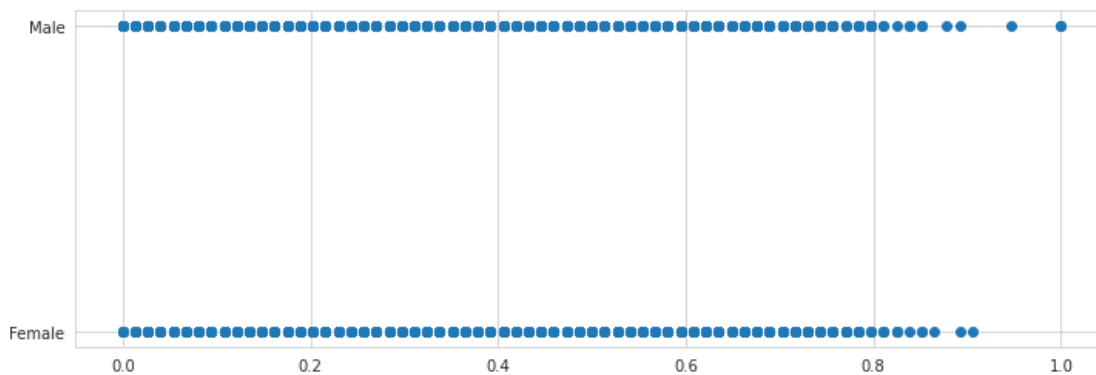


```
fig, ax = plt.subplots(figsize=(12, 4))
```

```
scaler = MinMaxScaler()
```

```
x_minmax = scaler.fit_transform(x)
```

```
ax.hist(x_minmax[:,0])
```

```
(array([ 611., 2179., 3629., 1871.,  910.,  441.,  208.,  127.,   20.,
         4.]),
 array([0. , 0.1, 0.2, 0.3, 0.4, 0.5, 0.6, 0.7, 0.8, 0.9, 1. ]),
 <a list of 10 Patch objects>)
```

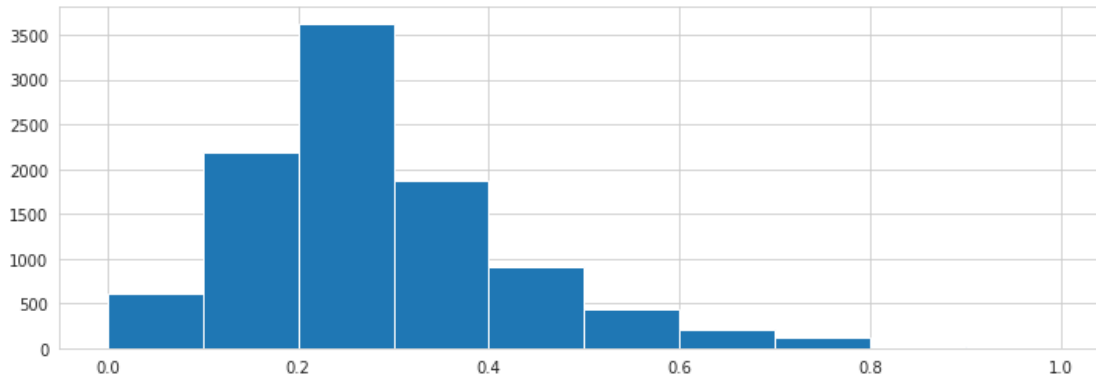

```
from sklearn.model_selection import train_test_split
from sklearn.pipeline import Pipeline
from sklearn.linear_model import SGDRegressor
from sklearn.preprocessing import StandardScaler
from sklearn.preprocessing import MinMaxScaler
from sklearn.metrics import mean_absolute_error
import sklearn.metrics as metrics

import pandas as pd
import numpy as np
import matplotlib.pyplot as plt

# Import Data
df = pd.read_csv('/content/Churn_Modelling.csv')
x = df[['Age', 'Tenure']].values
y = df['Balance'].values

# Split into a training and testing set
X_train, X_test, Y_train, Y_test = train_test_split(x, y)

# Define the pipeline for scaling and model fitting
pipeline = Pipeline([
    ("MinMax Scaling", MinMaxScaler()),
    ("SGD Regression", SGDRegressor())
])

# Scale the data and fit the model
pipeline.fit(X_train, Y_train)

# Evaluate the model
Y_pred = pipeline.predict(X_test)
print('Mean Absolute Error: ', mean_absolute_error(Y_pred, Y_test))
print('Score', pipeline.score(X_test, Y_test))

Mean Absolute Error: 56888.10041966131
Score -0.0023005203295385357
```

Split the data into training and testing

```
dataset = pd.read_csv('/content/Churn_Modelling.csv')
print(dataset)
```

	RowNumber	CustomerId	Surname	CreditScore	Geography	Gender
Age \						
0	1	15634602	Hargrave	619	France	Female
42						
1	2	15647311	Hill	608	Spain	Female
41						
2	3	15619304	Onio	502	France	Female
42						
3	4	15701354	Boni	699	France	Female
39						
4	5	15737888	Mitchell	850	Spain	Female
43						
...
...						
9995	9996	15606229	Obijiaku	771	France	Male
39						
9996	9997	15569892	Johnstone	516	France	Male
35						
9997	9998	15584532	Liu	709	France	Female
36						
9998	9999	15682355	Sabbatini	772	Germany	Male
42						
9999	10000	15628319	Walker	792	France	Female
28						

	Tenure	Balance	NumOfProducts	HasCrCard	IsActiveMember	\
0	2	0.00	1	1		1
1	1	83807.86	1	0		1
2	8	159660.80	3	1		0
3	1	0.00	2	0		0
4	2	125510.82	1	1		1
...
9995	5	0.00	2	1		0
9996	10	57369.61	1	1		1
9997	7	0.00	1	0		1
9998	3	75075.31	2	1		0
9999	4	130142.79	1	1		0

	EstimatedSalary	Exited
0	101348.88	1
1	112542.58	0
2	113931.57	1
3	93826.63	0
4	79084.10	0
...
9995	96270.64	0

```

9996      101699.77      0
9997      42085.58      1
9998      92888.52      1
9999      38190.78      0

```

```
[10000 rows x 14 columns]
```

```
dataset.drop(["HasCrCard"],axis=1,inplace=True)
```

```

print(dataset.shape)#no. of rows and colume
print(dataset.head(10))

```

```
(10000, 13)
```

	RowNumber	CustomerId	Surname	CreditScore	Geography	Gender	Age
0	1	15634602	Hargrave	619	France	Female	42
1	2	15647311	Hill	608	Spain	Female	41
2	3	15619304	Onio	502	France	Female	42
3	4	15701354	Boni	699	France	Female	39
4	5	15737888	Mitchell	850	Spain	Female	43
5	6	15574012	Chu	645	Spain	Male	44
6	7	15592531	Bartlett	822	France	Male	50
7	8	15656148	Obinna	376	Germany	Female	29
8	9	15792365	He	501	France	Male	44
9	10	15592389	H?	684	France	Male	27

	Tenure	Balance	NumOfProducts	IsActiveMember	EstimatedSalary
0	2	0.00	1	1	101348.88
1	1	83807.86	1	1	112542.58
2	8	159660.80	3	0	113931.57
3	1	0.00	2	0	93826.63
4	2	125510.82	1	1	79084.10
5	8	113755.78	2	0	149756.71

1					
6	7	0.00	2	1	10062.80
0					
7	4	115046.74	4	0	119346.88
1					
8	4	142051.07	2	1	74940.50
0					
9	2	134603.88	1	1	71725.73
0					

```
X=dataset.iloc[:, :-1].values
```

```
X
```

```
array([[1, 15634602, 'Hargrave', ..., 1, 1, 101348.88],
       [2, 15647311, 'Hill', ..., 1, 1, 112542.58],
       [3, 15619304, 'Onio', ..., 3, 0, 113931.57],
       ...,
       [9998, 15584532, 'Liu', ..., 1, 1, 42085.58],
       [9999, 15682355, 'Sabbatini', ..., 2, 0, 92888.52],
       [10000, 15628319, 'Walker', ..., 1, 0, 38190.78]],
```

```
dtype=object)
```

```
Y=dataset.iloc[:, -1].values
```

```
Y
```

```
array([1, 0, 1, ..., 1, 1, 0])
```

```
from sklearn.model_selection import train_test_split
```

```
X_train,X_test,Y_train,Y_test = train_test_split( X, Y, test_size =
0.25, random_state = 0 )
```

```
print(X_test)
```

```
[[9395 15615753 'Upchurch' ... 1 1 192852.67]
 [899 15654700 'Fallaci' ... 1 0 128702.1]
 [2399 15633877 'Morrison' ... 1 1 75732.25]
 ...
 [2042 15709846 'Yeh' ... 1 0 84487.62]
 [1109 15678886 'Golubev' ... 2 0 46522.68]
 [3333 15720508 'Hsing' ... 1 0 72927.68]]
```