

SENDGRID INTEGRATION WITH PYTHON

DATE	30 October 2022
TEAM ID	PNT2022TMID34259
PROJECT NAME	CUSTOMER CARE REGISTRY


STEP 1:

REQUIREMENTS:

Python 2.6, 2.7, 3.4 or 3.5.

STEP 2:

Create an API key

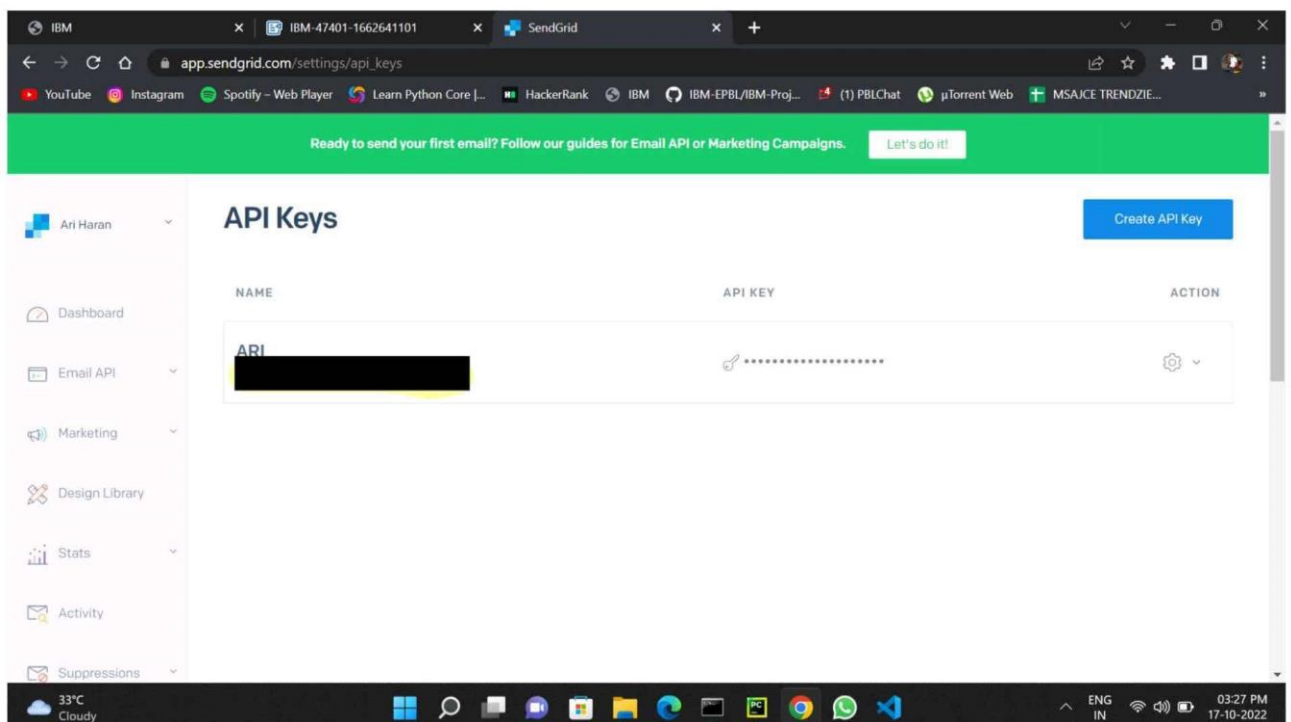


STEP 3:

INSTALL PACKAGE:

> pip install sendgrid

STEP 4:

SEND EMAIL

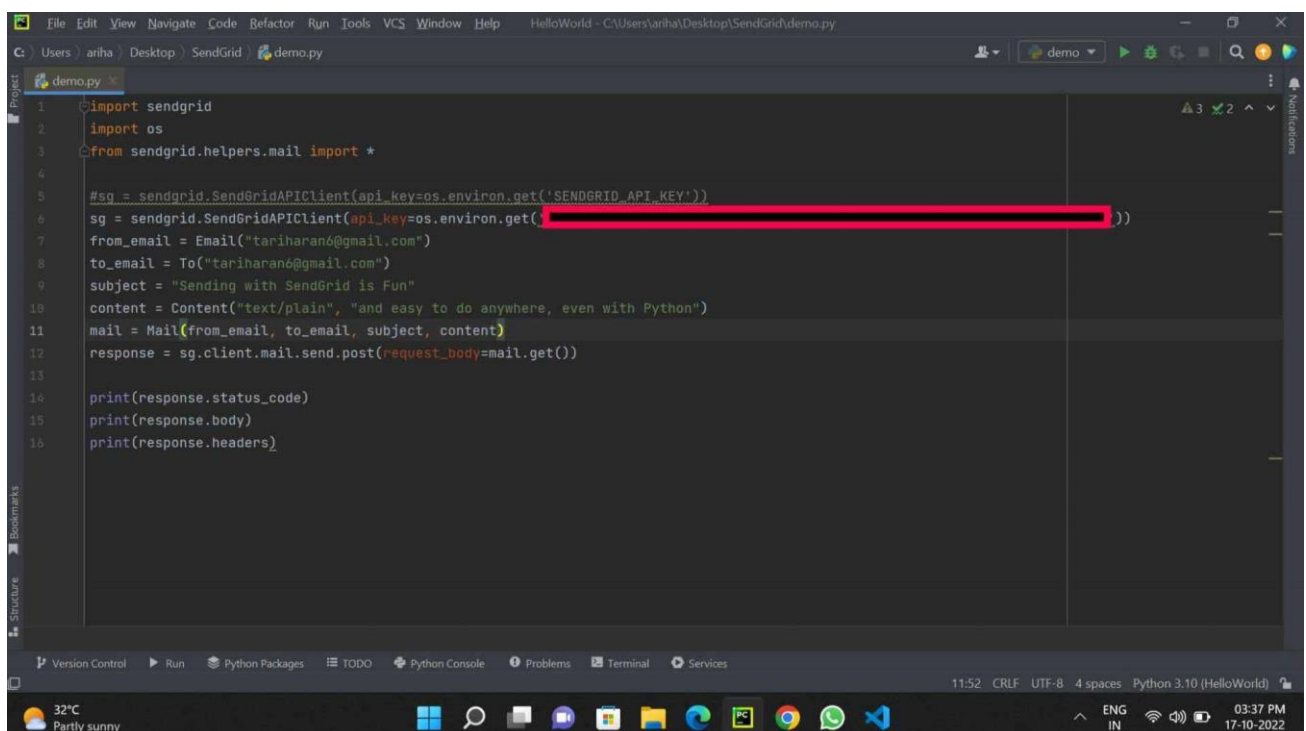

The screenshot shows a code editor with a Python script named `demo.py`. The script imports the `sendgrid` and `os` modules, and uses `sendgrid.helpers.mail` to create an email. It sets the API key from an environment variable, defines email details (from, to, subject, content), and sends the email using `sg.client.mail.send.post`. The response status code, body, and headers are printed.

```
1 import sendgrid
2 import os
3 from sendgrid.helpers.mail import *
4
5 # sg = sendgrid.SendGridAPIClient(api_key=os.environ.get('SENDGRID_API_KEY'))
6 sg = sendgrid.SendGridAPIClient(api_key=os.environ.get('SENDGRID_API_KEY'))
7 from_email = Email("tariharan@gmail.com")
8 to_email = To("tariharan@gmail.com")
9 subject = "Sending with SendGrid is Fun"
10 content = Content("text/plain", "and easy to do anywhere, even with Python")
11 mail = Mail(from_email, to_email, subject, content)
12 response = sg.client.mail.send.post(request_body=mail.get())
13
14 print(response.status_code)
15 print(response.body)
16 print(response.headers)
```

SENDGRID PYTHON CODE :

```

1  import os
2  from sendgrid import SendGridAPIClient
3  from sendgrid.helpers.mail import Mail
4
5  message = Mail(
6      from_email='from_email@example.com',
7      to_emails='to@example.com',
8      subject='Sending with Twilio SendGrid is Fun',
9      html_content='<strong>and easy to do anywhere, even with
    Python</strong>')
10 try:
11     sg = SendGridAPIClient(os.environ.get('SENDGRID_API_KEY'))
12     response = sg.send(message)
13     print(response.status_code)
14     print(response.body)
15     print(response.headers)
16 except Exception as e:
17     print(e.message)

```

HTTP CLIENT PROGRAM:

```

1  """HTTP Client library"""
2  import json
3  import logging
4  from .exceptions import handle_error
5
6  try:
7      # Python 3
8      import urllib.request as urllib
9      from urllib.parse import urlencode
10     from urllib.error import HTTPError
11 except ImportError:
12     # Python 2

```

```

13     import urllib2 as urllib
14     from urllib2 import HTTPError
15     from urllib import urlencode
16
17 _logger = logging.getLogger(__name__)
18
19
20 class Response(object):
21     """Holds the response from an API call."""
22
23     def __init__(self, response):
24         """
25         :param response: The return value from a open call
26                         on a urllib.build_opener()
27         :type response:  urllib response object
28         """
29         self._status_code = response.getcode()
30         self._body = response.read()
31         self._headers = response.info()
32
33     @property
34     def status_code(self):
35         """
36         :return: integer, status code of API call
37         """
38         return self._status_code
39
40     @property
41     def body(self):
42         """
43         :return: response from the API
44         """
45         return self._body
46
47     @property

```

```

48     def headers(self):
49         """
50         :return: dict of response headers
51         """
52         return self._headers
53
54     @property
55     def to_dict(self):
56         """
57         :return: dict of response from the API
58         """
59         if self.body:
60             return json.loads(self.body.decode('utf-8'))
61         else:
62             return None
63
64
65 class Client(object):
66     """Quickly and easily access any REST or REST-like API."""
67
68     # These are the supported HTTP verbs
69     methods = {'delete', 'get', 'patch', 'post', 'put'}
70
71     def __init__(self,
72                  host,
73                  request_headers=None,
74                  version=None,
75                  url_path=None,
76                  append_slash=False,
77                  timeout=None):
78         """
79         :param host: Base URL for the api. (e.g.
80             https://api.sendgrid.com)
81         :type host: string
82         :param request_headers: A dictionary of the headers you want

```

```

82             applied on all calls
83         :type request_headers: dictionary
84         :param version: The version number of the API.
85             Subclass _build_versioned_url for custom
behavior.
86             Or just pass the version as part of the URL
87             (e.g. client._("/v3"))
88         :type version: integer
89         :param url_path: A list of the url path segments
90         :type url_path: list of strings
91         """
92         self.host = host
93         self.request_headers = request_headers or {}
94         self._version = version
95         # _url_path keeps track of the dynamically built url
96         self._url_path = url_path or []
97         # APPEND SLASH set
98         self.append_slash = append_slash
99         self.timeout = timeout
100
101     def _build_versioned_url(self, url):
102         """Subclass this function for your own needs.
103             Or just pass the version as part of the URL
104             (e.g. client._('/v3'))
105         :param url: URI portion of the full URL being requested
106         :type url: string
107         :return: string
108         """
109         return '{}{}/v{}{}'.format(self.host, str(self._version),
url)
110
111     def _build_url(self, query_params):
112         """Build the final URL to be passed to urllib
113
114         :param query_params: A dictionary of all the query

```



```

parameters
115         :type query_params: dictionary
116         :return: string
117         """
118         url = ''
119         count = 0
120         while count < len(self._url_path):
121             url += '/{}'.format(self._url_path[count])
122             count += 1
123
124         # add slash
125         if self.append_slash:
126             url += '/'
127
128         if query_params:
129             url_values = urlencode(sorted(query_params.items()),
True)
130             url = '{}?{}'.format(url, url_values)
131
132         if self._version:
133             url = self._build_versioned_url(url)
134         else:
135             url = '{}{}'.format(self.host, url)
136         return url
137
138     def _update_headers(self, request_headers):
139         """Update the headers for the request
140
141         :param request_headers: headers to set for the API call
142         :type request_headers: dictionary
143         :return: dictionary
144         """
145         self.request_headers.update(request_headers)
146
147     def _build_client(self, name=None):

```

```

148         """Make a new Client object
149
150         :param name: Name of the url segment
151         :type name: string
152         :return: A Client object
153         """
154         url_path = self._url_path + [name] if name else
            self._url_path
155         return Client(host=self.host,
156                       version=self._version,
157                       request_headers=self.request_headers,
158                       url_path=url_path,
159                       append_slash=self.append_slash,
160                       timeout=self.timeout)
161
162     def _make_request(self, opener, request, timeout=None):
163         """Make the API call and return the response. This is
            separated into
164             it's own function, so we can mock it easily for testing.
165
166         :param opener:
167         :type opener:
168         :param request: url payload to request
169         :type request: urllib.Request object
170         :param timeout: timeout value or None
171         :type timeout: float
172         :return: urllib response
173         """
174         timeout = timeout or self.timeout
175         try:
176             return opener.open(request, timeout=timeout)
177         except HTTPError as err:
178             exc = handle_error(err)
179             exc.__cause__ = None
180             _logger.debug('{method} Response: {status}

```



```

        {body}'.format(
181             method=request.get_method(),
182             status=exc.status_code,
183             body=exc.body))
184         raise exc
185
186     def _(self, name):
187         """Add variable values to the url.
188         (e.g. /your/api/{variable_value}/call)
189         Another example: if you have a Python reserved word,
        such as global,
190         in your url, you must use this method.
191
192         :param name: Name of the url segment
193         :type name: string
194         :return: Client object
195         """
196         return self._build_client(name)
197
198     def __getattr__(self, name):
199         """Dynamically add method calls to the url, then call a
        method.
200         (e.g. client.name.name.method())
201         You can also add a version number by using
        .version(<int>)
202
203         :param name: Name of the url segment or method call
204         :type name: string or integer if name == version
205         :return: mixed
206         """
207         if name == 'version':
208             def get_version(*args, **kwargs):
209                 """
210                 :param args: dict of settings
211                 :param kwargs: unused

```

```

212         :return: string, version
213         """
214         self._version = args[0]
215         return self._build_client()
216     return get_version
217
218     # We have reached the end of the method chain, make the API
    call
219     if name in self.methods:
220         method = name.upper()
221
222         def http_request(
223             request_body=None,
224             query_params=None,
225             request_headers=None,
226             timeout=None,
227             **_):
228             """Make the API call
229             :param timeout: HTTP request timeout. Will be
    propagated to
230             urllib client
231             :type timeout: float
232             :param request_headers: HTTP headers. Will be
    merged into
233             current client object state
234             :type request_headers: dict
235             :param query_params: HTTP query parameters
236             :type query_params: dict
237             :param request_body: HTTP request body
238             :type request_body: string or json-serializable
    object
239             :param kwargs:
240             :return: Response object
241             """
242             if request_headers:

```

```
243         self._update_headers(request_headers)
244
245         if request_body is None:
246             data = None
247         else:
248             # Don't serialize to a JSON formatted str
249             # if we don't have a JSON Content-Type
250             if 'Content-Type' in self.request_headers and \
251                 self.request_headers['Content-Type'] != \
252                 'application/json':
253                 data = request_body.encode('utf-8')
254             else:
255                 self.request_headers.setdefault(
256                     'Content-Type', 'application/json')
257                 data =
258                 json.dumps(request_body).encode('utf-8')
259
260         opener = urllib.build_opener()
261         request = urllib.Request(
262             self._build_url(query_params),
263             headers=self.request_headers,
264             data=data,
265         )
266         request.get_method = lambda: method
267
268         _logger.debug('{method} Request: {url}'.format(
269             method=method,
270             url=request.get_full_url()))
271         if request.data:
272             _logger.debug('PAYLOAD: {data}'.format(
273                 data=request.data))
274         _logger.debug('HEADERS: {headers}'.format(
275             headers=request.headers))
```

```
276         response = Response(
277             self._make_request(opener, request,
278                 timeout=timeout)
279         )
280         _logger.debug('{method} Response: {status}
281             {body}'.format(
282                 method=method,
283                 status=response.status_code,
284                 body=response.body))
285         return response
286
287         return http_request
288     else:
289         # Add a segment to the URL
290         return self._.(name)
291
292     def __getstate__(self):
293         return self.__dict__
294
295     def __setstate__(self, state):
```