

ASSIGNMENT 4

```
import pandas as pd
import numpy as np
import seaborn as sns
import matplotlib.pyplot as plt
```

```
from google.colab import files
upload=files.upload()
df=pd.read_csv('abalone.csv')
df.describe()
```

Choose files abalone.csv **abalone.csv**(text/csv) - 191962 bytes, last modified:

- 31/10/2022 - 100% done

Saving abalone.csv to abalone (1).csv

	Length			Whole Diameter weight	Shucked Height weight	Viscera weight	
count	4177.000000	4177.000000	4177.000000	4177.000000	4177.000000	4177.000000	4177
mean	0.523992	0.407881	0.139516	0.828742	0.359367	0.180594	0
std	0.120093	0.099240	0.041827	0.490389	0.221963	0.109614	0
min	0.075000	0.055000	0.000000	0.002000	0.001000	0.000500	0
25%	0.450000	0.350000	0.115000	0.441500	0.186000	0.093500	0
50%	0.545000	0.425000	0.140000	0.799500	0.336000	0.171000	0
75%	0.615000	0.480000	0.165000	1.153000	0.502000	0.253000	0

```
df.head()
```


	Sex	Length	Diameter	Height	Whole weight	Shucked weight	Viscera weight	Shell weight	Rings
0	M	0.455	0.365	0.095	0.5140	0.2245	0.1010	0.150	15
1	M	0.350	0.265	0.090	0.2255	0.0995	0.0485	0.070	7
2	F	0.530	0.420	0.135	0.6770	0.2565	0.1415	0.210	9
3	M	0.440	0.365	0.125	0.5160	0.2155	0.1140	0.155	10
4	I	0.330	0.255	0.080	0.2050	0.0895	0.0395	0.055	7

```
sns.boxplot(df.Length)
```

```
s.s.boxplot(d.e.g.t)
```


```
/usr/local/lib/python3.7/dist-packages/seaborn/_decorators.py:43: FutureWarning: Pass the  
FutureWarning
```

```
<matplotlib.axes._subplots.AxesSubplot at 0x7fc169f7ca50>
```

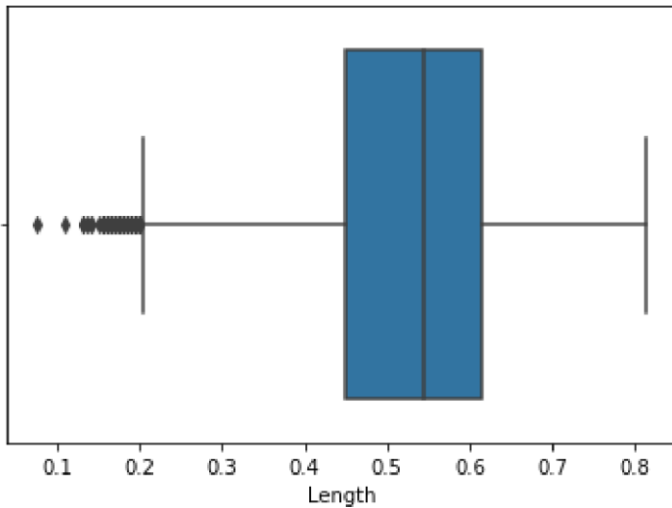

```
sns.countplot(x='Sex',data=df,palette='Set3')
```

```
<matplotlib.axes._subplots.AxesSubplot at 0x7fc169a05750>
```

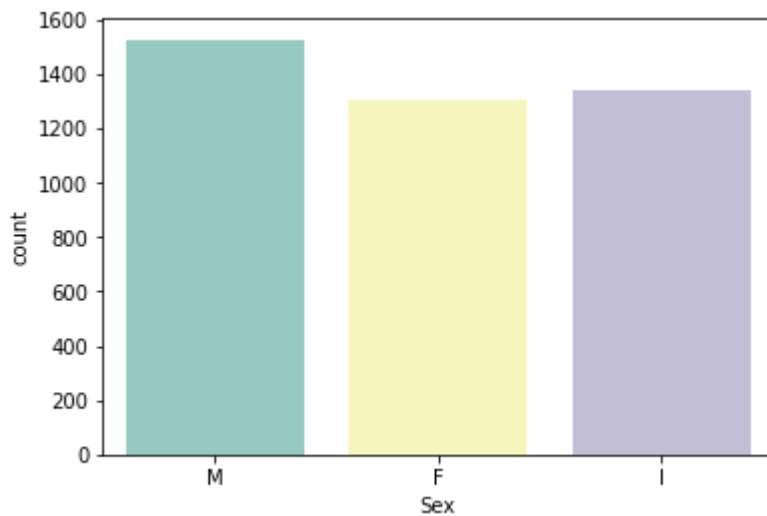



```
a=pd.read_csv('abalone.csv')
```

```
a['age']=a['Rings']+1.5
```


```
a=a.drop('Rings',axis=1)
```

```
sns.kdeplot(a['Diameter'])
```

```
<matplotlib.axes._subplots.AxesSubplot at  
0x7fc169986a90>
```

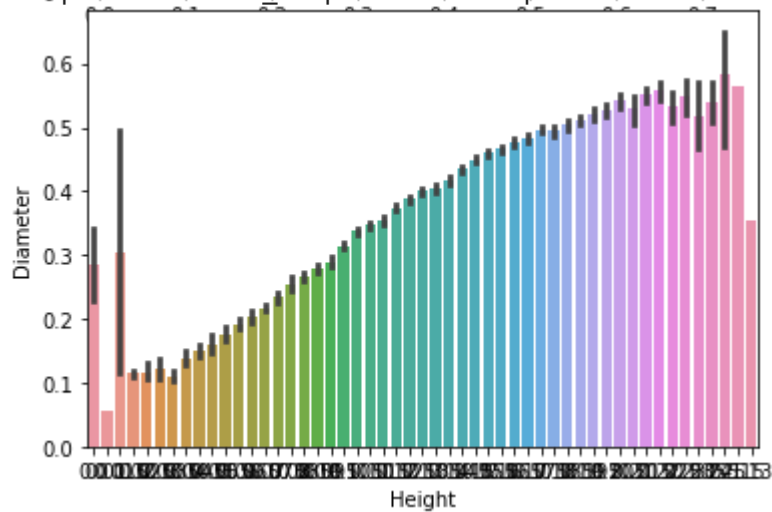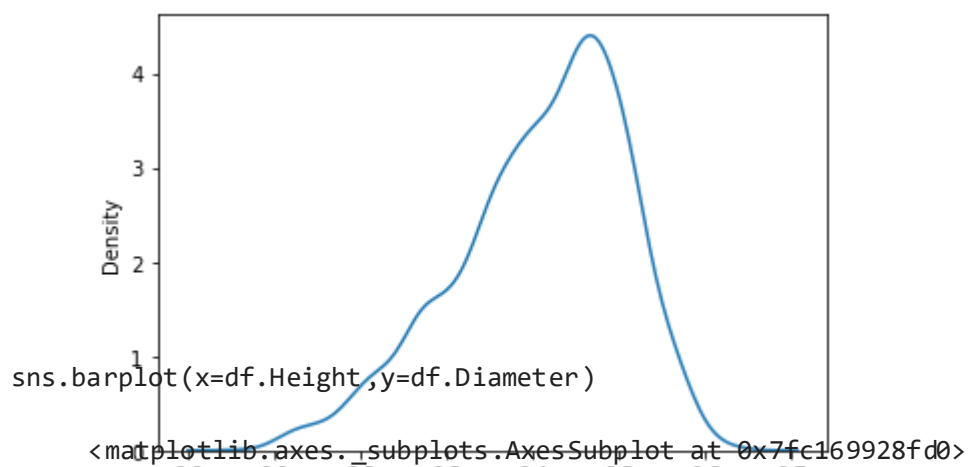

```
sns.pairplot(a)
<seaborn.axisgrid.PairGrid at 0x7fc1696dbc90>
```

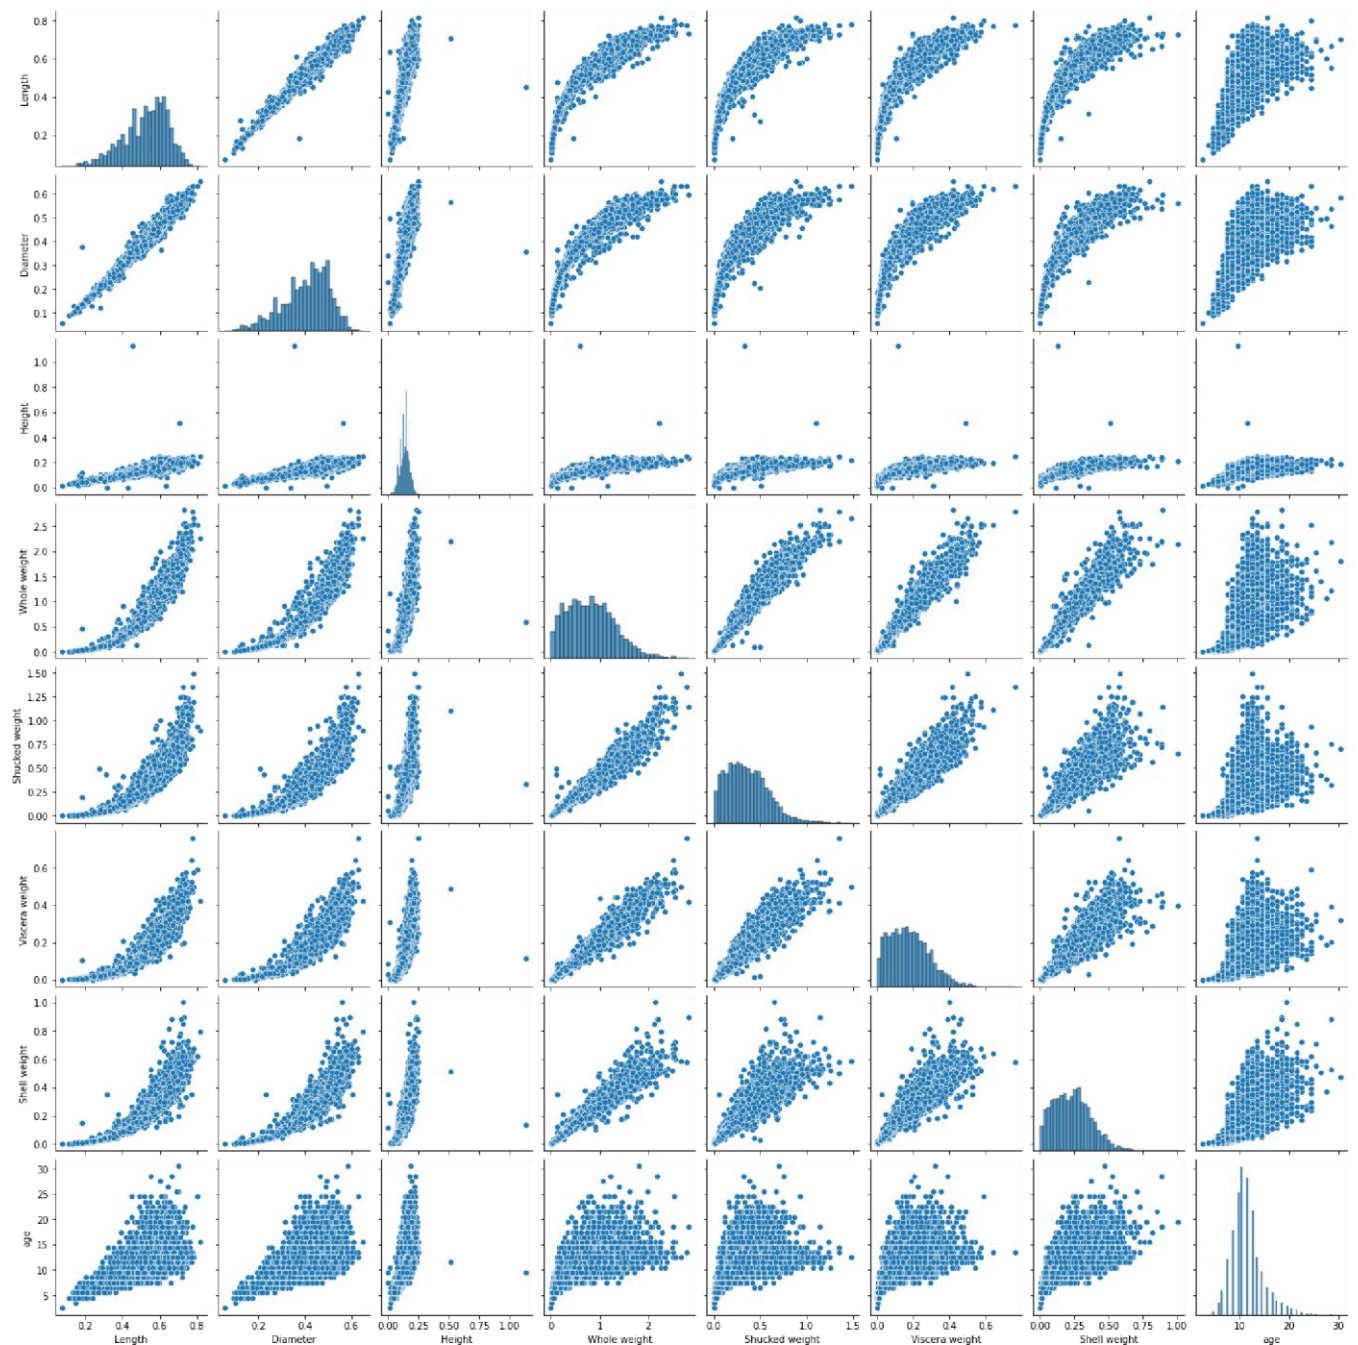

```
a.info()
```

```
<class 'pandas.core.frame.DataFrame'> RangeIndex:
```

```
4177 entries, 0 to 4176
```

```
Data columns (total 9 columns):
```

```
#    Column          Non-Null Count  Dtype
```

```
---  ---
```

```
0    Sex            4177 non-null    object
```

```
1    Length         4177 non-null    float64
```

```
2    Diameter       4177 non-null    float64
```

```
3    Height         4177 non-null    float64
```

```
4    Whole weight   4177 non-null    float64
```

```
5    Shucked weight 4177 non-null    float64
```

```
6    Viscera weight 4177 non-null    float64
```

```
7    Shell weight   4177 non-null    float64  8    age
```

```
4177 non-null    float64
```

```
dtypes: float64(8), object(1) memory usage: 293.8+ KB
```

```
a['Diameter'].describe()

count      4177.000000
mean        0.407881 std
0.099240 min
0.055000 25%
0.350000
50%        0.425000 75%
0.480000 max
0.650000
Name: Diameter, dtype: float64
```

```
a['Sex'].value_counts()

M      1528
I      1342
F      1307
Name: Sex, dtype: int64
```

```
df['Height'].describe()

count      4177.000000
mean        0.139516 std
0.041827 min
0.000000 25%
0.115000
50%        0.140000
75%        0.165000
max        1.130000
Name: Height, dtype: float64
```

```
df[df.Height==0]
```

Sex Length Diameter Height					Whole weight	Shucked weight	Viscera weight	Shell weight	Rings
1257	I	0.430	0.34	0.0	0.428	0.2065	0.0860	0.1150	8
3996	I	0.315	0.23	0.0	0.134	0.0575	0.0285	0.3505	6


```
df['Diameter'].median()

0.425
```

```
df['Shucked weight'].skew()

0.7190979217612694
```

```
missing_values=df.isnull().sum().sort_values(ascending=False)
percentage_missing_values=(missing_values/len(df))*100
pd.concat([missing_values,percentage_missing_values],axis=1,keys=['Missing values','%'])
```

	Missing values	%	
Sex	0	0.0	
Length	0	0.0	
Diameter	0	0.0	
Height	0	0.0	
Whole weight	0	0.0	
Shucked weight	0	0.0	
Viscera weight	0	0.0	
Shell weight	0	0.0	
Rings	0	0.0	

```
q1=df.Rings.quantile(0.25
)
```

```
q2=df.Rings.quantile(0.75
) iqr=q1-q2 print(iqr)
```


```
-3.0
```

```
df=pd.get_dummies(df)
```

```
dummy_df=df
```

```
df.boxplot(rot=90 ,figsize=(20,5))
```

```
<matplotlib.axes._subplots.AxesSubplot at 0x7fc164f09310>
```

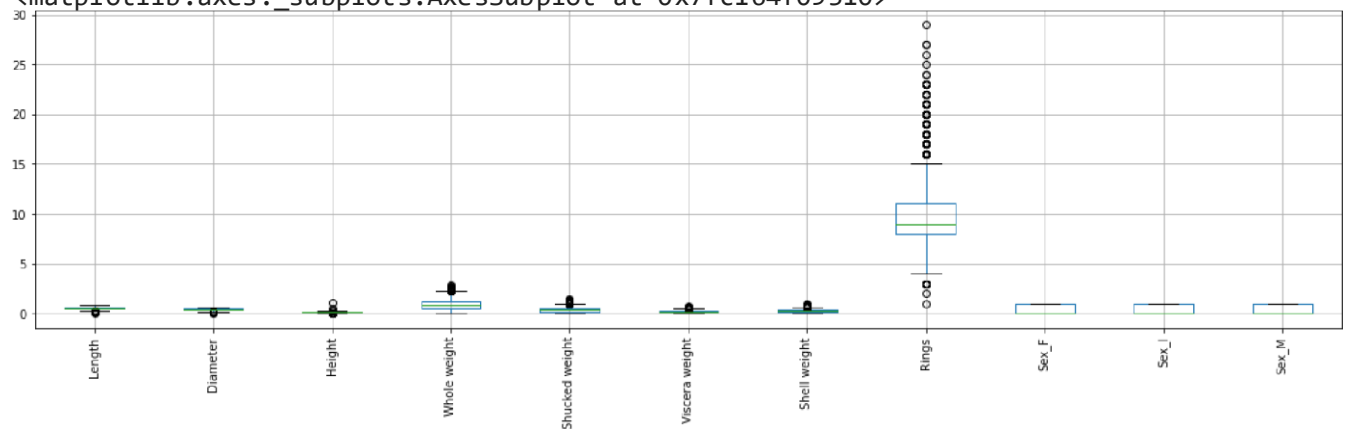


```
df['age']=df['Rings']
```

```
df=df.drop('Rings',axis=1)
```

```
df.drop(df[(df['Viscera weight']>0.5)& (df['age']<20)].index,inplace=True)
df.drop(df[(df['Viscera weight']<0.5)& (df['age']>25)].index,inplace=True)
```


```
var='Shell weight'
plt.scatter(x=df[var],y=df['age'])
```

<matplotlib.collections.PathCollection at 0x7fc1634bf0d0>

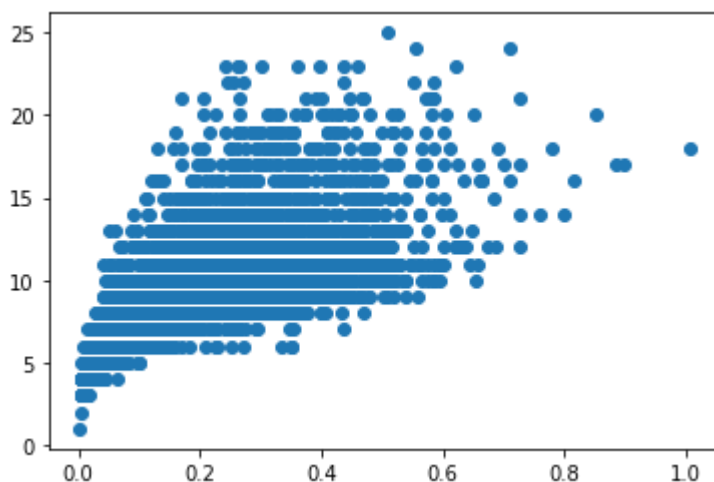

```
numerical_features=df.select_dtypes(include=[np.number]).columns
categorical_features=df.select_dtypes(include=[np.object]).columns
```

/usr/local/lib/python3.7/dist-packages/ipykernel_launcher.py:2: DeprecationWarning: `np` deprecated in NumPy 1.20; for more details and guidance: [https://numpy.org/devdocs/relea](https://numpy.org/devdocs/release-1.20.0-notes.html#deprecations)



```
abalone_numeric=df[['Length','Diameter','Height','Whole weight','Shucked weight','Viscera wei
```

```
abalone_numeric.head()
```

	Length	Diameter	Height	Whole age	weight	Shucked weight	Viscera weight	Shell
0	0.455	0.365	0.095	0.5140	0.2245	0.1010	0.150	15
1	0.350	0.265	0.090	0.2255	0.0995	0.0485	0.070	7
2	0.530	0.420	0.135	0.6770	0.2565	0.1415	0.210	9
3	0.440	0.365	0.125	0.5160	0.2155	0.1140	0.155	10
4	0.330	0.255	0.080	0.2050	0.0895	0.0395	0.055	7

```
x=df.iloc[:,0:1].value
s y=df.iloc[:,1] y
```

```
0    0.365
1    0.265
2    0.420
3    0.365
```

```

4      0.255      ...
4172   0.450
4173   0.440
4174   0.475
4175   0.485
4176   0.555
Name: Diameter, Length: 4150, dtype: float64

```

```
print("\n ORIGINAL VALUES:\n\n", x,y )
```

ORIGINAL VALUES:

```

[[0.455]
 [0.35 ]
 [0.53 ]
 ...
 [0.6  ]
 [0.625]
 [0.71 ]] 0      0.365
1      0.265
2      0.420
3      0.365
4      0.255      ...
4172   0.450
4173   0.440
4174   0.475
4175   0.485
4176   0.555
Name: Diameter, Length: 4150, dtype: float64

```

```

from sklearn import preprocessing
min_max_scaler=preprocessing.MinMaxScaler(feature_range=(0,1)
) new_y=min_max_scaler.fit_transform(x,y) print("\n Values
after min max scaling: \n\n", new_y)

```

Values after min max scaling:

```

[[0.51351351]
 [0.37162162]
 [0.61486486]
 ...
 [0.70945946]
 [0.74324324]
 [0.85810811]]

```

```

x=df.drop(' age', axis=1)
y=df[' age']

```



```

from sklearn.preprocessing import StandardScaler
from sklearn.model_selection import train_test_split, cross_val_score
from sklearn.feature_selection import SelectKBest
StandardScale=StandardScaler()
StandardScale.fit_transform(x)

```

```

array([[ -0.56736455, -0.42395732, -1.05992592, ..., -0.67424712,
        -0.69131775,  1.32156176],
       [ -1.44754363, -1.43820927, -1.1801252 , ..., -0.67424712,
        -0.69131775,  1.32156176],
       [  0.0613348 ,  0.13388126, -0.0983317 , ...,  1.48313573,
        -0.69131775, -0.75668049],
       ...,
       [  0.64812085,  0.69171983,  1.58445819, ..., -0.67424712,
        0.69131775,  1.32156176],
       [  0.8576873 ,  0.79314503,  0.26226613, ...,  1.48313573,
        0.69131775, -0.75668049],
       [  1.57021323,  1.50312139,  1.34405963, ..., -0.67424712,
        -0.69131775,  1.32156176]])

```

```

SelectkBest=SelectKBest()
x_new=SelectkBest.fit_transform(x,y)

```

```

x_train,x_test,y_train,y_test=train_test_split(x_new,y,test_size=0.25)
x_train

```

```

array([[0.525, 0.425, 0.12 , ..., 0.    , 0.    , 1.    ],
       [0.46 , 0.355, 0.14 , ..., 0.    , 1.    , 0.    ],
       [0.59 , 0.445, 0.13 , ..., 1.    , 0.    , 0.    ],
       ...,
       [0.38 , 0.28 , 0.085, ..., 0.    , 1.    , 0.    ],
       [0.645, 0.49 , 0.19 , ..., 1.    , 0.    , 0.    ],
       [0.465, 0.37 , 0.115, ..., 0.    , 1.    , 0.    ]])

```

```

y_train

```

```

734      18
583      13
766      13
1113     8
2857     11
..
1564     7
2886     8
2166     6
3918     18
942       7

```

```

Name: age, Length: 3112, dtype: int64

```

```

from sklearn import linear_model as lm
from sklearn.linear_model import LinearRegression
model=lm.LinearRegression()
results=model.fit(x_train,y_train)
accuracy=model.score(x_train,y_train)
print('Accuracy of the model:',accuracy)

```

Accuracy of the model: 0.5290674506339392

```

from matplotlib.ticker import LinearLocator
lm=LinearRegression()
lm.fit(x_train,y_train)
y_train_pred=lm.predict(x_train)
y_train_pred
array([12.25 ,  8.375 , 12.5625, ...,  7.25 , 12.6875,  8.0625])
x_train

```

```

array([[0.525, 0.425, 0.12 , ..., 0.    , 0.    , 1.    ],
       [0.46 , 0.355, 0.14 , ..., 0.    , 1.    , 0.    ],
       [0.59 , 0.445, 0.13 , ..., 1.    , 0.    , 0.    ],
       ...,
       [0.38 , 0.28 , 0.085, ..., 0.    , 1.    , 0.    ],
       [0.645, 0.49 , 0.19 , ..., 1.    , 0.    , 0.    ],
       [0.465, 0.37 , 0.115, ..., 0.    , 1.    , 0.    ]])

```

y_train

```

734      18
583      13
766      13
1113     8
2857     11
..
1564      7
2886      8
2166      6
3918     18
942       7

```

Name: age, Length: 3112, dtype: int64

```

from sklearn.metrics import
mean_absolute_error,mean_squared_error
s=mean_squared_error(y_train,y_train_pred)
print('Mean Squared error of training set:%2f'%s)

```

Mean Squared error of training set:4.773554

```

y_train_pred=lm.predict(x_train)
y_test_pred=lm.predict(x_test)
y_test_pred
array([ 9.375 ,  7.3125, 11.5625, ...,  6.875 , 12.8125,
  8.1875])

```

x_test

```
array([[0.48 , 0.375, 0.105, ..., 1.    , 0.    , 0.    ],
       [0.635, 0.495, 0.015, ..., 1.    , 0.    , 0.    ],
       [0.655, 0.52 , 0.17 , ..., 0.    , 0.    , 1.    ],
       ...,
       [0.34 , 0.26 , 0.08 , ..., 0.    , 1.    , 0.    ],
       [0.5   , 0.4   , 0.165, ..., 0.    , 0.    , 1.    ],
       [0.485, 0.37 , 0.1   , ..., 0.    , 1.    , 0.    ]])
```

y_test

```
↳ 727      12
    1174      9
    1963      9
    3440      7
    2982      9
      ..
    4023      6
    2921      9
    347       6
    201      13
    3443      7
    Name: age, Length: 1038, dtype: int64
```

```
p=mean_squared_error(y_test,y_test_pred)
print('Mean Squared error of testing set:%2f'%p)
Mean Squared error of testing set:4.711923
```

```
from sklearn.metrics import r2_score
s=r2_score(y_train,y_train_pred)
print('R2 score of training set:%.2f'%s)
```

R2 score of training set:0.53

 0s completed at 3:46 PM

