

# **VELAMMAL INSTITUTE OF TECHNOLOGY**

## **DEVELOPING A VEHICLE PERFORMANCE ANALYZER MODEL USING MACHINE LEARNING**

Bonafide record of work done by

**YUKESH (113319205048)**

**AJAY (113319205002)**

**SHARUN (113319205042)**

**NIVETHA(113319205028)**

Project report submitted in partial fulfillment of the requirements for the degree of

**BACHELOR OF TECHNOLOGY**

**Branch: INFORMATION TECHNOLOGY**

of Anna University

**NOVEMBER 2022**

## **CONTENTS**

### **1. INTRODUCTION**

- . Project Overview
- . Purpose

### **2. LITERATURE SURVEY**

- . Existing problem
- . References
- . Problem Statement Definition

### **3. IDEATION & PROPOSED SOLUTION**

- . Empathy Map Canvas
- . Ideation & Brainstorming
- . Proposed Solution
- . Problem Solution fit

### **4. REQUIREMENT ANALYSIS**

- . Functional requirement
- . Non-Functional requirements

### **5. PROJECT DESIGN**

- . Data Flow Diagrams
- . Solution & Technical Architecture
- . User Stories

### **6. PROJECT PLANNING & SCHEDULING**

- . Sprint Planning & Estimation
- . Sprint Delivery Schedule
- . Reports from JIRA

### **7. CODING & SOLUTIONING (Explain the features added in the project along with code)**

- . Feature 1
- . Feature 2
- . Database Schema (if Applicable)

### **8. TESTING**

- . Test Cases
- . User Acceptance Testing

### **9. RESULTS**

- . Performance Metrics

### **10. ADVANTAGES & DISADVANTAGES**

### **11. CONCLUSION**


### **12. APPENDIX**

## CHAPTER 1

### INTRODUCTION

Vehicle performance analysis is the study of performance of a vehicle. The performance of any vehicle depends upon all the forces and moments that act upon it. These forces and moments, for the most part are caused by interaction of the vehicle with the surrounding medium(s) such as air or water (e.g. fluid static and dynamic forces), gravitational attraction (gravity forces), Earth's surface (support, ground, or landing gear forces), and on-board energy consuming devices such as rocket, turbojet, piston engine and propellers (propulsion forces). Consequently, in order to fully understand the performance problem, it is necessary to study and in some way characterize these interacting forces. Defects caused by these forces can be identified and analysed and the performance can be improved.

#### PROJECT OVERVIEW

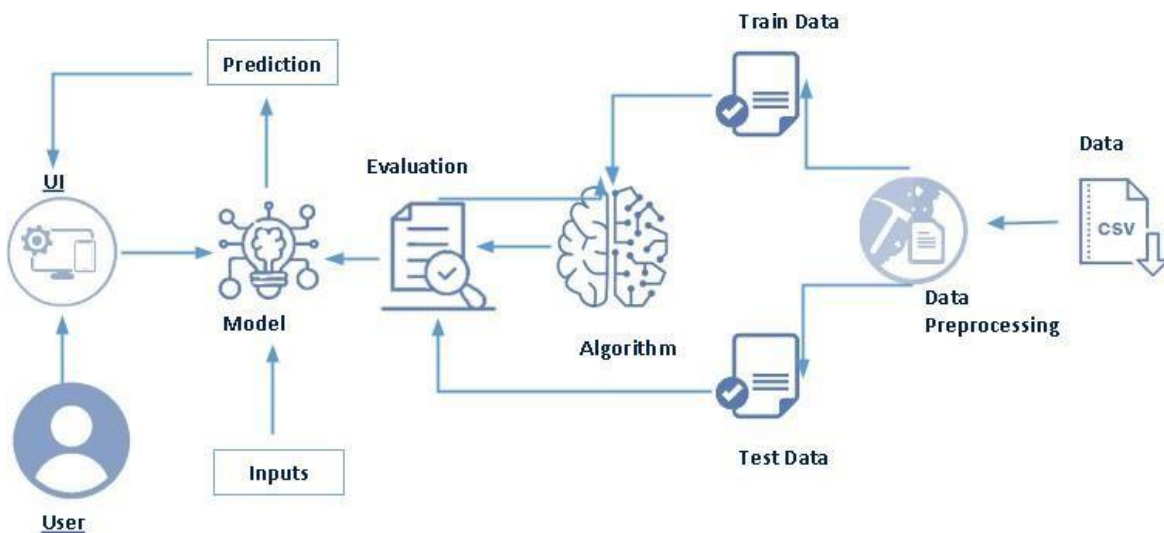

**Figure 1.1. Technical Architecture**

Vehicle performance can be predicted using a machine learning algorithm. Rows of feature vectors, such as aerodynamics, rigidity of the vehicle body, fuel consumption, and sensor detection provide the input to our algorithm. The decision tree classifier is then used to determine the performance of the vehicle. When there is a defect found in any of the given inputs, a vehicle is deemed to be not upto its performance level .

## **PURPOSE**

The main goal of this project is to predict the vehicle's performance using machine learning algorithms. Vehicle performance analysing is one of the difficulties in the industrial environment because there are many unpredictabilities. One such condition is sensor defects, which can result in unwanted sensory alarms in the vehicle. Defects in aerodynamics can be brought by a damage on the body of the vehicle. Hence Predicting defects can improve vehicle performance and customer satisfaction, which will result in a positive impact on the economy.

## CHAPTER 2

# LITERATURE SURVEY

### LITERATURE SURVEY:

TITLE	AUTHOR	ALGORITHM	ADVANTAGES	DISADVANTAGES
<b>VEHICLE PERFORMANCE ANALYZER BASED ON DEEPLARNING AND LEVENBERG-MARQUART ALGORITHM</b>	Daniel A.Roberts and Sho Yaida,Nikhil Buduma,Nithi Buduma, Joe papaand Nicholas Locascio.	Deep Learning	Integrating a GPS tracking device is beneficial to reduce the overhead cost as it prevents the consumption of fuel, unnecessary overtimeexpenses, and unauthorized vehicle usage. The tracking system helps you to monitor the activitiesof drivers more efficiently.	GPS receivers rely on signals from at least four satellites. If they only connect with three, the positioning is not entirely accurate. When obstacles such as walls, buildings, skyscrapers, and trees obstruct a signal, problemscan arise.
<b>VEHICLE PERFORMANCE ANALYSIS USING MACHINE LEARNING ALGORITHM (XGBOOST)</b>	Oliver Theobald,AndriyBurkov,Chip Huyen,Robert Munro	Machin e Learnin g	Different ML algorithms to predict ifa Vehicle performancewill be good or bad. So, it will not be aiming to get the highest accuracy possible, because it would be quite easy byadding a series of features that will bias the model in terms of predictive power. So, this information was looked at as part of theExploratory Data Analysis (EDA).	The authors compare various machine learning algorithms topredict vehicle performance, but failed to consider simple neural networks and decision tree classifiers. Sosimple machine learning algorithms like decision tree and simple neural networks to be implemented to predict vehicle performance, andinvestigate if we can predict vehicle performance with fewer feature-set accurately.

<p><b>BIG DATA IN VEHICLE PERFORMANCE ANALYZER PREDICTION FOR MAINTAINING DATABASE OF THE ENGINE'S PERFORMANCE OF VEHICLES.</b></p>	<p>Nathan Marz, James Warren, V.K. Jain, Tony Guida</p>	<p><b>Big Data</b></p>	<p>The data source and pre-processing steps including the data merging and cleansing will be introduced. As each dataset is untidy with messy redundant records and missing values. Using forward type vehicle simulation, It aims at comparing the potential and limitations of front wheel drive and rear wheel drive electric motor placements for regenerative braking under extreme driving situations.</p>	<p>Data is thoroughly examined for integrity criteria as well. Since expected model is to work with all the forms like offline, near line and online data, the irrelevant and unnecessary parameters that could overburden the dataset is reduced. Dropped the null values and assigned zero to Not a Number (NaN) values as one of the data cleansing activities. The data types of time factors such as scheduled time, motion time etc., are found to be in float point and proper conversion of input time to standard date time format. Finally, the data is analysed for distribution, converting and pre-processing. Then different datasets such the horse power, engine size, mileage and etc., are integrated and normalized to identify the correlating factors that affect the vehicle performance.</p>
---	---	------------------------	--	---

<p><b>PREDICTION OF THE VEHICLE'S PERFORMANCE USING DATA MINING.</b></p>	<p>Shantanu Pardhi,Ajinkya Deshmukh, Hugo Ajrouche</p>	<p><b>Data Mining</b></p>	<p>First, the considered dynamic/data-driven modelling approach for the complete traction chain with attention to the effects of detailed vehicle dynamics has been implemented in MATLAB Simulink. Simple parallel regenerative braking technique and recuperation favouring brake distribution strategies have been employed on a performance electric car considering front and rear wheel propulsion cases. Powertrain behaviour in a dynamic driving scenario has been investigated to understand how the two cases with the corresponding recuperation favouring braking strategies perform under elevated transient vehicle dynamics. Finally, the impact of normal load transfer, tyre slip and wheel adhesion limits on regenerative braking has been quantitatively compared for the complete range of brake pedal demands using high-speed braking tests while avoiding wheel lock-up.</p>	<p>Data collected are vehicle's performance is stored in a warehouse will be updated only at certain points in time. In this way, there is a trade-off exists between the correctness of data and the substantial effort required to bring the data into the warehouse. Data warehouses of vehicle performance also provide a great deal of opportunities for performing data mining tasks such as classification and summarization. Updates are collected and applied to the data warehouse periodically. Then, all patterns derived from the warehouse by some data mining algorithm have to be updated as well.</p>
--	--	---------------------------	---	--

### Figure 3.1. Empathy Map





# IDEATION & BRAINSTORMING

## Step 1 - Team Gathering, Collaboration and Selecting the Problem Statement



### Brainstorm & idea prioritization

Use this template in your own brainstorming sessions so your team can unleash their imagination and start shaping concepts even if you're not sitting in the same room.

- 10 minutes to prepare
- 1 hour to collaborate
- 2-8 people recommended



#### Before you collaborate

A little bit of preparation goes a long way with this session. Here's what you need to do to get going.

10 minutes



##### Team gathering

Define who should participate in the session and send an invite. Share relevant information or pre-work ahead.



##### Set the goal

Think about the problem you'll be focusing on solving in the brainstorming session.



##### Learn how to use the facilitation tools

Use the Facilitation Superpowers to run a happy and productive session.

[Open article](#) →



#### Define your problem statement

What problem are you trying to solve? Frame your problem as a How Might We statement. This will be the focus of your brainstorm.

5 minutes

##### PROBLEM

Developing a Flight Delay  
Prediction Model using  
Machine Learning



#### Key rules of brainstorming

To run a smooth and productive session



Stay in topic.



Encourage wild ideas.



Defer judgment.



Listen to others.




Go for volume.



If possible, be visual.

## Step 2 - Brainstorm, Idea Listing and Grouping and Idea Prioritization


Template



### Vehicle Performance Analysis.

In this, we are going to see about how can we analyse the performance of vehicles and help our customers to maintain their vehicles for a long time. This is where our project comes.

- 10 minutes to prepare
- 1 hour to collaborate
- 2-8 people recommended






#### Before you collaborate


A little bit of preparation goes a long way with this session. Here's what you need to do to get going.

🕒 10 minutes

---

-  Team gathering  
our team include 4 members.
-  Set the goal  
analyse the performance of the vehicles.
-  Learn how to use the facilitation tools  
[Google colab](#)

[Open article](#) →



#### Define your problem statement


vehicle performance analysis, the automation in automobile by analyzing its performance first and help our customers take care of their vehicles.

🕒 5 minutes

---

PROBLEM

Is it possible to analyse the performance of vehicles effectively at any situation?



#### Key rules of brainstorming

To run an smooth and productive session

Stay in topic.	Encourage wild Ideas.
Defer judgment.	Listen to others.
Go for volume.	If possible, be visual.

2

## Vehicle performance analysis

🕒 10 minutes

Yukesh



Ajay



Nivetha



Sharun



3

## Group ideas

Take turns sharing your ideas while clustering similar or related notes as you go. In the last 10 minutes, give each cluster a sentence-like label. If a cluster is bigger than six sticky notes, try and see if you can break it up into smaller sub-groups.

🕒 20 minutes

The production, exports and imports of automobile of automobile sector for the period 2001 to 2018. The performance of automobiles has been measured by calculating compound annual growth rate, Y-o-Y growth rate of production, export share in total exports, trade balance etc

common members to suggest this idea


1. Yukesh
2. Ajay
3. Nivetha
4. Sharun

4

## Prioritize

Your team should all be on the same page about what's important moving forward. Place your ideas on this grid to determine which ideas are important and which are feasible.

🕒 20 minutes

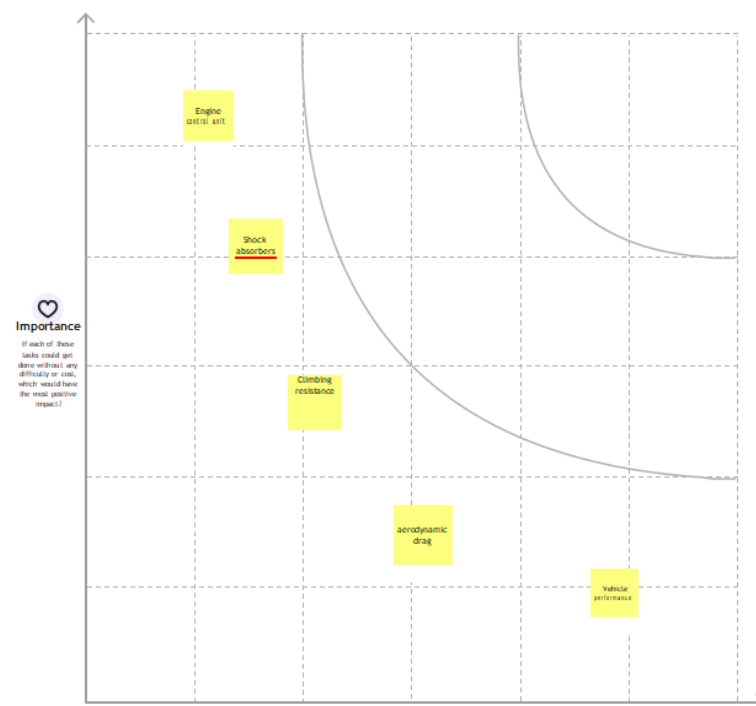

→

## After you collaborate

You can export the mural as an image or pdf to share with members of your company who might find it helpful.

## Quick add-ons

- Share the mural**  
Share a view link to the mural with stakeholders to keep them in the loop about the outcomes of the session.
- Export the mural**  
Export a copy of the mural as a PNG or PDF to attach to emails, include in slides, or save in your drive.

## Keep moving forward

- Strategy blueprint**  
Define the components of a new idea or strategy.  
[Open the template](#) →
- Customer experience journey map**  
Understand customer needs, motivations, and obstacles for an experience.  
[Open the template](#) →
- Strengths, weaknesses, opportunities & threats**  
Identify strengths, weaknesses, opportunities, and threats (SWOT) to develop a plan.  
[Open the template](#) →

[Share template feedback](#)

## PROPOSED SOLUTION

Project team shall fill the following information in proposed solution template.

S.No.	Parameter	Description
1.	Problem Statement (Problem to be solved)	vehicle performance analysis, the automation in automobile by analyzing its performance first and help our customers take care of their vehicles.
2.	Idea / Solution description	In the past years, several machine learning algorithms have been proposed to predict vehicle's performance. Most studies predict vehicle's performance using (i) binary classifiers (delayed/not delayedflight), (ii) multi-class classifiers (multiple delay classes), or (iii) regression (estimating the delay value).
3.	Novelty / Uniqueness	In this project we use anaconda navigator , Scikit-learn ,NumPy, Pandas, flask ,Matplotlib. These makes project as more unique than other ways in vehicle performance prediction
4.	Social Impact / Customer Satisfaction	This has a major impact on the drivers' experience and social welfare. Except from the direct impact on passengers, there are also impacts on roadways, in terms of fines and operational costs as well as the environment, in terms of increased fuelconsumption or emissions of an inefficient system. Accordingly, Improving the understanding and prediction of performance is in thebest interest of many stakeholders in air transportation, including navigation service providers and network managers, as well as passengers.
5.	Business Model (Revenue Model)	The application of machine learning to business processes has led to higher levels of acceleration, growth, and adaptability than ever before. Revenue model should look to

		incorporate machine learning and to secure better market position and competitive differentiation.
6.	Scalability of the Solution	Machine learning scalability is scaling ML models to handle massive data sets and perform many computations in a cost-effective and time-saving way of vehicle's performance prediction

# PROBLEM SOLUTION FIT

## Problem-Solution fit canvas 2.0

To detect Vehicle performance

Define CS, fit into CC	<b>1. CUSTOMER SEGMENT(S)</b> <span>CS</span>  For the vehicle performance analysis the customers who are involved are the vehicle manufacturing company.	<b>6. CUSTOMER CONSTRAINTS</b> <span>CC</span>  1.Warning light shows the engine is sputtering. 2.The steering wheel is shaking. 3.The brake pads are worn. 4.The brakes are squeaking.	<b>5. AVAILABLE SOLUTIONS</b> <span>AS</span>  1.Fuel economy emission 2.Thermal and energy management 3.Durability and integrated security 4.Driving dynamics	Explore AS, differentiate
	<b>2. JOBS-TO-BE-DONE / PROBLEMS</b> <span>J&amp;P</span>  1.Temporary, complete loss of power. Engine quits at sharp, irregular intervals. 2.Mild to severe ping, usually worse under acceleration and load.	<b>9. PROBLEM ROOT CAUSE</b> <span>RC</span>  1.Prediction of failed parts during the analysis.	<b>7. BEHAVIOUR</b> <span>BE</span>  1.Customer approaches and gives the required input details 2.Prediction of failures according to the data. 3.Add user friendly interface where the customer can interact and find the particularities.	
Identify strong TR & EM	<b>3.TRIGGERS</b> <span>TR</span>  1.Make simple adjustments to maximize fuel economy and power. 2.Install a cold air intake. 3.Purchase a higher flowing exhaust	<b>10. YOUR SOLUTION</b> <span>SL</span>  To overcome the stated problems a detection of Vehicle crash application can be proposed so that all the needs of the customer are satisfied along with providing them the platform to communicate and find the best available solutions do around the world according to their needs.	<b>8. CHANNELS of BEHAVIOUR</b> <span>CH</span>  <b>8.1 In car checks</b> 1.Driving controls ,seat and head adjusted correctly. 2.steering and brkes working correctly.	Extract online & offline CH of BE
	<b>4.EMOTIONS</b>  Maladjusted driving, such as aggressive driving and delayed reactions, is seen as one cause of traffic accidents. Such behavioural patterns could be influenced by strong emotions in the driver		<b>8.2 External checks</b> 1. Vehicle sitting square and leaning to one sides. 2.check underside of vehicles for fluid leaks.	

## CHAPTER 4

### REQUIREMENT ANALYSIS

#### FUNCTIONAL REQUIREMENT

Following are the functional requirements of the proposed solution.

FR No.	Functional Requirement (Epic)	Sub Requirement (Story / Sub-Task)
FR-1	User Registration	Registration through Form Registration through Gmail
FR-2	User Confirmation	Confirmation via Email Confirmation via OTP
FR-3	Display of services	It display various services that can be opted for particular vehicle.
FR-4	Safety Measures	It tracks the vehicle location to avoid theft.
FR-5	Performance Analysis	It analysis the performance of the vehicle before and after service provided.
FR-6	Bill payment mode	It provides various payment options.

### Non-functional Requirements:

Following are the non-functional requirements of the proposed solution.

FR No.	Non-Functional Requirement	Description
NFR-1	<b>Usability</b>	The UX/UI will be user-friendly and will be highly responsive .
NFR-2	<b>Security</b>	It provides a facility to track vehicles location that satisfies security.
NFR-3	<b>Reliability</b>	The database of vehicles can be maintained for long time ensuring reliability.
NFR-4	<b>Performance</b>	The application is programmed to efficiently work under circumstances like network congestion etc
NFR-5	<b>Availability</b>	The application available for everyone at ease. The UX/UI experience should be understandable.
NFR-6	<b>Scalability</b>	The application is designed in such a way that it can handle ,if any high traffic occurs.




## CHAPTER 5

### PROJECT DESIGN

#### DATA FLOW DIAGRAMS

A Data Flow Diagram (DFD) is a traditional visual representation of the information flows within a system. A neat and clear DFD can depict the right amount of the system requirement graphically. It shows how data enters and leaves the system, what changes the information, and where data is stored.

Figure 5.1. Data flow diagram

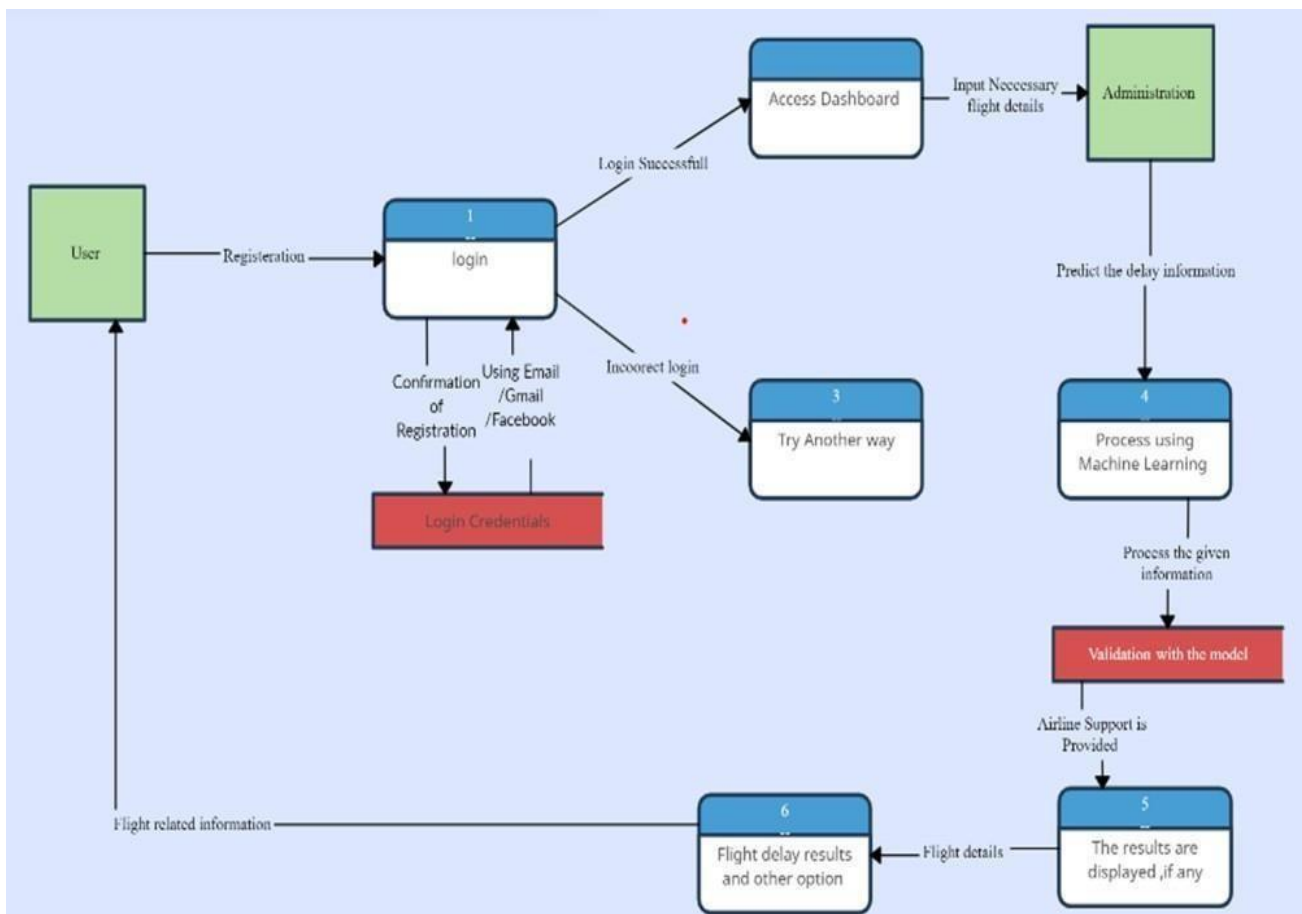

## SOLUTION & TECHNICAL ARCHITECTURE


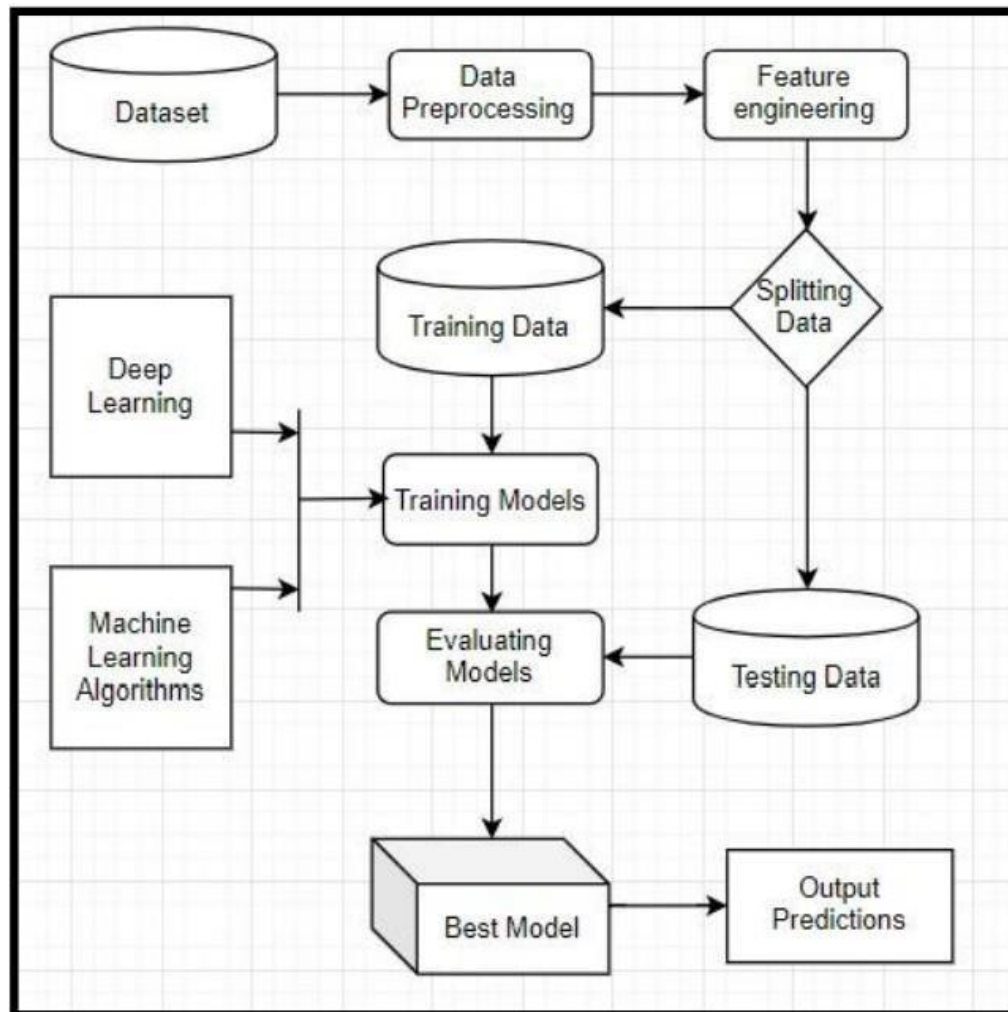


Figure 5.2. Solution Architecture

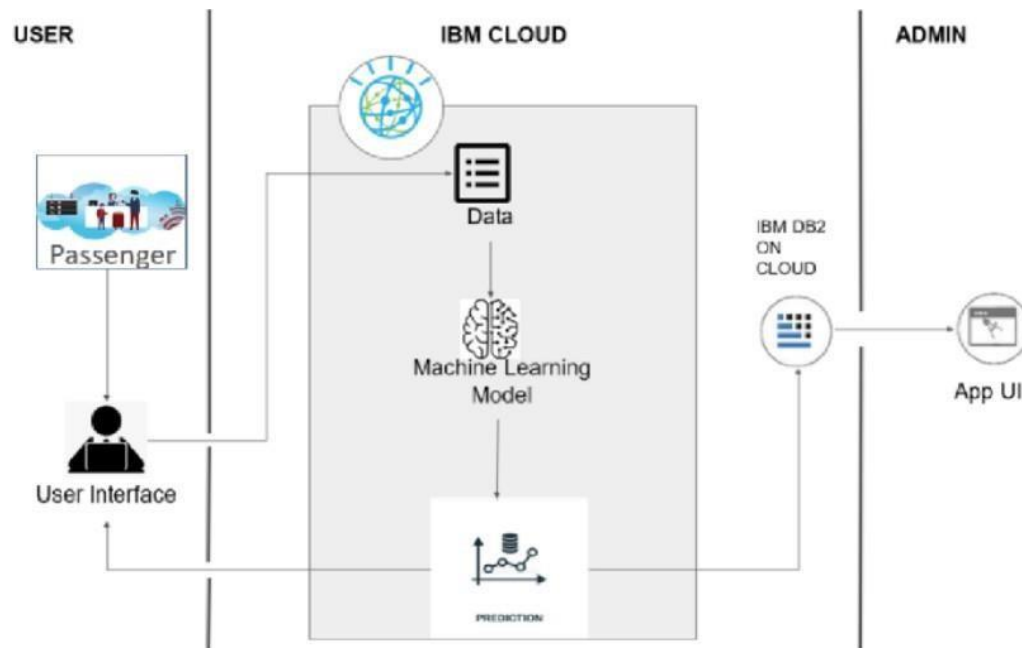

**Figure 5.3. Technology Stack**

### Components & Technologies

Table-1 : Components & Technologies:

S.No	Component	Description	Technology
1.	User Interface	How user interacts with application e.g. Web UI, Mobile App, Chatbot etc.	Python-Flask
2.	Application Logic-1	Logic for a process in the application	Python
3.	Application Logic-2	Logic for a process in the application	IBM Watson STT service
4.	Application Logic-3	Logic for a process in the application	IBM Watson Assistant
5.	Database	Data Type, Configurations etc.	MySQL
6.	Cloud Database	Database Service on Cloud	IBM DB2,

7.	File Storage	File storage requirements	IBM Block Storage
8.	External API-1	Purpose of External API used in the application	IBM Weather API
9.	External API-2	Purpose of External API used in the application	Flight Confirmation API
10.	Machine Learning Model	Purpose of Machine Learning Model	Evaluation and Prediction Model
11.	Infrastructure (Server / Cloud)	Application Deployment	IBM Cloud

Table-2: Application Characteristics:

S.No	Characteristics	Description	Technology
1.	Open-Source Frameworks	List the open-source frameworks used	Python-Flask
2.	Security Implementations	List all the security / access controls implemented, use of firewalls etc.	Encryptions, IAM Con
3.	Scalable Architecture	Justify the scalability of architecture (3 - tier, Micro-services)	Python
4.	Availability	Justify the availability of application (e.g. use of load balancers, distributed servers etc.)	IBM Cloud
5.	Performance	Design consideration for the performance of the application (number of requests per sec, use of Cache, use of CDN's) etc.	Python

## CHAPTER 6

### PROJECT PLANNING & SCHEDULING

Product Backlog, Sprint Schedule, and Estimation (4 Marks)

<b>Sprint</b>	<b>Functional Requirement (Epic)</b>	<b>User Story Number</b>	<b>User Story / Task</b>	<b>Story Points</b>	<b>Priority</b>	<b>Team Members</b>
Sprint -1	REGISTRATION	USN-1	As a user, I can register for the application by entering my email, password, and confirming my password.	2	high	3
Sprint -1		USN-2	As a user, I will receive a confirmation email once I have registered for the application	1	high	1
Sprint -2		USN-3	As a user, I can register for the application through Facebook	2	low	1
Sprint -1		USN-4	As a user, I can register for the application through google account	2	high	1

Sprint -1	LOGIN	USN-5	As a user, I can log into the application by entering email & password	1	high	1
Sprint-1	DASHBOARD	USN-6	As a customer I can check with all the Flight details available on the website and choose the correct prediction	3	high	3
Sprint-4	Customer support	USN-7	As a user I want to contact with the customer support when there is any query with the the application	2	low	2
Sprint-1	User details display	USN-8	As a customer I should be able to see all my given details filled with the registration process	2	high	2
Sprint-2	algorithm	USN-9	As a customer, I should be able to get the accurate prediction of the flight details available on the website	5	high	4
Sprint-2		USN-10	As a customer I should be updated with various best available.	2	medium	2
Sprint-3	IBM watson for storage and organization	USN-11	As a customer I should be able to give all the necessary details and predict the flight arrival and provide best user experience.	3	high	2
Sprint-4	Flight management	USN-12	As a customer I can manage the details of the flight arrival timings and schedule changes.	5	high	4

Project Tracker, Velocity & Burndown Chart: (4 Marks)

Sprint	Total Story Points	Duration	Sprint Start Date	Sprint End Date (Planned)	Story Points Completed (as on Planned End Date)	Sprint Release Date (Actual)
Sprint-1	20	6 Days	24 Oct 2022	29 Oct 2022		
Sprint-2	20	6 Days	31 Oct 2022	05 Nov 2022		
Sprint-3	20	6 Days	07 Nov 2022	12 Nov 2022		
Sprint-4	20	6 Days	14 Nov 2022	19 Nov 2022		




## CHAPTER 7

### CODING AND SOLUTIONING

#### FEATURE 1 - CORRELATION BETWEEN THE VARIABLES IN THE DATASET

```
In [19]: sns.heatmap(data.corr())
```

```
Out[19]: <AxesSubplot:>
```

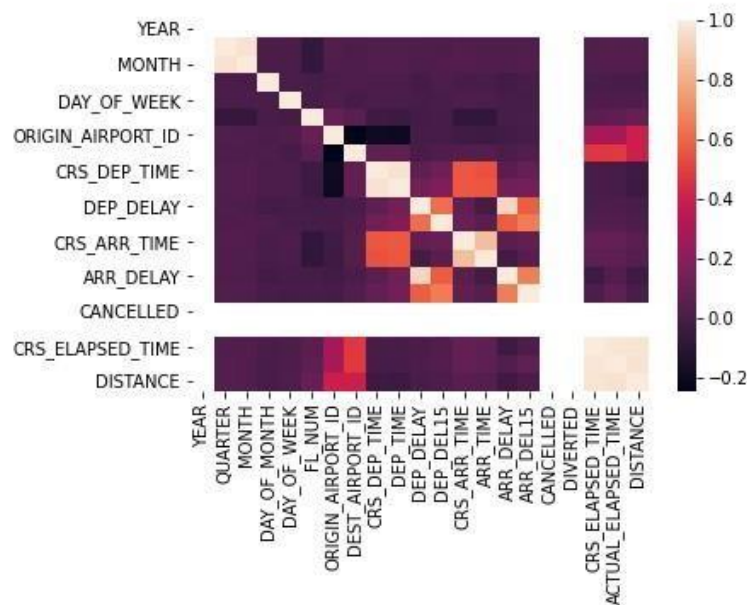

This will help us to find out the correlation between the variables in the dataset which would help us to find out the columns that are unnecessary and hence to be dropped.

#### FEATURE 2 - ONE HOT ENCODING

```
In [39]: data=pd.get_dummies(data,columns=['ORIGIN','DEST'])
```

```
In [40]: data['ARR_DEL15'].value_counts()
```

```
Out[40]: 0.0    9668
         1.0    1375
         Name: ARR_DEL15, dtype: int64
```

```
In [41]: data.tail()
```

```
Out[41]:
```

	FL_NUM	MONTH	DAY_OF_MONTH	DAY_OF_WEEK	CRS_ARR_TIME	DEP_DEL15	ARR_DEL15	ORIGIN_0	ORIGIN_1	ORIGIN_2	ORIGIN_3	ORIGIN_4
11226	1715	12	30	5	12	0.0	0.0	0	1	0	0	0
11227	1770	12	30	5	20	1.0	0.0	0	0	0	0	1
11228	1823	12	30	5	22	0.0	0.0	0	1	0	0	0
11229	1901	12	30	5	18	0.0	0.0	1	0	0	0	0
11230	2005	12	30	5	9	0.0	0.0	1	0	0	0	0

The cities in both Origin and Destination are one-hot encoded using the above code.

## FEATURE 3 - SAVING THE MODEL WEIGHTS FOR DEPLOYMENT

### SAVING THE MODEL

```
In [63]: pickle.dump(classifier,open('flight_new.pk1','wb'))
```

```
In [64]: from sklearn.metrics import confusion_matrix
confusion_matrix(predicted, y_test)
```

```
Out[64]: array([[1825, 129],
               [ 138, 117]], dtype=int64)
```

```
In [66]: from sklearn.metrics import classification_report
print(classification_report(predicted, y_test, labels=[1, 2]))
```

	precision	recall	f1-score	support
1	0.48	0.46	0.47	255
2	0.00	0.00	0.00	0
micro avg	0.48	0.46	0.47	255
macro avg	0.24	0.23	0.23	255
weighted avg	0.48	0.46	0.47	255

The above code will save the model weights for further deployment in IBM Cloud and also measure the performance metrics.

## FEATURE 4 - FLASK INTERFACE - UI

```
from flask import Flask, request, render_template
import numpy as np
import pandas as pd
import pickle
import os
model = pickle.load(open('flight_new.pk1','rb'))
app = Flask(__name__)
@app.route('/')
def home():
    return render_template("mainpage.html")

@app.route('/prediction',methods=['GET','POST'])
def predict():
    name = request.form['fname']
    month = request.form['month']
    dayofmonth = request.form['daymonth']
    dayofweek = request.form['dayweek']
    origin = request.form['origin']
```

```

if(origin == "msp"):
    origin1, origin2, origin3, origin4, origin5 = 0,0,0,0,1
if(origin == "dtw"):
    origin1, origin2, origin3, origin4, origin5 = 1,0,0,0,0
if(origin == "jfk"):
    origin1, origin2, origin3, origin4, origin5 = 0,0,1,0,0,
if(origin == "sea"):
    origin1, origin2, origin3, origin4, origin5 = 0,1,0,0,0
if(origin == "atl"):
    origin1, origin2, origin3, origin4, origin5 = 0,0,0,1,0
destination = request.form['destination']
if(destination == "msp"):
    destination1,destination2,destination3,destination4,destination5 = 0,0,0,0,1
if(destination == "dtw"):
    destination1,destination2,destination3,destination4,destination5 = 1,0,0,0,0
if(destination == "jfk"):
    destination1,destination2,destination3,destination4,destination5 = 0,0,1,0,0
if(destination == "sea"):
    destination1,destination2,destination3,destination4,destination5 = 0,1,0,0,0
if(destination == "atl"):
    destination1,destination2,destination3,destination4,destination5 = 0,0,0,1,0
dept = request.form['sdeparttime']
arrtime = request.form['sarrivaltime']
actdept = request.form['adeparttime']
dept15 = int(dept)-int(actdept)
y_pred = model.predict(total)
print(y_pred)
if(y_pred == [0.]):
    ans = "The Flight will be on time"
else:
    ans = "The Flight will be delayed"
return render_template("index.html",data = ans)

```

```

app.run(debug=True)

```

**Explanation:**

The above code will be able to get the details of the flight from the user in the respective text fields created using the HTML, scale the inputs and give the inputs to the model which has been developed already. The predictions are shown in another HTML page.

**FEATURE 5 - HTML PAGES FOR FRONTEND DESIGN**

```
<html>
.image{
  background-image: url("vec.jpg");
  background-repeat: no-repeat;
  background-size: cover;
  height:100% ;
  width:100% ;
  color: azure;
  padding-bottom: 4%;
}
.text{
  font-family: Georgia, 'Times New Roman', Times, serif;
  font-weight: 800;
  color: azure;
}

.form{
  margin: 0 auto;
  border: 1px solid black;
  box-shadow: white 2px 2px 7px 4px;
  width: 50%;
}

.input{
  text-align: center;
  outline:corner;
}
.input:hover{
  box-shadow: black 4px 2px 1px 1px;
}
.select{
  width: 40%;
}
</html>
```

## CHAPTER 8

### RESULTS

#### PERFORMANCE METRICS

##### Training Accuracy

###### MODEL EVALUATION

```
acc=accuracy_score(predicted,y_test)
```

```
acc
```

```
0.8791308284291535
```

##### Confusion Matrix

```
from sklearn.metrics import confusion_matrix
confusion_matrix(predicted, y_test)
```

```
array([[1825, 129],
       [ 138, 117]], dtype=int64)
```

##### Classification Model

```
from sklearn.metrics import classification_report
print(classification_report(predicted, y_test, labels=[1, 2, 3]))
```

	precision	recall	f1-score	support
1	0.48	0.46	0.47	255
2	0.00	0.00	0.00	0
3	0.00	0.00	0.00	0
micro avg	0.48	0.46	0.47	255
macro avg	0.16	0.15	0.16	255
weighted avg	0.48	0.46	0.47	255

## **CHAPTER 8**

### **ADVANTAGES AND DISADVANTAGES**

#### **Advantages**

- Customers are happy
- The performance of the vehicle is enhanced
- Prior information will be sent if there is a defect in the performance
- The current performance status of the vehicle can be tracked

#### **Disadvantages**

- Wrong prediction due to wrong input data
- If the prediction is wrong, then there will be issues in the vehicle's performance

## **CHAPTER 9**

### **CONCLUSION**

In this project, we use fuel usage, aerodynamics, and sensor systems as factors to predict the vehicle performance. In the end, our model correctly predicts the defects and correctly shows the analysis. As a result, there can be additional features related to the causes of defects in the performance of the vehicle that are not yet discovered using our existing data sources.

## CHAPTER 10

### APPENDIX

#### Source codes

##### Exploratory Data Analysis

```
#!/usr/bin/env python
# coding: utf-8

# **Importing all the libraries**

# In[1]:

import numpy as np
import pandas as pd
import matplotlib.pyplot as plt
import seaborn as sns
import pickle
get_ipython().run_line_magic('matplotlib', 'inline')
from sklearn.preprocessing import LabelEncoder
from sklearn.preprocessing import OneHotEncoder
from sklearn.model_selection import train_test_split
from sklearn.preprocessing import StandardScaler
from sklearn.tree import DecisionTreeClassifier
from sklearn.metrics import accuracy_score
import sklearn.metrics as metrics

# **Importing the dataset**

# In[2]:
import numpy as np
from flask import Flask, request, jsonify, render_template
import request
import json
API_KEY="HEiDudCYxnCSUXVZnh0YbyeSb7v9r9qqECxOQ9ASyXKI"
token_response=request.post("https://us-
south.ml.cloud.ibm.com/identity/token",data={"apikey":API_KEY,"grant_type":"client_credentials"})
mltoken=token_response.json()["access_token"]
print("mltoken",mltoken)
header={'content-type':'application/json','Authorization':'Bearer'+ mltoken}
import pickle
app=Flask(__name__)
model=pickle.load(open('regression.pkl','rb'))

@app.predict('/')
def intro():
    return render_template('index.html')
```



```

@app.route('/y_predict', methods =["POST"])
def y_predict():
    cyl=request.form["input1"]
    dis=request.form["input2"]
    hp=request.form["input3"]
    w=request.form["input4"]
    a=request.form["input5"]
    my=request.form["input6"]
    ori=request.form["input7"]
    total=[[int(cyl),int(dis),int(hp),int(w),int(a),int(my),int(ori)]]

    p=model.predict(total)
    p=p[0]
    return render_template('index.html',prediction_text=p,label="The performance of the car is
".format(p))
if(__name__=='main_') :
    app.run(debug = True,port=9000)

```

## CHAPTER 11

### APPENDIX

#### SOURCE CODE

```

import numpy as np
from flask import Flask,request,jsonify,render_template
import request
import json
API_KEY="HEiDudCYxnCSUXVZnh0YbyeSb7v9r9qqECxOQ9ASyXKI"
token_response=request.post("https://us-
south.ml.cloud.ibm.com/identity/token",data={"apikey":API_KEY,"grant_type":"client_credentials"})
mltoken=token_response.json()["access_token"]
print("mltoken",mltoken)
header={'content-type':'application/json','Authorization':'Bearer'+ mltoken}
import pickle
app=Flask(__name__)
model=pickle.load(open('regression.pkl','rb'))

@app.predict('/')
def intro():
    return render_template('index.html')

@app.route('/y_predict', methods =["POST"])
def y_predict():
    cyl=request.form["input1"]
    dis=request.form["input2"]
    hp=request.form["input3"]
    w=request.form["input4"]
    a=request.form["input5"]
    my=request.form["input6"]
    ori=request.form["input7"]
    total=[[int(cyl),int(dis),int(hp),int(w),int(a),int(my),int(ori)]]

```

```
p=model.predict(total)
p=p[0]
return render_template('index.html',prediction_text=p,label="The performance of the car is {}".format(p))
if __name__=='__main__':
    app.run(debug = True,port=9000)
```

## **Train the ML Model**

```
# # SPRINT-2
```

```
# **TRAIN-TEST-SPLIT**
```

```
# In[45]:
```

```
x_train,x_test,y_train,y_test=train_test_split(x,y,test_size=0.2,random_state=0)
```

```
# In[46]:
```

```
x_test.shape
```

```
# In[47]:
```

```
x_train.shape
```

```
# In[48]:
```

```
y_test.shape
```

```
# In[49]:
```

```
y_train.shape
```

```
# **Scaling**
```

```
# In[50]:
```

```
sc = StandardScaler()
```

```
# In[51]:
```

```
x_train=sc.fit_transform(x_train)
```

```
# In[52]:
```

```
x_test=sc.fit_transform(x_test)
```

```
# **Model Building**
```

```
# In[53]:
```

```
classifier = DecisionTreeClassifier(random_state=0)
```

```
# In[54]:
```

```
classifier.fit(x_train,y_train)
```

```
# In[55]:
```

```
predicted = classifier.predict(x_test)
```

```
# In[56]:
```

```
predicted
```

```
# In[57]:
```

```
y_test
```

```
# **MODEL EVALUATION**
```

```
# In[58]:
```

```
acc=accuracy_score(predicted,y_test)
```

```
# In[59]:
```

```
acc
```

```
# In[ ]:
```

```
# In[60]:
```

```
data[data['ARR_DEL15']>0].iloc[33].values
```

```
# In[61]:
```

```
sample=[[1.187e+03, 1.000e+00, 1.500e+01, 5.000e+00, 1.900e+01, 1.000e+00,  
0.000e+00, 0.000e+00, 0.000e+00, 1.000e+00, 0.000e+00,  
0.000e+00, 0.000e+00, 0.000e+00, 0.000e+00, 1.000e+00]]
```

```
# In[62]:
```

```
classifier.predict(sample)
```

```
# **SAVING THE MODEL **
```

```
# In[63]:
```

```
pickle.dump(classifier,open('car_new.pk1','wb'))#
```

```
In[64]:
```

```
from sklearn.metrics import confusion_matrix  
confusion_matrix(predicted, y_test)
```

```
# In[66]:
```

```
from sklearn.metrics import classification_report  
print(classification_report(predicted, y_test, labels=[1, 2]))
```

```
# In[ ]:
```

## Mainpage – HTML Code

```
<html>
<div align="center" class="logbg">
<head>
<meta charset="UTF-8">
<center>
<table>
<tr>
<td><h1><br>Prediction of Flight Delay<br><br></h1></td>
</tr>
</table>
</center>
</head>
<body background='C:\Users\Public\project\templates\flight_4.jpg'>
<form action="http://localhost:5000/prediction" method="POST" >
<center>
<table>
<tr>
<td>Enter the flight number:</td>
<td><input type="number" name="fname"><br></td>
</tr>
<tr>
<td>Month:</td>
<td><input type="number" name="month"><br></td>
</tr>
<tr>
<td>Day of Month:</td>
<td><input type="number" name="daymonth"><br></td>
</tr>
<tr>
<td>Day of Week:</td>
<td><input type="number" name="dayweek"><br></td>
</tr>
<tr>
<td>Origin:</td>
<td><select name="origin">
<option value="atl">ATL</option>
<option value="dtw">DTW</option>
<option value="sea">SEA</option>
<option value="msp">MSP</option>
```

```
<option value="jfk">JFK</option>
</select></td>
<tr>
<tr>
<td>Destination:</td>
<td><select name="destination">
<option value="atl">ATL</option>
<option value="dtw">DTW</option>
<option value="sea">SEA</option>
<option value="msp">MSP</option>
<option value="jfk">JFK</option>
</select></td>
<tr>
<tr>
<td>Scheduled Departure Time:</td>
<td><input type="number" name="sdeparttime"><br></td>
</tr>
<tr>
<td>Scheduled Arrival Time:</td>
<td><input type="number" name="sarrivaltime"><br></td>
</tr>
<tr>
<td>Actual Departure Time:</td>
<td><input type="number" name="adeparttime"><br></td>
</tr>
<tr>
<td><br><input type="submit" class="btn" value="SUBMIT"></br>
</tr>
</table>
</center>
</form>
</body>
</div>
</html>
```

## Prediction Page - HTML Code

```
<!doctype html>
<html lang="en">
<head>
  <meta charset="UTF-8">
  <meta http-equiv="X-UA-Compatible" content="IE=edge">
  <meta name="viewport" content="width=device-width, initial-scale=1.0">
  <link href="https://cdn.jsdelivr.net/npm/bootstrap@5.2.2/dist/css/bootstrap.min.css"
rel="stylesheet" integrity="sha384-
Zenh87qX5JnK2Jl0vWa8Ck2rdkQ2Bzep5IDxbcnCeuOxjzrPF/et3URy9Bv1WTRi"
crossorigin="anonymous">
  <link rel="stylesheet" href="{{url_for('static',filename='css/style.css')}}">
  <title>Project</title>
</head>
<body>
  <section class="image ">
  <form action="{{url_for('y_predict')}}"method="post">
    <h1 class="text text-center"><i><b>Vehicle Performance Analyzer</b></i></h1>
    <form class="container form p-4 mt-5">
      <div class="container text-center">
        <div class="row">
          <div class="col">
            <label class="form-label me-4" for="input1">No.of.cylinders</label>
          </div>
          <div class="col">
            <input type="text" class="input" id="input1" placeholder="nos">
          </div>
        </div>
        <div class="row mt-3">
          <div class="col">
            <label class="form-label me-5" for="input2">Displacement</label>
          </div>
          <div class="col">
            <input type="text" class="input" id="input2" placeholder="mts">
          </div>
        </div>
        <div class="row mt-3">
          <div class="col">
            <label class="form-label me-4" for="input3">Horsepower</label>
          </div>
          <div class="col">
            <input type="text" class="input" id="input3" placeholder="HP">
          </div>
        </div>
        <div class="row mt-3">
          <div class="col">
            <label class="form-label me-4" for="input4">Weight</label>

```

```

        </div>
        <div class="col">
            <input type="text" class="input" id="input4" placeholder="Kgs">
        </div>
    </div>

    <div class="row mt-3">
        <div class="col">
            <label class="form-label me-4" for="input5">Accelaration</label>
        </div>
        <div class="col">
            <input type="text" class="input" id="input5" placeholder="m/s">
        </div>
    </div>

    <div class="row mt-3 ">
        <div class="col">
            <label class="form-label me-5" for="input6">Model year</label>
        </div>
        <div class="col ms-4">
            <input type="text" class="input" id="input6" placeholder="year">
        </div>
    </div>

    <div class="row mt-3">
        <div class="col">
            <label class="form-label me-4" for="input7">Origin</label>
        </div>
        <div class="col">
            <input type="text" class="input" id="input7" placeholder="origin">
        </div>
    </div>
    <button type="submit" class="btn">login</button>
        {{prediction_text}}

    </div>
</form>
</section>

```

```

<script src="https://cdn.jsdelivr.net/npm/@popperjs/core@2.11.6/dist/umd/popper.min.js"
integrity="sha384-
oBqDVmMz9ATKxlep9tiCxS/Z9fNfEXiDAYTujMAeBAsjFuCZSmKbSSUnQlImh/jp3"
crossorigin="anonymous"></script>
<script src="https://cdn.jsdelivr.net/npm/bootstrap@5.2.2/dist/js/bootstrap.min.js" integrity="sha384-
IDwe1+LCz02ROU9k972gdyvl+AESN10+x7tBKgc9I5HFtuNz0wWnPclzo6p9vxnk"
crossorigin="anonymous"></script>
</body>
</html>

```



### 13.1.4. Flask Application

```
from flask import Flask, request, render_template
import numpy as np
import pandas as pd
import pickle
import os
model = pickle.load(open('flight_new.pk1','rb'))
app = Flask(__name__)
@app.route('/')
def home():
    return render_template("mainpage.html")
```

```
import numpy as np
```

```
from flask import
```

```
Flask,request,jsonify,render_template
```

```
import request
```

```
import json
```

```
API_KEY="HEiDudCYxnCSUXVZnh0YbyeSb7
```

```
v9r9qqECxOQ9ASyXKI"
```

```
token_response=request.post("https://us-
south.ml.cloud.ibm.com/identity/token",data={"api
key":API_KEY,"grant_type":"client_credentials"})
```

```
mltoken=token_response.json()["access_token"]
```

```
print("mltoken",mltoken)
```

```
header={'content-
type':'application/json','Authorization':'Bearer'+
mltoken}
```

```
import pickle
```

```
app=Flask(__name__)
```

```
model=pickle.load(open('regression.pkl','rb'))
```

```
@app.predict('/')
```

```
def intro():
```

```
    return render_template('index.html')
```

```
@app.route('/y_predict', methods=["POST"])
```

```
def y_predict():
```

```
    cyl=request.form["input1"]
```

```
    dis=request.form["input2"]
```

```
    hp=request.form["input3"]
```

```
    w=request.form["input4"]
```

```
    a=request.form["input5"]
```

```
    my=request.form["input6"]
```

```
    ori=request.form["input7"]
```

```
total=[[int(cyl),int(dis),int(hp),int(w),int(a),int(my),in
```

```
t(ori)]]
```

```
p=model.predict(total)

p=p[0]

return

render_template('index.html',prediction_text=p,lab
el="The performance of the car is {}".format(p))

if(__name__=='main_') :

    app.run(debug = True,port=9000)

app.run(debug=True)
```

## **GITHUB LINK**

### **Github link**

<https://github.com/IBM-EPBL/IBM-Project-53421-1661401778>