

EMERGING METHODS FOR EARLY DETECTION OF FOREST FIRE

MODEL BUILDING

IMPORTING THE MODEL BUILDING LIBRARIES

Team ID	PNT2022TMID37632
Project Name	Project- Emerging Methods For Early Detection of Forest Fire

IMPORTING THE MODEL BUILDING LIBRARIES:

Import the libraries that are required to initialize the neural network layer, create and add different layers to the neural network model. The below libraries are imported and executed.

11/7/22, 12:35 AM

Untitled8.ipynb - Colaboratory

▼ Importing Keras libraries

```
import keras
```

▼ Importing ImageDataGenerator from Keras

```
from keras.preprocessing.image import ImageDataGenerator
```

▼ Importing Keras libraries

```
[1] import keras
```

▼ Importing ImageDataGenerator from Keras

```
[13] from matplotlib import pyplot as plt
      from keras.preprocessing.image import ImageDataGenerator
```


▼ Defining the Parameters

```
train_datagen=ImageDataGenerator(rescale=1./255, shear_range=0.2, rotation_range=180, zoom_range=0.2, horizontal_flip=True)
test_datagen=ImageDataGenerator(rescale=1./255)
```

```
<keras.preprocessing.image.ImageDataGenerator at 0x7fb7448ac110>
```

APPLYING ImageDataGenerator to train dataset:

`flow_from_directory ()` method for Train folder.

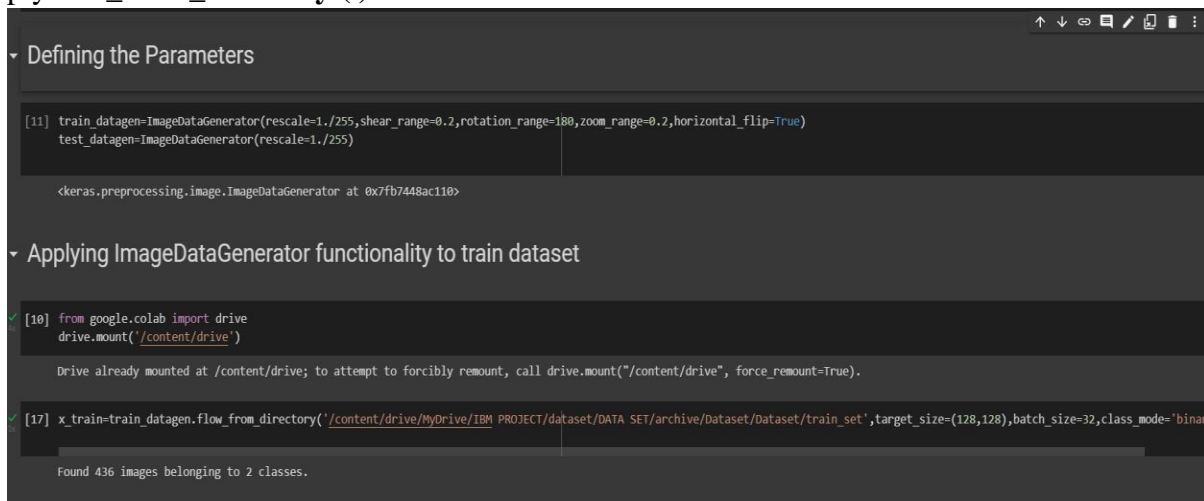

The screenshot shows a Jupyter notebook with two sections. The first section, 'Defining the Parameters', contains code to create `ImageDataGenerator` objects for training and testing. The second section, 'Applying ImageDataGenerator functionality to train dataset', shows the mounting of Google Drive and the use of `flow_from_directory` to load training data. The output indicates that 436 images were found belonging to 2 classes.

```
[11] train_datagen=ImageDataGenerator(rescale=1./255, shear_range=0.2, rotation_range=180, zoom_range=0.2, horizontal_flip=True)
test_datagen=ImageDataGenerator(rescale=1./255)

<keras.preprocessing.image.ImageDataGenerator at 0x7fb7448ac110>

[10] from google.colab import drive
drive.mount('/content/drive')


Drive already mounted at /content/drives; to attempt to forcibly remount, call drive.mount("/content/drive", force_remount=True).

[17] x_train=train_datagen.flow_from_directory('/content/drive/MyDrive/IBM PROJECT/dataset/DATA SET/archive/Dataset/Dataset/train_set', target_size=(128,128), batch_size=32, class_mode='binary')

Found 436 images belonging to 2 classes.
```

APPLYING ImageDataGenerator to test dataset:

Applying the `flow_from_directory ()` method for test folder.

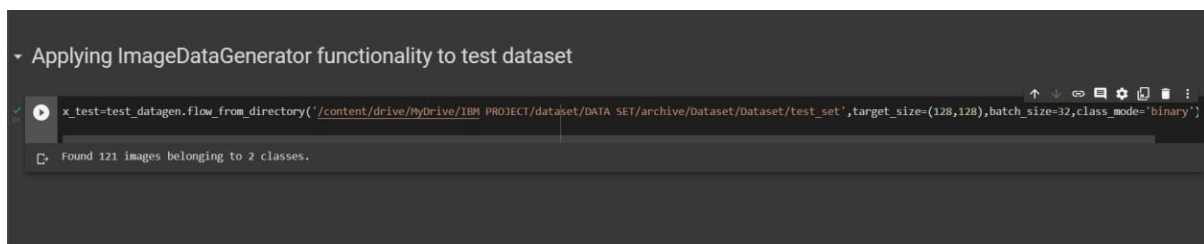

The screenshot shows a Jupyter notebook section titled 'Applying ImageDataGenerator functionality to test dataset'. It contains code to use `flow_from_directory` on the test data. The output indicates that 121 images were found belonging to 2 classes.

```
x_test=test_datagen.flow_from_directory('/content/drive/MyDrive/IBM PROJECT/dataset/DATA SET/archive/Dataset/Dataset/test_set', target_size=(128,128), batch_size=32, class_mode='binary')

Found 121 images belonging to 2 classes.
```

IMPORTING MODEL BUILDING LIBRARIES:

11/8/22, 1:16 AM

Main code - Colaboratory

▾ Importing Model Building Libraries

```
#to define the linear Initialisation import sequential
from keras.models import Sequential
#to add layers import Dense
from keras.layers import Dense
#to create Convolutional kernel import convolution2D
from keras.layers import Convolution2D
#import Maxpooling layer
from keras.layers import MaxPooling2D
#import flatten layer
from keras.layers import Flatten
import warnings
warnings.filterwarnings('ignore')
```