



THIRUVALLUVAR COLLEGE OF ENGG & TECH

Department of Electronics & Communication Engineering

**Smart Farmer-IOT Enabled Smart Farming
Application**

IBM NALAIYATHIRAN

SPRINT DELIVERY – 2

Team ID : PNT2022TMID39119

Arivuchudar E (TL) - 422319106004

Abinaya S (TM1) - 422319106001

Banupriya M (TM2) - 422319106005

Kowsalya R (TM3) - 422319106009

Nivetha S (TM4) - 422319106010

\5, Building Project

Connecting IoT Simulator to IBM Watson IoT Platform

Open link provided in above section 4.3

Give the credentials of your device in IBM Watson IoT Platform

Platform Click on connect

My credentials given to simulator are:


OrgID: **157uf3** api: **a-157uf3-**

f5rg4qxp3 Device type: **abcd**

token: **6ogMaaQHNWFEgOD8R?**

Device ID : **7654321**

Device Token : **87654321**

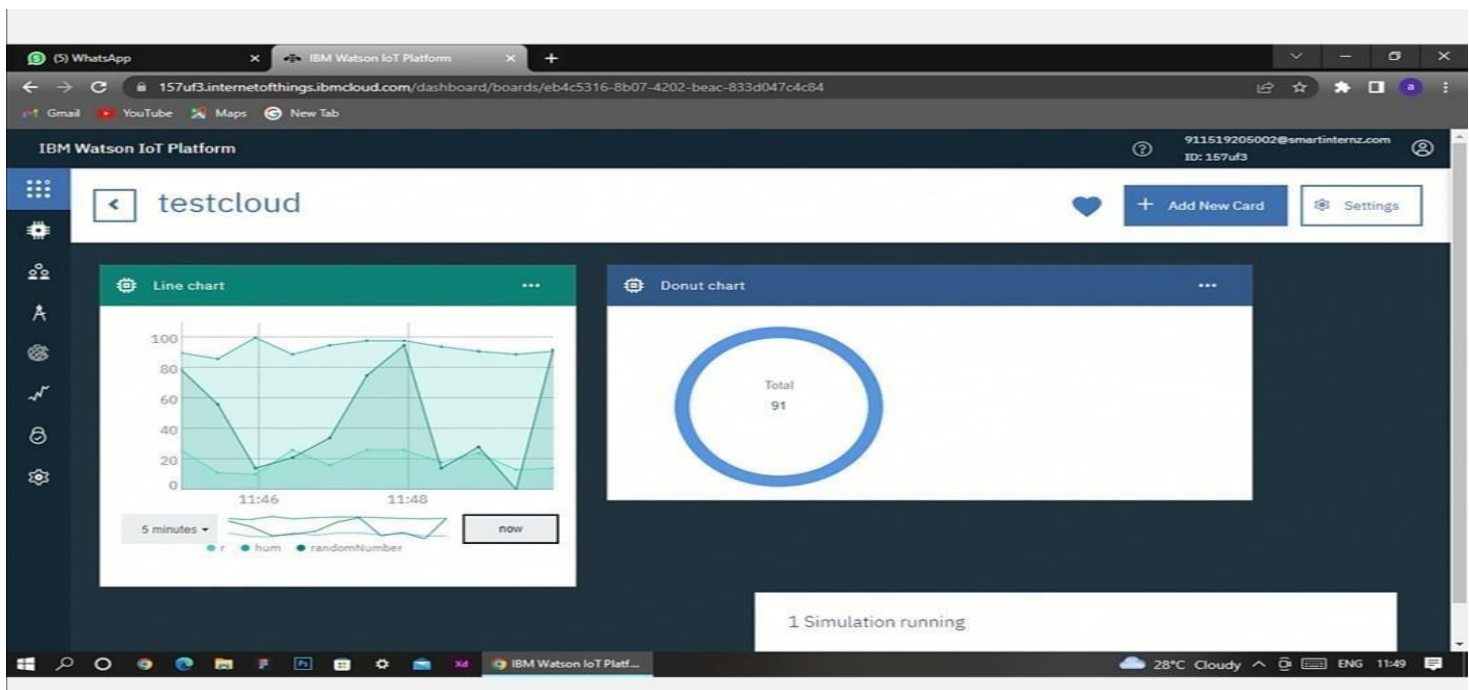

You can see the received data in graphs by creating cards in Boards tab

- You will receive the simulator data in cloud
- You can see the received data in Recent Events under your device

➤ Data received in this format(json)

```
{  
  "d": {  
    ▪ "name": "abcd",  
    ▪ "temperature": 17,  
    ▪ "humidity": 76,  
    ▪ "Moisture ": 25  
  }  
}
```


The screenshot displays the IBM Watson IoT Platform dashboard. The top navigation bar includes tabs for 'Browse', 'Action', 'Device Types', and 'Interfaces'. A sidebar on the left contains icons for various platform features. The main content area shows a modal window titled 'Recent Events' for a specific device. This window contains a table with the following data:

Event	Value	Format	Last Received
IoTSensor	{"temp":108,"Humid":64}	json	a few seconds ago
IoTSensor	{"temp":91,"Humid":93}	json	a few seconds ago
IoTSensor	{"temp":108,"Humid":83}	json	a few seconds ago

Below the table, there is a pagination control showing 'Items per page 50' and '1-2 of 2 items'. The bottom of the dashboard shows a status bar with system information like '29°C Cloudy' and 'ENG 11:14'.

Configuration of Node-Red to collect IBM cloud data

The node IBM IoT App In is added to Node-Red workflow. Then the appropriate device credentials obtained earlier are entered into the node to connect and fetch device telemetry to Node-Red.

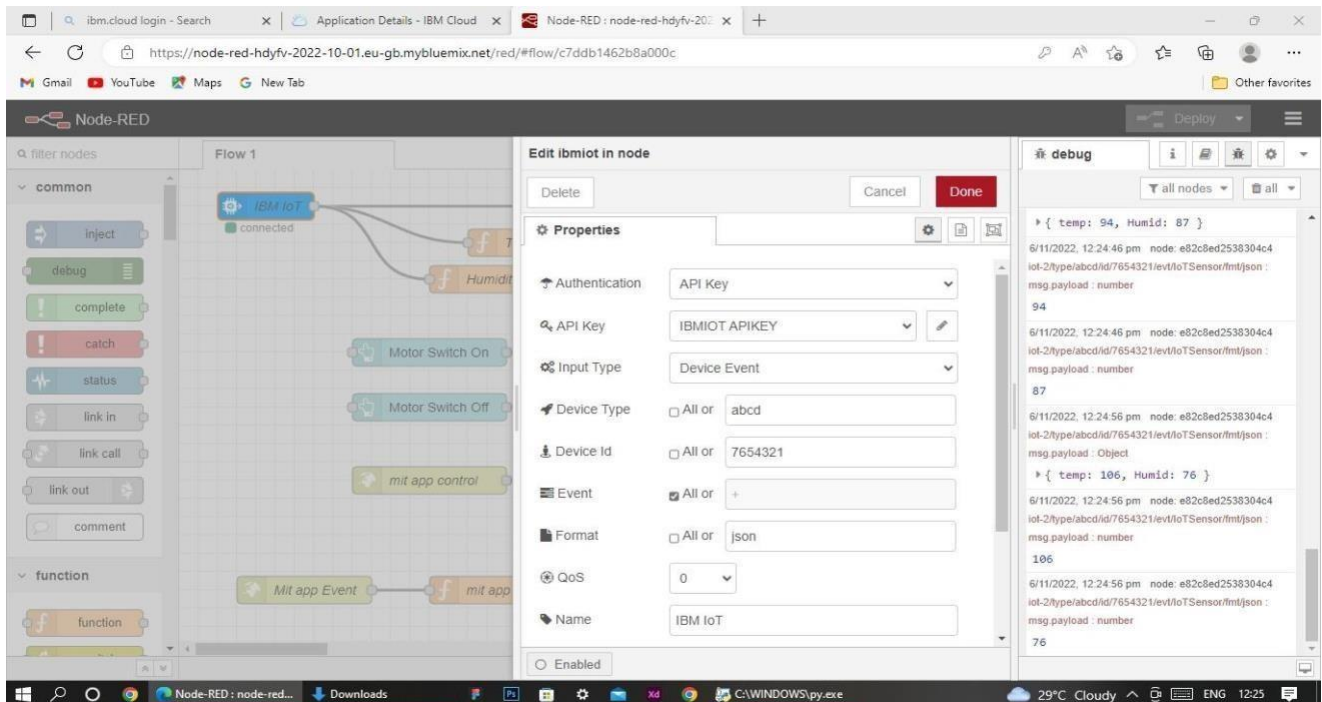

Once it is connected Node-Red receives data from the device

Display the data using debug node for verification

Connect function node and write the Java script code to get each reading separately.

The Java script code for the function node is:


```
msg.payload=msg.payload.d.temperature return msg;
```

Finally connect Gauge nodes from dashboard to see the data in UI


The screenshot shows a web browser window with multiple tabs. The active tab is titled "Node-RED : node-red-hdyfv-2022-10-01.eu-gb.mybluemix.net/ui/#/1?socketid=CF6nygqzvmjqZo7UAAAP". The browser address bar shows the URL. A console window is open, displaying a list of 20 log messages. Each message follows the format: "Published Temperature = [value] C Humidity = [value] % to IBM Watson". The values for temperature range from 92 to 109 C, and humidity values range from 64% to 96%.

```
Published Temperature = 109 C Humidity = 64 % to IBM Watson
Published Temperature = 105 C Humidity = 86 % to IBM Watson
Published Temperature = 105 C Humidity = 83 % to IBM Watson
Published Temperature = 102 C Humidity = 86 % to IBM Watson
Published Temperature = 103 C Humidity = 60 % to IBM Watson
Published Temperature = 106 C Humidity = 83 % to IBM Watson
Published Temperature = 101 C Humidity = 85 % to IBM Watson
Published Temperature = 106 C Humidity = 84 % to IBM Watson
Published Temperature = 95 C Humidity = 74 % to IBM Watson
Published Temperature = 107 C Humidity = 73 % to IBM Watson
Published Temperature = 92 C Humidity = 96 % to IBM Watson
Published Temperature = 93 C Humidity = 82 % to IBM Watson
Published Temperature = 98 C Humidity = 80 % to IBM Watson
Published Temperature = 107 C Humidity = 71 % to IBM Watson
Published Temperature = 94 C Humidity = 87 % to IBM Watson
Published Temperature = 106 C Humidity = 76 % to IBM Watson
Published Temperature = 98 C Humidity = 81 % to IBM Watson
Published Temperature = 103 C Humidity = 95 % to IBM Watson
Published Temperature = 92 C Humidity = 66 % to IBM Watson
Published Temperature = 99 C Humidity = 76 % to IBM Watson
Published Temperature = 93 C Humidity = 68 % to IBM Watson
```

Data received from the cloud in Node-Red console

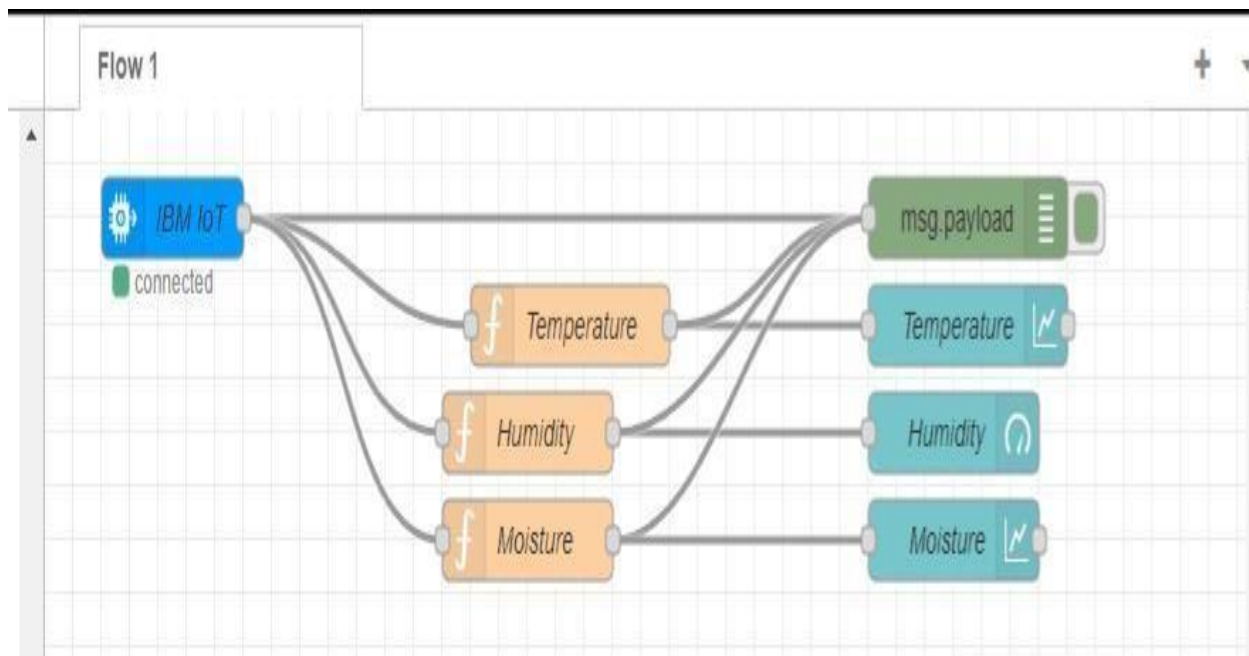

Nodes connected in following manner to get each reading separately

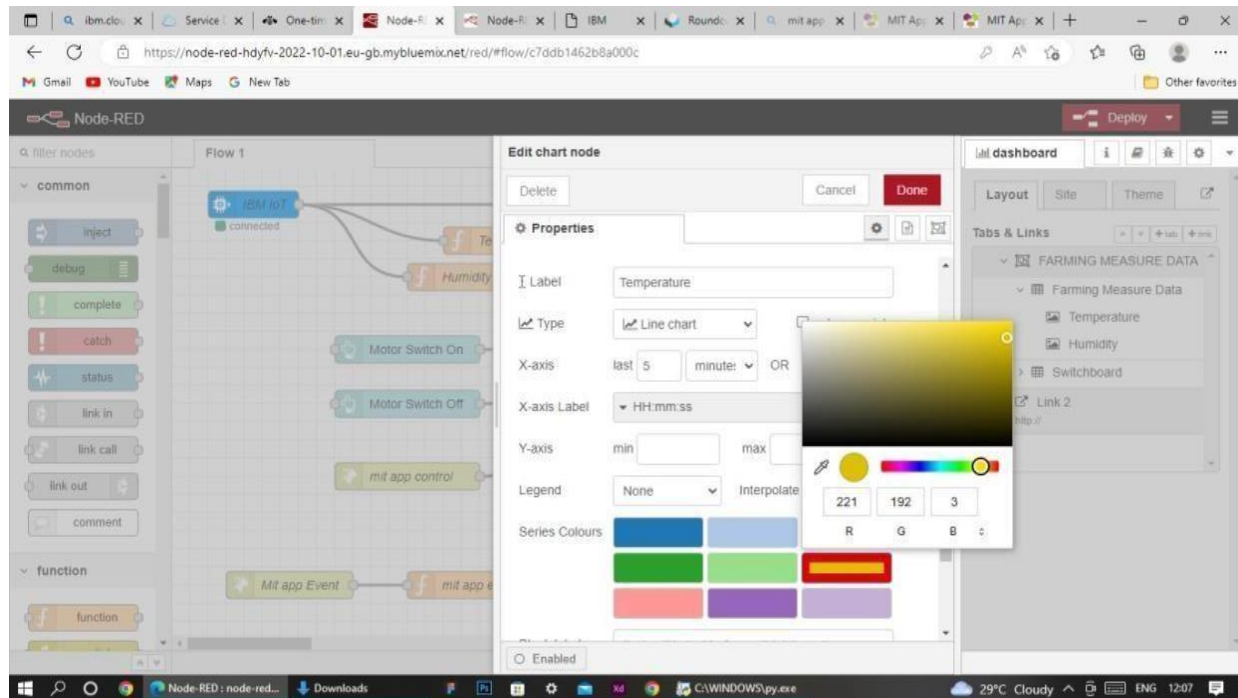

This is the Java script code I written for the function node to get Temperature separately.

Configuration of Node-Red to collect data from OpenWeather

The Node-Red also receive data from the OpenWeather API by HTTP GET request. An inject trigger is added to perform HTTP request for every certain interval.

HTTP request node is configured with URL we saved before in section 4.4 The data we receive from OpenWeather after request is in below JSON

```
format:{ "coord":{ "lon":79.85,"lat":14.13},"weather":[{"id":803,"main":"Clouds","description":"brokenclouds","icon":"04n"}],"base":"stations","main":{"temp":307.59,"feels_like":305.5,"temp_min":307.59,"temp_max":307.59,"pressure":1002,"humidity":35,"sea_level":1002,"grnd_level":1000},"wind":{"speed":6.23,"deg":170}
,"clouds":{"all":68},"dt":1589991979,"sys":{"country":"IN","sunrise":1589933553,"sunset":1589979720},"timezone":19800,"id":1270791,"name":"Gūdūr","cod":200}
```

In order to parse the JSON string we use Java script functions and get each parameters

```
var temperature = msg.payload.main.temp;temperature  
= temperature-273.15;  
return {payload : temperature.toFixed(2)};
```

In the above Java script code we take temperature parameter into a new variable and convert it from kelvin to Celsius

Then we add Gauge and text nodes to represent data visually in UI

