Project Development Phase SPRINT-1

Date	29 October 2022
Team ID	PNT2022TMID01887
Project Name	Project - IOT Based Safety Gadget for Child Safety Monitoring&Notification

✓ REGISTRATION:


HTML:

```
<!DOCTYPE html>
<html lang="en">
<head>
  <meta charset="UTF-8">
  <meta http-equiv="X-UA-Compatible" content="IE=edge">
  <meta name="viewport" content="width=device-width, initial-scale=1.0">
  k rel="stylesheet" href="/css/login.css">
  <title>Sign Up</title>
  <script>
    if (window.location.hostname !== "localhost") {
      if (location.protocol !== "https:") {
         location.replace(
           `https:${location.href.substring(
             location.protocol.length
           )}`
        )
      }
    }
  </script>
  <script src="./localforage.js"></script>
</head>
<body>
  <div class="wrapper">
    <div class="loginContainer">
       <span>Login to Continue/span>
      <div class="traditionalLoginContainer">
         <form class="signupForm" action="/" method="post">
           <input type="text" name="firstName" placeholder="First Name" id="firstName">
           <input type="text" name="lastName" placeholder="Last Name" id="lastName">
           <input type="text" name="username" placeholder="User Name" id="username">
```

```
<input type="email" name="email" placeholder="Email" id="email">
           <input type="password" name="password" placeholder="Password" id="password">
           <input class="loginButton" type="submit" value="Sign Up">
         </form>
       </div>
       <div class="loginWithFireContainer">
         <button type="button" class="fire" title="Login with SAFETY" id="fire">Login with
SAFETY</button>
       </div>
       <a class="hyperLink" href="/login">Already have an Account? Login / </a>
    </div>
  </div>
  <script>
    // Necessary for Fire OAuth to Function
    const fireBroadcastingChannel = new BroadcastChannel('fireOAuthChannel');
    fireBroadcastingChannel.addEventListener('message', async event => {
      let data = event.data
      * @typedef {Object<string, any>} Data
      * @property {boolean} success - Whether the login was successful
      * @property {string} token - The data returned from the login i.e. Fire Token
      // data.token is the message sent from the fireOAuthChannel after verification
      // data.success is a boolean that indicates whether the verification was successful
      // data.token is the fire token
      // What to do with the Fire Token?
      //* Fire Token is an unique token which uniquely identifies the user who authorized your login attempt
with Fire
      //* You can use this token ONLY ONCE as it will be destroyed after the first use
      // 1. Send the fire token to the Fire Server to verify the user
      // - You can do that client sided or server sided
      // - You need to send a POST Request to the Fire Server with the fire token
      // at the URL: http://localhost:3003/api/tokens/verify
      // - The Fire Server will verify the fire token and return a response
          - If the verification was successful - CODE (200), the Fire Server will return a response with the
user's data
      // - If the verification was unsuccessful - CODE (400) or CODE (401), the Fire Server will return a
response with an error 'message'
      // - You can use the data returned from the Fire Server to create a new user in your database
      // This example will send the token to Fire Servers and console.log the response
       console.log("%c" + `Fire Token: ${data.token}`, `color: #f1c40f; font-weight: bold;`);
```

```
const response = await fetch('https://fire.adaptable.app/api/tokens/verify', {
         method: 'POST',
         headers: {
            'Content-Type': 'application/json'
         },
         body: JSON.stringify({
           token: data.token
         })
       })
       // get the response
       const responseData = await response.json()
       // console.log the response
       console.log(responseData)
       await localforage.setItem('userData', {...responseData, isFire: true})
       // Adding the user data to the user Database
       let database = await localforage.getItem("userDatabase")
       if (database == null) {
         database = []
       }
       database.push(responseData)
       await localforage.setItem("userDatabase", database)
       // redirect to the home page
       window.location.href = '/'
    })
    function popupwindow(url, title, w, h) {
       var left = (screen.width/2)-(w/2);
       var top = (screen.height/2)-(h/2);
       return window.open(url, title, 'toolbar=no, location=no, directories=no, status=no, menubar=no,
scrollbars = no, resizable = no, copy history = no, width = '+w+', height = '+h+', top = '+top+', left = '+left); \\
    }
    document.getElementById("fire").addEventListener("click", function() {
       popupwindow("/fireoauth.html", "Fire OAuth", 450, 600)
    })
  </script>
  <script>
    // this.Website's Scripts / App Logic
    document.querySelector(".signupForm").addEventListener("submit" , async (e) => {
       e.preventDefault()
       let firstName = document.getElementById("firstName").value
       let lastName = document.getElementByld("lastName").value
       let username = document.getElementById("username").value
```

```
let email = document.getElementByld("email").value
      let password = document.getElementById("password").value
      let profilePic = `https://avatars.dicebear.com/api/adventurer-
neutral/${firstName}${lastName}.svg?backgroundColor=variant03`
      let data = { firstName, lastName, username, email, password, profilePic }
      await localforage.setItem("userData", data)
      let database = await localforage.getItem("userDatabase")
      if (database == null) {
         database = []
      }
      database.push(data)
      await localforage.setItem("userDatabase", database)
      window.location.href = "/"
    })
  </script>
</body>
```

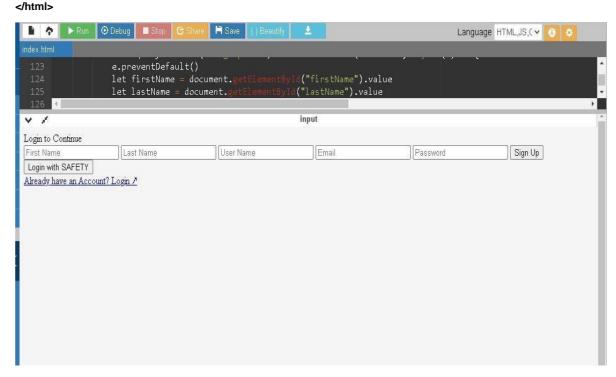

✓ CONFIRMATION EMAIL:

INDEX:

```
<meta name="viewport" content="width=device-width, initial-scale=1.0" />
              <title>IOT Based Safety Gadget for Child Safety Monitoring and Notification</title>
<script src="./localforage.js"></script>
              <script>
                       if (window.location.hostname !== "localhost") {
                                 if (location.protocol !== "https:") {
                                           location.replace(
                                                    `https:${location.href.substring(
                                                              location.protocol.length
                                                    )}`
                                           )
                                 }
                       }
                       async function check() {
    let data = localforage.getItem("userData")
    if (data == null) {
      window.location.href = "/login"
    }
 }
 check()
              </script>
    </head>
    <body
              style="
                       height: 100%;
                       margin: 0;
                       font-weight: 300;
                       font-family: -apple-system, BlinkMacSystemFont, 'Segoe UI', Roboto,
                                 Oxygen, Ubuntu, Cantarell, 'Open Sans', 'Helvetica Neue',
                                 sans-serif;
              <div
                       class="wrapper"
                       style="
                                 height: 90%;
                                 display: flex;
                                 flex-direction: column;
```

```
align-items: center;
                                     justify-content: center;
         text-align: center;
                            <div
                                     class="details"
                                     style="
                                               display: flex;
                                               flex-direction: column;
                                               align-items: center;
                                               gap: 20px;
                                               padding: 1rem;
                                               border-radius: 5px;
                                               box-shadow: 0 0 8px 0px #44444444;
           max-width: 80%;
                            >
                                     <h1 class="name" style="margin: 0"></h1>
                                      <div
                                               class="imageContainer"
                                               style="padding: 10px; height: 10rem; width: 10rem"
                                               <img class="image" alt="profile picture" />
                                      </div>
                                      <h2 class="email" style="margin: 0"></h2>
         <a style="text-decoration: none;text-align: center;font-size: 1.2rem;color: #0070f3;font-weight:
400;" href="./dashboard">Go to Dashboard / </a>
                            </div>
                   </div>
                  <script>
                            async function main() {
         let name = document.querySelector(".name")
         let image = document.querySelector(".image")
         let email = document.querySelector(".email")
         let userData = await localforage.getItem("userData")
         if(userData == null) {
           window.location.href = "/login"
```



LOCALFORAGE:

```
| localForage -- Offline Storage, Improved
| Version 1.10.0 |
| https://localforage.github.io/localForage |
| (c) 2013-2017 Mozilla, Apache License 2.0 |
| */ |
| !function(a) |
| if("object"==typeof exports&&"undefined"!=typeof module)module.exports=a(); |
| else if("function"==typeof define&&define.amd)define([],a); |
| else{var b; |
| b="undefined"!=typeof window?window:"undefined"!=typeof global?global:"undefined"!=typeof self?self:this,b.localforage=a()}){function(){ |
| return function a(b,c,d){ |
| function e(g,h){if(!c[g]){if(!b[g]){ |
| var i="function"==typeof require&&require; |
| if(!h&&i)return i(g,!0);if(f)return f(g,!0); |
```

```
throw j.code="MODULE_NOT_FOUND",j}var k=c[g]={exports:{}};
                         b[g][0].call(k.exports,function(a){
                          var c=b[g][1][a];return e(c||a)},k,k.exports,a,b,c,d)}
                return c[g].exports}
   for(var f="function"==typeof require&&require,g=0;g<d.length;g++)e(d[g]);
   return e}({1:[function(a,b,c){(function(a){"use strict";
                                       function c(){k=!0;for(var a,b,c=l.length;c;){
                                         for(b=I,I=[],a=-1;++a<c;)b[a]();c=I.length}k=!1}
                                       function d(a){1!==l.push(a)||k||e()}var
e,f=a.MutationObserver||a.WebKitMutationObserver;
                                       if(f){var g=0,h=new
f(c),i=a.document.createTextNode("");h.observe(i,{characterData:!0}),e=function(){i.data=g=++g%2}}
                                       else if(a.setImmediate||void 0===a.MessageChannel)e="document"in
a&&"onreadystatechange"in a.document.createElement("script")?function(){var
b=a.document.createElement("script");b.onreadystatechange=function(){c(),b.onreadystatechange=null,b.pa
rentNode.removeChild(b),b=null},a.document.documentElement.appendChild(b)}:function(){setTimeout(c,0)};
else{var j=new a.MessageChannel;j.port1.onmessage=c,e=function(){j.port2.postMessage(0)}}var
k,l=[];b.exports=d}).call(this,"undefined"!=typeof global?global:"undefined"!=typeof
self?self:"undefined"!=typeof window?window:{})},{}],2:[function(a,b,c){"use strict";function d(){}function
e(a){if("function"!=typeof a)throw new TypeError("resolver must be a
function"):this.state=s.this.gueue=[1.this.outcome=void 0.a!==d&&i(this.a)}function
f(a,b,c){this.promise=a,"function"==typeof
b&&(this.onFulfilled=b,this.callFulfilled=this.otherCallFulfilled),"function"==typeof
c&&(this.onRejected=c,this.callRejected=this.otherCallRejected)}function g(a,b,c){o(function(){var
d;try{d=b(c)}catch(b){return p.reject(a,b)}d===a?p.reject(a,new TypeError("Cannot resolve promise with
itself")):p.resolve(a,d)})}function h(a){var b=a&&a.then;if(a&&("object"==typeof a||"function"==typeof
a)&&"function"==typeof b)return function(){b.apply(a,arguments)}}function i(a,b){function
c(b)\{f||(f=!0,p.reject(a,b))\}function d(b)\{f||(f=!0,p.resolve(a,b))\}function e()\{b(d,c)\}var
f=!1,g=j(e);"error"===g.status&&c(g.value)}function j(a,b){var
c={\};try{c.value=a\}b),c.status="success"\}catch(a){c.status="error",c.value=a\}return c\}function k(a){return a
instanceof this?a:p.resolve(new this(d),a)}function I(a){var b=new this(d);return p.reject(b,a)}function
m(a){function b(a,b){function
d(a)\{g[b]=a,++h!==e||f||(f=!0,p.resolve(j,g))\}c.resolve(a).then(d,function(a)\{f||(f=!0,p.reject(j,a))\})\}var
c=this:if("lobiect Arrayl"!==Object.prototype.toString.call(a))return this.reject(new TypeError("must be an
array"));var e=a.length,f=!1;if(!e)return this.resolve([]);for(var g=new Array(e),h=0,i=-1,j=new
this(d);++i<e;)b(a[i],i);return j}function n(a){function
b(a)\{c.resolve(a).then(function(a)\{f||(f=!0,p.resolve(h,a))\},function(a)\{f||(f=!0,p.reject(h,a))\}\})\} var
c=this;if("[object Array]"!==Object.prototype.toString.call(a))return this.reject(new TypeError("must be an
array"));var e=a.length,f=!1;if(!e)return this.resolve([]);for(var g=-1,h=new this(d);++g<e;)b(a[g]);return h}var
o=a(1),p={},q=["REJECTED"],r=["FULFILLED"],s=["PENDING"];b.exports=e,e.prototype.catch=function(a){ret urn
this.then(null,a)),e.prototype.then=function(a,b){if("function"!=typeof a&&this.state===r||"function"!=typeof
b&&this.state===q)return this;var c=new
this.constructor(d);if(this.state!==s){g(c,this.state===r?a:b,this.outcome)}else this.queue.push(new
c},f.prototype.callFulfilled=function(a){p.resolve(this.promise,a)},f.prototype.otherCallFulfilled=function(a){g(
this.promise,this.onFulfilled,a)},f.prototype.callRejected=function(a){p.reject(this.promise,a)},f.prototype.oth
erCallRejected=function(a){g(this.promise,this.onRejected,a)},p.resolve=function(a,b){var
c=j(h,b);if("error"===c.status)return p.reject(a,c.value);var
d=c.value;if(d)i(a,d);else{a.state=r,a.outcome=b;for(var e=-
1,f=a.queue.length;++e<f;)a.queue[e].callFulfilled(b)}return
a},p.reject=function(a,b){a.state=q,a.outcome=b;for(var c=-
1,d=a.queue.length;++c<d;)a.queue[c].callRejected(b);return
a\}, e. resolve = k, e. reject = l, e. all = m, e. race = n\}, \{1:1\}], 3: [function(a, b, c)\{(function(b)\{"use strict"; "function"! = type of the limit of the linit of the limit of the limit of the limit of the limit of the li
b.Promise&&(b.Promise=a(2))}).call(this,"undefined"!=typeof global?global:"undefined"!=typeof
self?self:"undefined"!=typeof window?window:{}}},{2:2}],4:[function(a,b,c){"use strict";function d(a,b){if(!(a
instanceof b))throw new TypeError("Cannot call a class as a function")}function
e(){try{if("undefined"!=typeof indexedDB)return indexedDB;if("undefined"!=typeof webkitIndexedDB)return
webkitIndexedDB;if("undefined"!=typeof mozIndexedDB)return mozIndexedDB;if("undefined"!=typeof
OIndexedDB)return OIndexedDB;if("undefined"!=typeof msIndexedDB)return
msIndexedDB}catch(a){return}}function f(){try{if(!ua||!ua.open)return!1;var a="undefined"!=typeof
```

var j=new Error("Cannot find module '"+g+"'");

```
openDatabase&&/(Safari|iPhone|iPad|iPod)/.test(navigator.userAgent)&&!/Chrome/.test(navigator.userAgent)
 &&!/BlackBerry/.test(navigator.platform),b="function"==typeof fetch&&-1!==fetch.toString().indexOf("[native
 code");return(!a||b)&&"undefined"!=typeof indexedDB&&"undefined"!=typeof
IDBKeyRange}catch(a){return!1}}function g(a,b){a=a||[],b=b||{};try{return new
 Blob(a,b)}catch(f){if("TypeError"!==f.name)throw f;for(var c="undefined"!=typeof
 BlobBuilder?BlobBuilder:"undefined"!=typeof MSBlobBuilder?MSBlobBuilder:"undefined"!=typeof
 MozBlobBuilder:MozBlobBuilder:WebKitBlobBuilder,d=new c,e=0;e<a.length;e+=1)d.append(a[e]);return
\label{lob_basis} d.getBlob(b.type)\} function \ h(a,b) \{b\&\&a.then(function(a)\{b(null,a)\}, function(a)\{b(a)\})\} function \ d.getBlob(b.type)\} function \ h(a,b) \{b\&\&a.then(function(a)\{b(null,a)\}, function(a)\{b(a)\})\} function \ h(a,b) \{b\&\&a.then(function(a)\{b(null,a)\}, function(a)\{b(null,a)\}, function(a)\{b(null,a)
 i(a,b,c){"function"==typeof b&&a.then(b),"function"==typeof c&&a.catch(c)}function
 j(a){return"string"!=typeof a&&(console.warn(a+" used as a key, but it is not a
 string."),a=String(a)),a}function k(){if(arguments.length&&"function"==typeof arguments[arguments.length-
 1])return arguments[arguments.length-1]}function I(a){for(var b=a.length,c=new ArrayBuffer(b),d=new
 Uint8Array(c),e=0;e<b;e++)d[e]=a.charCodeAt(e);return c}function m(a){return new va(function(b){var
c=a.transaction(wa,Ba),d=g([""]);c.objectStore(wa).put(d,"key"),c.onabort=function(a){a.preventDefault(),a.st
opPropagation(),b(!1)},c.oncomplete=function(){var
>=43)}}).catch(function(){return!1}))function n(a){return"boolean"==typeof
xa?va.resolve(xa):m(a).then(function(a){return xa=a})}function o(a){var b=ya[a.name],c={};c.promise=new
 va(function(a,b){c.resolve=a,c.reject=b}),b.deferredOperations.push(c),b.dbReady?b.dbReady=b.dbReady.th
 en(function(){return c.promise}):b.dbReady=c.promise}function p(a){var
b = ya[a.name], c = b.deferredOperations.pop(); if(c) return \ c.resolve(), c.promise\} function \ q(a,b) \{varante (a,b), c.promise) \} function \ q(a,b) \{varante (a,
c=ya[a.name],d=c.deferredOperations.pop();if(d)return d.reject(b),d.promise}function r(a,b){return new
va(function(c,d){if(ya[a.name]=ya[a.name]||B(),a.db){if(!b)return c(a.db);o(a),a.db.close()}var
e=[a.name]; b\&\&e.push(a.version); var\ f=ua.open.apply(ua,e); b\&\&(f.onupgradeneeded=function(b) \{var\ f=ua.open.apply(ua,e)\} b\&\&e.push(a.version); var\ f=ua.open.apply(ua,e); b\&e.push(a.version); var\ f=ua.open.apply(ua,e); b\&e.push(a.version); var\ f=ua.open.apply(ua,e); b\&e.push(a.version); var\ f=ua.open.apply(ua,e); b\&e.push(a.version); b
c=f.result;try{c.createObjectStore(a.storeName),b.oldVersion<=1&&c.createObjectStore(wa)}catch(c){if("Con
straintError"!==c.name)throw c;console.warn('The database "'+a.name+'" has been upgraded from version
 '+b.oldVersion+" to version "+b.newVersion+', but the storage "'+a.storeName+'" already
exists.')\}\}), f. onerror = function(a) \{a.prevent Default(), d(f.error)\}, f. on success = function() \{varantee function(a), d(f.error), f. on success = function(a), d(f.error), f. on success = function(b), f. on suc
b=f.result;b.onversionchange=function(a){a.target.close()},c(b),p(a)}})function s(a){return r(a,!1)}function
t(a){return r(a,!0)}function u(a,b){if(!a.db)return!0;var
c=!a.db.objectStoreNames.contains(a.storeName),d=a.version<a.db.version,e=a.version>a.db.version;if(d&&
(a.version!==b&&console.warn('The database "'+a.name+"\" can't be downgraded from version
     '+a.db.version+" to version "+a.version+"."),a.version=a.db.version),e||c){if(c){var
f=a.db.version+1;f>a.version&&(a.version=f)}return!0}return!1}function v(a){return new va(function(b,c){var
d=new FileReader;d.onerror=c,d.onloadend=function(c){var
 d=btoa(c.target.result||"");b({ local_forage_encoded_blob:!0,data:d,type:a.type})},d.readAsBinaryString(a)})}
function w(a){return g([l(atob(a.data))],{type:a.type}))}function x(a){return
a\&\&a.\_local\_forage\_encoded\_blob\} function \ y(a) \{var\ b=this, c=b.\_initReady(). then (function() \{var\ b=this, c=b.\_initReady(). the
a=ya[b.\_dbInfo.name]; if (a\&\&a.dbReady) return \ a.dbReady)); return \ i(c,a,a), c) function \ z(a) \{o(a); for (varance), constant \ a = 1, constant \ a =
b=ya[a.name],c=b.forages,d=0;d<c.length;d++){var
e = c[d]; e\_dbln fo.db \& (e\_dbln fo.db. close(), e\_dbln fo.db=null) \} return \ a.db=null, s(a). then (function(b) \{ return a.db=null, s(a).then (functio
a.db=b,u(a)?t(a):b}).then(function(d){a.db=b.db=d;for(var
e=0; e<c.length; e++)c[e].\_dbInfo.db=d\}). catch (function(b)\{throw\ q(a,b),b\})\} function\ A(a,b,c,d)\{void\ average and by\ average\ avera
0===d&&(d=1);try{var
e=a.db.transaction(a.storeName,b);c(null,e)}catch(e){if(d>0&&(!a.db||"InvalidStateError"===e.name||"NotFou
 ndError"===e.name))return
 va.resolve().then(function(){if(!a.db||"NotFoundError"===e.name&&!a.db.objectStoreNames.contains(a.store
Name)&&a.version<=a.db.version)return a.db&&(a.version=a.db.version+1),t(a)}).then(function(){return
z(a).then(function(){A(a,b,c,d-1)})).catch(c);c(e)}}function
 B(){return{forages:[],db:null,dbReady:null,deferredOperations:[]}}function C(a){function b(){return
 va.resolve())var c=this,d={db:null};if(a)for(var e in a)d[e]=a[e];var
f=ya[d.name]; f||(f=B(),ya[d.name]=f), f. for ages. push(c), c.\_initReady||(c.\_initReady=c.ready,c.ready=y); for (varable), f||(f=B(),ya[d.name]=f), f||(f=B(),ya[d.name]
g=[],h=0;h<f.forages.length;h++) \{var\ i=f.forages[h];i!==c\&\&g.push(i.\_initReady().catch(b))\} \ var\ i=f.forages[h];i!=c\&\&g.push(i.\_initReady().catch(b))\} \ var\ i=f.forages[h];i!=c\&\&g.push(i.\_initReady().catch(b))
j=f.forages.slice(0);return va.all(g).then(function(){return d.db=f.db,s(d)}).then(function(a){return
d.db=a,u(d,c._defaultConfig.version)?t(d):a}).then(function(a){d.db=f.db=a,c._dblnfo=d;for(var
b=0; b<j. length; b++) \{var \ e=j[b]; e!==c\&\&(e.\_dblnfo.db=d.db, e.\_dblnfo.version=d.version)\}\}) \} function \ D(a,b) \{var \ e=j[b]; e!==c\&\&(e.\_dblnfo.db=d.db, e.\_dblnfo.version=d.version)\}\}) \} function \ D(a,b) \{var \ e=j[b]; e!==c\&\&(e.\_dblnfo.db=d.db, e.\_dblnfo.version=d.version)\}\}) \} function \ D(a,b) \{var \ e=j[b]; e!==c\&\&(e.\_dblnfo.db=d.db, e.\_dblnfo.version=d.version)\}\}) \} function \ D(a,b) \{var \ e=j[b]; e!==c\&\&(e.\_dblnfo.db=d.db, e.\_dblnfo.version=d.version)\}\}) \} function \ D(a,b) \{var \ e=j[b]; e!==c\&\&(e.\_dblnfo.db=d.db, e.\_dblnfo.version=d.version)\}\}) \} function \ D(a,b) \{var \ e=j[b]; e!==c\&\&(e.\_dblnfo.db=d.db, e.\_dblnfo.version=d.version)\}\}) \} function \ D(a,b) \{var \ e=j[b]; e!=c\&\&(e.\_dblnfo.db=d.db, e.\_dblnfo.version=d.version)\}\}
 c=this;a=j(a);var d=new va(function(b,d){c.ready().then(function(){A(c._dblnfo,Aa,function(e,f){if(e)return
\label{lem:decomposition} d(e); try\{var\ g=f.objectStore(c.\_dbInfo.storeName), h=g.get(a); h.onsuccess=function()\{var\ a=h.result; void\ a=h.result; void\
0 == a\&\&(a = null), x(a)\&\&(a = w(a)), b(a)\}, h. one rror = function()\{d(h.error)\}\} catch(a)\{d(a)\}\}\}). catch(d)\}); return = (a = a & (a = null), x(a) & (a = w(a)), b(a)\}, h. one rror = function()\{d(h.error)\}\} catch(a)\{d(a)\}\}\}). catch(d)\}); return = (a = a & (a = null), x(a) & (a = w(a)), b(a)\}, h. one rror = function()\{d(h.error)\}\} catch(a)\{d(a)\}\}\}). catch(d)\}); return = (a = a & (a = w(a)), b(a)\}, h. one rror = function()\{d(h.error)\}\} catch(a)\{d(a)\}\}). catch(d)\}); return = (a = a & (a = w(a)), b(a)\}, h. one rror = function()\{d(h.error)\}\} catch(a)\{d(a)\}\}). catch(a)\{d(a)\}\}); return = (a = a & (a = w(a)), b(a)\}, h. one rror = function()\{d(h.error)\}\} catch(a)\{d(a)\}\}); return = (a = a & (a = w(a)), b(a)\}, h. one rror = function()\{d(h.error)\}\} catch(a)\{d(a)\}\}); return = (a = a & (a = w(a)), b(a)\}, h. one rror = function()\{d(h.error)\}\} catch(a)\{d(a)\}\}); return = (a = a & (a = w(a)), b(a)\}, h. one rror = function()\{d(h.error)\}\} catch(a)\{d(a)\}\}); return = (a = a & (a = w(a)), b(a)\}, h. one rror = function()\{d(h.error)\}\} catch(a)\{d(a)\}\}); return = (a = a & (a = w(a)), b(a)\}, h. one rror = function()\{d(h.error)\}\} catch(a)\{d(a)\}\}); return = (a = a & (a = w(a)), b(a)\}, h. one rror = function()\{d(h.error)\}\} catch(a)\{d(a)\}\}); return = (a = a & (a = w(a)), b(a)\}, h. one rror = function()\{d(h.error)\}\} catch(a)\{d(h.error)\}
h(d,b),d}function E(a,b){var c=this,d=new
 va(function(b,d)\{c.ready().then(function()\{A(c.\_dblnfo,Aa,function(e,f)\{if(e)return\ d(e);try\{varantee,Aa,function(e,f)\}\})\} \\
 g = f.objectStore(c.\_dbInfo.storeName), h = g.openCursor(), i = 1; h.onsuccess = function() \{var\ c = h.result; if(c) \{var\ c = h.result\}\} \} = f.objectStore(c.\_dbInfo.storeName), h = g.openCursor(), i = 1; h.onsuccess = function() \{var\ c = h.result\}\} = f.objectStore(c.\_dbInfo.storeName), h = g.openCursor(), i = 1; h.onsuccess = function() \{var\ c = h.result\}\} = f.objectStore(c.\_dbInfo.storeName), h = g.openCursor(), i = 1; h.onsuccess = function() \{var\ c = h.result\}\} = f.objectStore(c.\_dbInfo.storeName), h = g.openCursor(), i = 1; h.onsuccess = function() \{var\ c = h.result\}\} = f.objectStore(c.\_dbInfo.storeName), h = g.openCursor(), i = 1; h.onsuccess = function() \{var\ c = h.result\}\} = f.objectStore(c.\_dbInfo.storeName), h = g.openCursor(), i = 1; h.onsuccess = function() \{var\ c = h.result\}\} = f.objectStore(c.\_dbInfo.storeName), h = g.openCursor(), i = 1; h.onsuccess = function() \{var\ c = h.result\}\} = f.objectStore(c.\_dbInfo.storeName), h = g.openCursor(), i = 1; h.onsuccess = function() \{var\ c = h.result\}\} = f.objectStore(c.\_dbInfo.storeName), h = g.openCursor(), i = 1; h.onsuccess = function() \{var\ c = h.result\}\} = f.objectStore(c.\_dbInfo.storeName), h = g.openCursor(), i = 1; h.onsuccess = function() \{var\ c = h.result\}\} = f.objectStore(c.\_dbInfo.storeName), h = g.openCursor(), i = 1; h.onsuccess = function() \{var\ c = h.result\}\} = f.openCursor(), h = g.openCursor(), h = 
 d=c.value; x(d) \& (d=w(d)); var e=a(d,c.key,i++); void 0!==e?b(e):c.continue()) else
b()\}, h. onerror = function() \{d(h.error)\} \\ catch(a)\{d(a)\}\})). catch(d)\}); return \ h(d,b), d\} \\ function \ F(a,b,c)\{varable (a,b,c), (a,b,c)\} \\ function \ F(a,b,c)\{varable (a,b,c), (a,b,c), (a,b,c)\} \\ function \ F(a,b,c)\{varable (a,b,c), (a,b,c), (a,b,c), (a,b,c)\} \\ function \ F(a,b,c)\{varable (a,b,c), (a,b,c), (a,b,c), (a,b,c), (a,b,c), (a,b,c)\} \\ function \ F(a,b,c)\{varable (a,b,c), (a,b,c)
d=this;a=j(a);var e=new va(function(c,e){var f;d.ready().then(function(){return f=d._dblnfo,"[object
 Blob]"===za.call(b)?n(f.db).then(function(a){return
a?b:v(b)\}):b\}).then(function(b)\{A(d.\_dbInfo,Ba,function(f,g)\{if(f)return\ e(f);try\{varnow(f,g)\}\})\})
h=g.objectStore(d._dblnfo.storeName);null===b&&(b=void 0);var i=h.put(b,a);g.oncomplete=function(){void
0 \! = \! = \! b\&\&(b \! = \! null), c(b)\}, g.onabort \! = \! g.onerror \! = \! function() \{varantee | function(), c(b)\}, g.onabort = \! g.onerror = \! function() \{varantee | function(), c(b)\}, g.onabort = \! g.onerror = \! function(), c(b)\}, g.onabort = \! g.onabort = \!
 a=i.error?i.error:i.transaction.error;e(a)}}catch(a){e(a)}})).catch(e)});return h(e,c),e}function G(a,b){var
```

```
c=this;a=j(a);var d=new va(function(b,d){c.ready().then(function(){A(c._dblnfo,Ba,function(e,f){if(e)return
g=f.objectStore(c._dbInfo.storeName),h=g.delete(a);f.oncomplete=function(){b()},f.onerror=function(){d(h.err
or)},f.onabort=function(){var a=h.error?h.error:h.transaction.error;d(a)}}catch(a){d(a)}})}.catch(d)});return
h(d,b),d}function H(a){var b=this,c=new
va(function(a,c)\{b.ready().then(function()\{A(b.\_dblnfo,Ba,function(d,e)\{if(d)return\ c(d);try\{varnde,ba,function(d,e)\}\})\}
f=e.objectStore(b._dbInfo.storeName),g=f.clear();e.oncomplete=function(){a()},e.onabort=e.onerror=function()
b=this,c=new va(function(a,c){b.ready().then(function(){A(b._dblnfo,Aa,function(d,e){if(d)return c(d);try{var
f=e.objectStore(b._dbInfo.storeName),g=f.count();g.onsuccess=function(){a(g.result)},g.onerror=function(){c(
g.error)}}catch(a){c(a)}})}).catch(c)});return h(c,a),c}function J(a,b){var c=this,d=new
va(function(b,d){if(a<0)return void b(null);c.ready().then(function(){A(c._dbInfo,Aa,function(e,f){if(e)return
d(e);try{var g=f.objectStore(c._dbInfo.storeName),h=!1,i=g.openKeyCursor();i.onsuccess=function(){var
c=i.result;if(!c)return void
b(null);0===a?b(c.key):h?b(c.key):(h=!0,c.advance(a))},i.onerror=function(){d(i.error)}}catch(a){d(a)}})).catch(
d)});return h(d,b),d}function K(a){var b=this,c=new
va(function(a,c){b.ready().then(function(){A(b._dblnfo,Aa,function(d,e){if(d)return c(d);try{var
f=e.objectStore(b._dbInfo.storeName),g=f.openKeyCursor(),h=[];g.onsuccess=function(){var
b=g.result;if(!b)return void
a(h);h.push(b.key),b.continue()},g.onerror=function(){c(g.error)}}catch(a){c(a)}})}).catch(c)});return
h(c,a),c}function L(a,b){b=k.apply(this,arguments);var c=this.config();a="function"!=typeof
a&&a||{},a.name||(a.name=a.name||c.name,a.storeName=a.storeName||c.storeName);var
d,e=this;if(a.name){var
f=a.name===c.name&&e._dblnfo.db,g=f?va.resolve(e._dblnfo.db):s(a).then(function(b){var
c=ya[a.name],d=c.forages;c.db=b;for(var e=0;e<d.length;e++)d[e]._dblnfo.db=b;return
b});d=a.storeName?g.then(function(b){if(b.objectStoreNames.contains(a.storeName)){var
c=b.version+1; o(a); var\ d=ya[a.name], e=d.forages; b.close(); for (var\ f=0; f< e.length; f++) \{var\ f=0; f< e.length; f++\} \{var
g=e[f];g._dbInfo.db=null,g._dbInfo.version=c}return new va(function(b,d){var
e=ua.open(a.name,c);e.onerror=function(a){e.result.close(),d(a)},e.onupgradeneeded=function(){e.result.delet
eObjectStore(a.storeName)},e.onsuccess=function(){var
a=e.result;a.close(),b(a)}}).then(function(a){d.db=a;for(var b=0;b<e.length;b++){var
c=e[b];c._dblnfo.db=a,p(c._dblnfo)}}).catch(function(b){throw(q(a,b)||va.resolve()).catch(function(){}),b})}});g.t
hen(function(b){o(a);var c=ya[a.name],d=c.forages;b.close();for(var
e=0; e< d.length; e++) \{d[e].\_dbInfo.db=null\} return\ new\ va(function(b,c)\{varante e=0; e< d.length; e++)\} \}
d=ua.deleteDatabase(a.name);d.onerror=function(){var
a=d.result;a&&a.close(),c(d.error)},d.onblocked=function(){console.warn('dropInstance blocked for database
"'+a.name+'" until all open connections are closed')},d.onsuccess=function(){var
a=d.result;a&&a.close(),b(a)}}).then(function(a){c.db=a;for(var
b=0;b<d.length;b++)p(d[b]._dblnfo)}).catch(function(b){throw(q(a,b)||va.resolve()).catch(function(){}),b})})}els
e d=va.reject("Invalid arguments");return h(d,b),d}function M(){return"function"==typeof
openDatabase}function N(a){var b,c,d,e,f,g=.75*a.length,h=a.length,i=0;"="===a[a.length-1]&&(g--
   ====a[a.length-2]&&g--);var j=new ArrayBuffer(g),k=new
Uint8Array(j);for(b=0;b<h;b+=4)c=Da.indexOf(a[b]),d=Da.indexOf(a[b+1]),e=Da.indexOf(a[b+2]),f=Da.indexOf(
a[b+3]),k[i++]=c<<2|d>>4,k[i++]=(15&d)<<4|e>>2,k[i++]=(3&e)<<6|63&f; return j} function O(a){var b,c=new
\label{limits} \begin{tabular}{ll} $$ Uint8Array(a),d="";for(b=0;b<c.length;b+=3)d+=Da[c[b]>>2],d+=Da[(3&c[b])<<4|c[b+1]>>4],d+=Da[(15&c[b+1])><1],d+=Da[(15&c[b+1])><1],d+=Da[(15&c[b+1])><1],d+=Da[(15&c[b+1])><1],d+=Da[(15&c[b+1])><1],d+=Da[(15&c[b+1])><1],d+=Da[(15&c[b+1])><1],d+=Da[(15&c[b+1])><1],d+=Da[(15&c[b+1])><1],d+=Da[(15&c[b+1])><1],d+=Da[(15&c[b+1])><1],d+=Da[(15&c[b+1])><1],d+=Da[(15&c[b+1])><1],d+=Da[(15&c[b+1])><1],d+=Da[(15&c[b+1])><1],d+=Da[(15&c[b+1])><1],d+=Da[(15&c[b+1])><1],d+=Da[(15&c[b+1])><1],d+=Da[(15&c[b+1])><1],d+=Da[(15&c[b+1])><1],d+=Da[(15&c[b+1])><1],d+=Da[(15&c[b+1])><1],d+=Da[(15&c[b+1])><1],d+=Da[(15&c[b+1])><1],d+=Da[(15&c[b+1])><1],d+=Da[(15&c[b+1])><1],d+=Da[(15&c[b+1])><1],d+=Da[(15&c[b+1])><1],d+=Da[(15&c[b+1])><1],d+=Da[(15&c[b+1])><1],d+=Da[(15&c[b+1])><1],d+=Da[(15&c[b+1])><1],d+=Da[(15&c[b+1])><1],d+=Da[(15&c[b+1])><1],d+=Da[(15&c[b+1])>1],d+=Da[(15&c[b+1])><1],d+=Da[(15&c[b+1])><1],d+=Da[(15&c[b+1])><1],d+=Da[(15&c[b+1])><1],d+=Da[(15&c[b+1])><1],d+=Da[(15&c[b+1])><1],d+=Da[(15&c[b+1])><1],d+=Da[(15&c[b+1])><1],d+=Da[(15&c[b+1])><1],d+=Da[(15&c[b+1])><1],d+=Da[(15&c[b+1])><1],d+=Da[(15&c[b+1])><1],d+=Da[(15&c[b+1])><1],d+=Da[(15&c[b+1])><1],d+=Da[(15&c[b+1])><1],d+=Da[(15&c[b+1])><1],d+=Da[(15&c[b+1])><1],d+=Da[(15&c[b+1])><1],d+=Da[(15&c[b+1])><1],d+=Da[(15&c[b+1])><1],d+=Da[(15&c[b+1])><1],d+=Da[(15&c[b+1])><1],d+=Da[(15&c[b+1])><1],d+=Da[(15&c[b+1])><1],d+=Da[(15&c[b+1])><1],d+=Da[(15&c[b+1])><1],d+=Da[(15&c[b+1])><1],d+=Da[(15&c[b+1])><1],d+=Da[(15&c[b+1])><1],d+=Da[(15&c[b+1])>1],d+=Da[(15&c[b+1])>1],d+=Da[(15&c[b+1])>1],d+=Da[(15&c[b+1])>1],d+=Da[(15&c[b+1])>1],d+=Da[(15&c[b+1])>1],d+=Da[(15&c[b+1])>1],d+=Da[(15&c[b+1])>1],d+=Da[(15&c[b+1])>1],d+=Da[(15&c[b+1])>1],d+=Da[(15&c[b+1])>1],d+=Da[(15&c[b+1])>1],d+=Da[(15&c[b+1])>1],d+=Da[(15&c[b+1])>1],d+=Da[(15&c[b+1])>1],d+=Da[(15&c[b+1])>1],d+=Da[(15&c[b+1])>1],d+=Da[(15&c[b+1])>1],d+=Da[(15&c[b+1])>1],d+=Da[(15&c[b+1])>1],d+=Da[(15&c[b+1])>1],d+=Da[(15&c[b+1])>1],d+=Da[(15&c[b+1])>1],d+=Da[(15&c[b+1])>1],d+=Da[(1
<<2|c[b+2]>>6],d+=Da[63&c[b+2]];return c.length%3==2?d=d.substring(0,d.length-
1) + "=":c.length%3 == 1 \&\& (d=d.substring(0,d.length-2) + "=="),d} function P(a,b) \{varante = (a,b) + (a,b)
c="";if(a&&(c=Ua.call(a)),a&&("[object ArrayBuffer]"===c||a.buffer&&"[object
ArrayBuffer]"===Ua.call(a.buffer))){var d,e=Ga;a instanceof ArrayBuffer?(d=a,e+=la):(d=a.buffer,"[object
Int8Array]"===c?e+=Ka:"[object Uint8Array]"===c?e+=La:"[object Uint8ClampedArray]"===c?e+=Ma:"[object
Int16Array]"===c?e+=Na:"[object Uint16Array]"===c?e+=Pa:"[object Int32Array]"===c?e+=Oa:"[object Int32Array]"==c?e+=Oa:"[object Int32Array]"==c?e+Oa:"[object Int32Array]"=cobject Int32Array]"=cobject Int32Array]"=cobject Int32Array]"=cobject Int32Array]"=cobject Int32Array]"=cobject Int32Array]"=cobject Int32Array]"=cobject Int3Array]"=cobject Int3Array]"=cobject Int3Array]"=cobject Int3Array]"=cobject Int3Array]"=cobject Int3Array]"=cobject Int3Array]"=cobject Int3Array]"=cobject Int3Array]"=cobject Int3Array
Uint32Array]"===c?e+=Qa:"[object Float32Array]"===c?e+=Ra:"[object Float64Array]"===c?e+=Sa:b(new
Error("Failed to get type for BinaryArray"))),b(e+O(d))}else if("[object Blob]"===c){var f=new
FileReader;f.onload=function(){var c=Ea+a.type+"~"+O(this.result);b(Ga+Ja+c)},f.readAsArrayBuffer(a)}else
try{b(JSON.stringify(a))}catch(c){console.error("Couldn't convert value into a JSON string:
",a),b(null,c)}}function Q(a){if(a.substring(0,Ha)!==Ga)return JSON.parse(a);var
b,c=a.substring(Ta),d=a.substring(Ha,Ta);if(d===Ja&&Fa.test(c)){var
e=c.match(Fa);b=e[1],c=c.substring(e[0].length)}var f=N(c);switch(d){case la:return f;case Ja:return
g([f],{type:b});case Ka:return new Int8Array(f);case La:return new Uint8Array(f);case Ma:return new
Uint8ClampedArray(f);case Na:return new Int16Array(f);case Pa:return new Uint16Array(f);case Oa:return
new Int32Array(f);case Qa:return new Uint32Array(f);case Ra:return new Float32Array(f);case Sa:return new
Float64Array(f);default:throw new Error("Unkown type: "+d)}}function R(a,b,c,d){a.executeSql("CREATE
TABLE IF NOT EXISTS "+b.storeName+" (id INTEGER PRIMARY KEY, key unique, value)",[],c,d)}function
S(a){var b=this,c={db:null};if(a)for(var d in a)c[d]="string"!=typeof a[d]?a[d].toString():a[d];var e=new
va(function(a,d){try{c.db=openDatabase(c.name,String(c.version),c.description,c.size)}catch(a){return
c.serializer=Va,e}function
T(a,b,c,d,e,f){a.executeSql(c,d,e,function(a,g){g.code===g.SYNTAX_ERR?a.executeSql("SELECT name FROM
sqlite_master WHERE type='table' AND name
```

 $=?",[b.storeName],function(a,h)\{h.rows.length?f(a,g):R(a,b,function()\{a.executeSql(c,d,e,f)\},f)\},f):f(a,g)\},f\}\{function(a,b)\{f$

```
ction U(a,b){var c=this;a=j(a);var d=new va(function(b,d){c.ready().then(function(){var
 e=c._dbInfo;e.db.transaction(function(c){T(c,e,"SELECT * FROM "+e.storeName+" WHERE key = ? LIMIT
  1",[a],function(a,c){var
 d=c.rows.length?c.rows.item(0).value:null; d\&\&(d=e.serializer.deserialize(d)), b(d)\}, function(a,b)\{d(b)\})\})).catc
 h(d)});return h(d,b),d}function V(a,b){var c=this,d=new va(function(b,d){c.ready().then(function(){var
 e=c.\_dbInfo; e.db.transaction(function(c) \\ \{T(c,e,"SELECT*FROM"+e.storeName,[],function(c,d)\}\\ \{for(varner), for(varner), for(varner
  f=d.rows,g=f.length,h=0;h<g;h++){var i=f.item(h),j=i.value;if(j&&(j=e.serializer.deserialize(j)),void
 0!{==}(j{=}a(j{,}i.key{,}h{+}1))) return\ void\ b(j){}b(){}, function(a{,}b){}(d(b){}){}))).catch(d){}); return\ h(d{,}b){,}d{}function
  W(a,b,c,d){var e=this;a=j(a);var f=new va(function(f,g){e.ready().then(function(){void 0===b&&(b=null);var
  \label{eq:heb} $$h=b,=e.\_dbInfo; i.serializer.serialize(b,function(b,j)\{j?g(j):i.db.transaction(function(c)\{T(c,i,"INSERT\ OR\ Institute of the property of 
  REPLACE INTO "+i.storeName+" (key, value) VALUES
 (?,?)",[a,b],function()\{f(h)\},function(a,b)\{g(b)\})\},function(b)\{if(b.code===b.QUOTA\_ERR)\{if(d>0)return\ void\ f(h)\},function(b)\{if(b.code===b.QUOTA\_ERR)\},function(b)\{if(b.code===b.QUOTA\_ERR)\},function(b)\{if(b.code===b.QUOTA\_ERR)\},function(b)\{if(b.code===b.QUOTA\_ERR)\},function(b)\{if(b.code===b.QUOTA\_ERR)\},function(b)\{if(b.code===b.QUOTA\_ERR)\},function(b)\{if(b.code===b.QUOTA\_ERR)\},function(b)\{if(b.code===b.QUOTA\_ERR)\},function(b)\{if(b.code===b.QUOTA\_ERR)\},function(b)\{if(b.code===b.QUOTA\_ERR)\},function(b)\{if(b.code==b.QUOTA\_ERR)\},function(b)\{if(b.code==b.QUOTA\_ERR)\},function(b)\{if(b.code==b.QUOTA\_ERR)\},function(b)\{if(b.code==b.QUOTA\_ERR)\},function(b)\{if(b.code==b.QUOTA\_ERR)\},function(b)\{if(b.code==b.QUOTA\_ERR)\},function(b)\{if(b.code==b.QUOTA\_ERR)\},function(b)\{if(b.code=b.QUOTA\_ERR)\},function(b)\{if(b.code=b.QUOTA\_ERR)\},function(b)\{if(b.code=b.QUOTA\_ERR)\},function(b)\{if(b.code=b.QUOTA\_ERR)\},function(b)\{if(b.code=b.QUOTA\_ERR)\},function(b)\{if(b.code=b.QUOTA\_ERR)\},function(b)\{if(b.code=b.QUOTA\_ERR)\},function(b)\{if(b.code=b.QUOTA\_ERR)\},function(b)\{if(b.code=b.QUOTA\_ERR)\},function(b)\{if(b.code=b.QUOTA\_ERR)\},function(b)\{if(b.code=b.QUOTA\_ERR)\},function(b)\{if(b.code=b.QUOTA\_ERR)\},function(b)\{if(b.code=b.QUOTA\_ERR)\},function(b)\{if(b.code=b.QUOTA\_ERR)\},function(b)\{if(b.code=b.QUOTA\_ERR)\},function(b)\{if(b.code=b.QUOTA\_ERR)\},function(b)\{if(b.code=b.QUOTA\_ERR)\},function(b)\{if(b.code=b.QUOTA\_ERR)\},function(b)\{if(b.code=b.QUOTA\_ERR)\},function(b)\{if(b.code=b.QUOTA\_ERR)\},function(b)\{if(b.code=b.QUOTA\_ERR)\},function(b)\{if(b.code=b.QUOTA\_ERR)\},function(b)\{if(b.code=b.QUOTA\_ERR)\},function(b)\{if(b.code=b.QUOTA\_ERR)\},function(b)\{if(b.code=b.QUOTA\_ERR)\},function(b)\{if(b.code=b.QUOTA\_ERR)\},function(b)\{if(b.code=b.QUOTA\_ERR)\},function(b)\{if(b.code=b.QUOTA\_ERR)\},function(b)\{if(b.code=b.QUOTA\_ERR)\},function(b)\{if(b.code=b.QUOTA\_ERR)\},function(b)\{if(b.code=b.QUOTA\_ERR)\},function(b)\{if(b.code=b.QUOTA\_ERR)\},function(b)\{if(b.code=b.QUOTA\_ERR)\},function(b)\{if(b.code=b.QUOTA\_ERR)\},function(b)\{if(b.code=b.QUOTA\_ERR)\},function(b)\{if(b.code=b.QUOTA
 f(W.apply(e,[a,h,c,d-1]));g(b)\}\})\})).catch(g)\}); return\ h(f,c),f\} function\ X(a,b,c)\{return\ f(W.apply(e,[a,h,c,d-1]));g(b)\}\})\}).catch(g)\}); return\ h(f,c),f\} function\ X(a,b,c)\{return\ f(W.apply(e,[a,h,c,d-1]));g(b)\}\})\}).catch(g)\}); return\ h(f,c),f\} function\ X(a,b,c)\{return\ f(W.apply(e,[a,h,c,d-1]));g(b)\}\})\}).catch(g)\}); return\ h(f,c),f\} function\ X(a,b,c)\{return\ f(W.apply(e,[a,h,c,d-1]));g(b)\})\}).catch(g)\}); return\ h(f,c),f\} function\ X(a,b,c)\{return\ f(W.apply(e,[a,h,c,d-1]));g(b)\})\}).catch(g)\}); return\ h(f,c),f\} function\ X(a,b,c)\{return\ f(W.apply(e,[a,h,c,d-1]));g(b)\})\}).catch(g)\}); return\ h(f,c),f\} function\ X(a,b,c)\{return\ f(W.apply(e,[a,h,c,d-1]));g(b)\}); return\ h(f,c),f\} function\ X(a,b,c)\{return\ f(W.apply(e,[a,h,c,d-1]));g(b)\}); return\ h(f,c),f\} function\ X(a,b,c)\{return\ f(W.apply(e,[a,h,c,d-1])); g(b)\}); return\ h(f,c),f\} function\ X(a,b,c)\{return\ f(W.apply(e,[a,h,c,d-1])); g(b)\}); return\ h(f,c),f\} function\ X(a,b,c)\{return\ f(W.apply(e,[a,h,c,d-1])); g(b)\}); return\ h(f,c),f\} function\ f(W.apply(e,[a,h,c,d-1])); g(b)\}); return\ h(f,c),f\} function\ f(W.apply(e,[a,h,c,d-1])); g(b)\} function\ f(W.apply(e,[a,h,c])); g(B)\} function\ f(W.apply(e,[a,h,c
  W.apply(this,[a,b,c,1])}function Y(a,b){var c=this;a=j(a);var d=new
  va(function(b,d){c.ready().then(function(){var e=c._dblnfo;e.db.transaction(function(c){T(c,e,"DELETE FROM
     "+e.storeName+" WHERE key = ?",[a],function(){b()},function(a,b){d(b)}}})).catch(d)});return h(d,b),d}function
 Z(a){var b=this,c=new va(function(a,c){b.ready().then(function(){var
  d=b._dbInfo;d.db.transaction(function(b){T(b,d,"DELETE FROM
   "+d.storeName,[],function(){a()},function(a,b){c(b)})}}).catch(c)});return h(c,a),c}function $(a){var
 b=this,c=new va(function(a,c){b.ready().then(function(){var
 d=b._dbInfo;d.db.transaction(function(b){T(b,d,"SELECT COUNT(key) as c FROM
  "+d.storeName,[],function(b,c){var d=c.rows.item(0).c;a(d)},function(a,b){c(b)}}}).catch(c)});return
 h(c,a),c\} function \ \_(a,b) \{ var \ c=this,d=new \ va(function(b,d)\{c.ready().then(function()\{var \ c=this,d=new \ va(function(b,d)\{c.ready().then(function(b,d)\{c.ready().then(b,d)\{c.ready().then(b,d)\{c.ready().then(b,d)\{c.ready().then(b,d)\{c.ready().then(b,d)\{c.ready().then(b,d)\{c.ready().then(b,d)\{c.ready().then(b,d)\{c.ready().then(b,d)\{c.ready().then(b,d)\{c.ready().then(b,d)\{c.ready().then(b,d)\{c.ready().then(b,d)\{c.ready().then(b,d)\{c.ready().then(b,d)\{c.ready().then(b,d)\{c.ready().then(b,d)\{c.ready().then(b,d)\{c.ready().then(b,d)\{c.ready().then(b,d)\{c.ready().then(b,d)\{c.ready().then(b,d)\{c.ready().then(b,d)\{c.ready().then(b,d)\{c.ready().then(b,d)\{c.ready().then(b,d)\{c.ready().then(b,d)\{c.ready().then(b,d)\{c.ready().then(b,d)\{c.ready().then(b,d)\{c.ready().then(b,d)\{c.ready().then(b,d)\{c.ready().then(b,d)\{c.ready().then(b,d)\{c.ready().then(b,d)\{c.ready().then(b,d)\{c.ready().then(b,d)\{c.ready().then(b,d)\{c.ready().then(b,d)\{c.ready().then(b,d)\{c.ready().then(b,d)\{c.ready().then(b,d)\{c.ready().then(b,d)\{c.ready().then(b,d)\{c.ready().then(b,d)\{c.ready().then(b,d)\{c.ready().then(b,d)\{c.ready().then(b,d)\{c.ready().then(b,d)\{c.ready().then(b,d)\{c.ready().then(b,d)\{c.ready().then(b,d)\{c.ready().then(b,d)\{c.ready().then(b,d)\{c.ready().then(b,d)\{c.ready().then(b,d)\{c.ready().then(b,d)\{c.ready().then(b,d)\{c.ready().then(b,d)\{c.ready().then(b,d)\{c.ready().then(b,d)\{c.ready().then(b,d)\{c.ready().then(b,d)\{c.ready().then(b,d)\{c.ready().then(b,d)\{c.ready().then(b,d)\{c.ready().then(b,d)\{c.ready().then(b,d)\{c.ready().t
 e=c._dbInfo;e.db.transaction(function(c){T(c,e,"SELECT key FROM "+e.storeName+" WHERE id = ? LIMIT
  1",[a+1],function(a,c){var
 d=c.rows.length?c.rows.item(0).key:null;b(d)},function(a,b){d(b)})}).catch(d)});return h(d,b),d}function
  aa(a){var b=this,c=new va(function(a,c){b.ready().then(function(){var
 d=b._dbInfo;d.db.transaction(function(b){T(b,d,"SELECT key FROM "+d.storeName,[],function(b,e){for(var
  d=[],e=0;e<c.rows.length;e++)d.push(c.rows.item(e).key);a(d)},function(a,b){c(b)}))}).catch(c)});return
 h(c,a),c\} function\ ba(a) \{return\ new\ va(function(b,c)\{a.transaction(function(d)\{d.executeSql("SELECT\ name of the context of the context
  FROM sqlite_master WHERE type='table' AND name <>
  \label{lem:condition} \begin{tabular}{ll} $$' WebKitDatabaseInfoTable $'',[], function(c,d){for(var)} \end{tabular}
 e=[],f=0;f<d.rows.length;f++)e.push(d.rows.item(f).name);b(\{db:a,storeNames:e\})\},function(a,b)\{c(b)\})\},function(a,b)\{c(b),f(a,b)\},f(a,b)\}
 n(a) \{c(a)\}\} function\ ca(a,b) \{b=k.apply(this,arguments); var\ c=this.config(); a="function"!=typeofallow of the configuration of th
 a&&a||{},a.name||(a.name=a.name||c.name,a.storeName=a.storeName||c.storeName);var d,e=this;return
  d=a.name?new va(function(b){var
d;d=a.name===c.name?e._dblnfo.db:openDatabase(a.name,"","",0),b(a.storeName?{db:d,storeNames:[a.storeName]}:ba(d))}).then(function(a){return new va(function(b,c){a.db.transaction(function(d){function
 e(a){return new va(function(b,c){d.executeSql("DROP TABLE IF EXISTS
  "+a,[],function(){b()},function(a,b){c(b)})})for(var
 f=[],g=0,h=a.storeNames.length;g<h;g++)f.push(e(a.storeNames[g]));va.all(f).then(function()\{b()\}).catch(function()(b())).catch(function()(b())).catch(function()(b())).catch(function()(b())).catch(function()(b())).catch(function()(b())(b())).catch(function()(b())(b()()(b())(b()()(b()()(b()()(b()()(b()()(b()()(b()()(b()()(b()()(b()()(b()()(b()()(b()()(b()()(b()()(b()()(b()()(b()()(b()()(b()()(b()()(b()()(b()()(b()()(b()()(b()()(b()()(b()()(b()()(b()()(b()()(b()()(b()()(b()()(b()()(b()()(b()()(b()()(b()()(b()()(b()()(b()()(b()()(b()()(b()()(b()()(b()()(b()()(b()()(b()()(b()()(b()()(b()()(b()()(b()()(b()()(b()()(b()()(b()()(b()()(b()()(b()()(b()()(b()()(b()()(b()()(b()()(b()()(b()()(b()()(b()()(b()()(b()()(b()()(b()()(b()()(b()()(b()()(b()()(b()()(b()()(b()()(b()()(b()()(b()()(b()()(b()()(b()()(b()()(b()()(b()()(b()()(b()()(b()()(b()()(b()()(b()()(b()()(b()()(b()()(b()()(b()()(b()()(b()()(b()()(b()()(b()()(b()()(b()()(b()()(b()()(b()()(b()()(b()()(b()()(b()()(b()()(b()()(b()()(b()()(b()()(b()()(b()()(b()()(b()()(b()()(b()()(b()()(b()()(b()()(b()()(b()()(b()()(b()()(b()()(b()()(b()()(b()()(b()()(b()()(b()()(b()()(b()()(b()()(b()()(b()()(b()()(b()()(b()()(b()()(b()()(b()()(b()()(b()()(b()()(b()()(b()()(b()()(b()()(b()()(b()()(b()()(b()()(b()()(b()()(b()()(b()()(b()()(b()()(b()()(b()()(b()()(b()()(b()()(b()()(b()()(b()()(b()()(b()()(b()()(b()()(b()()(b()()(b()()(b()()(b()()(b()()(b()()(b()()(b()()(b()()(b()()(b()()(b()()(b()()(b()()(b()()(b()()(b()()(b()()(b()()(b()()(b()()(b()()(b()()(b()()(b()()(b()()(b()()(b()()(b()()(b()()(b()()(b()()(b()()(b()()(b()()(b()()(b()()(b()()(b()()(b()()(b()()(b()()(b()()(b()()(b()()(b()()(b()()(b()()(b()()(b()()(b()()(b()()(b()()(b()()(b()()(b()()(b()()(b()()(b()()(b()()(b()()(b()()(b()()(b()()(b()()(b()()(b()()(b()()(b()()(b()()(b()()(b()()(b()()(b()()(b()()(b()()(b()()(b()()(b()()(b()()(b()()(b()()(b()()(b()()(b()()(b()()(b()()(b()()(b()()(b()()(b()()(b()()(b()()(b()()(b()()(b()()(b()()(b()()(b()()(b()()(b()()(b()()(b()()(b()()(b()()(b()()(b()()(b()()(b()()(b()()(b()()(b()()(b()()(
  on(a){c(a)})},function(a){c(a)})})):va.reject("Invalid arguments"),h(d,b),d}function
 da(){try{return"undefined"!=typeof localStorage&&"setItem"in
  localStorage&&!!localStorage.setItem}catch(a){return!1}}function ea(a,b){var c=a.name+"/";return
 a.storeName!==b.storeName&&(c+=a.storeName+"/"),c}function fa(){var
  a="_localforage_support_test";try{return
 local Storage.set Item (a,!0), local Storage.remove Item (a),!1\} catch (a) \{return!0\} \} function
 ga(){return!fa()||localStorage.length>0}function ha(a){var b=this,c={};if(a)for(var d in a)c[d]=a[d];return
  c.keyPrefix=ea(a,b._defaultConfig),ga()?(b._dbInfo=c,c.serializer=Va,va.resolve()):va.reject()}function
  ia(a) \{var\ b=this, c=b.ready(). then (function() \{for (var\ a=b.\_dbln fo. key Prefix, c=local Storage.length-1; c>=0; c-this, c=b.ready(). then (function() \{for (var\ a=b.\_dbln fo. key Prefix, c=local Storage.length-1; c>=0; c-this, c=b.ready(). then (function() \{for (var\ a=b.\_dbln fo. key Prefix, c=local Storage.length-1; c>=0; c-this, c=b.ready(). then (function() \{for (var\ a=b.\_dbln fo. key Prefix, c=local Storage.length-1; c>=0; c-this, c=b.ready(). then (function() \{for (var\ a=b.\_dbln fo. key Prefix, c=local Storage.length-1; c>=0; c-this, c=b.ready(). then (function() \{for (var\ a=b.\_dbln fo. key Prefix, c=local Storage.length-1; c>=0; c-this, c=b.ready(). then (function() \{for (var\ a=b.\_dbln fo. key Prefix, c=local Storage.length-1; c>=0; c-this, c=b.ready(). then (function() \{for (var\ a=b.\_dbln fo. key Prefix, c=local Storage.length-1; c>=0; c-this, c=b.ready(). then (function() \{for (var\ a=b.\_dbln fo. key Prefix, c=local Storage.length-1; c>=0; c-this, c=b.ready(). then (function() \{for (var\ a=b.\_dbln fo. key Prefix, c=local Storage.length-1; c>=0; c-this, c=b.ready(). then (function() \{for (var\ a=b.\_dbln fo. key Prefix, c=local Storage.length-1; c>=0; c-this, c=b.ready(). then (function() \{for (var\ a=b.\_dbln fo. key Prefix, c=local Storage.length-1; c>=0; c-this, c=b.ready(). then (function() \{for (var\ a=b.\_dbln fo. key Prefix, c=local Storage.length-1; c>=0; c-this, c=b.ready(). then (function() \{for (var\ a=b.\_dbln fo. key Prefix, c=local Storage.length-1; c>=0; c-this, c=b.ready(). then (function() \{for (var\ a=b.\_dbln fo. key Prefix, c=local Storage.length-1; c>=0; c-this, c=b.ready(). then (function() \{for (var\ a=b.\_dbln fo. key Prefix, c=local Storage.length-1; c>=0; c-this, c=b.ready(). then (function() \{for (var\ a=b.\_dbln fo. key Prefix, c=local Storage.length-1; c>=0; c-this, c=b.ready(). then (function() \{for (var\ a=b.\_dbln fo. key Prefix, c=local Storage.length-1; c>=0; c-this, c=b.ready(). then (function() \{for (var\ a=b.\_dbln fo. key Prefix, c=local Storage.length-1; c>=0;
 \label{lem:condition} $$ \operatorname{d=localStorage.key(c);0===d.indexOf(a)\&localStorage.removeltem(d)}})$ ; return h(c,a),c} function $$ \operatorname{d=localStorage.key(c);0===d.indexOf(a)\&localStorage.removeltem(d)}})$ ; return h(c,a),c} function $$ \operatorname{d=localStorage.key(c);0===d.indexOf(a)\&localStorage.removeltem(d)}}.
 ja(a,b){var c=this;a=j(a);var d=c.ready().then(function(){var
  b=c._dbInfo,d=localStorage.getItem(b.keyPrefix+a);return d&&(d=b.serializer.deserialize(d)),d});return
 h(d,b),d\} function \ ka(a,b) \{ var \ c=this, d=c.ready().then(function()\{for(var \ c=this, d=c.ready().then(function(), d=c.ready(), 
 b=c.\_dbInfo, d=b.keyPrefix, e=d.length, f=localStorage.length, g=1, h=0; h< f; h++) \{varallength, f=localStorage.length, g=1, h=0; h< f; h++) \}
 i=local Storage.key(h); if (0===i.indexOf(d)) \{var\ j=local Storage.getItem(i); if (j\&\&(j=b.serializer.deserialize(j)), void for the control of the contro
 0!==(j=a(j,i.substring(e),g++)))return j}}));return h(d,b),d}function la(a,b){var
  c=this,d=c.ready().then(function(){var b,d=c._dblnfo;try{b=localStorage.key(a)}catch(a){b=null}return
 b\&\&(b=b.substring(d.keyPrefix.length)),b\}); return\ h(d,b),d\} function\ ma(a) \{varante (a,b),b\} = b.substring(d.keyPrefix.length)),b\} = b.substring(d.keyPrefix.length)),b] = b.substr
 b=this, c=b.ready(). then (function() for (var\ a=b.\_dblnfo, c=local Storage.length, d=[], e=0; e<c; e++) \{var\ a=b.\_dblnfo,
 f=localStorage.key(e);0===f.indexOf(a.keyPrefix)&&d.push(f.substring(a.keyPrefix.length)))return d});return
 h(c,a),c\} function \ na(a) \{var\ b=this,c=b.keys().then(function(a)\{return\ a.length\}); return\ h(c,a),c\} function \ na(a) \{var\ b=this,c=b.keys(),c\} function \ na(a) \{var\ b=this,c=b.
 oa(a,b){var c=this;a=j(a);var d=c.ready().then(function(){var
 b=c._dblnfo;localStorage.removeItem(b.keyPrefix+a)});return h(d,b),d}function pa(a,b,c){var d=this;a=j(a);var
 e=d.ready().then(function(){void 0===b&&(b=null);var c=b;return new va(function(e,f){var
  g=d._dbInfo;g.serializer.serialize(b,function(b,d){if(d)f(d);else
  try\{local Storage.set Item(g.keyPrefix+a,b), e(c)\} catch(a) \{ "Quota Exceeded Error" !== a.name \& \& "NS\_ERROR\_DOBA | Particular | Par
  M_QUOTA_REACHED"!==a.name||f(a),f(a)}}))));return h(e,c),e}function
 \label{eq:qa} $$qa(a,b)$ if $(b=k.apply(this,arguments),a="function"!=typeof a\&\&a||\{\},!a.name)$ (varange) $$ if $(b=k.apply(this,arguments),a="function"!=typeof a\&\&a||\{\},!a.name,a.name,a.name,a.name,a.name,a.name,a.name,a.name,a.name,a.name,a.name,a.name,a.name,a.name,a.name,a.name,a.name,a.name,a.name,a.name,a.name,a.name,a.name,a.name,a.name,a.name,a.name,a.name,a.name,a.name,a.name,a.name,a.name,a.name,a.name,a.name,a.name,a.name,a.name,a.name,a.name,a.name,a.name,a.name,a.name,a.name,a.name,a.name,a.name,a.name,a.name,a.name,a.name,a.name,a.name,a.name,a.name,a.name,a.name,a.name,a.name,a.name,a.name,a.name,a.name,a.name,a.name,a.name,a.name,a.name,a.name,a.name,a.name,a.name,a.name,a.name,a.name,a.name,a.name,a.name,a.name,a.name,a.name,a.name,a.name,a.name,a.name,a.name,a.name,a.name,a.name,a.name,a.name,a.name,a.name,a.name,a.name,a.name,a.name,a.name,a.name,a.name,a.name,a.name,a.name,a.name,a.name,a.name,a.name,a.name,a.name,a.name,a.name,a.name,a.name,a.name,a.name,a.name,a.name,a.name,a.name,a.name,a.name,a.name,a.name,a.name,a.name,a.name,a.name,a.name,a.name,a.name,a.name,a.name,a.name,a.name,a.name,a.name,a.name,a.name,a.name,a.name,a.name,a.name,a.name,a.name,a.name,a.name,a.name,a.name,a.name,a.name,a.name,a.name,a.name,a.name,a.name,a.name,a.name,a.name,a.name,a.name,a.name,a.name,a.name,a.name,a.name,a.name,a.name,a.name,a.name,a.name,a.name,a.name,a.name,a.name,a.name,a.name,a.name,a.name,a.name,a.name,a.name,a.name,a.name,a.name,a.name,a.name,a.name,a.name,a.name,a.name,a.name,a.name,a.name,a.name,a.name,a.name,a.name,a.name,a.name,a.name,a.name,a.name,a.name,a.name,a.name,a.na
  c=this.config();a.name=a.name||c.name,a.storeName=a.storeName||c.storeName}var d,e=this;return
```

```
d=a.name?new va(function(b){b(a.storeName?ea(a,e._defaultConfig):a.name+"/")}).then(function(a){for(var
b=localStorage.length-1;b>=0;b--){var
c=localStorage.key(b);0===c.indexOf(a)&&localStorage.removeltem(c)}}):va.reject("Invalid
arguments"),h(d,b),d}function ra(a,b){a[b]=function(){var c=arguments;return a.ready().then(function(){return
a[b].apply(a,c)})}}function sa(){for(var a=1;a<arguments.length;a++){var b=arguments[a];if(b)for(var c in
b) b. has Own Property (c) \&\& (\$a(b[c])? arguments [0][c] = b[c]. slice (): arguments [0][c] = b[c]) \} return
arguments[0]}var ta="function"==typeof Symbol&&"symbol"==typeof Symbol.iterator?function(a){return
typeof a}:function(a){return a&&"function"==typeof
Symbol \& a.constructor === Symbol \& a! == Symbol. prototype? "symbol": type of a \}, ua = e(); "undefined" == type of a \}, ua = e(); "undefined" == type of a \}, ua = e(); "undefined" == type of a \}, ua = e(); "undefined" == type of a \}, ua = e(); "undefined" == type of a \}, ua = e(); "undefined" == type of a \}, ua = e(); "undefined" == type of a \}, ua = e(); "undefined" == type of a \}, ua = e(); "undefined" == type of a \}, ua = e(); "undefined" == type of a \}, ua = e(); "undefined" == type of a \}, ua = e(); "undefined" == type of a \}, ua = e(); "undefined" == type of a \}, ua = e(); "undefined" == type of a \}, ua = e(); "undefined" == type of a \}, ua = e(); "undefined" == type of a \}, ua = e(); "undefined" == type of a \}, ua = e(); "undefined" == type of a \}, ua = e(); "undefined" == type of a \}, ua = e(); "undefined" == type of a \}, ua = e(); "undefined" == type of a \}, ua = e(); "undefined" == type of a \}, ua = e(); "undefined" == type of a \}, ua = e(); "undefined" == type of a \}, ua = e(); "undefined" == type of a \}, ua = e(); "undefined" == type of a \}, ua = e(); "undefined" == type of a \}, ua = e(); "undefined" == type of a \}, ua = e(); "undefined" == type of a \}, ua = e(); "undefined" == type of a \}, ua = e(); "undefined" == type of a \}, ua = e(); "undefined" == type of a \}, ua = e(); "undefined" == type of a \}, ua = e(); "undefined" == type of a \}, ua = e(); "undefined" == type of a \}, ua = e(); "undefined" == type of a \}, ua = e(); "undefined" == type of a \}, ua = e(); "undefined" == type of a \}, ua = e(); "undefined" == type of a \}, ua = e(); "undefined" == type of a \}, ua = e(); "undefined" == type of a \}, ua = e(); "undefined" == type of a \}, ua = e(); "undefined" == type of a \}, ua = e(); "undefined" == type of a \}, ua = e(); "undefined" == type of a \}, ua = e(); "undefined" == type of a \}, ua = e(); "undefined" == type of a \}, ua = e(); "undefined" == type of a \}, ua = e(); "undefined" == type of a \}, ua = e(); "undefined" == type of a \}, ua = e(); "undefined" == type of a \}, ua = e(); "undefined" 
Promise&&a(3);var va=Promise,wa="local-forage-detect-blob-support",xa=void
0, ya=\{\}, za=Object.prototype.toString, Aa="readonly", Ba="readwrite", Ca=\{\_driver: "asyncStorage", \_initStorage: approximation of the property of the prope
"ABCDEFGHIJKLMNOPQRSTUVWXYZabcdefghijklmnopqrstuvwxyz0123456789+/",Ea="~~local_forage_type
~",Fa=/^~~local_forage_type~([^~]+)~/,Ga="_lfsc_:",Ha=Ga.length,la="arbf",Ja="blob",Ka="si08",La="ui08",
Ma="uic8",Na="si16",Oa="si32",Pa="ur16",Qa="ui32",Ra="fl32",Sa="fl64",Ta=Ha+la.length,Ua=Object.prototy
pe.toString,Va={serialize:P,deserialize:Q,stringToBuffer:N,bufferToString:0},Wa={_driver:"webSQLStorage",
  _initStorage:S,_support:M(),iterate:V,getItem:U,setItem:X,removeItem:Y,clear:Z,length:$,key:_,keys:aa,dropIn
stance:ca},Xa={_driver:"localStorageWrapper",_initStorage:ha,_support:da(),iterate:ka,getItem:ja,setItem:pa,
remove Item: oa, clear: ia, length: na, key: la, keys: ma, dropInstance: qa\}, Ya=function (a,b) \{returnation (a,b) \} (a,b) \}
a===b||"number"==typeof a&&"number"==typeof b&&isNaN(a)&&isNaN(b)},Za=function(a,b){for(var
c=a.length,d=0;d<c;){if(Ya(a[d],b))return!0;d++}return!1},$a=Array.isArray||function(a){return"[object
Array]"===Object.prototype.toString.call(a)\}, \\ \_a=\{\}, ab=\{\}, bb=\{INDEXEDDB: Ca, WEBSQL: Wa, LOCALSTORAGE: Array\}, \\ \_a=\{\}, ab=\{\}, ab
Xa},cb=[bb.INDEXEDDB._driver,bb.WEBSQL._driver,bb.LOCALSTORAGE._driver],db=["dropInstance"],eb=["
{\tt clear","getItem","iterate","key","keys","length","removeItem"].concat (db), fb=\{description:"", driver: {\tt clear","getItem"}\}. The state of the
cb.slice(),name:"localforage",size:4980736,storeName:"keyvaluepairs",version:1},gb=function(){function
a(b){d(this,a);for(var c in bb)if(bb.hasOwnProperty(c)){var
e=bb[c], f=e\_driver; this[c]=f, \_a[f]||this.defineDriver(e)\} this.\_defaultConfig=sa(\{\},fb), this.\_config=sa(\{\},this.\_defaultConfig=sa(\{\},fb), this.\_config=sa(\{\},fb), this.\_defaultConfig=sa(\{\},fb), this.\_defaultConfi
fault Config, b), this.\_driver Set=null, this.\_init Driver=null, this.\_ready=!1, this.\_dbInfo=null, this.\_wrapLibrary Method Set=null, this.\_wrapLibrary Method Method Set=null, this.\_wrapLibrary Method Set=null, this.\_wrapLi
hodsWithReady(),this.setDriver(this._config.driver).catch(function(){})}return
a.prototype.config=function(a){if("object"===(void 0===a?"undefined":ta(a))){if(this._ready)return new
Error("Can't call config() after localforage has been used.");for(var b in
a){if("storeName"===b&&(a[b]=a[b].replace(\textit{NW/g,"_")},"version"===b&&"number"!=typeof a[b])return new
Error("Database version must be a number.");this._config[b]=a[b]}return!("driver"in
a&&a.driver)||this.setDriver(this._config.driver)}return"string"==typeof
a?this._config[a]:this._config},a.prototype.defineDriver=function(a,b,c){var d=new va(function(b,c){try{var
d=a._driver,e=new Error("Custom driver not compliant; see
https://mozilla.github.io/localForage/#definedriver");if(!a._driver)return void c(e);for(var
f=eb.concat("\_initStorage"), g=0, i=f.length; g<i; g++) \{var\ j=f[g]; if((!Za(db,j)||a[j])\&\&"function"!=typeof\ a[j]) return f=eb.concat("\_initStorage"), g=0, i=f.length; g<i; g++) \{var\ j=f[g]; if((!Za(db,j)||a[j])\&\&"function"!=typeof\ a[j]) return f=eb.concat("\_initStorage"), g=0, i=f.length; g<i; g++) \{var\ j=f[g]; if((!Za(db,j)||a[j])\&\&"function"!=typeof\ a[j]) return f=eb.concat("\_initStorage"), g=0, i=f.length; g<i; g++) \{var\ j=f[g]; if((!Za(db,j)||a[j])\&\&"function"!=typeof\ a[j]) return f=eb.concat("\_initStorage"), g=0, i=f.length; g<i; g++) \{var\ j=f[g]; if((!Za(db,j)||a[j])\&\&"function"!=typeof\ a[j]) return f=eb.concat("\_initStorage"), g=0, i=f.length; g<i; g++) \{var\ j=f[g]; if((!Za(db,j)||a[j])\&\&"function"!=typeof\ a[j]) return f=eb.concat("\_initStorage"), g=0, i=f.length; g<i; g++) \{var\ j=f[g]; if((!Za(db,j)||a[j])\&\&"function"!=typeof\ a[j]) return f=eb.concat("\_initStorage"), g=0, i=f.length; g<i; g++) \{var\ j=f[g]; if((!Za(db,j)||a[j])\&\&"function"!=typeof\ a[j]) return f=eb.concat("\_initStorage"), g=0, i=f.length; g<i; g++) \{var\ j=f[g]; if((!Za(db,j)||a[j])\&\&"function"], g<i; g++, i=f.length; g<i; g++, i=f.l
void c(e)}(function(){for(var b=function(a){return function(){var b=new Error("Method "+a+" is not
implemented by the current driver"),c=va.reject(b);return h(c,arguments[arguments.length-
1]),c\}\},c=0,d=db.length;c< d;c++) \{var\ e=db[c];a[e]||(a[e]=b(e))\}\})();var\ e=db[c];a[e]||(a[e]=b(e))\}\})();var\ e=db[c];a[e]||(a[e]=b(e))\}\})();var\ e=db[c];a[e]||(a[e]=b(e))\}\})();var\ e=db[c];a[e]||(a[e]=b(e))\}\})();var\ e=db[c];a[e]||(a[e]=b(e))\}\})();var\ e=db[c];a[e]||(a[e]=b(e))\})();var\ e=db[c];a[e]||(a[e]=b(e))]();var\ e=db[c];a[e]||(a[e]=b(e))]();var\ e=db[c]||(a[e]=b(e))]();var\ e=db[c]||(a[e]=b(e))]();
k=function(c){_a[d]&&console.info("Redefining LocalForage driver: "+d),_a[d]=a,ab[d]=c,b()};"_support"in
a?a._support&&"function"==typeof
a.\_support?a.\_support().then(k,c):k(!!a.\_support):k(!0)\} catch(a)\{c(a)\}\}); return
i(d,b,c),d},a.prototype.driver=function(){return this._driver||null},a.prototype.getDriver=function(a,b,c){var
d=_a[a]?va.resolve(_a[a]):va.reject(new Error("Driver not found."));return
i(d,b,c),d},a.prototype.getSerializer=function(a){var b=va.resolve(Va);return
i(b,a),b},a.prototype.ready=function(a){var b=this,c=b._driverSet.then(function(){return
null===b._ready&&(b._ready=b._initDriver()),b._ready});return
i(c,a,a),c},a.prototype.setDriver=function(a,b,c){function d(){g._config.driver=g.driver()}function e(a){return
g._extend(a),d(),g._ready=g._initStorage(g._config),g._ready}function f(a){return function(){function
b() \{ for(; c< a. length;) \{ var\ f=a[c]; return\ c++, g\_dbln fo=null, g\_ready=null, g\_getDriver(f). then (e). catch (b) \} d(); var\ dbln fo=null, g\_ready=null, g\_getDriver(f). then (e). catch (b) \} d(); var\ dbln fo=null, g\_ready=null, g\_getDriver(f). then (e). catch (b) \} d(); var\ dbln fo=null, g\_ready=null, g\_getDriver(f). then (e). catch (b) \} d(); var\ dbln fo=null, g\_ready=null, g\_getDriver(f). then (e). catch (b) \} d(); var\ dbln fo=null, g\_getDriver(f). then (e). catch (b) \} d(); var\ dbln fo=null, g\_getDriver(f). then (e). catch (b) \} d(); var\ dbln fo=null, g\_getDriver(f). then (e). catch (b) \} d(); var\ dbln fo=null, g\_getDriver(f). then (e). catch (b) \} d(); var\ dbln fo=null, g\_getDriver(f). then (e). catch (b) \} d(); var\ dbln fo=null, g\_getDriver(f). then (e). catch (b) \} d(); var\ dbln fo=null, g\_getDriver(f). then (e). catch (b) \} d(); var\ dbln fo=null, g\_getDriver(f). then (e). catch (b) \} d(); var\ dbln fo=null, g\_getDriver(f). then (e). catch (b) \} d(); var\ dbln fo=null, g\_getDriver(f). then (e). catch (b) \} d(); var\ dbln fo=null, g\_getDriver(f). then (e). catch (b) \} d(); var\ dbln fo=null, g\_getDriver(f). then (e). catch (b) \} d(); var\ dbln fo=null, g\_getDriver(f). then (e). catch (b) \} d(); var\ dbln fo=null, g\_getDriver(f). then (e). catch (b) \} d(); var\ dbln fo=null, g\_getDriver(f). then (e). catch (b) \} d(); var\ dbln fo=null, g\_getDriver(f). then (e). catch (b) \} d(); var\ dbln fo=null, g\_getDriver(f). then (e). catch (b) \} d(); var\ dbln fo=null, g\_getDriver(f). then (e). catch (b) \} d(); var\ dbln fo=null, g\_getDriver(f). then (e). catch (b) \} d(); var\ dbln fo=null, g\_getDriver(f). then (e). catch (b) \} d(); var\ dbln fo=null, g\_getDriver(f). then (e). catch (b) \} d(); var\ dbln fo=null, g\_getDriver(f). then (e). catch (b) \} d(); var\ dbln fo=null, g\_getDriver(f). then (e). catch (b) \} d(); var\ dbln fo=null, g\_getDriver(f). then (e). catch (b) \} d(); var\ dbln fo=null, g\_getDriver(f). then (e). catch (b) \} d(); var\ dbln fo=null, g\_getDriver(f). then (e). catch (b) \} d(); 
h=new Error("No available storage method found.");return g._driverSet=va.reject(h),g._driverSet}var
c=0;return b()}}var g=this;a(a)||(a=[a]);var
h=this._getSupportedDrivers(a),j=null!==this._driverSet?this._driverSet.catch(function(){return
va.resolve()}):va.resolve();return this._driverSet=j.then(function(){var a=h[0];return
g._dblnfo=null,g._ready=null,g.getDriver(a).then(function(a){g._driver=a._driver,d(),g._wrapLibraryMethodsW
ithReady(),g._initDriver=f(h)})}).catch(function(){d();var a=new Error("No available storage method
found.");return
g.\_driverSet=va.reject(a), g.\_driverSet\}), i(this.\_driverSet,b,c), this.\_driverSet\}, a.prototype.supports=function(a)
{return!!ab[a]},a.prototype._extend=function(a){sa(this,a)},a.prototype._getSupportedDrivers=function(a){for(
var\ b=[],c=0,d=a.length;c< d;c++) \{var\ e=a[c];this.supports(e)\&\&b.push(e)\} \\ return
b},a.prototype._wrapLibraryMethodsWithReady=function(){for(var
a=0,b=eb.length;a<b;a++)ra(this,eb[a])},a.prototype.createInstance=function(b){return new a(b)},a}(),hb=new
gb;b.exports=hb},{3:3}]},{},[4])(4)});
```

✓ AUTHENTICATION:

FIREOAUTH:

```
<!DOCTYPE html>
<html lang="en">
<head>
  <meta charset="UTF-8">
  <meta name="viewport" content="width=device-width, initial-scale=1.0">
  k rel="stylesheet" href="/css/fireoauth.css">
  rel="stylesheet" href="https://cdnjs.cloudflare.com/ajax/libs/nprogress/0.2.0/nprogress.min.css">
  k rel="shortcut icon" href="https://raw.githubusercontent.com/tharunoptimus-
pd/firepwa/main/favicon.ico?token=GHSAT0AAAAAABR46HVJ5M5L3QGFRZRQXOISYUJUWAA"
type="image/x-icon">
  <style>
    html,
    body {
      height: 100%;
      margin: 0;
      font-family: -apple-system, BlinkMacSystemFont, "Segoe UI", Roboto, Oxygen,
         Ubuntu, Cantarell, "Open Sans", "Helvetica Neue", sans-serif;
      font-weight: 300;
    }
    a {
      text-decoration: none;
      color: #007bff;
      font-weight: 500;
      font-size: 1.2rem;
    }
    h3 {
      font-size: 1.4rem;
    }
    h3, h4 {
      margin: 0;
      padding: 0.3rem 0;
    }
    .wrapper {
       display: flex;
```

```
flex-direction: column;
  align-items: center;
  justify-content: center;
  height: 100%;
  text-align: center;
}
.oneClickSignin {
  padding: 0.5rem;
  border: 1px solid #4444444;
  border-radius: 5px;
  box-shadow: 0 0 3px 0px #4444444;
  opacity: 0.2;
  pointer-events: none;
}
.qrcode {
  opacity: 0.1;
}
.learnAboutFire {
  padding-top: 1.25em;
}
.qrHolder {
  display: none;
  margin-top: 3rem;
}
.qrContainer {
  align-items: center;
  display: flex;
  justify-content: center;
  padding: 8px;
  margin: 2rem auto;
  box-shadow: 0 0px 6px 1px rgb(0 0 0 / 16%);
  border: 1px solid #4444444;
  border-radius: 6px;
  width: 200px;
```

```
height: 200px;
    }
  </style>
  <title>Fire OAuth</title>
  <script>
    if (window.location.hostname !== "localhost") {
      if (location.protocol !== "https:") {
         location.replace(
           `https:${location.href.substring(
              location.protocol.length
           )}`
         )
      }
    }
  </script>
</head>
<body>
  <div class="wrapper">
    <h3 class="pageTitle">Login with SAFETY</h3>
    <div class="qrAuthorize">
       <h4 class="subTitle">Scan QR from your Fire OAuth App </h4>
       <div class="qrContainer">
         <canvas id="qr-code" class="qrcode"></canvas>
       </div>
    </div>
    <div class="oneClickSignin">
       <h4>Have Fire PWA on this device?</h4>
       <a target="_blank" id="authorizeOverLink" href="https://firepwa.netlify.app/authorize?sessionId"</pre>
rel="noopener">Click to Authorize </a>
    </div>
    <div class="learnAboutFire">
      <a target="_blank" href="https://fireoauth.netlify.app" rel="noopener">Learn More about SAFETY</a>
    </div>
  </div>
  <script src="https://cdnjs.cloudflare.com/ajax/libs/nprogress/0.2.0/nprogress.min.js"></script>
```

```
<script src="https://cdnjs.cloudflare.com/ajax/libs/qrious/4.0.2/qrious.min.js"></script>
<script src="https://cdnjs.cloudflare.com/ajax/libs/socket.io/4.2.0/socket.io.js"></script>
<script>
  const FIRE_API_KEY = "635b790a3bcc6b59c4b772d0"
  const FIRE_ENDPOINT = "https://fire.adaptable.app/api/apis/generate"
  const CHANNEL_NAME = "fireOAuthChannel"
  const broadCastingChannel = new BroadcastChannel(CHANNEL_NAME)
  const FIRE_SERVER_SOCKET_ENDPOINT = "https://fire.adaptable.app"
  let socket = io(FIRE_SERVER_SOCKET_ENDPOINT)
  let qr
  let qrcode = document.querySelector(".qrcode")
  let oneClickSignin = document.querySelector(".oneClickSignin")
  let pageTitle = document.querySelector(".pageTitle")
  let subTitle = document.querySelector(".subTitle")
  function setOpacity(opacity) {
    oneClickSignin.style.opacity = opacity
    oneClickSignin.style.pointerEvents = opacity === "1" ? "auto" : "none"
    qrcode.style.opacity = opacity
 }
  async function getSessionID() {
    let response
    try {
      response = await fetch(`${FIRE_ENDPOINT}/${FIRE_API_KEY}`, {
        method: "GET",
        headers: {
           "Content-Type": "application/json",
        }
      })
    } catch (error) {
      console.log(error)
      return null
    }
```

let data = await response.json()

```
let { sessionId, chatRoomId } = data
      return { sessionId, chatRoomId }
    }
    function generateQR(value) {
      (qr = new QRious({
         element: document.getElementById("qr-code"),
         size: 200,
         level: 'M',
         value: value,
      }))
    }
    function changeHREF ({sessionId, chatRoomId}) {
      let firePwaUrlHostname = "https://firepwa.netlify.app"
      let originURL = encodeURIComponent(window.location.origin)
      let url =
`${firePwaUrlHostname}/authorize.html?sessionId=${sessionId}&chatRoomId=${chatRoomId}&url=${originU
RL}`
      let a = document.getElementById("authorizeOverLink")
      a.href = url
    }
    async function fire() {
      NProgress.set(0.4)
      let { sessionId, chatRoomId } = await getSessionID()
      if(sessionId === undefined || chatRoomId === undefined || sessionId === null || chatRoomId === null) {
         pageTitle.innerHTML = "Something went wrong "
         subTitle.innerHTML = "Please try again later "
         return
      }
       setOpacity("1")
      NProgress.done()
      let data = {
         sessionId,
```

```
url: encodeURIComponent(window.location.origin)
      }
      data = JSON.stringify(data)
      generateQR(data)
      changeHREF({sessionId, chatRoomId})
      socket.emit("join room", sessionId)
    }
    fire()
    socket.on("trusted token", (token) => {
      let data = {}
      data.success = true
       data.token = token
      broadCastingChannel.postMessage(data)
      window.close()
    })
  </script>
</body>
</html>
✓ LOGIN:
HTML:
<!DOCTYPE html>
<html lang="en">
<head>
  <meta charset="UTF-8">
  <meta http-equiv="X-UA-Compatible" content="IE=edge">
  <meta name="viewport" content="width=device-width, initial-scale=1.0">
  <link rel="stylesheet" href="/css/login.css">
  <title>Sign Up</title>
  <script>
    if (window.location.hostname !== "localhost") {
      if (location.protocol !== "https:") {
         location.replace(
           `https:${location.href.substring(
```

```
location.protocol.length
          )}`
        )
      }
    }
  </script>
  <script src="./localforage.js"></script>
</head>
<body>
  <div class="wrapper">
    <div class="loginContainer">
      <span>SignUp To Continue</span>
      <div class="traditionalLoginContainer">
        <form class="signupForm" action="/" method="post">
           <input type="email" name="email" placeholder="Email" id="email">
           <input type="password" name="password" placeholder="Password" id="password">
           <input class="loginButton" type="submit" value="Login">
        </form>
      </div>
      <div class="loginWithFireContainer">
        <button type="button" class="fire" title="Login with Safety" id="fire">Login with Safety</button>
      </div>
      <a class="hyperLink" href="/register">Don't have an Account? Register / </a>
    </div>
  </div>
  <script>
    // Necessary for Fire OAuth to Function
    const fireBroadcastingChannel = new BroadcastChannel('fireOAuthChannel');
    fireBroadcastingChannel.addEventListener('message', async event => {
      let data = event.data
      * @typedef {Object<string, any>} Data
      * @property {boolean} success - Whether the login was successful
      * @property {string} token - The data returned from the login i.e. Fire Token
      */
      // data.token is the message sent from the fireOAuthChannel after verification
      // data.success is a boolean that indicates whether the verification was successful
      // data.token is the fire token
```

```
// What to do with the Fire Token?
       //* Fire Token is an unique token which uniquely identifies the user who authorized your login attempt
with Fire
       //* You can use this token ONLY ONCE as it will be destroyed after the first use
       // 1. Send the fire token to the Fire Server to verify the user
       // - You can do that client sided or server sided
       // - You need to send a POST Request to the Fire Server with the fire token
       // at the URL: http://localhost:3003/api/tokens/verify
       // - The Fire Server will verify the fire token and return a response
       // - If the verification was successful - CODE (200), the Fire Server will return a response with the
user's data
       // - If the verification was unsuccessful - CODE (400) or CODE (401), the Fire Server will return a
response with an error 'message'
       // - You can use the data returned from the Fire Server to create a new user in your database
       // This example will send the token to Fire Servers and console.log the response
       console.log("%c" + `Fire Token: ${data.token}`, `color: #f1c40f; font-weight: bold;`);
       const response = await fetch('https://fire.adaptable.app/api/tokens/verify', {
         method: 'POST',
         headers: {
            'Content-Type': 'application/json'
         body: JSON.stringify({
           token: data.token
         })
       })
       // get the response
       const responseData = await response.json()
       // console.log the response
       console.log(responseData)
       await localforage.setItem('userData', {...responseData, isFire: true})
       // Adding the user data to the user Database
       let database = await localforage.getItem("userDatabase")
       if (database == null) {
         database = []
       }
       database.push(responseData)
       await localforage.setItem("userDatabase", database)
       // redirect to the home page
       window.location.href = '/'
```

})

```
function popupwindow(url, title, w, h) {
       var left = (screen.width/2)-(w/2);
       var top = (screen.height/2)-(h/2);
       return window.open(url, title, 'toolbar=no, location=no, directories=no, status=no, menubar=no,
scrollbars=no, resizable=no, copyhistory=no, width='+w+', height='+h+', top='+top+', left='+left);
    document.getElementById("fire").addEventListener("click", function() {
       popupwindow("/fireoauth.html", "Fire OAuth", 450, 600)
    })
  </script>
  <script>
    // this.Website's Scripts / App Logic
    document.querySelector(".signupForm").addEventListener("submit" , async (e) => {
       e.preventDefault()
       let email = document.getElementByld("email").value
       let password = document.getElementById("password").value
       let flag = false
       let userData = await localforage.getItem("userDatabase")
       if(userData) {
         userData.forEach(e => {
           if(e.email === email) {
              if(e.password === password || e.isFire === true) {
                localforage.setItem("userData", e)
                flag = true
                window.location.href = "/"
              }
           }
         })
       } else {
         alert("User Not Found")
      }
       if(!flag) {
         alert("Invalid Credentials")
      }
    })
  </script>
</body>
```

</html>

CSS: html, body { height: 100%; margin: 0; font-weight: 300; font-family: -apple-system, BlinkMacSystemFont, "Segoe UI", Roboto, Oxygen, Ubuntu, Cantarell, "Open Sans", "Helvetica Neue", sans-serif; } .wrapper { height: 100%; display: flex; align-items: center; justify-content: center; } .loginContainer { display: flex; flex-direction: column; gap: 1rem; min-width: 25rem; padding: 1rem 3rem; border: 1px solid #4444444;

```
box-shadow: 0px 3px 2px 1px #4444444;
                                   border-radius: 8px;
}
.loginContainer span {
                                  text-align: center;
                                   font-size: 3rem;
                                  font-weight: 500;
                                   margin: 1rem 1rem 3rem;
}
.traditionalLoginContainer form {
                                   display: flex;
                                   flex-direction: column;
                                   align-items: center;
                                  justify-content: center;
}
. traditional Login Container: is (input[type="text"], input[type="password"], input[type="email"]) \ \{ input[type="text"], 
                                   margin: 0.3rem;
                                   padding: 0.3em 0.5em;
                                   border: 1px solid #4444444;
                                   border-radius: 5px;
                                   outline: none;
                                   min-width: 200px;
                                  font-size: 1.3rem;
}
. traditional Login Container . login Button \{\\
                                   background-color: #0070f3;
                                  font-size: 1.6rem;
                                   padding: 0.2em 0.8em;
                                   color: white;
                                   margin: 0.4rem;
                                   border: none;
                                   border-radius: 5px;
        cursor: pointer;
                                   margin-top: 2rem;
}
```

```
.traditionalLoginContainer .loginButton:hover {
  background-color: #0071f3d6;
}
.loginWithFireContainer {
         display: grid;
         display: -ms-grid;
         place-items: center;
}
.fire {
         background-color: #f8f9fa;
         border: 1px solid #3c404321;
         border-radius: 4px;
         color: #3c4043;
         font-family: arial, sans-serif;
         margin: 11px 4px;
         padding: 0.4em 0.8em;
         line-height: 27px;
         min-width: 54px;
         text-align: center;
         cursor: pointer;
         user-select: none;
         font-size: 1.3rem;
         font-weight: 500;
}
.hyperLink {
         text-decoration: none;
  text-align: center;
  font-size: 1.2rem;
  color: #0070f3;
  font-weight: 400;
}
@media screen and (max-width: 480px) {
```

```
.loginContainer {
            border: none;
            box-shadow: none;
            min-width: fit-content;
            min-width: -moz-fit-content;
            min-width: -webkit-fill-available;
            padding: 1rem;
     }
}
2gdb.com/online_html_compiler
                                                                                                                                                                                                                                      A .
                                              Debug
                                                                                                                                                                                                                                             Language HTML,JS,C 	✓ (1) (2)
                                user-select: none;
                                 font-size: 1.3rem;
                                 font-weight: 500;
                                                                                                                                                          input
      html, body { height: 100%; margin: 0; font-weight: 300; font-family: -apple-system, BlinkMacSystemFont, "Segoe UI", Roboto, Oxygen, Ubuntu, Cantarell, "Open Sans",
      "Helvetica Neue", sans-serif, ) .wrapper ( height: 100%; display: flex; align-items: center; justify-content: center; ) .loginContainer ( display: flex; flex-direction: column; gap:
      1rem; min-width: 25rem; padding: 1rem 3rem; border: 1px solid #44444444, box-shadow: 0px 3px 2px 1px #44444444, border-radius: 8px, } .loginContainer span { text-
      align: center; font-size: 3rem; font-weight: 500; margin: 1rem 1rem 3rem; ) .traditionalLoginContainer form ( display: flex; flex-direction: column; align-items: center; justify-
      content: center; } .traditionalLoginContainer is(input[type="text"], input[type="password"], input[type="email"]) { margin: 0.3rem; padding: 0.3em 0.5em; border: 1px solid
      #4444444; border-radius: 5px, outline: none; min-width: 200px, font-size: 1.3rem, } .traditionalLoginContainer .loginButton { background-color: #0070f3, font-size: 1.6rem;
      padding: 0.2em 0.8em; color: white; margin: 0.4rem; border: none; border-radius: 5px; cursor: pointer; margin-top: 2rem; ) .traditionalLoginContainer .loginButton:hover (
      background-color: #0071f3d6; ) .loginWithFireContainer ( display: grid; display: -ms-grid; place-items: center; ) .fire ( background-color: #f8f9fa; border: 1px solid
      #3c404321; border-radius: 4px, color: #3c4043; font-family: arial, sans-serif; margin: 11px 4px, padding: 0.4em 0.8em, line-height: 27px, min-width: 54px, text-align: center;
      cursor: pointer, user-select: none; font-size: 1.3rem; font-weight: 500; ) .hyperLink (text-decoration: none; text-align: center; font-size: 1.2rem; color: #0070f3; font-weight:
      400; ) @media screen and (max-width: 480px) { .loginContainer { border: none; box-shadow: none; min-width: fit-content, min-width: -moz-fit-content, min-width: -
      fill-available; padding: 1rem; } }
```

✓ DASHBOARD:

HTML:

```
<script src="./localforage.js"></script>
</head>
<body>
  <div class="wrapper">
    <div class="header">
       <span class="heading">Dashboard</span>
      <span class="right">
         <span class="username">Hello User</span>
           <img class="profilePic" src="https://avatars.dicebear.com/api/avataaars/asdfasdfds.svg"</p>
alt="User Profile" height="30" width="30">
        </span>
       </span>
    </div>
    <div class="actionCenter">
      <div class="action">
        <span>Create Child Card</span>
      </div>
      <div class="action">
         <span class="logout">Log out</span>
       </div>
    </div>
    <div class="childCardContainer">
      <div class="childCard">
         <div class="childCardHeader">
           <span>Child Name</span>
           <span>Age 12</span>
         </div>
         <div class="actions">
           <span>View</span>
           <span>GeoFence</span>
         </div>
      </div>
    </div>
  </div>
  <script>
    async function main() {
```

```
let userData = await localforage.getItem('userData')
       if(userData == null) {
          window.location.href = "/login"
       }
       document.querySelector(".username").innerHTML = `Hello ${userData.firstName}`
       document.querySelector(".profilePic").src = userData.profilePic
     }
     main()
     document.querySelector(".logout").addEventListener("click", async () => {
       await localforage.setItem('userData', null)
       window.location.href = "/login"
    })
  </script>
</body>
</html>
nlinegdb.com/online_html_compiler
                                                                                    A 6 6 @ 8
                                                                                      Language HTML,JS,C V (1)
     Dashboard Hello User
Create Child Card
    Child Name Age 10
View GeoFence
CSS:
 html, body {
  margin: 0;
  padding: 0;
  font-family: system-ui, -apple-system, BlinkMacSystemFont, 'Segoe UI', Roboto, Oxygen, Ubuntu,
Cantarell, 'Open Sans', 'Helvetica Neue', sans-serif;
}
.wrapper {
  display: flex;
```

flex-direction: column;

```
height: 100vh;
  margin: 0 auto;
}
.header {
  display: flex;
  justify-content: space-between;
  align-items: center;
  padding: 1rem;
  background-color: #f1f1f1;
}
.heading {
  font-size: 1.3rem;
}
.right {
  display: flex;
  align-items: center;
  gap: 0.5rem;
}
.actionCenter {
  display: flex;
  justify-content: flex-end;
  align-items: center;
  gap: 1rem;
  padding: 0.5rem 0;
}
.actionCenter .action {
  padding: 0.5rem 0.8rem;
  border: 1px solid #4444444;
  border-radius: 12px;
  margin-right: 0.5rem;
  cursor: pointer;
}
.actionCenter .action:hover {
  background-color: #0070f3;
  color: white;
}
```

```
.childCardContainer {
  display: flex;
  flex-wrap: wrap;
  padding: 0.5rem 1rem;
}
.childCardContainer .childCard {
  display: flex;
  flex-direction: column;
  border: 1px solid #4444444;
  border-radius: 12px;
  max-width: 300px;
  font-size: 1.4rem;
}
.childCardContainer .childCard .childCardHeader {
  display: flex;
  gap: 3rem;
  margin: 0.1rem 0.1rem 0.8rem;
  padding: 1rem 0.8rem 0;
}
.childCardContainer .childCard .actions {
  background-color: #0070f3;
  padding: 2rem 0.5rem 1rem;
  color: white;
  display: flex;
  justify-content: space-around;
  border-radius: 12px;
  border-top-left-radius: 0;
  border-top-right-radius: 0;
}
.childCardContainer .childCard .actions span {
  border: 1px solid #0070f3;
  background-color: white;
  color: #0070f3;
  padding: 0.3rem 0.9rem;
  border-radius: 12px;
```

cursor: pointer;

