

Smart Farmer-IOT Enabled Smart Farming Application

SPRINT DELIVERY – 2

TITLE	Smart Farmer-IOT Enabled Smart Farming Application
DOMAIN NAME	INTERNET OF THINGS
TEAM ID	PNT2022TMID44924

Building Project

Connecting IoT Simulator to IBM Watson IoT Platform


- Open link provided in below image
- Give the credentials of your device in IBM Watson
- PlatformClick on connect

My credentials given to simulator are:

api: **a-ck2tf0-yutwjjanphx**

Device type: 1234

Token: **MaZKMomT_thHLD54ml**

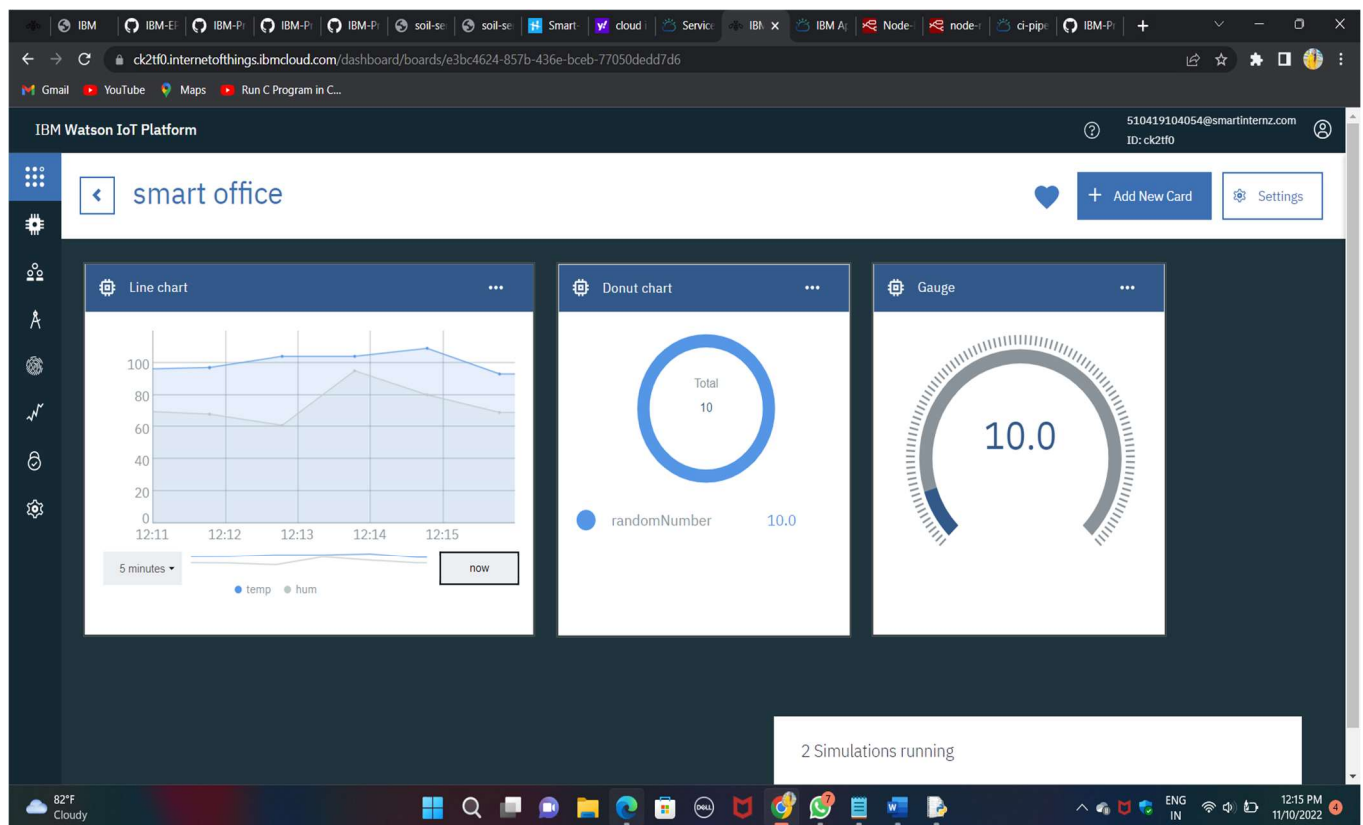

You can see the received data in graphs by creating cards in Boards tab

- You will receive the simulator data in cloud

- You can see the received data in Recent Events under your device
- Data received in this format(json)

```
{  
  "d": {  
    ▪ "name": "abcd",  
    ▪ "temperature": 17,  
    ▪ "humidity": 76,  
    ▪ "Moisture ": 25  
  }  
}
```

The screenshot displays the IBM Watson IoT Platform dashboard. The main view shows a list of devices under the 'Recent Events' tab. A modal window is open for configuring a device event.

Device List:

Identity	Device Information	Recent Events	State	Logs
1234	Disconnected	NodeMCU	Device	10
12345	Disconnected	NodeMCU	Device	6

Recent Events Table:


Event	Value	Format	Last Received
eventflow	{"randomNumber":17,"temp":103,"hum":91}	json	a few seconds ago
eventflow	{"randomNumber":9,"temp":109,"hum":66}	json	a few seconds ago
eventflow	{"randomNumber":77,"temp":101,"hum":98}	json	a few seconds ago

Event Configuration Modal:

- Device Type: NodeMCU
- Event type name: eventflow
- Schedule: 1 Every Minute
- Payload:


```
{  
  "randomNumber": random(0, 100),  
  "temp": random(90, 110),  
  "hum": random(60, 100)  
}
```
- Buttons: Send, Upload a CSV file, Cancel, Save

Configuration of Node-Red to collect IBM cloud data

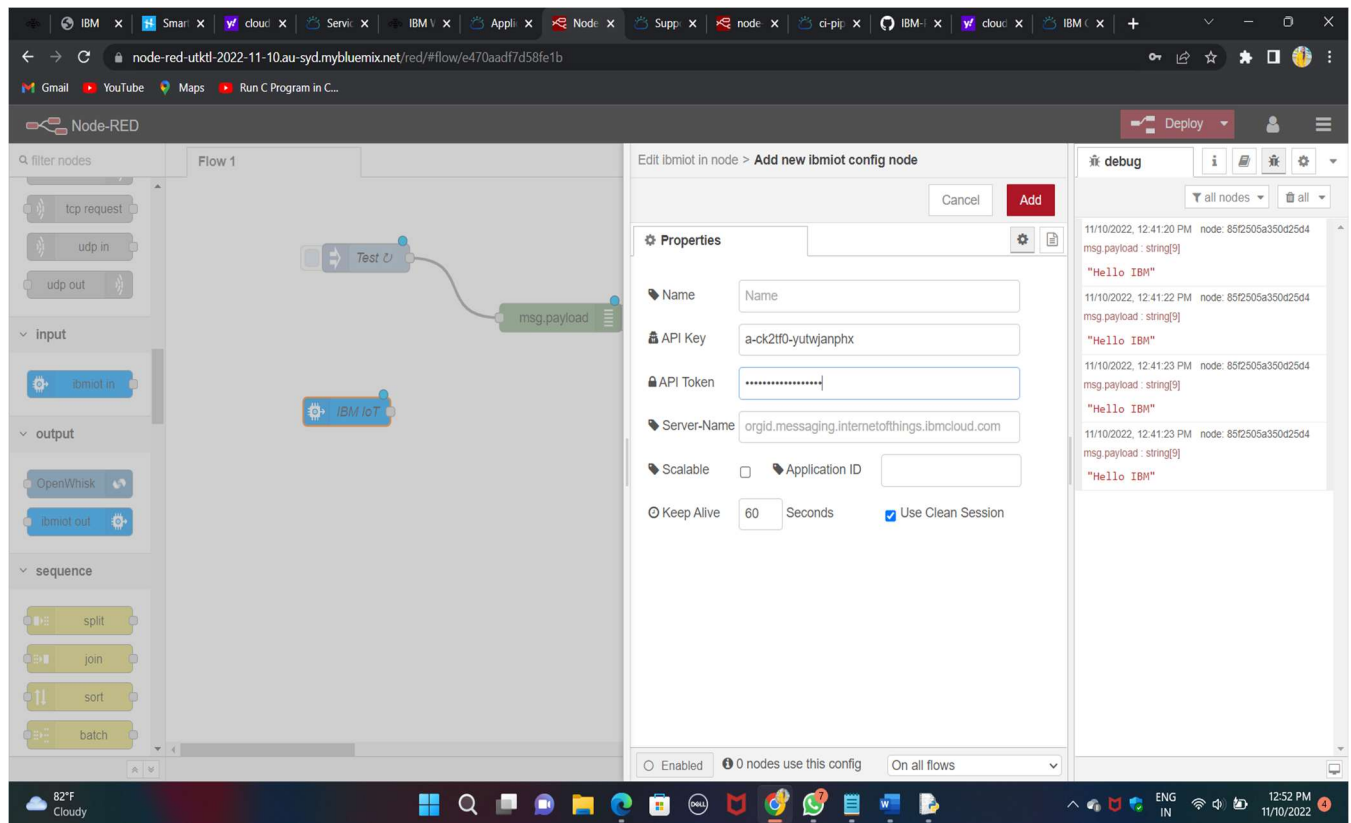


- The node IBM IoT App In is added to Node-Red workflow. Then the appropriate device credentials obtained earlier are entered into the node to connect and fetch device telemetry to Node-Red.
- Once it is connected Node-Red receives data from the device
Display the data using debug node for verification
- Connect function node and write the Java script code to get each reading separately.
- The Java script code for the function node is:


```
msg.payload=msg.payload.d.temperature  
return msg;
```
- Finally connect Gauge nodes from dashboard to see the data in UI

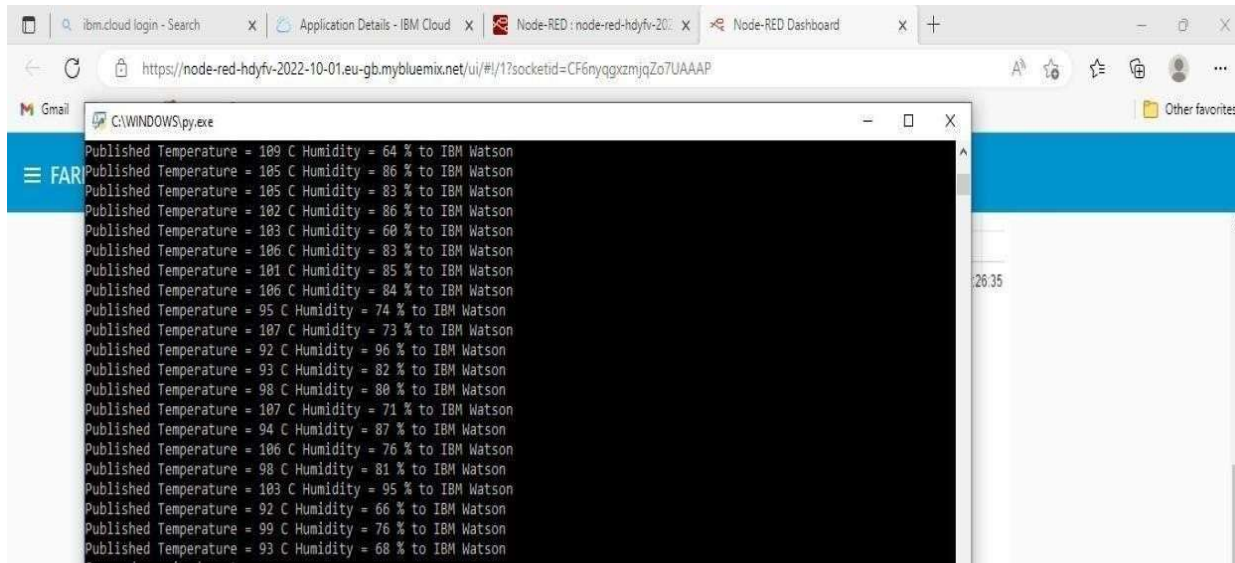

➤ Data received from the cloud in Node-Red console

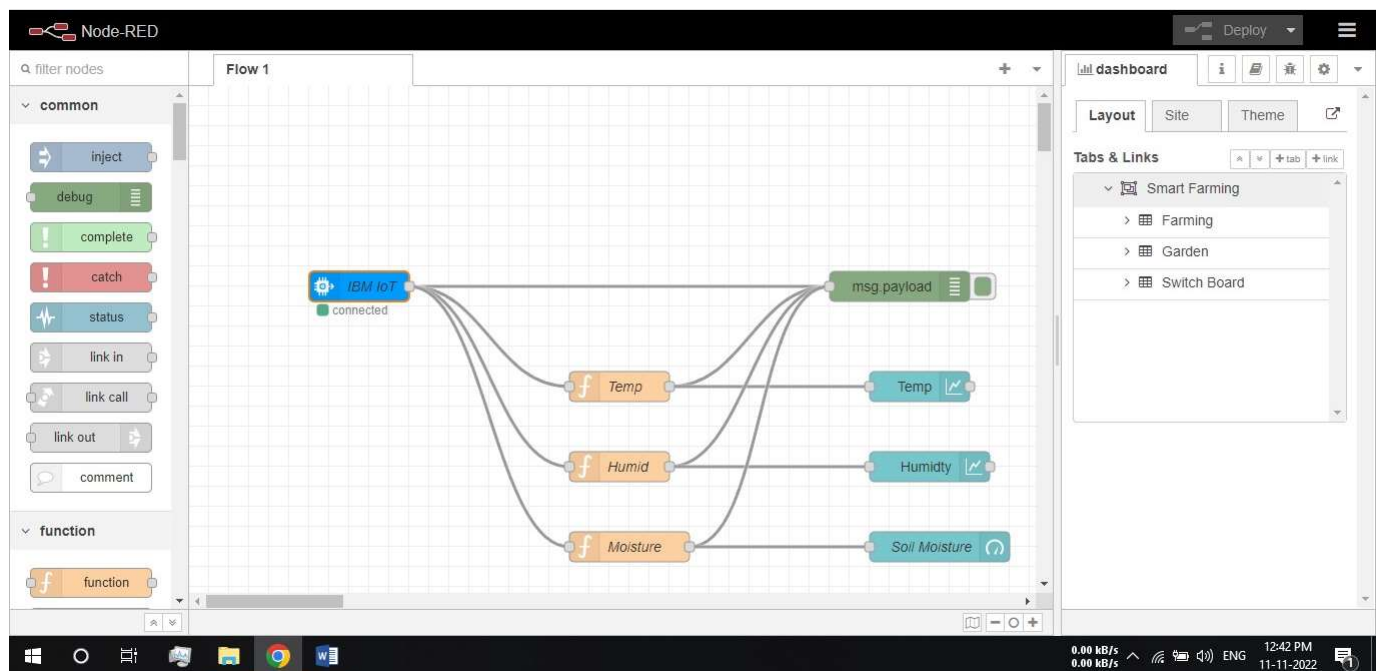

➤ Nodes connected in following manner to get each reading separately

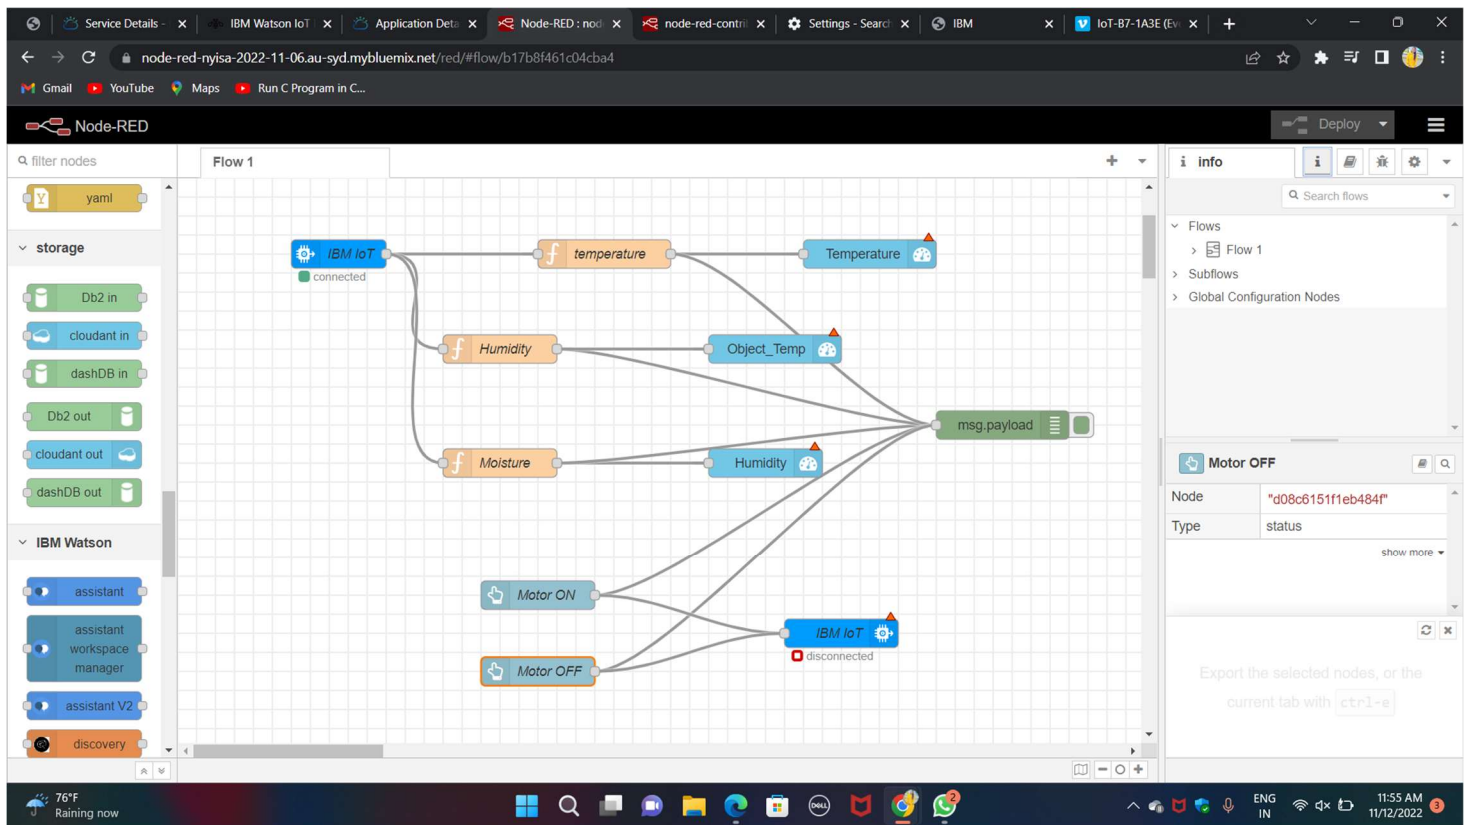

This is the Java script code I written for the function node to get Temperature separately.

Configuration of Node-Red to collect data from OpenWeather

The Node-Red also receive data from the OpenWeather API by HTTP GET request. An inject trigger is added to perform HTTP request for every certain interval. HTTP request node is configured with URL we saved before in section 4.4 The data we receive from OpenWeather after request is in below JSON

```
format: {"coord": {"lon": 79.85, "lat": 14.13}, "weather": [{"id": 803, "main": "Clouds", "description": "brokenclouds", "icon": "04n"}], "base": "stations", "main": {"temp": 307.59, "feels_like": 305.5, "temp_min": 307.59, "temp_max": 307.59, "pressure": 1002, "humidity": 35, "sea_level": 1002, "grnd_level": 1000}, "wind": {"speed": 6.23, "deg": 170}, "clouds": {"all": 68}, "dt": 1589991979, "sys": {"country": "IN", "sunrise": 158993355}}
```

```
3"sunset":1589979720},"timezone":19800,"id":1270791,"name":"Gūdūr","cod":20
0}
```

In order to parse the JSON string we use Java script functions and get each parameters

```
var temperature = msg.payload.main.temp;

temperature = temperature-273.15;

return
```

```
{payload : temperature.toFixed(2)};
```

In the above Java script code we take temperature parameter into a new variable and convert it from kelvin to Celsius

Then we add Gauge and text nodes to represent data visually in UI

