


## DEVELOP A WEB APPLICATION USING NODE-RE

Team ID	PNT2022TMID10956
Project Name	Project – IOT Based Real – Time River Water Quality Monitoring and Control System
Maximum Marks	4 Marks

1. Double-click the tab with the flow name, and call it Earthquake Details.
2. Click the hamburger menu, and then click **Manage palette**. Look for **node-red-node-open weather map** to install these additional nodes in your palette.

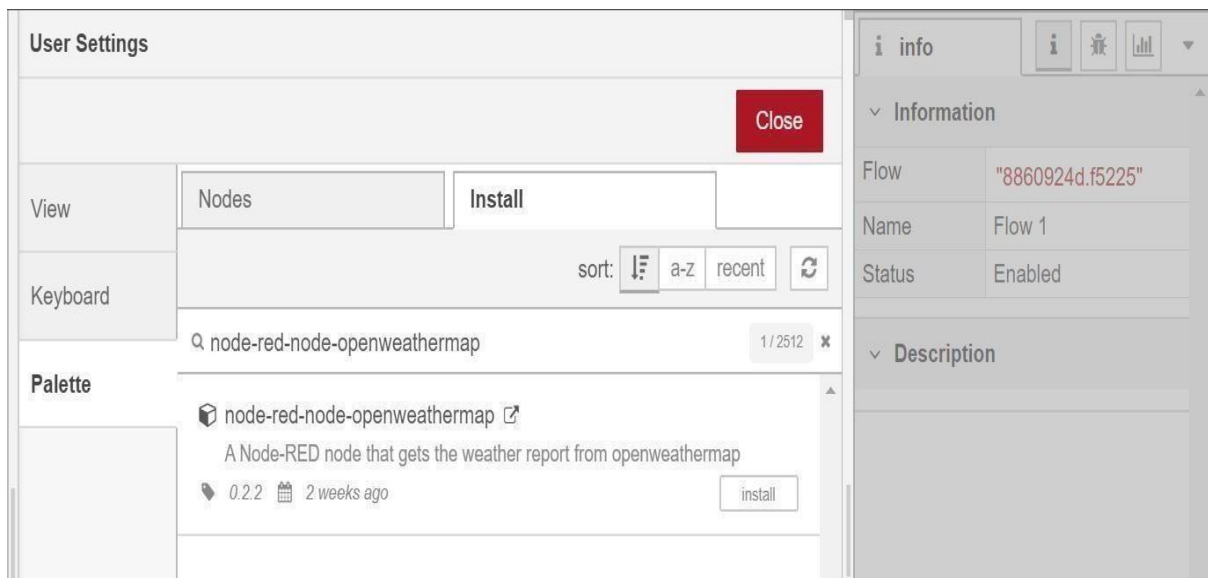

Add an **HTTP input** node to your flow.

Double-click the node to edit it. Set the method to `GET` and set the URL to `/earthquakeinfo-hr`.

1. Add an **HTTP response** node, and connect it to the previously added **HTTP input** node. All other nodes introduced in this sub-section is to be added between the **HTTP input** node and the **HTTP response** node.
2. Add an **HTTP request** node and set the *URL* to `https://earthquake.usgs.gov/earthquakes/feed/v1.0/summary`

`/all_hour.geojson`, the *Method* to **GET** and the *Return* to a **parsed JSON object**. This will allow extracting all earthquakes that occurred within the last hour. Name this node `Get`

**Edit http request node**

Delete Cancel Done

**Properties**

Method: GET

URL: `https://earthquake.usgs.gov/earthquakes/feed/v1.`

☐ Append msg.payload as query string parameters

☐ Enable secure (SSL/TLS) connection

☐ Use authentication

☐ Enable connection keep-alive

☐ Use proxy

Return: a parsed JSON object

Name: Name

Tip: If the JSON parse fails the fetched string is returned as-is.

**info**

**Information**

Node: `"c7419935.8192a8"`

Type: http request

show more

**Description**

**Node Help**

Sends HTTP requests and returns the response.

**Inputs**

*url* (string)  
If not configured in the node, this optional property sets the url of the request.

*method* (string)

Hold down **ctrl** when you click on a node to add or remove it from the current

Add a **change** node. Double-click the node to modify it. Name this node `Set Earthquake Info`. In

the **Rules** section, add

rule to *Delete* `msg.topic,`

`msg.headers, msg.statusCode, msg.responseUrl` and `msg.redirectLis`

to `msg.payload.features.`

`msg.payload`

```
{  
  "type":properties.type, "magnitude":  
  properties.mag,  
  "location": properties.place,  
  "longitude":geometry.coordinates[0],  
  "latitude":geometry.coordinates[1],  
  "depth":geometry.coordinates[2],  
  "timestamp": $fromMillis( properties.time,
```