

Project Development Phase

SPRINT DELIVERY – 2

Team ID	PNT2022TMID05383
Project	IoT Enabled Smart Farming Application
Date	09 November 2022

5. Building Project

Connecting IOT Simulator to IBM Watson IOT

Platform Open link provided in above section 4.3

Give the credentials of your device in IBM Watson IOT

Platform Click on connect

My credentials given to simulator are:


OrgID: **157uf3** api: **a-157uf3-**

f5rg4qxp3 Device type: **abcd** token:

6ogMaaQHNWFEgOD8R?

Device ID : **7654321**

Device Token : **87654321**

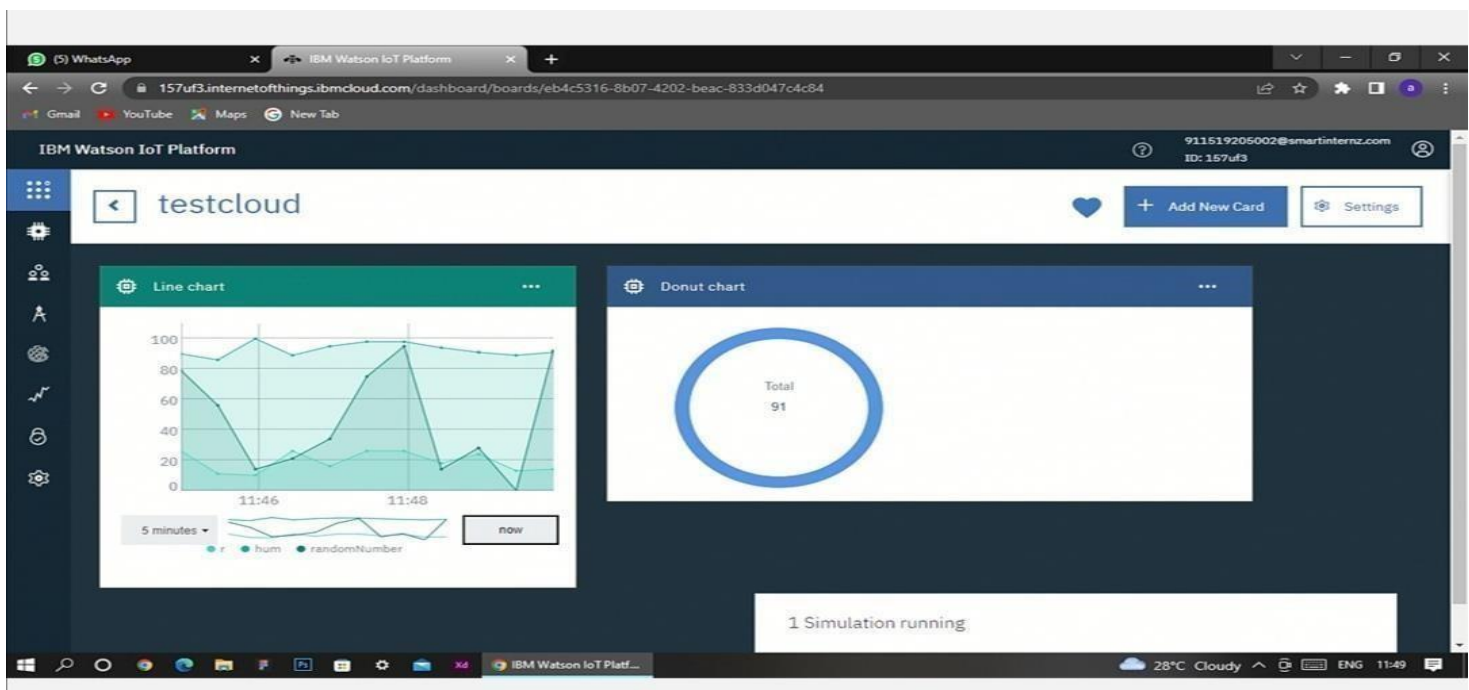

You can see the received data in graphs by creating cards in Boards tab

➤ You will receive the simulator data in cloud

➤ You can see the received data in Recent Events under your device

➤ Data received in this format(json)

```
{  
  "d": {  
    ▪ "name": "abcd",  
    ▪ "temperature": 17,  
    ▪ "humidity": 76,  
    ▪ "Moisture ": 25  
  }  
}
```


The screenshot displays the IBM Watson IoT Platform interface. The top navigation bar includes tabs for 'Browse', 'Action', 'Device Types', and 'Interfaces'. A sidebar on the left contains icons for various platform features. The main content area shows a modal window titled 'Recent Events' with a close button. Inside this modal, a message states: 'The recent events listed show the live stream of data that is coming and going from this device.' Below this message is a table with the following data:

Event	Value	Format	Last Received
IoTSensor	{"temp":108,"Humid":64}	json	a few seconds ago
IoTSensor	{"temp":91,"Humid":93}	json	a few seconds ago
IoTSensor	{"temp":108,"Humid":83}	json	a few seconds ago

At the bottom of the modal, there is a pagination control showing 'Items per page: 50' and '1-2 of 2 items'. The bottom of the screenshot shows the Windows taskbar with various application icons and a system tray displaying '29°C Cloudy' and 'ENG 11:14'.

Configuration of Node-Red to collect IBM cloud data

The node IBM IOT App In is added to Node-Red workflow. Then the appropriate device credentials obtained earlier are entered into the node to connect and fetch device telemetry to Node-Red.

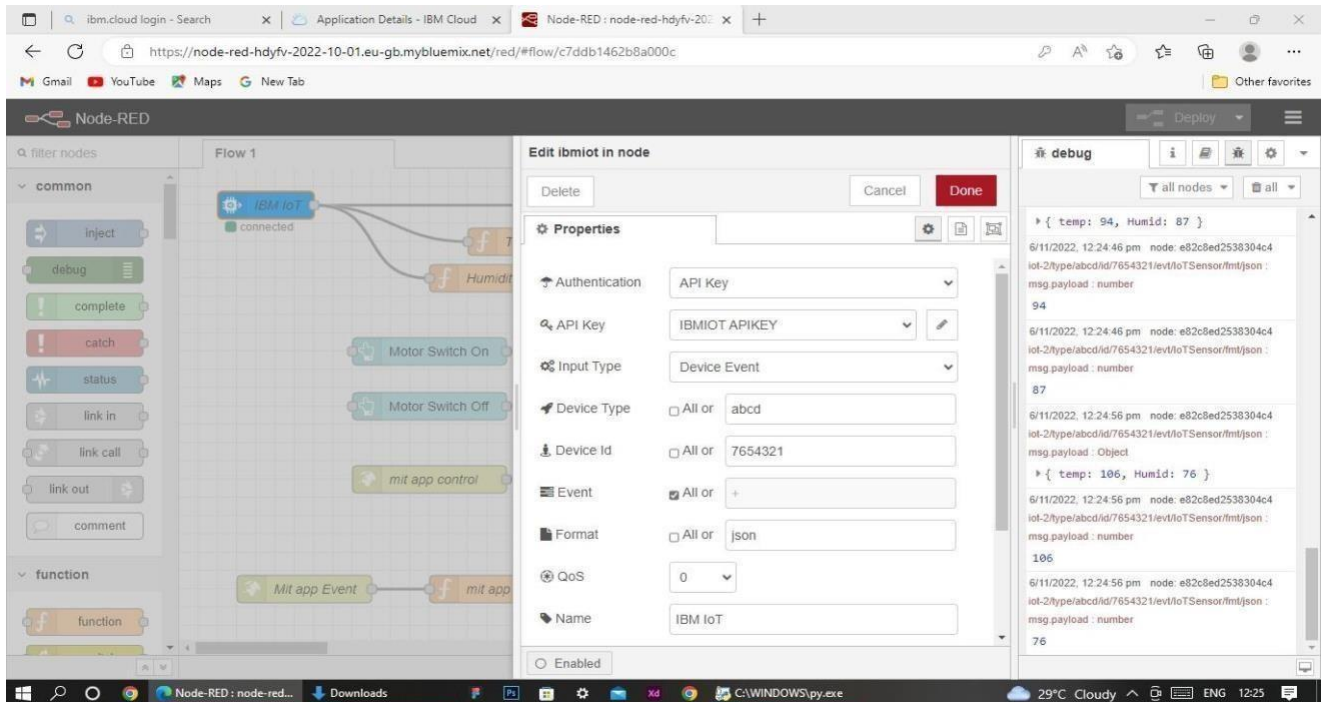

Once it is connected Node-Red receives data from the device

Display the data using debug node for verification

Connect function node and write the Java script code to get each reading separately.

The Java script code for the function node is:

```
msg.payload=msg.payload.d.temperature return
```


```
msg;
```

Finally connect Gauge nodes from dashboard to see the data in UI


The screenshot shows a web browser window with the URL `https://node-red-hdyfv-2022-10-01.eu-gb.mybluemix.net/ui/#/17socketid=CF6nygqxzmjqZo7UAAAP`. A console window titled `C:\WINDOWS\py.exe` is open, displaying a list of 20 published data points. Each line contains the following information: 'Published Temperature = [value] C Humidity = [value] % to IBM Watson'. The values for temperature range from 92 to 109 C, and humidity values range from 64% to 96%.

```
Published Temperature = 109 C Humidity = 64 % to IBM Watson
Published Temperature = 105 C Humidity = 86 % to IBM Watson
Published Temperature = 105 C Humidity = 83 % to IBM Watson
Published Temperature = 102 C Humidity = 86 % to IBM Watson
Published Temperature = 103 C Humidity = 60 % to IBM Watson
Published Temperature = 106 C Humidity = 83 % to IBM Watson
Published Temperature = 101 C Humidity = 85 % to IBM Watson
Published Temperature = 106 C Humidity = 84 % to IBM Watson
Published Temperature = 95 C Humidity = 74 % to IBM Watson
Published Temperature = 107 C Humidity = 73 % to IBM Watson
Published Temperature = 92 C Humidity = 96 % to IBM Watson
Published Temperature = 93 C Humidity = 82 % to IBM Watson
Published Temperature = 98 C Humidity = 80 % to IBM Watson
Published Temperature = 107 C Humidity = 71 % to IBM Watson
Published Temperature = 94 C Humidity = 87 % to IBM Watson
Published Temperature = 106 C Humidity = 76 % to IBM Watson
Published Temperature = 98 C Humidity = 81 % to IBM Watson
Published Temperature = 103 C Humidity = 95 % to IBM Watson
Published Temperature = 92 C Humidity = 66 % to IBM Watson
Published Temperature = 99 C Humidity = 76 % to IBM Watson
Published Temperature = 93 C Humidity = 68 % to IBM Watson
```

Data received from the cloud in Node-Red console

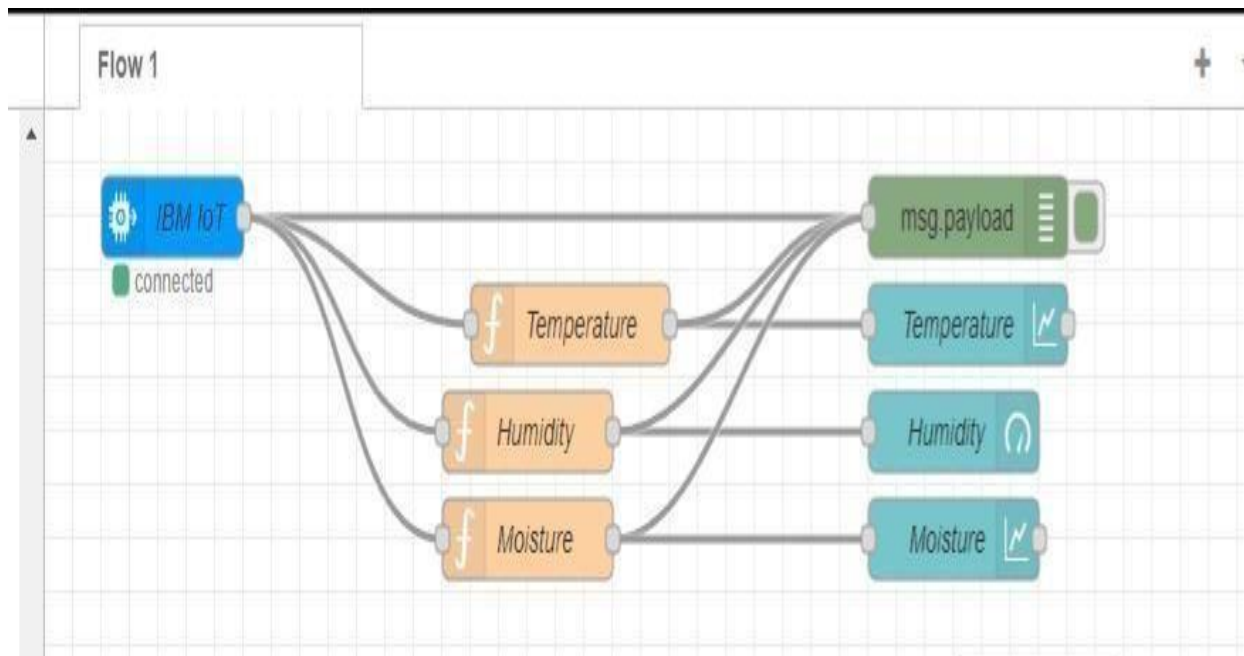

Nodes connected in following manner to get each reading separately

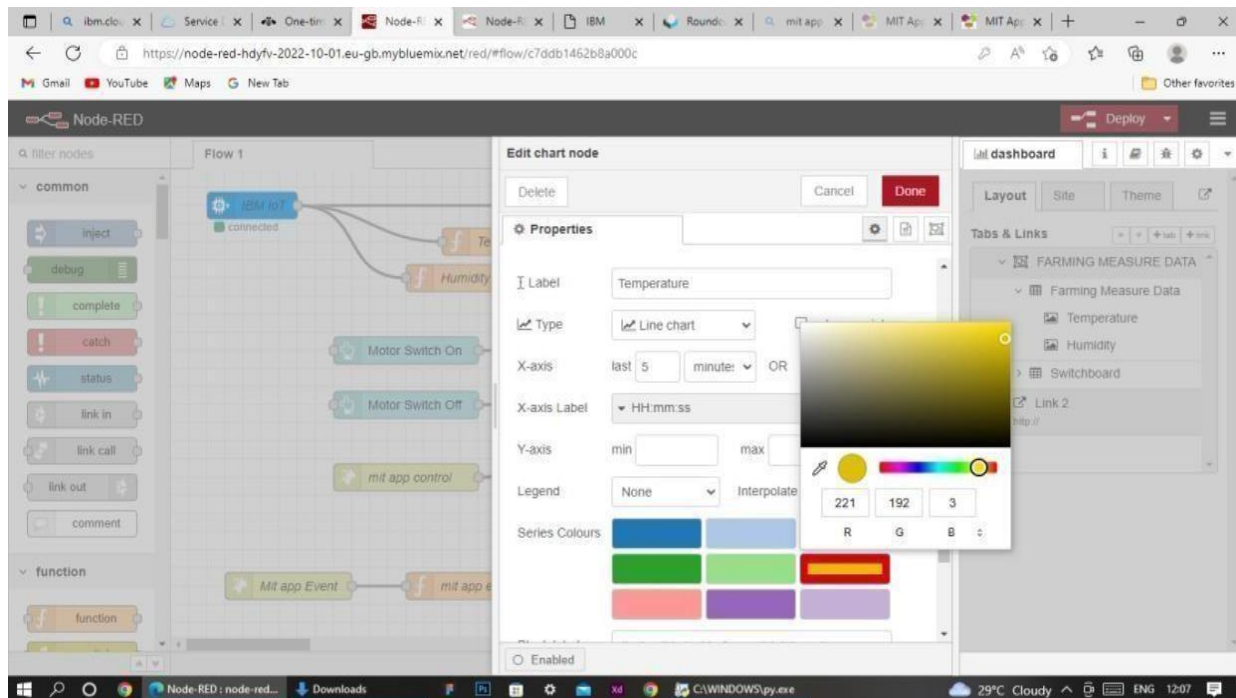

This is the Java script code I written for the function node to get Temperature separately.

Configuration of Node-Red to collect data from Open Weather

The Node-Red also receive data from the Open Weather API by HTTP GET request. An inject trigger is added to perform HTTP request for every certain interval.

HTTP request node is configured with URL we saved before in section 4.4 The data we receive from Open Weather after request is in below JSON

```
format:{"coord":{"lon":79.85,"lat":14.13},"weather":[{"id":803,"main":"Clouds","description":"brokenclouds","icon":"04n"}],"base":"stations","main":{"temp":307.59,"feels_like":305.5,"temp_min":307.59,"temp_max":307.59,"pressure":1002,"humidity":35,"sea_level":1002,"grnd_level":1000},"wind":{"speed":6.23,"deg":170},"clouds":{"all":68},"dt":1589991979,"sys":{"country":"IN","sunrise":1589933553,"sunset":1589979720},"timezone":19800,"id":1270791,"name":"Gūdūr","cod":200}
```

In order to parse the JSON string we use Java script functions and get each parameters

```
var temperature = msg.payload.main.temp;  
  
temperature = temperature-273.15;  
  
return {payload : temperature.toFixed(2)};
```

In the above Java script code we take temperature parameter into a new variable and convert it from kelvin to Celsius

Then we add Gauge and text nodes to represent data visually in UI

