

#SPRINT 1

TEAM ID:PNT2022TMID35216

#Importing required Libraries

```
import numpy#for numerical analysis import
tensorflow#open source ml tool by google

from tensorflow.keras.datasets import mnist #mnist dataset from
tensorflow.keras.models import Sequential# stack for layers from
tensorflow.keras import layers#input,middle and output layers
for cnn structure

from tensorflow.keras.layers import Dense,Flatten#dense and flatten
layers
from tensorflow.keras.layers import Conv2D#convolutional layers
from tensorflow import keras#library for building neural networks
built on tensorflow

from tensorflow.keras.optimizers import Adam#optimizers
from keras.utils import np_utils
```

#Loading dataset

Dataset is available in tensorflow dataset repository

```
(x_train,y_train),(x_test,y_test)=mnist.load_data()
```

Downloading data from

```
https://storage.googleapis.com/tensorflow/tfkeras-datasets/mnist.npz
11490434/11490434 [=====] - 0s 0us/step
```

automatically data is splitted for train ,test -70:30 ratio

```
print(x_train.shape)
print(y_train.shape)

(60000, 28, 28)
(60000,)
```

Training Dataset has 60000 images & testing has 10000 images

```
print(x_test.shape)
print(y_test.shape)

(10000, 28, 28)
(10000,)
```

Analyze the data

```
x_train[3]
```

[illegible]

[illegible]

```
0,
      0,  0]], dtype=uint8)
```


```
y_train[36]
```

```
6
```

image in 36th position in training dataset

```
import matplotlib.pyplot as plt
```

```
plt.imshow(x_train[36]) <matplotlib.image.AxesImage at
0x7fa70fb3b550>
```

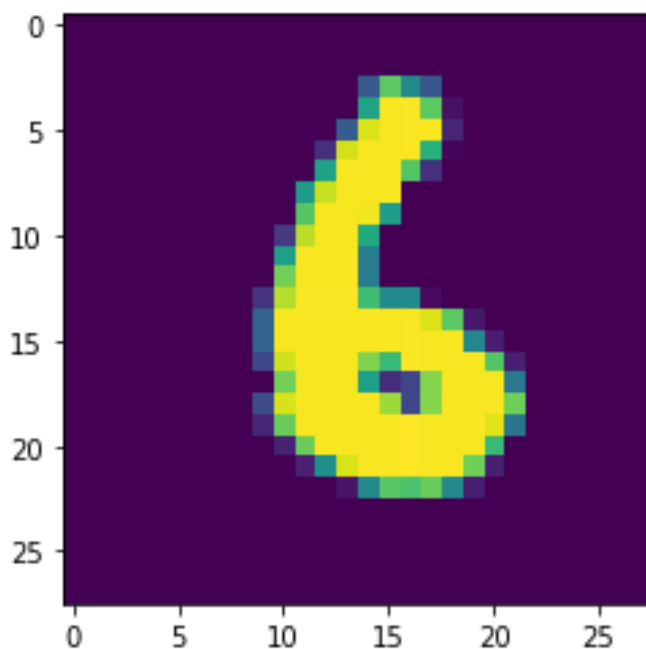

#Reshaping the data

,As we are using Deep learning neural network, the input for this network to get trained on should be of higher dimensional. Our dataset is having three-dimensional images so we have to reshape them too higher dimensions

```
# (batch,height,width,channel)
x_train=x_train.reshape(60000,28,28,1).astype('float32')
x_test=x_test.reshape(10000,28,28,1).astype('float32')
```

#Applying one hot encoding

One hot encoding to convert numerical values to classes where 0 to 9 are 10 separate classes if value is 5 class 5 is 1 else 0

```
no_of_classes=10
```

```
y_train=np_utils.to_categorical(y_train,no_of_classes)
y_test=np_utils.to_categorical(y_test,no_of_classes)
y_test[3]
array([1., 0., 0., 0., 0., 0., 0., 0., 0., 0.], dtype=float32)
```