THANTHAI PERIYAR GOVERNMENT INSTITUTE OF TECHNOLOGY

PROJECT REPORT

Real-Time Communication System Powered by AI for Specially Abled



Submitted by

TEAM ID : PNT2022TMID29700

TEAM LEADER : PRIYANGA V (513119106067)

TEAM MEMBER 1: SWETHA B (513119106088)

TEAM MEMBER 2: SARUMATHI R (513119106073)

TEAM MEMBER 3 : SRINATH P (513119106082)

TEAM MEMBER 4: YAMIN SEHWAG (5131191060101)

PROJECT REPORT FORMAT

- > INTRODUCTION
- > LITERATURE SURVEY
- IDEATION & PROPOSED SOLUTION
- > REQUIREMENT ANALYSIS
- > PROJECT DESIGN
- > PROJECT PLANNING & SCHEDULING
- > CODING & SOLUTIONING
- > TESTING
- > RESULTS
- > ADVANTAGES
- > DISADVANTAGES
- > CONCLUSION
- > FUTURE SCOPE
- > APPENDIX

INTRODUCTION

1.1 Project Overview

Al technologies can play an important role in breaking down the communication barriers of deaf or hearing-impaired people with other communities, contributing significantly to their social inclusion. Recent advances in both sensing technologies and AI algorithms have paved the way for the development of various applications aiming at fulfilling the needs of deaf and hearing-impaired communities. To this end, this survey aims to provide a comprehensive review of state-ofthe-art methods in sign language capturing, recognition, translation and representation, pinpointing their advantages and limitations. In addition, the survey presents many applications, while it discusses the main challenges in sign language technologies. Future research direction are also proposed in order to assist prospective researchers towards further advancing the field. Sign languages are the primary language of many people worldwide. To overcome communication barriers between the Deaf and the hearing community, artificial intelligence technologies have been employed, aiming to develop systems for automated sign language recognition and generation have to be considered though sharing some characteristics of spoken languages -since they differ in others.

1.2 Purpose

The main purpose is communication between hearingimpaired people and other communities and also the Sign language recognition, sign language representation, sign language capturing. We are using a convolution neural network to create a model that is trained on different hand gestures. An app is built which uses this model. This app enables deaf and dumb people to convey their information using signs which get converted to human-understandable language and speech is given as output. The main purpose is communication between hearing-impaired people and other communities and also the Sign language recognition, sign language representation, sign language capturing. We are using a convolution neural network to create a model that is trained on different hand gestures. A basic understanding of the particularities and notation of sign language serves to understand the importance better and challenges of automated sign language translation. An app is built which uses this model. This app enables deaf and dumb people to convey their information using signs which get converted to human-understandable language and speech is given as output.

LITERATURE SURVEY

2.1 Existing Problem

The aforementioned search condition describes the existence of the above words (i.e., recognition, translation, etc.) in the title, abstract or keywords of the literature works. In this context, allows for variations in the search terms i.e., capture allows the existence of words, such as capture, capturing, etc. In addition, the search is performed for papers published after 2018 since the field is evolving with fast pace and older methods are rendered quickly obsolete. To this end, this review aims to present only the latest and best works related to sign language technologies. Communication is the only medium by which we can share our thoughts or convey the message but for a person with disability (deaf and dumb) faces difficulty in communication with normal person. Because of this, a person who lacks in hearing and speaking ability is not able to stand in race with normal person.

Deafness is either congenital or acquired. Congenital deafness arises from some natural cause which deprives the child of hearing from its birth. Acquired deafness arises from disease, accident, or other causes. Older people who can't hear well may become depressed, or they may withdraw from others because they feel frustrated or embarrassed about not understanding what is being said. Sometimes, older people are mistakenly thought to be confused, unresponsive, or uncooperative because they don't hear well. Hearing people

and their constant, pervasive audism. Hearing people and their incessant creation of barriers to Deaf people's equality, employment, language, culture, and freedom to be themselves in the way they want to be.Deaf individuals face oral and printed language barriers. Deaf individuals have limited access to health-care services due to communication barriers and interpersonal factors.You can imagine the emotional and psychological toll of not being able to communicate with those closest to you, let alone others at school or work. For many deaf individuals living in rural areas, they might be the only deaf person in their community or school, making it extremely challenging to build relationships.

2.2 Reference

The papers included in this review have been published as journal articles, conference proceedings and book chapters (i.e., DOCTYPE) in the fields of computing and engineering (i.e., SUBJAREA). A systematic literature search was performed by adopting the PRISMA guidelines. The articles were extracted in June 2021 from three academic databases, namely Scopus.

2.3 Problem Statement Definition


Communication is the only medium by which we can share our thoughts or convey the message but for a person

disability (deaf and dumb) faces difficulty with communication with normal person. Because of this, a person who lacks in hearing and speaking ability is not able to stand in race with normal person. The number of the records retrieved from the three databases is 2368. From this number, 331 duplicate records are removed, leading to 2037 unique records. After screening title, abstract and finally the full text with various criteria to discard irrelevant records, 106 records remain and are included in this review. Sign languages are natural languages that use different means of expression for communication in everyday life. More particularly, it is the only means of communication for the hearing impaired. Thus, it provides replacement for speech among deaf and mute people. Several research works are going on sign language in order to make the communication between a deaf person and a normal person easy. Japanese Sign Language etc. Generally, the semantic meanings of the language components in all these sign languages differ, but there are signs with a universal syntax. For example, a simple gesture with one hand expressing 'hi' or 'goodbye' has the same meaning all over the world and in all forms of sign languages. Sign languages are natural languages that use different means of expression for communication in everyday life.

IDEATION & PROPOSED SOLUTION

3.1 Empathy Map Canvas

- An empathy map is a simple, easy-to-digest visual that captures knowledge about a user's behaviors and attitudes.
- It is a useful tool to helps teams better understand their users. Creating an effective solution requires understanding the true problem and the person who is experiencing it.
- The exercise of creating the map helps participants consider things from the user's perspective along with his or her goals and challenges.

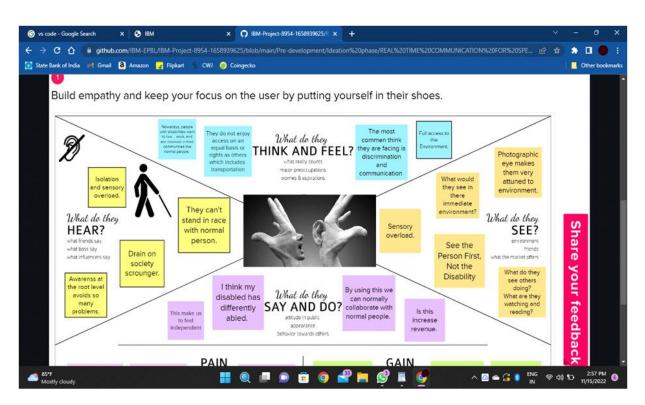

3.2 Ideation & Brainstroming

Step 1:

Team Gathering, Collaboration and Select the Problem Statement


Team was gathered in mural app for collaboration.

The team members are

- Priyanga
- Swetha
- Sarumathi
- Srinath
- Yamin Sehwag


Step 2:

Brainstorm, Idea Listing and Grouping

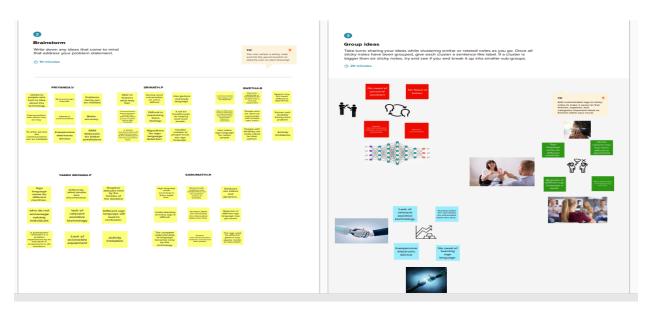


Step 3:

Idea Prioritization

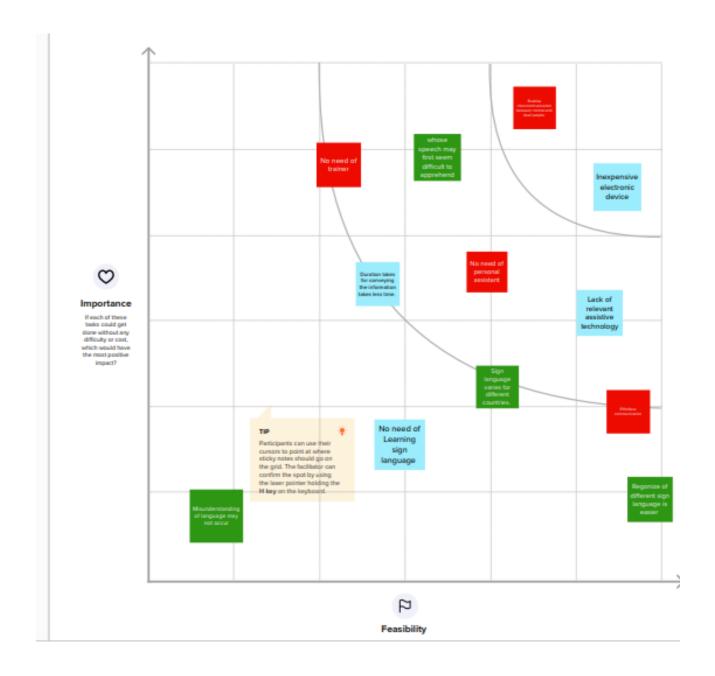

3.3 Proposed Solution

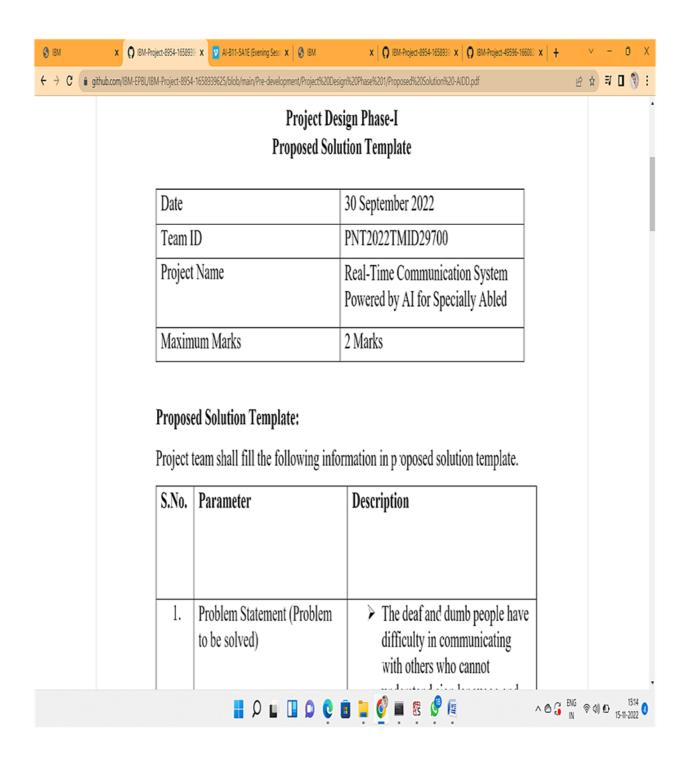


3.4 Problem Solution




REQUIREMENT ANALYSIS

4.1 Functional Requirement

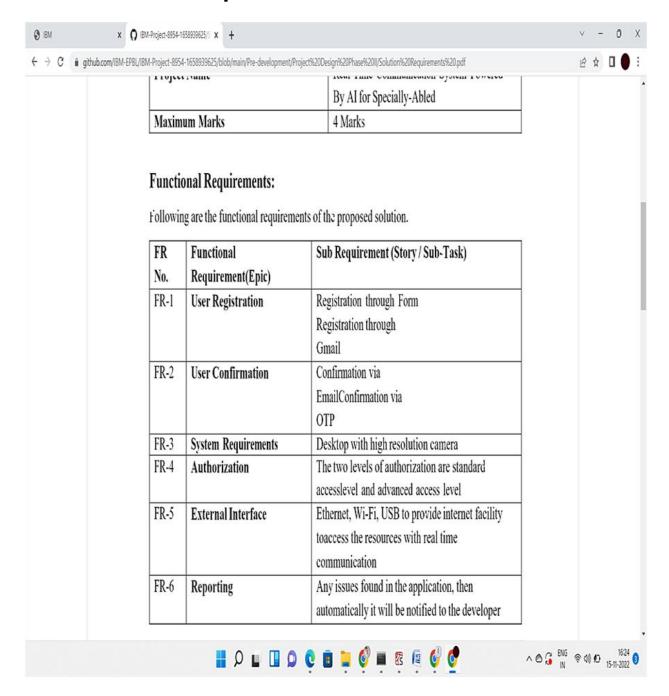


4.2 Non Functional Requirement

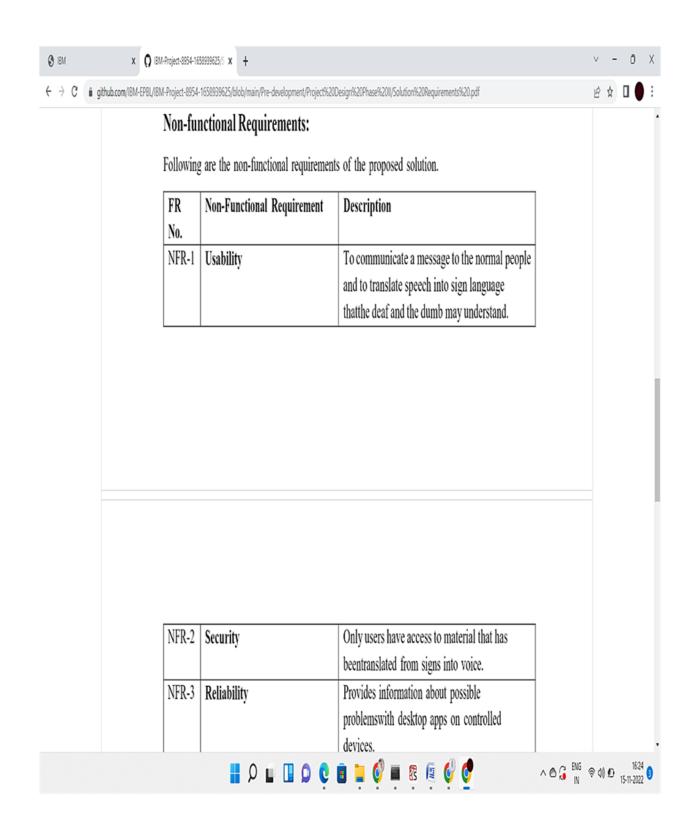


PROJECT DESIGN

5.1 Data Flow Diagrams

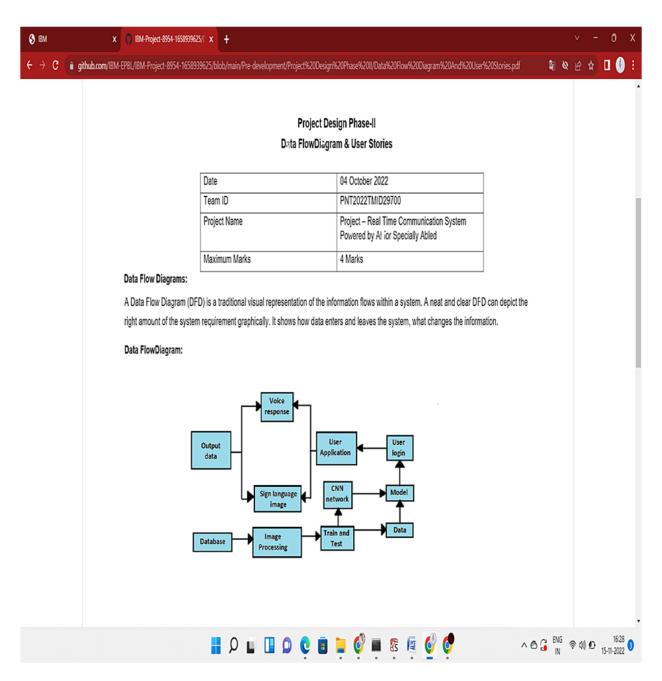


5.2 Solution Architecture

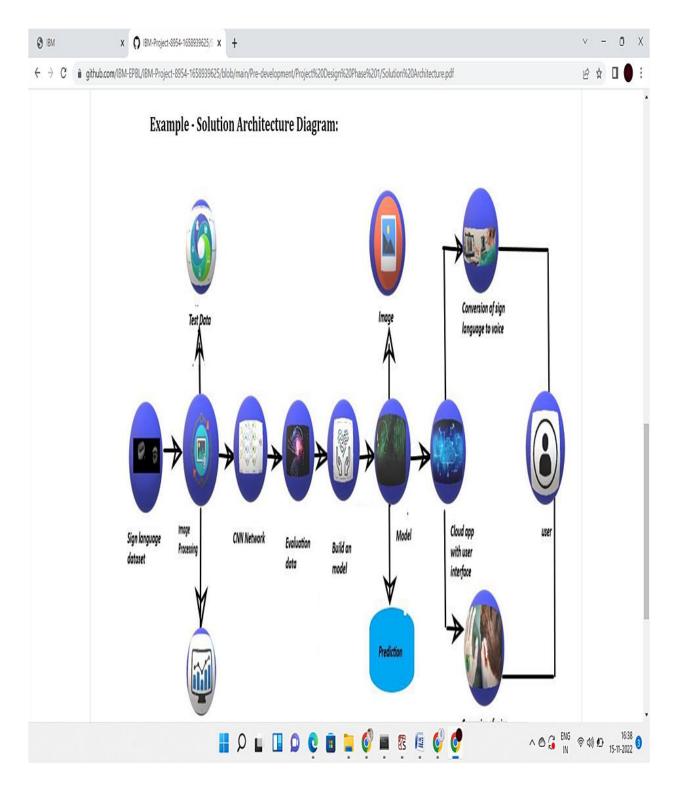

5.3 User Stories



5.4 TECHNOLOGY ARCHITECTURE

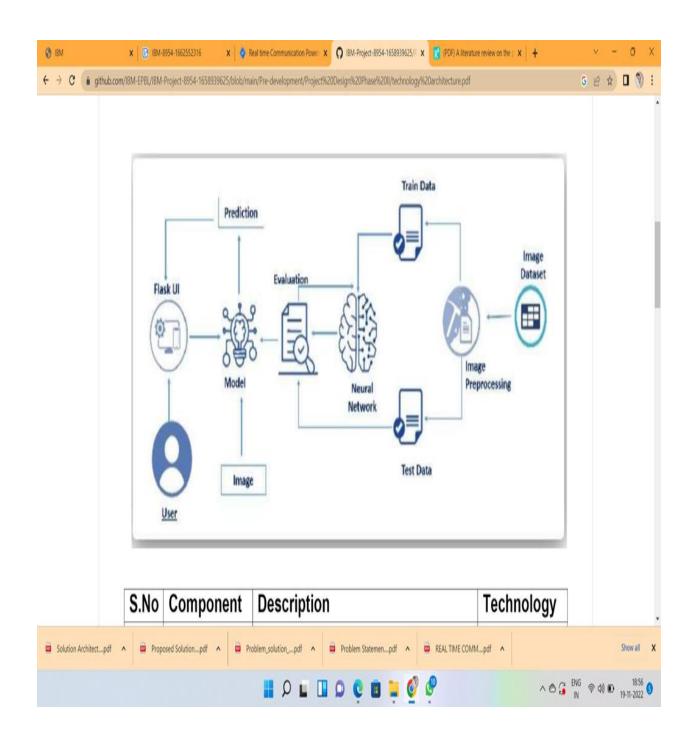


PROJECT PLANNING AND SCHEDULING

6.1 Sprint Planning & Estimation




6.2 Sprint Delivery Schedule

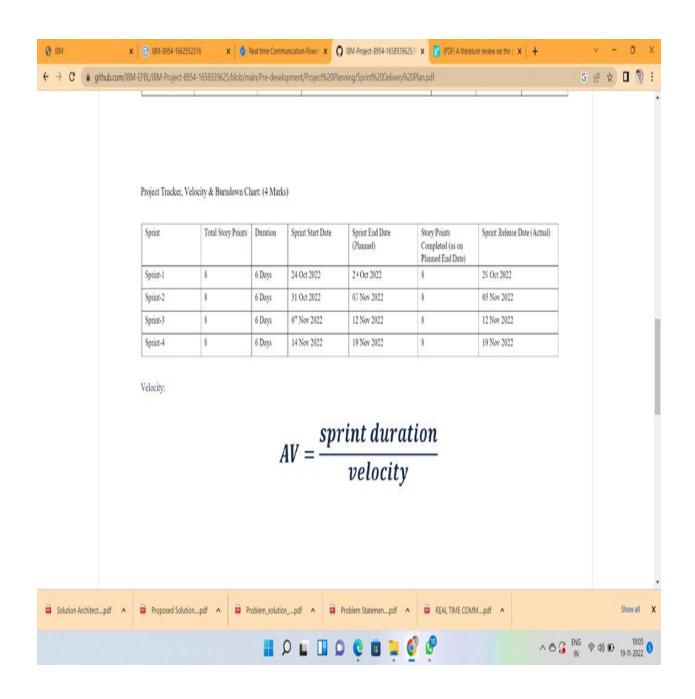


6.3 Reports from JIRA

Step 1: Sprint burndown chart

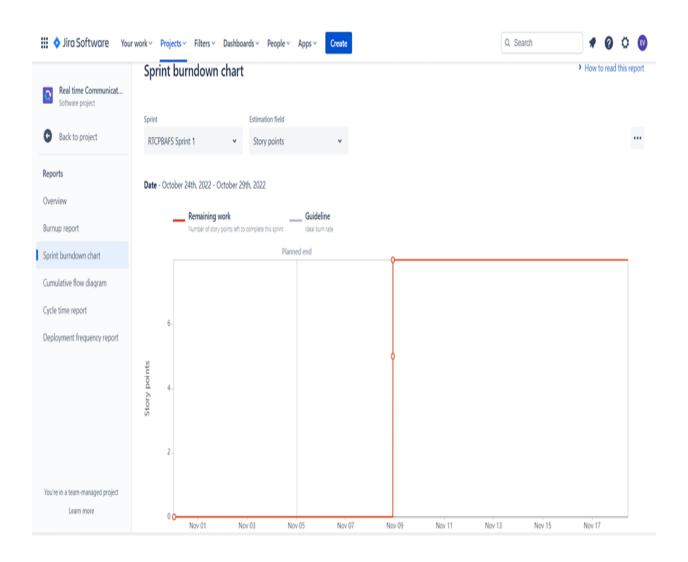

Step 2:

Roadmap

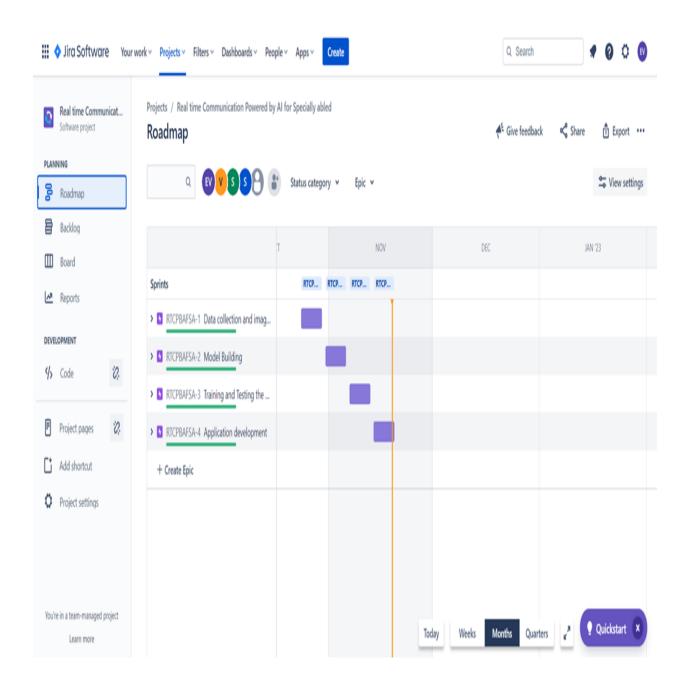

CODING & SOLUTIONING

7.1 Feature 1

```
<html lang="en">
<head>
  <meta charset="UTF-8">
  <meta name="viewport" content="width=device-width, initial-scale=1.0">
  <meta http-equiv="X-UA-Compatible" content="ie=edge">
  <title>Signlangue Classification</title>
  k href="https://cdn.bootcss.com/bootstrap/4.0.0/css/bootstrap.min.css" rel="stylesheet">
  <script src="https://cdn.bootcss.com/popper.js/1.12.9/umd/popper.min.js"></script>
  <script src="https://cdn.bootcss.com/jquery/3.3.1/jquery.min.js"></script>
  <script src="https://cdn.bootcss.com/bootstrap/4.0.0/js/bootstrap.min.js"></script>
  <link href="{{ url_for('static', filename='css/styles.css') }}" rel="stylesheet">
  <style>
  .bg-dark {
      background-color:white;
  #result {
      color:#fff;
  body{
  background-image: url("https://images.unsplash.com/photo-1668610662494-1bc9d49a22bc?ixlib=rb-
4.0.3&ixid=MnwxMjA3fDB8MHxlZGl0b3JpYWwtZmVlZHw3MHx8fGVufDB8fHx8&auto=format&fit=crop
  background-color:#0b0b0b;
  background-size: cover;
#grid{
  display: grid;
  grid-template-columns: auto auto;
  grid-template-rows:auto auto;
  grid-row-gap: 5px;
  grid-column-gap: 5px;
}
.box1{
  grid-column-start: 1;
  grid-column-end: 4;
  padding-top:5px;
```

```
font-family: 'Rubik Dirt', cursive;
  font-size: 80px;
  text-shadow: 10px 10px 20px whitesmoke;
   color:red;
  text-align:center;
}
.box3{
   grid-column-start: 1;
   grid-column-end: 4;
  padding-left: 185px;
}
#flex{
  display:flex;
  flex-wrap: wrap;
}
.home{
   flex-basis:750%;
  flex-grow: 0;
   flex-shrink: 1;
   padding-left: 75px;
   margin-left: 150px;
  display: inline-block;
}
.home ul{
  display:inline-block;
   padding: 20px;
   border-radius: 5px;
  list-style-type: none;
  font-size: 35px;
   font-family: 'Noto Serif', serif;
  text-shadow: 10px 10px 15px wheat;
}
.home li{
 float:left;
.home a{
   text-decoration: none;
```

```
padding: 50px;
   color: white;
   display: inline-block;
   transition:color 0.2s,
            font-size 0.2s,
            text-decoration-line 0.2s;
 .home a:hover{
   color: deeppink;
   text-decoration-line: underline;
   font-size: 50px;
  overflow: hidden;
}
::selection{
  background-color: gold;
   color: darkgreen;
}
#welcome{
  display:flex;
  flex-wrap: wrap;
#welcome div{
  border-radius: 50px;
   transition: all 0.5s;
}
.item1{
   flex-basis: 5%;
   flex-grow: 0;
   flex-shrink: 1;
}
.item2{
   flex-basis:80%;
   flex-grow: 1;
   flex-shrink: 0;
   height:640px;
   justify-content: center;
   align-items: center;
  background-image: url("openingimage.jpg");
  background-repeat: no-repeat;
```

```
background-size: cover;
  background-position: center;
  box-shadow: 7px 7px 100px violet;
  .item3{
      flex-basis:5%;
      flex-grow: 0;
      flex-shrink: 1;
   }
  .text1{
      color: white;
      text-align: center;
      justify-content: center;
      font-size: 100px;
      padding-top: 270px;
      font-family: "Sofia", sans-serif;
   @keyframes fade-inout{
      0% {opacity: 1;}
      100% {opacity:0;}
   }
  .fadeout{
      animation: fade-inout 1.5s infinite alternate;
      text-align: center;
      word-spacing: 20px;
      font-family: 'Noto Serif', serif;
      text-shadow: 10px 10px 15px black;
  #welcome:hover{
    padding: 20px;
    size: 50px;
@media all and(max-width:640px){
  .box2 #welcome{
      flex-basis: 100%;
      display: none;
@media all and(min-width:360){
  .box1 #welcome{
      flex-basis: 100%;
```

```
section{
   min-height:100vh;
   width:100%;
   display: flex;
  align-items:center;
   justify-content: center;
}
.layout{
   width: 90%;
   max-width: 1000px;
  margin: 0 auto;
  display: flex;
  align-items:center;
  justify-content: center;
}
.left{
   width:50%;
   height: 600px;
   background: url("https://encrypted-tbn0.gstatic.com/images?q=tbn:ANd9GcQdgg7tevUo2q9JblYyVcTuq6Fv
center/ cover;
   border-radius: 8px;
   border: 5px solid whitesmoke;
  box-shadow: 5px 5px 100px red;
  padding-right: 500px;
  margin-left: -100px;
}
.right{
   width:40%;
  max-height: 550px;
   background-color:white;
   display: flex;
   align-items:flex-start;
  justify-content: center;
   padding: 50px;
  border-radius: 20px;
   color: brown;
   margin-left: -100px;
}
.right h1{
   font-size: 40px;
```

```
font-weight: lighter;
  padding-top: 20px;
.right p{
  font-weight: 500;
   line-height: 25px;
  font-family: 'Noto Serif', serif;
}
.right a{
   text-decoration: none;
  text-transform: uppercase;
   color: black;
  padding: 20px 30px;
  display: inline-block;
  letter-spacing: 2px;
  background-color:black;
  border-radius: 20px;
   color:white;
@media only screen and (max-width:768px){
   .layout{
      flex-direction: column;
      width: 100%;
      margin: 0 30px;
   }
   .left{
      width: 100%;
      height: 400px;
   }
   .right{
      width: 90%;
      margin:0;
      margin-top: -100px;
   .item2{
      flex-basis: 100%;
      width:100%;
      background-image: cover;
      margin-top: 100px;
```

```
.home ul{
      flex-basis: 20%;
      width: 50%;
      margin: -200px;
      margin-top: 100px;
   }
   .text1{
      display: none;
   .mess1 p{
      display:none;
   }
   .mess1 h1{
      float:left;
      margin-left: -370px;
   .mess1 a{
      display:inline-block;
      margin-left: -570px;
   }
   .box2{
      margin-top:300px;
      margin-left: 150px;
      margin-bottom: 100px;
   .item1 .item3{
      flex-basis: 0%;
}
#rotate{
  display: flex;
   justify-content: center;
  align-items:center;
  min-height: 100vh;
}
.round{
  position: relative;
  width: 200px;
  height: 200px;
  transform-style: preserve-3d;
```

```
animation: animate 20s linear infinite;
}
@keyframes animate
   0%
   {
       transform: perspective(1000px) rotateY(0deg);
   100%
       transform: perspective(1000px) rotateY(360deg);
}
.round span{
   position: absolute;
   top: 0;
   left: 0;
   width: 100%;
   height: 100%;
   transform-origin: center;
   transform-style: preserve-3d;
   transform: rotateY(calc(var(--i)*45deg)) translateZ(400px);
   -webkit-box-reflect:below 0px linear-gradient(transparent,transparent,#0004);
}
.round span img{
   position: absolute;
   top:0;
   left: 0;
   width: 100%;
   height: 100%;
   object-fit: cover;
   border: 2px solid white;
   border-radius: 5px;
  box-shadow: 7px 7px 100px violet;
}
.horizontal{
   color: aliceblue;
   size: 30px;
#footer{
   width: 100%;
   position: absolute;
```

```
background: linear-gradient(to right,#0b0b0b,#565454);
  color:#fff;
  padding: 100px 0 30px;
  border-top-left-radius: 125px;
  font-size: 13px;
  line-height: 20px;
  border: 1px solid white;
  box-shadow: 7px 7px 100px red;
}
.row1{
  width: 85%;
  margin: auto;
  display: flex;
  flex-wrap: wrap;
  align-items:flex-start;
  justify-content: space-between;
}
.col1{
  flex-basis: 25%;
  padding: 10px;
}
.col1:nth-child(2){
  flex-basis: 15%;
}
.logo1{
  width:80px;
  margin-bottom: 30px;
  border-radius: 50% 50%;
  border: 2px solid;
  box-shadow: 7px 7px 100px white;
}
.col1 h3{
  width: fit-content;
  margin-bottom: 40px;
  position: relative;
  font-family: 'Abril Fatface', cursive;
  font-size: 25px;
  letter-spacing: 2px;
  color:white;
}
.email-id1{
  width: fit-content;
```

```
border-bottom: 2px solid #ccc;
  margin: 20px 0;
}
.foot ul li{
   list-style: none;
  margin-bottom: 15px;
   font-size: 20px;
}
.foot ul li a{
   text-decoration:none;
   color:white;
}
.foot ul li a:hover{
   text-decoration: underline;
   font-size: 25px;
   color:aqua;
}
form{
   padding-bottom: 15px;
   display: flex;
   align-items: center;
   justify-content:space-between;
   border-bottom: 2px solid white;
   margin-bottom:50px;
form .fa-solid{
   font-size: 18px;
   margin-right: 10px;
form input{
   width: 100%;
   background: transparent;
   color: #ccc;
   border: 0;
   outline: none;
form button{
   background: white;
   border: 0;
   outline: none;
   cursor: pointer;
```

```
form .fas-solid{
   font-size: 16px;
   color:black;
}
.social-icons .fa-brands{
   width: 40px;
  height: 40px;
  border-radius: 50%;
   text-align: center;
   line-height: 40px;
  font-size: 20px;
   color: #000;
  background:#fff;
   margin-right: 15px;
  cursor: pointer;
}
hr{
   width: 90%;
   border: 0;
   border-bottom: 1px solid #ccc;
  margin: 20px auto;
.copyright{
   text-align: center;
.underline{
   width: 100%;
   height: 5px;
  background: #767676;
   border-radius: 3px;
   position: absolute;
   top:25px;
   left: 0;
   overflow: hidden;
}
.underline span{
   width: 15px;
   height: 100%;
   background: #fff;
   border-radius: 3px;
   position: absolute;
```

```
top: 0px;
  left:10px;
  animation: moving 2s linear infinite;
@keyframes moving{
  0% {
      left: -20px;
   100% {
      left:100%;
   }
}
@media (max-width:700px)
  #footer{
      bottom:unset;
   .col1{
      flex-basis: 100%;
   .col1:nth-child(2){
      flex-basis:100%;
}
.signs{
  color: white;
}
  </style>
</head>
<body>
  <div id="grid">
    <div class="box1 item logo ">
       <h1>REAL TIME COMMUNICATION FOR SPECIALLY ABLED PERSON</h1>
    </div>
    <div class="box2 item"></div>
  </div>
```

```
<div>
<br>>
<br/>br>
<br>
</div>
 <div id="flex">
  <div class="home" >
     \langle ul \rangle
       <a href="index.html" class="button">Home</a>
       <a href="contacts.html" class="button">Sign To Voie Conversion</a>
       <a href="about.html" class="button">About</a>
     </div>
</div>
<div><br>
<br>
<br>
<br/>br>
<br>
<br>
</div>
 <div id="welcome">
  <div class="item1"></div>
  <div class="item2">
     <div><h1 class="text1 fadeout font-effect-neon">An AI Based solution for special people</h1>
  </div>
  </div>
  <div class="item3"></div>
</div>
<div><br>
<br>
<br/>br>
<br>
<br>
<br>
</div>
<section>
 <div class="layout">
    <div class="left"></div>
    <div class="right">
       <div class=content1>
```

```
<div>An app based cnn network model to provide communication for the specially abled person v
                                     uses cnn (convolutional neural network) for the deaf and dumb to understand provide the communication
                                     voice provision.
                            </div>
                           \langle br \rangle
                  </div>
        </div>
</section>
<div><br>
       <br/>br>
       <br>
       <br/>br>
       </div>
       <div>
              \langle br \rangle
              <br>
              <br>
              <br>
       </div>
        <div id="rotate">
              <div>
                    <div class="round">
                           <span style="--i:1"><img src="https://images.unsplash.com/photo-1565562195689-739680900319?ix</pre>
4.0.3 \& ixid = MnwxMjA3fDB8MHxzZWFyY2h8MTV8fGRIYWYIMjBhbmQlMjBkdW18ZW58MHx8MHx8\& and the state of the control of the control
alt="image" width="1000px"height="1000px"></span>
                           <span style="--i:2"><img src="https://images.unsplash.com/photo-1565562193381-576c27829023?ix</pre>
4.0.3&ixid=MnwxMjA3fDB8MHxzZWFyY2h8MTZ8fGRlYWYlMjBhbmQlMjBkdW18ZW58MHx8MHx8&a
alt="image" width="1000px"height="1000px"></span>
                           <span style="--i:3"><img src= "https://media.istockphoto.com/id/1254018943/photo/a-woman-suffers</pre>
hurts-due-to-otitis-media-cerumen.jpg?b=1&s=170667a&w=0&k=20&c=bstLhx8IoyZsQF0rN5p0IZtVhWU48d
```

<div><h1>App based CNN model</h1></div>

width="1000px"height="1000px">

alt="image" width="1000px"height="1000px">

 $< span \ style="--i:5">< img \ src="https://media.istockphoto.com/id/1180549312/photo/smiling-mixed-etalanguage.jpg?s=612x612\&w=0\&k=20\&c=wkb5Y7qpvgnCX7m4w27dNSb46d3rwMBLXLOI4MbBJdc=" alt="width="1000px"height="1000px">$

4.0.3&ixid=MnwxMjA3fDB8MHxzZWFyY2h8MTR8fGRpc2FibGVkJTIwcGVvcGxlfGVufDB8fDB8fA%3D

<img src="https://images.unsplash.com/photo-1580576079917-b66047bed513?ix</pre>

<img src="https://media.istockphoto.com/id/1257016195/photo/smiling-caucasiarkid.jpg?s=612x612&w=0&k=20&c=6hSbiiqirNzSSF5QfoBQVrzjP0QWnb6IPcmiYuTCQKY=" alt="image" w</pre>

```
<span style="--i:7"><img src="https://image.shutterstock.com/image-photo/young-deaf-mute-couple-</pre>
width="1000px"height="1000px"></span>
                                          <span style="--i:8"><img src="https://encrypted-</pre>
tbn0.gstatic.com/images?q=tbn:ANd9GcTEjmgQ3loP5ysjGJEly4IdpWl7463dm3n9Rg&usqp=CAU" alt="image" alternational content of the co
                     </div>
           </div>
           <br>
           <br>
           <div class="horizontal"><hr></div>
           <div><br>
           <br>
           \langle br \rangle
           <br/>br>
 </div>
 <hr>
           <div class="container">
                      <div id="content" style="margin-top:2em">
                             <div class="container">
                                   <div class="row">
                                           <div class="col-sm-6 bd signs">
                                                <h3>Signlanguage Classification: </h3>
                                                <br>
```

Sign languages (also known as signed languages) are languages that use the visual-manual modal words. Sign languages are expressed through manual articulation in combination with non-manual markers. Sign with their own grammar and lexicon.[1] Sign languages are not universal and are usually not mutually intelligible among different sign languages.

Linguists consider both spoken and signed communication to be types of natural language, meanin protracted aging process and evolved over time without meticulous planning.[3] Sign language should not be connonverbal communication.

Wherever communities of deaf people exist, sign languages have developed as useful means of concultures. Although signing is used primarily by the deaf and hard of hearing, it is also used by hearing individual those who have trouble with oral language due to a disability or condition (augmentative and alternative communiculuding children of deaf adults.

```
<footer>
      <script src="{{ url_for('static', filename='js/main.js') }}" type="text/javascript"></script>
    </footer>
    </div>
   </div>
   </div>
</div>
<div><br>
   <br>
   <br
   <br>
   </div>
   <div>
      <br>
      <br>>
      <br>>
      <br>>
   </div>
   <div><br>
      <br>
      <br>
      <br
      </div>
      <div>
         <br/>br>
         <br>
         <br>
         <br
      </div>
<div id="footer">
   <div class="row1">
      <div class="col1">
         </div>
      <div class="col1 foot">
         <h3>Links <div class="underline"><span></span></h3>
            <a href="index.html">Home</a>
            <a href="about.html">About</a>
            <a href="contacts.html">Contacts</a>
         </div>
```

```
<div class="col1">
            <h3>Newsletter <div class="underline"><span></span></h3>
            <form>
               <i class="fa-solid fa-envelope"></i>
               <input type="email" placeholder="Enter your Email id" required>
               <button type="submit"><i class="fas-solid fa-arrow-right"></i></button>
            </form>
            <div class="social-icons">
               <i class="fa-brands fa-facebook"></i>
               <i class="fa-brands fa-whatsapp"></i>
               <i class="fa-brands fa-instagram"></i>
               <i class="fa-brands fa-twitter"></i>
            </div>
         </div>
      </div>
      <hr>>
      Sri webdesign &copy 2022 - All Rights Reserved 
  </div>
  <footer>
      <script src="{{ url_for('static', filename='js/main.js') }}" type="text/javascript"></script>
  </footer>
</body>
</html>
```

9.2 Feature 2

```
var reader = new FileReader();
     reader.onload = function (e) {
       $('#imagePreview').css('background-image', 'url(' + e.target.result + ')');
       $('#imagePreview').hide();
       $('#imagePreview').fadeIn(650);
     reader.readAsDataURL(input.files[0]);
}
$("#imageUpload").change(function () {
   $('.image-section').show();
   $('#btn-predict').show();
  $('#result').text(");
  $('#result').hide();
  readURL(this);
});
// Predict
$('#btn-predict').click(function () {
   var form_data = new FormData($('#upload-file')[0]);
  // Show loading animation
  $(this).hide();
   $('.loader').show();
  // Make prediction by calling api /predict
  $.ajax({
     type: 'POST',
     url: '/predict',
     data: form_data,
     contentType: false,
     cache: false,
     processData: false,
     async: true,
     success: function (data) {
       // Get and display the result
       $('.loader').hide();
       $('#result').fadeIn(600);
       $('#result').text(' Result: ' + data);
       console.log('Success!');
     },
   });
});
```

8.3 Feature 3

```
.img-
preview
{
```

```
height: 256px;
  position: relative;
  border: 5px solid #F8F8F8;
  box-shadow: 0px 2px 4px 0px rgba(0, 0, 0,
0.1);
  margin-top: 1em;
  margin-bottom: 1em;
}
.img-preview>div {
  width: 100%;
  height: 100%;
  background-size: 256px 256px;
  background-repeat: no-repeat;
  background-position: center;
}
input[type="file"] {
  display: none;
```

```
}
.upload-label{
  display: inline-block;
  padding: 12px 30px;
  background:white;
  color: #fff;
  font-size: 1em;
  transition: all .4s;
  cursor: pointer;
.upload-label:hover{
  background: #34495E;
  color: #39D2B4;
}
.loader {
  border: 8px solid #f3f3f3; /* Light grey */
  border-top: 8px solid #3498db; /* Blue */
  border-radius: 50%;
  width: 50px;
  height: 50px;
  animation: spin 1s linear infinite;
}
@keyframes spin {
  0% { transform:rotate(0deg);}
}
```

TESTING

8.1 Test Cases

				Date	5-Nov-22								
				TeamID	PNT2022TMID29700								
				Project Name Maximum Marks	Real time communication by All for specially abled 4 marks								
Test case ID	Feature Type	Component	Test Scenario	Pre- Requisite	Steps To Execute	Test Data	Expected Result	Actual Result	Status	Comments	TC for Automation(Y /N)	BUG ID	Executed By
Detection _01	User Interface webpage	Register Page	Verify user is able to see the Registration page	Active server and internet connection with frontend code for Detection	1.Enter Website URL and Search the URL 2.Display the Register Page to the user	http://127.0.0.1: 5000	Register Page will be display withthe Process of Front end	Worked as expecte d	Pass	User can view the registratio n page	Yes	-	PNT2022TMID29 664 Team
Detection_0	User interface webpage	Register page	Verify user is able to register with user credentials	Active server and internet connection with frontendcode for Det ection	1.Enter Website URL and Search the URL 2.Display the Register Page to the User 3.Able to register in registration page	http://127.00.1:500 2	Successfully registered	Worked as expecte d	pass	User can register	Yes	-	PNT2022TMID29 700 Team
Detection 03	User interface webpage	Login page	Verify user is able to see the login page	Active server and internet connection with frontendcode for Detection HTML Search Tag with the valid URL	2 Display the login Page to the	http://127.0.0.1500 2	Login Page will be display with the Process of Front end		Pass	user can view the login page	yes		PNT2022TMID29 700 Team
Detection_0	User interface webpage	Login page	Verify user is able to login using user credentials	Active server and internet connection with frontendcode	the URL	http://127.0.0.1:500 2	Successful login	Worked as expecte d	pass	User can login into web app	Yes		PNT2022TMID29 700 Team
Detection _05	conversion	Detection Page	Verify user is able to see the hand sign to alphabet conversion page	Active server and internet connection	1 Enter URL Phttps://127.0.0.1:5000 and check 2. The Url will redirect to the conversion page	http://127.0.0.1.50 00	Able to see Conversio n page	Worked as expecte d	pass	User can see the conversion page	yes		PNT2022TMID297 00 Team
Detection ,06	Prediction	Detection Page	Verify user can able to show the hand sign in live camera	Active server and internet connection	1. Enter URL [https://127.0.0.1:5000] and sheck 2. The Uri will redirect to the conversion page 3.5 how hand sign in front of camera.	http://127.0.0.1.5 000	Able to show hand sign in camera	Worked as expecte d	pass	User can show hands in front of camera	yes		PNT2022TMID297 00 Team
Detection 07	prediction	Detection Page	Verify the user able to get the corresponding alphabet for their hand sign	Active server and internet connection	1.Enter URI. [https://127.0.0.1.5000) and check 2.The Uri will redirect to the conversion page 3.Show hand sign in front of camera. 4.Get corresponding alphabet as output	http://127.0.0.150 00	Able to get the predicted alphabet for the hand sign	Worked as expecte d	pass	User can get the conversion results.	yes	1	PNT2022 TM ID29 700 Team

8.2 UAT

Defect Analysis

Resolution	Severity 1	Severity 2	Severity 3	Severity 4	Subtotal
By Design	11	7	4	2	24
Duplicate	1	0	2	0	3
External	2	3	2	1	8
Fixed	10	5	3	14	32
Not Reproduced	0	0	1	0	1
Skipped	0	0	1	1	2
Won't Fix	1	0	0	1	1
Totals	25	15	13	26	70

Step 2

Test case Analysis

Section	Total Cases	Not Tested	Fail	Pass
CNNEngine	7	0	0	7
ClientApplication	15	0	0	15
Security	2	0	0	2
Outsource Shipping	0	0	0	0
Exception Reporting	9	0	0	9
Final ReportOutput	4	0	0	4
Version Control	2	0	0	2

RESULTS

9.1 Performance metrics

Accuracy	Training					
	Accuracy -	Implement [Instances] Instances, price training Tools fit generator is deprecated and will be record in a future version. Please use Tools fit, which apports generators, and fit generator (rain, steps per epoches), epoches (p. volidation dates test, validation steps20) Evon 1100				
	0.9858	30/30 [
	Validation	30 00				
	Accuracy -	\$200 3(10) 3(10) [
	0.9860	30 30				
		Epoch 6/100 30/30 [===========] - To 1/3ng/step - Less: 2.0005 - eccuracy: 0.9500 Epoch 7/100				
		20 20 [
		Special Control of the Control of				
		30 70				
Confidence	Class	N/A				
Score (OnlyYolo	Detected -					
Projects)	N/A					
	Confidence					
	Score- N/A					

ADVANTAGES

- Gives people who have more hearing impairment more confidence.
- The proposed model here produces enormous accuracy of classification.

- Images of enormous can be resized within the ditself.
- Vast datasets can also be trained and tested.
- Enables Children to Communicate Effectively.
- Decreases Frustration.
- Improves Child-Parent Communication.
- Helps Children Remember Words.
- Increases Self Esteem.
- Provides An Insight Into Your Child's World.
- Sign language Is for Everyone.
- Builds Relationships.

DISADVANTAGES

- Finger spelling, which is a representation of the letters of the written alphabet using only your hands.
- Sign supported speech, which combines spoken and sign language and is used as a basis for learning the grammatical structure of spoken language.

Cued speech, which facilitates speech reading.

CONCLUSION

The broad spectrum of AI technologies provide a result of sign language is covered. Starting from sign language capturing methods for the collection of sign language data and moving on to sign language recognition representation techniques for the identification and translation of sign language, this review highlights all important technologies for the construction of a complete Al-based sign language system. Additionally, it explores the in-between relations among the AI technologies and presents their advantages and challenges. Finally, it presents groundbreaking sign language applications that facilitate the communication between hearing-impaired and speaking people, as well as enable the social inclusion of hearing-impaired people in their everyday life. The aim of this review is to familiarize researchers with sign language technologies and assist them towards developing better approaches.

Several devices have been used to acquire sign data, such as Data glove, Kinect, Leap motion controller and Camera in acquiring data. Despite the fact that these devices have contributed to the performance and

accuracy of the ASLR system. These devices have some shortcomings, such as high cost and inconvenience to use associated with dataglove. The image acquired from a affects low-resolution camera also the recognition accuracy of the system. Therefore, there is a need for more research that fuses images from multiple devices such as a camera, dataglove, and Kinect to acquired to produce better results without feature extraction. Skin colour segmentation and edge detection demonstrated robust techniques have improved segmentation performance. Hybridization of two or more feature extraction techniques has also been shown to produce more robust recognition features.

APPENDIX

Source code:

from flask import Flask,render_template,Response

import cv2

from cvzone.HandTrackingModule import HandDetector from cvzone.ClassificationModule import Classifier import numpy as np import math

app=Flask(__name___)

```
def generate_frames():
  camera=cv2.VideoCapture(0)
  detector = HandDetector(maxHands=1)
  classifier = Classifier("Model/model.h5","Model/labels.txt")
  offset = 20
  imgSize = 300
  folder = "/Data/C"
  counter = 0
  labels = ["A", "B", "C", "D", "E", "F", "G", "H", "I"]
  while True:
    ## read the camera frame
    success,img=camera.read()
    if not success:
      break
    else:
      imgOutput = img.copy()
      hands, img = detector.findHands(img)
      if hands:
        hand = hands[0]
        x, y, w, h = hand['bbox']
        imgWhite = np.ones((imgSize, imgSize, 3), np.uint8) * 255
        imgCrop = img[y - offset:y + h + offset, x - offset:x + w +
offset]
        imgCropShape = imgCrop.shape
```

```
aspectRatio = h / w
         if aspectRatio > 1:
           k = imgSize / h
           wCal = math.ceil(k * w)
           imgResize = cv2.resize(imgCrop, (wCal, imgSize))
           imgResizeShape = imgResize.shape
           wGap = math.ceil((imgSize - wCal) / 2)
           imgWhite[:, wGap:wCal + wGap] = imgResize
           prediction, index = classifier.getPrediction(imgWhite,
draw=False)
           print(prediction, index)
         else:
           k = imgSize / w
           hCal = math.ceil(k * h)
           imgResize = cv2.resize(imgCrop, (imgSize, hCal))
           imgResizeShape = imgResize.shape
           hGap = math.ceil((imgSize - hCal) / 2)
           imgWhite[hGap:hCal + hGap, :] = imgResize
           prediction, labelsindex =
classifier.getPrediction(imgWhite, draw=False)
         cv2.rectangle(imgOutput, (x - offset, y - offset-50),
                (x - offset+90, y - offset-50+50), (255, 0, 255),
cv2.FILLED)
         cv2.putText(imgOutput, labels[index], (x, y -26),
cv2.FONT_HERSHEY_COMPLEX, 1.7, (255, 255, 255), 2)
         cv2.rectangle(imgOutput, (x-offset, y-offset),
                (x + w+offset, y + h+offset), (255, 0, 255), 4)
```

```
ret,buffer=cv2.imencode('.jpg',imgOutput)
      imgOutput=buffer.tobytes()
      yield(b'--img\r\n'
          b'Content-Type: image/jpeg\r\n\r\n' + imgOutput +
b'\r\n'
@app.route('/')
def index():
  return render_template('index.html')
@app.route('/video')
def video():
  return Response(generate_frames(),mimetype='multipart/x-
mixed-replace; boundary=img')
if __name__=="__main___":
  app.run(debug=True)
```

Github Link:https://github.com/IBM-EPBL/IBM-Project-8954-1658939625

Demo Link:https://youtu.be/rrcV2nedLxl

