Project Development - Delivery Of Sprint-4

Date	14-11-2022
Team ID	PNT2022TMID14244
ProjectName	Project-IoT Based Safety Gadget For Child Safety Monitoring & Notification
MaximumMarks	

WEB USER INTERFACE FIREOUTH.HTML

HTML, CSS AND JS CODE:

```
<!DOC
TYPE
html>
         <html lang="en">
         <head>
           <meta charset="UTF-8">
           <meta name="viewport" content="width=device-width,
         initial-scale=1.0">
           k rel="stylesheet" href="/FIREOAUTH.css">
           k rel="stylesheet"
         href="https://cdnjs.cloudflare.com/ajax/libs/nprogress/0.2.0/np
         rogress.min.css">
           <link rel="shortcut icon"</pre>
         href="https://raw.githubusercontent.com/tharunoptimus-
         pd/firepwa/main/favicon.ico?token=GHSAT0AAAAAABR46H
         VJ5M5L3QGFRZRQXOISYUJUWAA" type="image/x-
        icon">
           <style>
             html,
             body {
               height: 100%;
               margin: 0;
               font-family: -apple-system, BlinkMacSystemFont,
         "Segoe UI", Roboto, Oxygen,
```

```
Ubuntu, Cantarell, "Open Sans", "Helvetica Neue",
sans-serif;
      font-weight: 300;
    }
    a {
       text-decoration: none;
      color: #007bff;
      font-weight: 500;
      font-size: 1.2rem;
    }
    h3 {
       font-size: 1.4rem;
    h3, h4 {
       margin: 0;
       padding: 0.3rem 0;
    }
    .wrapper {
       display: flex;
      flex-direction: column;
      align-items: center;
      justify-content: center;
      height: 100%;
      text-align: center;
    }
    .oneClickSignin {
       padding: 0.5rem;
       border: 1px solid #4444444;
       border-radius: 5px;
       box-shadow: 0 0 3px 0px #44444444;
       opacity: 0.2;
      pointer-events: none;
```

```
.qrcode {
    opacity: 0.1;
  .learnAboutFire {
    padding-top: 1.25em;
  }
  .qrHolder {
    display: none;
    margin-top: 3rem;
  }
  .qrContainer {
    align-items: center;
    display: flex;
    justify-content: center;
    padding: 8px;
    margin: 2rem auto;
    box-shadow: 0 0px 6px 1px rgb(0 0 0 / 16%);
    border: 1px solid #44444444;
    border-radius: 6px;
    width: 200px;
    height: 200px;
  }
</style>
<title>Fire OAuth</title>
<script>
  if (window.location.hostname !== "localhost") {
    if (location.protocol !== "https:") {
       location.replace(
         `https:\{\location.\href.\substring(
           location.protocol.length
         )}`
      )
    }
</script>
```

```
</head>
<body>
  <div class="wrapper">
    <h3 class="pageTitle">Login with SAFETY</h3>
    <div class="qrAuthorize">
      <h4 class="subTitle">Scan QR from your Fire OAuth
App 4</hd>
      <div class="qrContainer">
         <canvas id="qr-code" class="qrcode"></canvas>
      </div>
    </div>
    <div class="oneClickSignin">
      <h4>Have Fire PWA on this device?</h4>
      <a target=" blank" id="authorizeOverLink"
href="https://firepwa.netlify.app/authorize?sessionId"
rel="noopener">Click to Authorize <>/a>
    </div>
    <div class="learnAboutFire">
      <a target="_blank"
href="https://fireoauth.netlify.app" rel="noopener">Learn
More about SAFETY</a>
    </div>
  </div>
  <script
src="https://cdnjs.cloudflare.com/ajax/libs/nprogress/0.2.0/npr
ogress.min.js"></script>
  <script
src="https://cdnjs.cloudflare.com/ajax/libs/qrious/4.0.2/qrious.
min.js"></script>
  <script
src="https://cdnjs.cloudflare.com/ajax/libs/socket.io/4.2.0/sock
et.io.js"></script>
  <script>
```

```
const FIRE_API_KEY = "635b790a3bcc6b59c4b772d0"
    const FIRE ENDPOINT =
"https://fire.adaptable.app/api/apis/generate"
    const CHANNEL NAME = "fireOAuthChannel"
    const broadCastingChannel = new
BroadcastChannel(CHANNEL NAME)
    const FIRE_SERVER_SOCKET_ENDPOINT =
"https://fire.adaptable.app"
    let socket = io(FIRE SERVER SOCKET ENDPOINT)
    let gr
    let qrcode = document.querySelector(".qrcode")
    let oneClickSignin =
document.guerySelector(".oneClickSignin")
    let pageTitle = document.querySelector(".pageTitle")
    let subTitle = document.querySelector(".subTitle")
    function setOpacity(opacity) {
      oneClickSignin.style.opacity = opacity
      oneClickSignin.style.pointerEvents = opacity === "1"?
"auto" : "none"
      qrcode.style.opacity = opacity
    }
    async function getSessionID() {
      let response
      try {
         response = await
fetch(`${FIRE_ENDPOINT}/${FIRE_API_KEY}`, {
          method: "GET",
          headers: {
             "Content-Type": "application/json",
           }
         })
      } catch (error) {
        console.log(error)
        return null
      }
```

```
let data = await response.json()
      let { sessionId, chatRoomId } = data
      return { sessionId, chatRoomId }
    }
    function generateQR(value) {
      (qr = new QRious({
         element: document.getElementById("qr-code"),
         size: 200,
         level: 'M',
         value: value,
      }))
    }
    function changeHREF ({sessionId, chatRoomId}) {
      let firePwaUrlHostname = "https://firepwa.netlify.app"
      let originURL =
encodeURIComponent(window.location.origin)
      let url =
`${firePwaUrlHostname}/authorize.html?sessionId=${sessionI
d}&chatRoomId=${chatRoomId}&url=${originURL}`
      let a =
document.getElementById("authorizeOverLink")
      a.href = url
    }
    async function fire() {
      NProgress.set(0.4)
      let { sessionId, chatRoomId } = await getSessionID()
      if(sessionId === undefined || chatRoomId ===
undefined || sessionId === null || chatRoomId === null) {
         pageTitle.innerHTML = "Something went wrong"
•••
         subTitle.innerHTML = "Please try again later ""
```

```
return
       }
      setOpacity("1")
      NProgress.done()
      let data = {
         sessionId,
         url: encodeURIComponent(window.location.origin)
      data = JSON.stringify(data)
      generateQR(data)
      changeHREF({sessionId, chatRoomId})
      socket.emit("join room", sessionId)
    }
    fire()
    socket.on("trusted token", (token) => {
      let data = \{\}
       data.success = true
       data.token = token
      broad Casting Channel. post Message (data)\\
       window.close()
    })
  </script>
</body>
</html>
```

OUTPUT:

Login with SAFETY

Scan QR from your Fire OAuth App 🖩




Have Fire PWA on this device?


Click to Authorize

Learn More about SAFETY

OUTPUT: AFTER CLICKING LEARN MORE ABOUT SAFETY

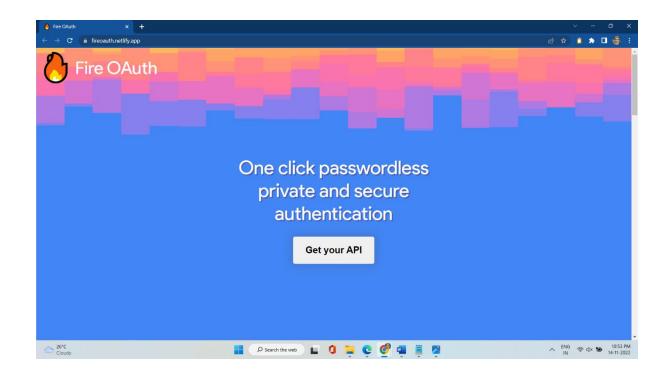

GEOFENCE NODE:

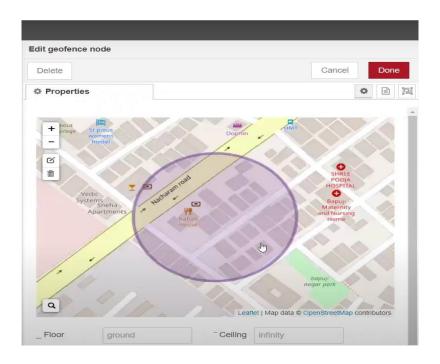

LOCATION:

After running the script, the web UI shows "Child is not in the particular area"



Result: successfully completed.