

IBM Power Systems Virtual Server Level 3 Demonstration Guide

None

Andrew R. Jones (andrewj@us.ibm.com)

Copyright © 2022 IBM

Table of contents

1. Introduction	3
1.1 Helpful tips for using this demonstration guide and environment	3
1.2 Acronyms	5
2. Part 1 - Overview	7
2.1 Introduction	7
3. Part 2 - Provisioning a PowerVS service	8
3.1 Introduction	8
3.2 Watch a service being provisioned	9
3.3 Click through demonstration of a service being provisioned	10
4. Part 3 - Provisioning a PowerVS instance	11
4.1 Introduction	11
4.2 Watch a instance being provisioned	12
4.3 Click through demonstration of a service instance being provisioned	13
5. Part 4 - Managing PowerVS instances	15
5.1 Introduction	15
5.2 Managing instances	16
6. Part 5 - Accessing PowerVS instances	20
6.1 Introduction	20
6.2 Access an instance	21
7. Part 6 - Explore other PowerVS topics	23
7.1 Introduction	23
7.2 Server placement groups	24
7.3 Storage volumes, boot volumes, and images	25
7.4 Subnets, Cloud connections, and VPN connections	26
7.5 Additional services catalog	28
8. Part 7 - Use the PowerVS command line interfaces (CLI)	29
8.1 Introduction	29
8.2 Command line exercises	30
9. Part 8 - Next steps	31
9.1 Next steps	31

1. Introduction

Welcome to the IBM Power Systems Virtual Server - Level 3 Demonstration Guide. The goal of this demonstration guide is to provide IBM and Business Partner Sales and Technical Sales the knowledge and tools to perform introductory demonstrations of IBM Power Systems Virtual Server (PowerVS).

There are 9 parts to this demonstration guide as seen in the left hand navigation. To complete the IBM Power Systems Virtual Server - Level 3 badge requirements, IBM and Business Partner **sellers** must complete Parts 1, 2, 3, 4, 5, and 8 of this demonstration guide. IBM and Business Partner **technical sellers** must complete all sections. The associated Learning Plan Stand and Deliver rubrics (IBM) and quizzes (Business Partners) are based upon the sections required for the respective roles. **All are welcome and encouraged to complete all sections.**

Business Partner Tip

To complete the IBM Power Systems Virtual Server - Level 3 badge, all Business Partners must complete a 5 question quiz. **The quiz is focused on validating completion of this demonstration script, and not general knowledge of PowerVS.** It is highly recommended to complete the quiz while the IBM Technology Zone environment is active. Several of the questions ask about specific settings or content that is seen in the IBM Cloud Portal.

In Parts 1, 2, and 3, learn how the demonstration environment was built, and how to perform a "baking show" style demonstration using the IBM Cloud Portal, click-thru demonstrations, and videos. New PowerVS resources are **not** provisioned as part of this demonstration guide. All resources are pre-provisioned in a shared environment to save time and money.

In Part 4, learn how to use the IBM Cloud Portal to manage PowerVS instances.

In Part 5, learn how to access the pre-provisioned PowerVS instances using the IBM Cloud Shell.

Parts 1 through 5 provide a good foundation for performing a high-level, customer facing demonstration of IBM Power Systems Virtual Server.

Parts 6 and 7 introduce several more technical aspects of IBM Power Systems Virtual Server including using the PowerVS IBM Cloud command line interface (CLI) plugin.

Finally, in Part 8, learn where to find additional resources about IBM Power Systems Virtual Server, and how to complete the IBM Power Systems Virtual Server - Level 3 badge.

Before jumping to part 1, please read the guidance below. Reading and understanding the information will save time while completing the steps in this guide.

1.1 Helpful tips for using this demonstration guide and environment

The IBM Power Systems Virtual Server - Level 3 Demonstration Guide is organized in parts and sub-parts or chapters. Most chapters contain numbered steps, which are actions to be performed.

Throughout the guide, images are used as examples of the IBM Cloud Portal, IBM Cloud Shell, and PowerVS instance consoles.

Warning

The IBM Cloud Portal and IBM Power Systems Virtual Server changes on a regular basis and may differ from the images captured in this guide.

In some images, the following styles of highlighting are utilized:

- Action highlight box: Illustrates where to click, enter, or select an item:




- Path/explore highlight box: Illustrates one of two things:
- the path to follow to get to a specific location in the user interface
- areas to explore



- Copy to clipboard box: The text is copied to the clipboard. Click the copy icon (highlighted below) and then paste using the operating systems paste function, for example, entering `^+v`, `⌘+v`, or right click and select paste.


4. In the YAML editor, at approximately line 45 notice the **resources{}** section under **template > spec > containers**. Replace the **resources {}** with:

```
resources:
  limits:
    cpu: 30m
    memory: 100Mi
  requests:
    cpu: 3m
    memory: 40Mi
```



Additionally, there are several "click-thru" demonstrations. Links to click-thru demonstrations will open in a new browser window or tab with a screen similar to the image below.

IBM Power Systems Virtual Server: Provision a PowerVS Service



This is a click-thru demonstration. Click the “play” button above to start. Once started, click anywhere on the screen and a green highlight box will appear at the location you could click next.

For full screen viewing, perform one of the browser specific actions below:

Firefox: right click, select “This Frame -> Open Frame in New Window”
 Safari: right click, select “Open Frame in New Window”
 Chrome: right click, select “View Frame Source”, remove “view-source:” from the new tab’s URL


Click the play button  in the middle of the screen to start the demo. Then, simply follow the steps in the demonstration guide. If unsure where to click, click anywhere on the screen and a highlight box will appear showing where to click next.

In this demonstration environment, full access to the IBM Cloud account is NOT provided. User identifications (IDs) will be restricted to specific capabilities. Permission to create or modify PowerVS service instances, virtual machines (instances), networks, images, etc. is not provided.



Warning

Attempting to perform an action without the appropriate permissions will result in an error message like the one below. This is not an issue with the IBM Cloud or PowerVS, rather a restriction of the demo environment and the permissions assigned to users.


 **Error**
✕


{ status: 403, statusText: Forbidden, error: Access Denied, description: Your access token is invalid or does not have the necessary permissions to perform this task. }

August 5, 2022, 8:36:30 AM

1.2 Acronyms

The following acronyms are used throughout this demonstration guide:





It is now time to proceed to Part 1, an overview of IBM Power Systems Virtual Server.

2. Part 1 - Overview

2.1 Introduction

IBM Power Systems Virtual Server (PowerVS) delivers flexible compute capacity for Power Systems workloads. Integrated with the IBM Cloud platform for on-demand provisioning, this offering provides a secure and scalable server virtualization environment built upon the advanced RAS features and leading performance of the Power Systems™ platform.

This IBM Technology Sales Enablement demonstration guide is part of the following Your Learning Level 3 learning plans for PowerVS:

UPDATE ALL THE LINKS BELOW

- **IBM Sales: Coming Soon**<https://yourlearning.ibm.com/activity/PLAN-4E64FE2FDBF0>
- **IBM Technical Sales: Coming Soon**
- **Business Partner Sales: Coming Soon**
- **Business Partner Technical Sales: Coming Soon**

You should be familiar with PowerVS and should have completed the IBM Power Systems Virtual Server [Sales Foundation Badge \(Level 2\)](#):

- **IBM:** <https://yourlearning.ibm.com/activity/PLAN-4E64FE2FDBF0>
- **Business Partners:** <https://learn.ibm.com/course/view.php?id=11419>

The content here is **not** a replacement for the Level 1 and 2 content that is part of that learning plan.

This demonstration environment has multiple purposes. First, it is meant to educate you on IBM Power Systems Virtual Server (PowerVS) and to hone your skills to perform PowerVS demonstrations. Additionally, the IBM Technology Zone (TechZone) environment, this demonstration guide and associated click-thru demos and videos can be re-used to perform client demonstrations.



The focus of the demonstration is on the Infrastructure as a Service capability of PowerVS and not on the operating systems supported by the offering: AIX, IBM i, and Linux.

In Part 2, learn about PowerVS **services** and how they are provisioned.

3. Part 2 - Provisioning a PowerVS service

3.1 Introduction

Before you create a PowerVS virtual server, you must understand the difference in terminology between a PowerVS **service** and a PowerVS **instance**. Think of the PowerVS **service** as a container for all PowerVS **instances** at a specific geographic region. PowerVS **instances** are virtual machines (VMs). The **service** is available from the Resource list in the IBM Cloud Portal. For example, you can have two **services**, one in Dallas, Texas, and another in Washington, D.C. Each **service** can contain multiple **instances**. A **service** must be associated with an IBM Cloud **resource group** which helps in grouping resources and assigning permissions. To learn more, refer to [Getting Started with IBM Power Systems Virtual Server](#).

The key parameters for a PowerVS service are:

- **Datacenter location:** As of August 2022, PowerVS is co-located with 15 IBM Cloud datacenters located around the world. When selecting a datacenter, consider choosing the datacenter located nearest the majority of the end users that will be accessing the workloads running in PowerVS.
- **Service name:** The PowerVS service name will appear in the IBM Cloud Portal under the provisioned services. Specify a name that is easily understood and recognized.
- **Resource group:** Resource groups are used to organize resources in your IBM Cloud account. Administrative and access rights for all PowerVS resources are associated with the PowerVS service and not individual PowerVS instances (VMs). Once a PowerVS service is assigned to a resource group, the resource group can not be changed.

In the next chapter, view a video of a PowerVS service being provisioned.

3.2 Watch a service being provisioned

In this chapter, watch a video of an IBM Power Systems Virtual Server **service** being provisioned in the IBM Cloud Portal.

This video includes audio that explains the steps being taken and things to consider while making choices on options. This video can be utilized for client demonstrations either with or without the audio.



If the video appears blurry, click the fullscreen or icon.


3.3 Click through demonstration of a service being provisioned

Now it is time for you to provision a PowerVS service. Use the click-thru demonstration below to practice provisioning a PowerVS service. The click-thru demonstration corresponds to the video from the previous chapter. Refer to the video for talking points if the click-thru demonstration is utilized with clients.

Note, fields that require a text entry (e.g. service name) are pre-populated in the click-thru demonstration.



Not sure where to click or what to do next? Simply click anywhere on the screen and the spot to click next will be highlighted.

1. Open the link below and then click the play button  to begin the demonstration.

Click-thru demo: [Create an IBM Power Systems Virtual Server service](#)

2. Click the **Catalog** in the top menu bar.
3. Click in the **Catalog search** text entry field.
4. Click the **Power Systems Virtual Server** tile.
5. Click the **Select a location** pull-down.
6. Click **Dallas (us-south) Region**.
7. Click in the **Service name** text entry field.
8. Click the **Select a resource group** pull-down.
9. Click **PowerVS-L3**.

Note: Tags can also be added to the service to assist in grouping, sorting, and applying flexible access policies.

1. Click the **I have read and agree to the following license agreements** check box.
2. Click **Create**.

Once the provisioning completes, the new PowerVS service can be found in the **Services and software** section of the IBM Cloud Portal dashboard.

1. Click **Services and software**.
2. Click the **PowerVS-L3-service** under **Services and software**.

The PowerVS service is now ready to be populated with virtual server **instances**. In the next Part of the demonstration guide, learn how to provision an **instance**.

4. Part 3 - Provisioning a PowerVS instance

4.1 Introduction

IBM Systems Virtual Servers are located in the IBM data centers, distinct from the IBM Cloud servers with separate networks and direct-attached storage. The environment is in its own pod and the internal networks are fenced but offer connectivity options to meet customer requirements. This infrastructure design enables IBM Power Systems Virtual Server to maintain key enterprise software certification and support as the PowerVS architecture is identical to certified on-premises infrastructure. The virtual servers, also known as instances, logical partitions (LPAR), or virtual machines (VMs) run on IBM Power Systems hardware with the PowerVM hypervisor.

The key parameters for a PowerVS instance are:

- **Instance name:** The PowerVS instance name will appear in the IBM Cloud Portal under the list of instances within a service. Specify a name that is easily understood and recognized.
- **Server placement group:** Server placement groups provide control over the host or server on which a new virtual machine (VM) is placed. By using server placement groups, high availability solutions can be created within a data center. Apply an affinity or anti-affinity policy to each VM instance within a server placement group. After creating a placement group, provision a new VM instance in the placement group. When setting a placement group with an affinity policy, all VMs in that placement group are launched on the same server. When setting a placement group with an anti-affinity policy, all VMs in that placement group are launched on different servers. Learn more about [placement groups](#).
- **VM pinning policy:** VM pinning controls the movement of VMs during disasters and other restart events. Learn more about hard and soft pinning [here](#).
- **SSH key:** A SSH public/private key pair is required to access the instance. A SSH key must be created and loaded into the IBM Cloud Portal prior to creating an instance. Learn more about using and generating SSH keys [here](#).
- **Operating system:** PowerVS instances can run either IBM AIX, IBM i, or Linux operating systems (OS). Several Linux images are available specifically for servers that will run SAP.
- **OS image:** Users have the ability to choose an operating system image from the PowerVS image catalog or users can bring their own image. Each supported OS has a specific set of images in the PowerVS catalog for supported OS versions. Each instance is provisioned with a boot volume using the storage tier selected.
- **Storage tier:** PowerVS supports both Tier 1 and Tier 3 storage. Tier 1 provides a maximum of 100 input/output operations per second (IOPs) per GB, while Tier 3 provides a maximum of 3 IOPS/GB. Tier 3 storage should only be utilized for non-production workloads.
- **Storage pool affinity:** Three storage pool affinity options are available: Auto-select, affinity, and anti-affinity. The affinity option specifies requires the boot volume to be placed in the same pool as another existing instance or existing boot volume. The new storage volume(s) for the instance will be placed in the same storage pool where the affinity object resides. The anti-affinity specifies a different pool should be used from that of another existing instance or existing boot volume.
- **Machine type:** Two IBM Power Systems machine types are supported: s922 and e980. Learn more about these s922 [here](#) and the e980 [here](#).
- **Core type:** PowerVS supports **shared uncapped**, **shared capped**, and **dedicated** cores. Shared uncapped cores are shared among other clients. Shared capped cores are shared, but resources do not expand beyond those that are requested (used mostly for licensing). Dedicated cores are allocated for a specific client (used for specific third-party licensing considerations). Learn more about core types [here](#).
- **Number of cores:** The option for the number of cores assigned to an instance depends on the core type. Shared capped and uncapped cores support .25 core increments, while dedicated cores must be assigned a full core. Note, the maximum number of cores will depend on the machine type and availability in the selected location.
- **Amount of memory:** PowerVS instances must be provisioned with a minimum of 2GB of random access memory (RAM). The maximum amount of memory varies based upon machine type and availability in the selected location. If greater than 64GB RAM per core is specified, a higher price is charged.
- **Additional storage volumes:** When provisioning a new instance, for additional storage, a new data volume can be created or an existing volume can be attached. Any storage volume added at this time will use the same storage tier as the boot volume specified earlier.
- **Networking:** PowerVS instances will always be attached to a private network and can optionally be attached to a public, Internet accessible network. Use private networks to connect to existing subnets or go a new subnet can be created. Learn more about PowerVS networking [here](#).

In the next chapter, view a video of a PowerVS instance being provisioned.

4.2 Watch a instance being provisioned

In this chapter, watch a video of an IBM Power Systems Virtual Server **instance** being provisioned using the IBM Cloud Portal.

The video has been edited to minimize the viewing time and does not reflect the actual provisioning time of a PowerVS **instance**. The actual provisioning time will vary, but it is typically less than 5 minutes. This video includes audio that explains the steps being taken and things to consider while making choices on options. This video can be utilized for client demonstrations either with or without the audio.

Included in this video is the creation of the SSH keys to secure initial administrative (root) access to the virtual machine. Demonstrating this process to clients should be considered optional depending on your audience.



If the video appears blurry, click the fullscreen or icon.


4.3 Click through demonstration of a service instance being provisioned

Now it is time for to provision a PowerVS instance. Use the click-thru demonstration below to practice provisioning a PowerVS instance. Unlike the video in previous chapter the creation of the SSH keys to secure initial administrative (root) access to the virtual machine is not included in the click-thru demonstration. Refer to the video for talking points if the click-thru demonstration is utilized with clients.

Note, fields that require a text entry (e.g. instance name) are pre-populated in the click-thru demonstration.



Not sure where to click or what to do next? Simply click anywhere on the screen and the spot to click next will be highlighted.

1. Open the link below and then click the play button  to begin the demonstration.

Click-thru demo: [Create an IBM Power Virtual Server Instance](#)

2. Click the **Services and software** link under **Resource summary** on the IBM Cloud Portal dashboard.
3. Click the **PowerVS-L3-service** entry under **Services and Software**.
4. Click the **Create instance+** button.

The next steps refer to the entries in the **General** section of the **Create virtual server instance** form.

1. Click in the **Instance name** text entry field.
2. Click the **Select VM pinning** pull-down.
3. Click **Soft**.
4. Click the **Select SSH key** pull-down.
5. Click **PowerVS-key**.
6. Click the **Continue** button under the **General** section.

The next steps refer to the entries in the **Boot image** section of the **Create virtual server instance** form.

1. Click the **Select the OS** pull-down.
2. Click **Linux**.
3. Click the **Select an image** pull-down.
4. Click **RHEL8-SP6**. Note: **RHEL8-SP6** is short for **Red Hat version 8 service pack 6**.
5. Click the **Select storage tier** pull-down.
6. Click **Tier 3 (3 IPOs / GB)**.
7. Click the **Continue** button under the **Boot image** section.

The next steps refer to the entries in the **Profile** section of the **Create virtual server instance** form.

1. Click the **Machine type** pull-down.
2. Click **s922**.
3. Click the **Continue** button under the **Profile** section.

The next steps refer to the entries in the **Storage volumes** section of the **Create virtual server instance** form.


1. Click the **Create volume +** button.
2. Click in the **Name** text entry field.
3. Click the + icon for the **Number of volumes** field.
4. Toggle the **Shareable** button to **On**.
5. Click the **Create and attach** button.
6. Click the **Continue** button under the **Storage volumes** section.

The next steps refer to the entries in the **Networking** section of the **Create virtual server instance** form.

Note: for this demonstration, the instance will be provisioned using a public network (Internet facing). Using the public network makes demonstrating access to instances easy, but most production deployments of PowerVS will utilize private networks and control access using Direct Link, Virtual Private Network (VPN), or Megaport Software Defined Network (SDN). To learn more about PowerVS networking options, look [here](#).

1. Toggle the **Public networks** button to **On**.
2. Click the **Finish** button under the **Networking** section.
3. Click the **I agree to the Terms and Conditions** checkbox.
4. Click **Create**.

The PowerVS instance is now being provisioned. This process took approximately 45 minutes when creating the TechZone environment. Notice the value under the **Status** column of the **Virtual server instances** table. Once the status changes to an **Active** state, the instance is ready to be accessed.

1. Click the **Refresh** icon  .
2. Click the **RH-vm-1** link in the **Virtual server instances** table.

In the next part of the demonstration script, learn how to use the IBM Cloud Portal to manage PowerVS instances.

5. Part 4 - Managing PowerVS instances

5.1 Introduction

Via the IBM Cloud Portal, clients can control and manage many aspects of their PowerVS deployment.

On a per PowerVS instance (VM) basis, using the IBM Cloud Portal or IBM Cloud Portal application programming interfaces (APIs) clients can:

- Perform an OS shutdown
- Perform an immediate shutdown (without killing processes)
- Restart
- Reset
- Open a console (terminal) to the instance
- Delete the instance
- Capture and export an image of the instance

Note, the options above may vary depending on the operating system of the PowerVS instance.

In addition, some instances can be modified. Depending on core type, operating system, etc., a client can:

- Change VM pinning (soft, hard)
- Change core type (Shared uncapped, Shared capped, Dedicated)
- Change number of cores
- Change amount of RAM
- Change placement group


And it is possible to attach and detach storage volumes and attach an instance to an existing network.

In the next chapter, explore some of the options listed above for managing PowerVS instances.

5.2 Managing instances


Through the IBM Cloud Portal or APIs, administrators with the appropriate IBM Cloud Portal access can manipulate PowerVS instances without needing to directly access the instance operating system.

Using your IBM Cloud credentials and the IBM Cloud portal, complete the following scenario for managing PowerVS instances using the "baking show" demonstration technique. Note, an error message like the one below will be encountered if an attempt is made to complete an action.

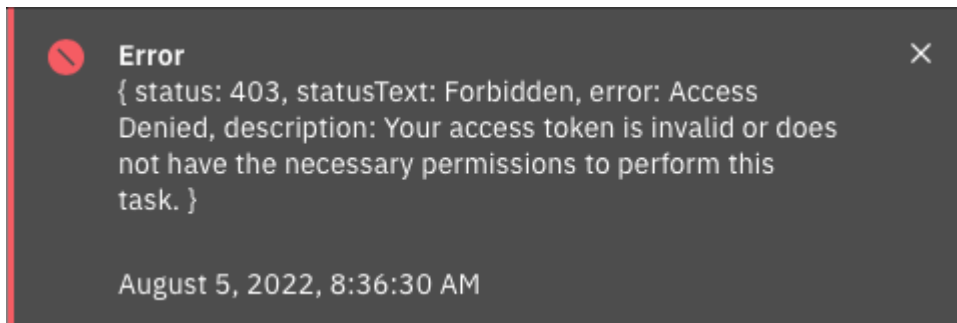


This is normal, as full access to the shared environment is **not** provided. To avoid the error message, simply click the **Cancel** button on the action dialog. If performing a live client demonstration, or for IBM employees completing the Stand and Deliver for the IBM Power Systems Virtual Server - Level 3 badge, tell the audience why the action is being canceled but explain what would typically happen if the action was completed.


1. Open the IBM Cloud Portal: <https://cloud.ibm.com/> and authenticate with your IBM Cloud credentials.
2. Change from your IBM Cloud account to the **2305900 - ITZ - ADHOC03** account.

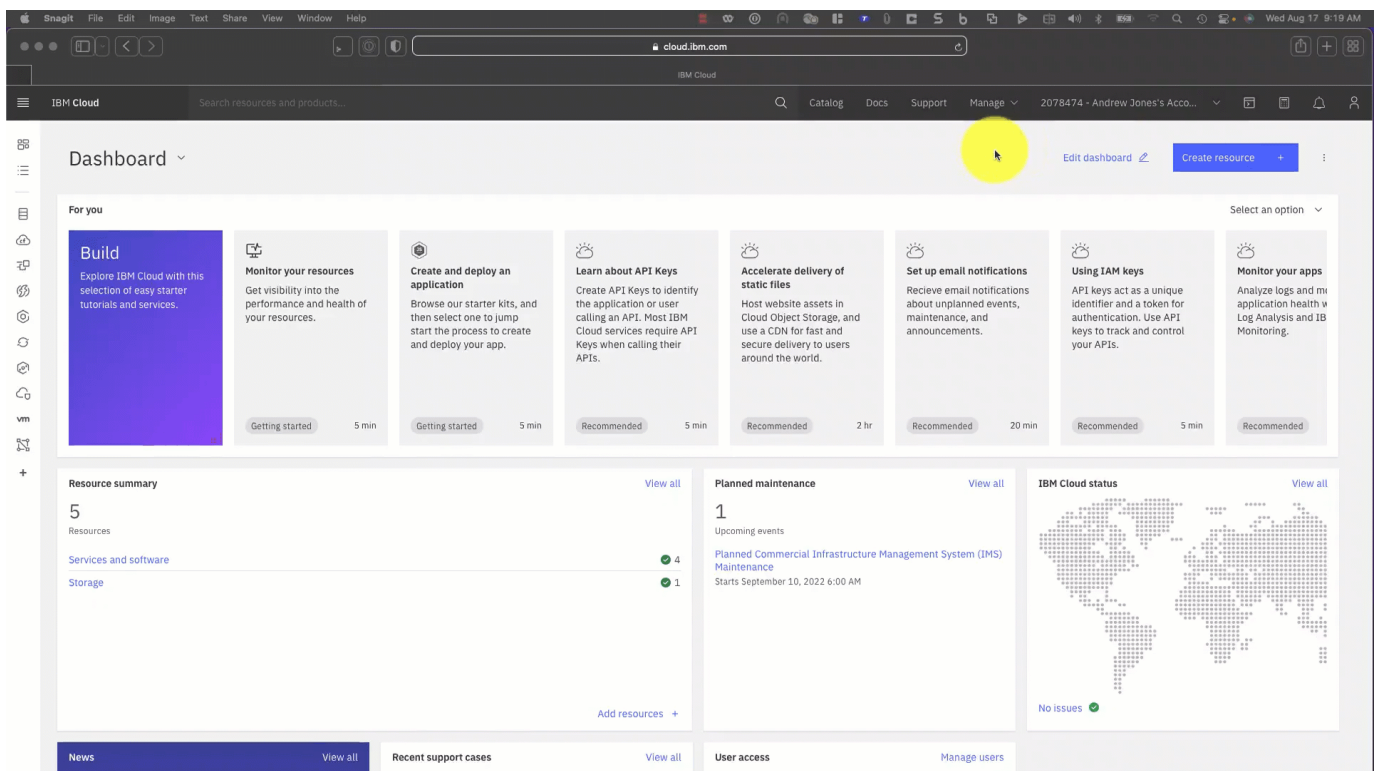




If your browser window is narrow, you may see this icon:  instead of the current account name as shown in the screen capture above.

1. Click **Services and software** under **Resource summary** on the IBM Cloud Dashboard.

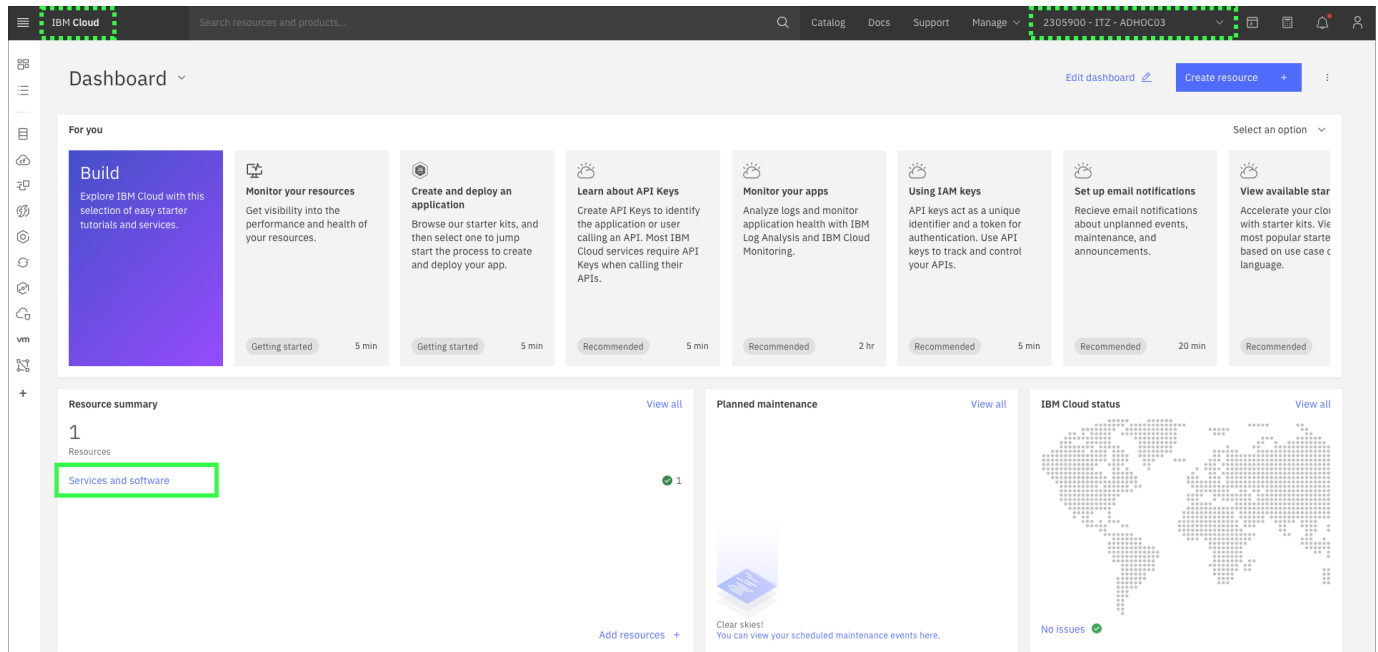


In some cases, after switching accounts you may be prompted with an IBM Cloud new user questionnaire and/or other pop-up windows. Simply cancel these windows. If the IBM Cloud Dashboard is not displayed as seen in the above figure, click the **IBM Cloud** text at top left of the IBM Cloud Portal.


1. Click **PowerVS-L3-service** under **Services and software**.

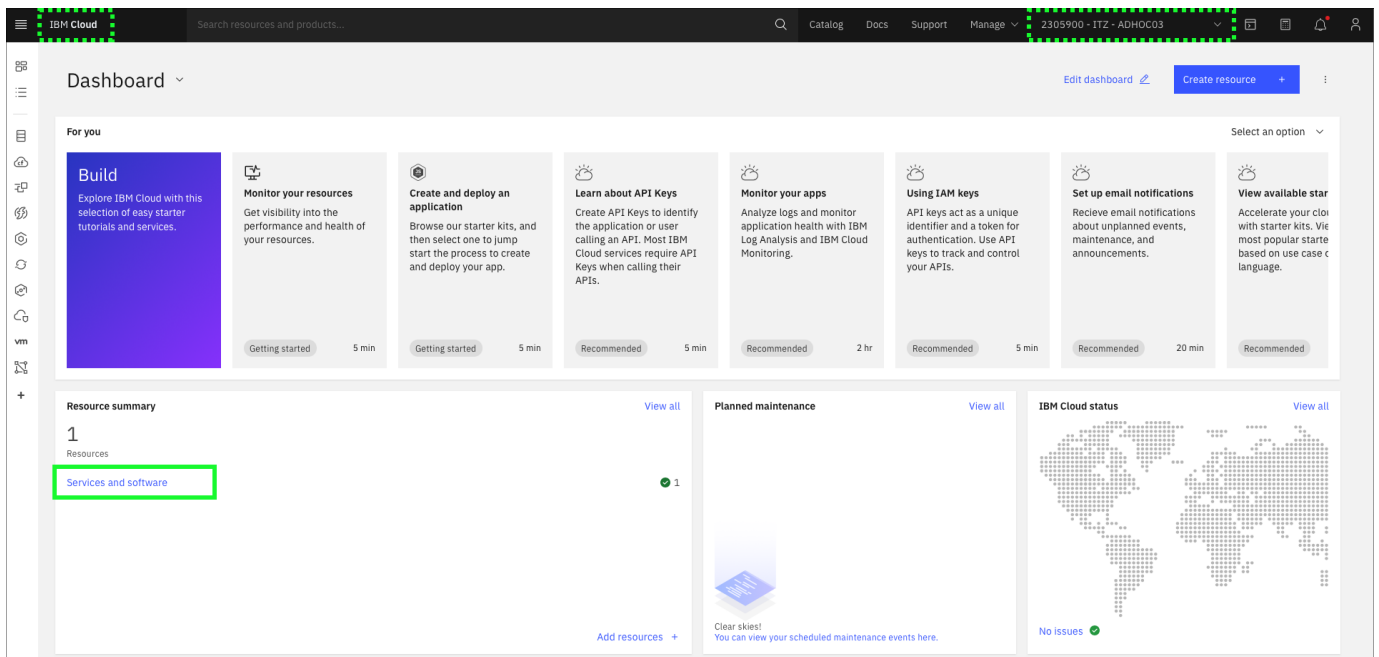

1. Click **AIX-vm-1** in the **Virtual server instances** table.

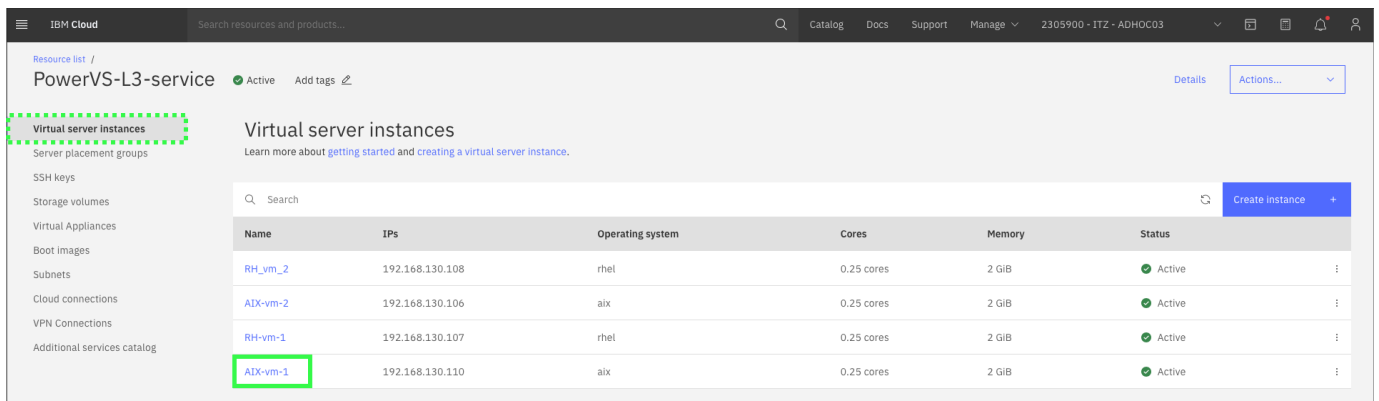

1. Click the **VM actions** pull-down.

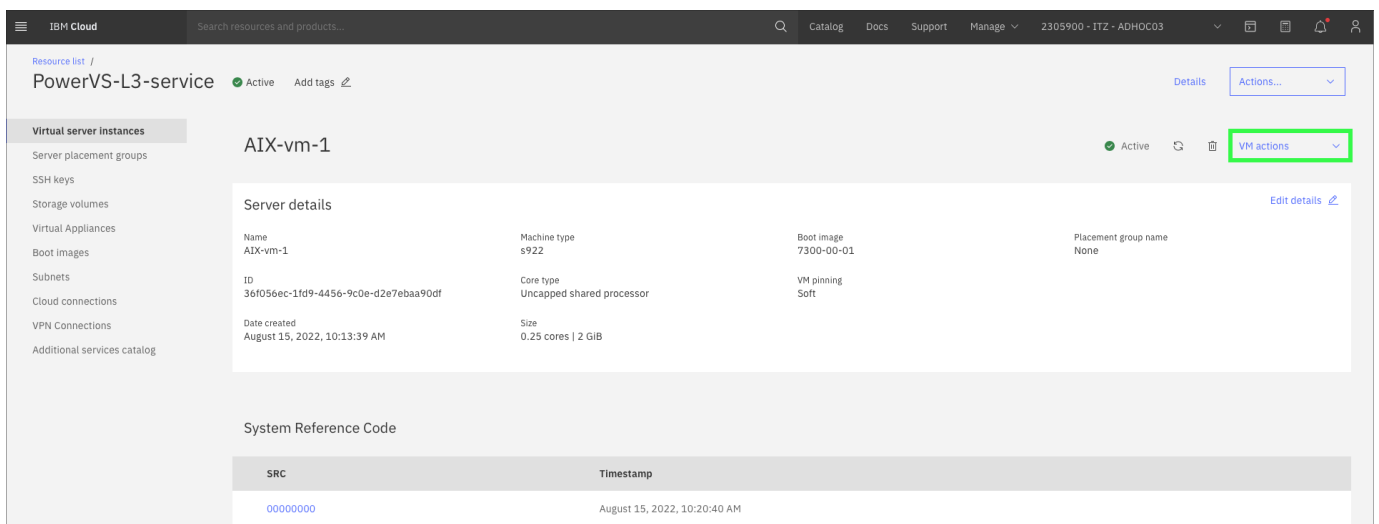

Notice the actions that can be initiated. The actions available will vary depending on the current state of the instance and the operating system of the instance.

1. Click anywhere on the main screen (away from the pop-up menu from step 6).
2. Click the **Edit details** link.

The screenshot shows the IBM Cloud console interface. On the left is a sidebar with navigation links: Resource list, Virtual server instances, Server placement groups, SSH keys, Storage volumes, Virtual Appliances, Boot images, Subnets, Cloud connections, VPN Connections, and Additional services catalog. The main area displays the details for a PowerVS instance named 'AIX-vm-1'. At the top, it shows 'PowerVS-L3-service' with an 'Active' status and an 'Add tags' link. Below this, the 'Server details' section contains a table with the following information:

Server details			
Name	Machine type	Boot image	Placement group name
AIX-vm-1	s922	7300-00-01	None
ID	Core type	VM pinning	
36f056ec-1fd9-4456-9c0e-d2e7ebaa90df	Uncapped shared processor	Soft	
Date created	Size		
August 15, 2022, 10:13:39 AM	0.25 cores 2 GiB		

Below the table is a 'System Reference Code' section with a table:

SRC	Timestamp
00000000	August 15, 2022, 10:20:40 AM

On the right side of the instance details, there are buttons for 'Details', 'Actions...', 'VM actions', and a highlighted 'Edit details' link.

Explore what instance configuration options can be modified. Depending on the running state of the instance, some options may not be possible. Note, making changes to the instance always requires the user to agree to the service terms.

1. Click the **Cancel** link for the **Edit server details** dialog.

The above steps, walked through 2 aspects of managing a single PowerVS instance. Before proceeding, spend a few minutes exploring other aspects of managing PowerVS instances using the IBM Cloud Portal. Detailed steps are not provided, but typically just click the **Cancel** button to return to the instances detail page. Here are a few things to try:

- Click **Attach storage**. Notice how only existing volumes that are marked as **shareable** are displayed.
- Click **Create volume**. Notice it is now possible to add a **Storage volume** using a different tier of storage than that of the instance boot volume.
- Click the **VM actions** drop-down menu and select **Captures and export**. From this dialog, the storage volumes can be exported to either the PowerVS service Image catalog or to IBM Cloud Object Storage.

In the next Part, learn how to access a running PowerVS instance.

6. Part 5 - Accessing PowerVS instances

6.1 Introduction

IBM Power Systems Virtual Server is an Infrastructure as a Service (IaaS) offering. PowerVS allows clients to rapidly provision new instances running AIX, IBM i, or Linux. Ultimately, clients will want to deploy applications on those machines. The applications that clients choose to deploy will vary widely. They may include middleware like databases, third party software products like SAP, or applications they have developed themselves. To install these applications, they need to access the instance and install the software.

In the next chapter, learn how to access a running instance by using secure socket shell (SSH).


6.2 Access an instance

Accessing PowerVS instances will depend on several factors, including the operating system the instance is running and the network connectivity available. Remote login tools like Secure Socket Shell (SSH), telnet, and other terminal emulators can be used to access instances. Note these tools will vary by operating system. PowerVS also provides access to running instances using a web-based console tool. In most cases, clients will deploy PowerVS instances using a secured network like Direct Link or Virtual Private Network (VPN). Learn more about the PowerVS network connectivity options [here](#).

For this exercise, the IBM Cloud Shell will be used. IBM Cloud Shell gives users complete control of their cloud resources, applications and infrastructure, from any web browser. IBM Cloud Shell provides pre-authenticated access to the latest tools and programming languages for cloud-based development, deployment and management of services and applications — all in a secure shell. IBM Cloud Shell is instantly accessible from the IBM Cloud portal.

To quickly demonstrate the value of PowerVS, this demonstration environment and all running instances are provisioned with a public, Internet facing network interface.


Follow the steps below to login to a running PowerVS instance using the IBM Cloud Shell and SSH. You can learn more about SSH and SSH keys [here](#).

1. Open a browser window/tab to the IBM Cloud Portal: `cloud.ibm.com`
2. Switch to the 2305900 - ITZ - ADHOC03 Cloud account.
3. Click the IBM Cloud Shell icon .

The next steps are performed in using the IBM Cloud Shell window that was opened. First, you need to create a SSH public key file using the key provided in your IBM Technology Zone's reservation welcome e-mail. The public key will look like:

```
ssh-rsa abunchofjumbleduplettersandnumbersandspecialcharaters/thatarerandomandhardtounderstandbut!!
provideasecuremeansofconnectingtootherpartingsystems that support ssh/
andpossiblyotherprotocols123478thereisalsoaprivatekeyassociatedwithpublickey+yourprivatekeywaspacedontherunninginstanceaspartoftheibmtehnolgyzoneprovisioningprocess
ibmtechzone@ibmtechzone.ibm.com
```


A private key was also provisioned at the same time and copied to the running PowerVS instances.

In most of the steps below, **copy** the command line using the  icon and paste it into the IBM Cloud Shell using `^+v`, `⌘+v`, or right click and select paste at the prompt in the IBM Cloud Shell.

1. Copy your public key from the TechZone welcome e-mail using your operating system's copy to clipboard capabilities (e.g. highlight the text starting with **ssh-rsa** to the end of the key and then use `^+c` or `⌘+c`.)
2. In the IBM Cloud Shell window, enter the following string, but do not hit enter.

```
cat "
```

1. Paste your public key into the IBM Cloud Shell window using either `^+v` or `⌘+v`.
2. In the IBM Cloud Shell window, after the text you just pasted, enter the following and press enter:

 **ample output**

```
cat "ssh-rsa abunchofjumbleduplettersandnumbersandspecialcharaters/thatarerandomandhardtounderstandbut!!
provideasecuremeansofconnectingtootherpartingsystems that support ssh/
andpossiblyotherprotocols123478thereisalsoaprivatekeyassociatedwithpublickey+yourprivatekeywaspacedontherunninginstanceaspartoftheibmtehnolgyzoneprovisioningprocess+thiswill
ibmtechzone@ibmtechzone.ibm.com" > mykey
```

1. To verify, run the following command in the IBM Cloud Shell.



Example output

```
cat mykey ssh-rsa abunchofjumbleduplettersandnumbersandspecialcharaters/thatarerandomandhardtounderstandbut!!
provideasecuremeansofconectingtoopertingsytesmsthatssupportssh/
andpossiblyotherprotocols123478thereisalsoaprivatekeyassociatedwithpublickey+yourprivatekeywasspacedontherunningsinstanceaspartoftheibmtehnolgyzoneprovisioningprocess+thiswill
ibmtechzone@ibmtechzone.ibm.com
```

1. Using the value of the **UserName** field found in your TechZone reservation, use ssh to log into the AIX-vm-1 instance. You must substitute your UserName in place of the string **UserName** in the command below:



Example output

Your terminal is now accessing the PowerVS instance. Any commands executed at this point will be executed on that instance.

1. Try running a few OS level commands:



Example output



Example output

1. Close the SSH connection by running the **exit** command.



Example output

To explore further, use the following public IP addresses to access the other instances:

Instance name	Instance public IP address
AIX-vm-1	52.117.41.110
AIX-vm-2	52.117.41.106
RH-vm-1	52.117.41.107
RH-vm-2	52.117.41.108

Use the `ssh` command to connect to the other servers. Be sure to replace **UserName** with the **UserName** field found in your TechZone reservation, and **IPaddress** with the instance's public IP address.

That concludes the required Parts of the demonstration script for IBM and Business Partners Sales. You are encouraged to complete Parts 6 and 7, but at this time you may skip to Part 8 for a few next steps.

Technical sellers proceed to the next Part and explore PowerVS server placement groups.

7. Part 6 - Explore other PowerVS topics

7.1 Introduction

In the earlier Parts of this demonstration script, you probably noticed additional features for managing other aspects of PowerVS instances. Below are brief introductions to some of those topics and links to more detailed information for each. Additionally, high level guidance of how to explore these topics using the IBM Cloud Portal are provided.

Learn more about these advanced topics in the next chapters.

7.2 Server placement groups

Server placement groups provide control over the host or server on which a new instance is placed. By using server placement groups, high availability within a data center can be achieved. When a placement group is set with an affinity policy, all instances in that placement group are launched on the same physical server. When a placement group is set with an anti-affinity policy, all instances in that placement group are launched on different servers.

A few facts about server placement groups:

- By default, there is a maximum of 25 server placement groups. A support ticket needs to be raised to go beyond this limit.
- The IBM Cloud Portal for server placement groups can only be used if the cloud account has less than 100 instances. If the account has > 100 instances, the command line interfaces (CLI) or application programming interfaces (API) must be used to create server placement groups.

In the TechZone environment:

- Explore the **Server placement groups** page in the IBM Cloud Portal.

The screenshot displays the IBM Cloud Portal interface for managing server placement groups. On the left, a navigation sidebar lists various resources, with 'Server placement groups' selected and highlighted. The main panel, titled 'Server placement groups', includes a search bar and a table of existing groups. The table has columns for 'Name', 'Number of VMs', and 'Colocation policy'. Two groups are listed: 'AntiAffinityGroup' (2 VMs, Different server policy) and 'AffinityGroup' (2 VMs, Same server policy). A 'Create group' button is located in the top right corner of the main panel.

Name	Number of VMs	Colocation policy
AntiAffinityGroup	2	Different server
AffinityGroup	2	Same server

Learn more about server placement groups [here](#).

Learn more about High Availability (HA) and Disaster Recovery (DR) options in PowerVS [here](#).

7.3 Storage volumes, boot volumes, and images

As mentioned earlier PowerVS supports both Tier 1 and Tier 3 storage volumes. Every instance consists of a boot volume and optionally additional storage volumes. While IBM manages the underlying physical storage, it is the client's responsibility to manage and protect the data on instances.

A few facts about storage volumes: - Storage volumes can be increased in size in 1GB increments, but not decreased. - Storage volume sizes maximums will depend on availability within the selected IBM datacenter. - Storage volumes can be marked as **shareable**. - Storage volumes can be marked as **bootable**. - Affinity and anti-affinity rules can be applied to storage volumes.

A few facts about boot volumes/images:

- Boot volumes can be imported from IBM Cloud Object Storage (COS).
- Boot volumes can be exported to IBM COS.
- Affinity and anti-affinity rules can be applied to boot volumes.
- Boot volumes (and storage volumes) of running instances can be captured (also known as a snapshot) to either the local image catalog associated with the PowerVS service or to IBM COS.
- Captured boot images can be used to provision new instances.

In the TechZone environment:

- Explore the **Storage volumes** page in the IBM Cloud Portal.

Storage volumes

Learn more about [managing storage volumes](#).

Name	Size	Tier	Storage pool	World Wide Name	Shareable	Bootable
AIX-vm-1-0e04a982-0000a2a9-boot-0	25 GB	Tier 3	Tier3-Flash-5	6005076810808481600000000000077A	Off	On
AIX-vm-2-40092e0b-0000a2ac-boot-0	25 GB	Tier 3	Tier3-Flash-4	600507681081029AF8000000000002AAC	Off	On
aix-volume-1	1 GB	Tier 3	Tier3-Flash-5	60050768108084816000000000000779	Off	Off
aix-volume-2	1 GB	Tier 3	Tier3-Flash-4	600507681081029AF8000000000002AAB	Off	Off
RH-vm-1-51bd3244-0000a2af-boot-0	100 GB	Tier 3	Tier3-Flash-5	6005076810808481600000000000077C	Off	On
RH-vm-2-55b3dbdd-0000a2b5-boot-0	100 GB	Tier 3	Tier3-Flash-5	6005076810808481600000000000077E	Off	On
RH-volume-1	1 GB	Tier 3	Tier3-Flash-5	6005076810808481600000000000077B	Off	Off
RH-volume-2	1 GB	Tier 3	Tier3-Flash-5	6005076810808481600000000000077D	Off	Off

- Explore the **Boot images** page in the IBM Cloud Portal.

Boot images

Learn more about [how to import a boot image](#).

Name	OS	Size	Tier	Storage pool	Status
7300-00-01	AIX	25 GB	Tier 3 (3 IOPs / GB)	Tier3-Flash-1	Active
RHEL8-SP6	RHEL	100 GB	Tier 3 (3 IOPs / GB)	Tier3-Flash-1	Active
capture-of-test1-aix	AIX	26 GB	Tier 3 (3 IOPs / GB)	Tier3-Flash-5	Active

Items per page: 10 1-3 of 3 items 1 1 of 1 page

Learn more about storage volumes [here](#).

Learn how to import a boot image [here](#).

7.4 Subnets, Cloud connections, and VPN connections

A few facts about subnets:

- A Classless inter-domain routing (CIDR) must be specified when creating a subnet.
- The first IP address in the CIDR is always reserved for the gateway in all data centers.
- The second and third IP addresses are reserved for gateway high availability (HA) in only the PowerVS colocation in the Washington, DC 04 datacenter (WDC04).

A few facts about Cloud connections:

- Cloud Connect (Managed Networking Services using Megaport) is available only in USA.
- A maximum of 2 connections can be created.
- A subnet must be created prior to creating a Cloud connection.

A few facts about VPN connections:

- A maximum of 4 connections can be created.
- A subnet must be created prior to creating a Cloud connection.

In the TechZone environment:

- Explore the **Subnets** page in the IBM Cloud Portal.

Resource list / PowerVS-service Active Add tags

Virtual server instances
Server placement groups
SSH keys
Storage volumes
Virtual Appliances
Boot images
Subnets
Cloud connections
VPN Connections
Additional services catalog

Subnets

Learn how to [configure and add a private network](#).

Search

Name	Type	IP ranges	VLAN ID
public-192.168.129.26 - 192.168.129.30	Public	192.168.129.26 — 192.168.129.30	2031

Items per page: 10 1–1 of 1 item

1 1 of 1 page

Create subnet +

- Explore the **Cloud connections** page in the IBM Cloud Portal.

Resource list / PowerVS-service Active Add tags

Virtual server instances
Server placement groups
SSH keys
Storage volumes
Virtual Appliances
Boot images
Subnets
Cloud connections
VPN Connections
Additional services catalog

Cloud connections

Cloud connections provide connectivity to IBM Cloud resources. [Learn more](#) about connecting to IBM Cloud. Only two connections can be created.

Search

Connection name	Connection ID	Speed	Transit gateway	Status
No Cloud connections have been provisioned. To provision, click "Create connection"				

Create connection +

- Explore the **VPN connections** page in the IBM Cloud Portal.

Resource list / PowerVS-service Active Add tags

Virtual server instances
Server placement groups
SSH keys
Storage volumes
Virtual Appliances
Boot images
Subnets
Cloud connections
VPN Connections
Additional services catalog

VPN connections

Learn how to [configure a VPN connection](#). A maximum of 4 connections can be created.

VPN connections IKE policies IPsec policies

Search

Name	Peer gateway address	Peer subnets	Status
The VPN connections list is empty To create VPN connection, click "Create VPN connection".			

Create VPN connection +

Learn more about subnets [here](#).

Learn more about Cloud connections [here](#).

Learn how to configure a VPN connection [here](#).

7.5 Additional services catalog

Complimentary products and services are available for IBM Power Systems Virtual Server.

Using the TechZone environment:

- Explore the **Additional services catalog** page of the PowerVS service.

The screenshot displays the 'Additional products and services' catalog for the PowerVS-service. The interface includes a left-hand navigation menu with categories such as 'Virtual server instances', 'Server placement groups', 'SSH keys', 'Storage volumes', 'Virtual Appliances', 'Boot images', 'Subnets', 'Cloud connections', and 'VPN Connections'. The 'Additional services catalog' item is highlighted in the menu. The main content area is titled 'Additional products and services' and features a grid of six service cards, each enclosed in a green dashed border. The cards are: 1) 'PowerSC' (AIX, Linux, IBM i, Security) - A security and compliance solution optimized for virtualized environments on Power Systems servers. 2) 'Managed BaaS by Kyndryl' (3rd Party, AIX, Linux, Backup) - Increase data protection, mitigate information risk, and ensure access to critical data. 3) 'OpenShift on PowerVS' (Linux, Hybrid cloud) - Leverage RedHat OpenShift's platform agnostic installer to quickly deploy OpenShift clusters on IBM Power Systems Infrastructure as a Service (IaaS). 4) 'Veeam' (AIX, Networking, Backup) - Predictable backup and fast recovery for your entire hybrid cloud that enables you to more easily move on-premises workloads and backups to the cloud for disaster recovery. 5) 'Spectrum Protect' (AIX, Linux, Security, Backup) - Provides comprehensive data resilience for virtual environments and a wide range of applications. 6) 'PowerHA for AIX' (AIX, HA/DR) - Deploy a HA solution that addresses both storage and high availability and offers robust performance. Each card includes a 'Learn more' link with a right-pointing arrow. The top right of the main area contains 'Details' and 'Actions...' buttons.

In the next Part, learn about the PowerVS command line interfaces (CLI).

8. Part 7 - Use the PowerVS command line interfaces (CLI)

8.1 Introduction

IBM Power Systems Virtual Server provides command line interfaces (CLI) as a plugin to the IBM Cloud CLI. The PowerVS CLIs provide system administrators the ability to programmatically manage their PowerVS environment without having to use the IBM Cloud Portal.

In the next chapter, use the IBM Cloud Shell to learn more about the PowerVS CLIs.

8.2 Command line exercises

In this exercise, explore several of the PowerVS CLIs. It is important to remember you are using a shared environment and have limited administrative permissions. The CLIs being executed here are command that only require "read" access to the environment. CLIs also exist to create and modify the PowerVS resources, you will just not have sufficient permissions to execute those commands in the shared environment. Attempting to do so will result in an error.

For this exercise, the IBM Cloud Shell will be used. IBM Cloud Shell gives users complete control of their cloud resources, applications and infrastructure, from any web browser. IBM Cloud Shell provides pre-authenticated access to the latest tools and programming languages for cloud-based development, deployment and management of services and applications — all in a secure shell. IBM Cloud Shell is instantly accessible from the IBM Cloud portal. The IBM command line interface (CLI) along with all the IBM Cloud CLI plugins are pre-installed in IBM Cloud Shell, including the PowerVS CLIs.

It is also possible to install the IBM Cloud CLIs and PowerVS CLI plugin other systems, like personal desktops, development servers, etc. To learn more about installing the PowerVS CLI locally click [here](#).

To get started, first open the IBM Cloud Shell from the IBM Cloud portal:

1. Open a browser window/tab to the IBM Cloud Portal: <https://cloud.ibm.com>.
2. Switch to the 2305900 - ITZ - ADHOC03 Cloud account.
3. Click the IBM Cloud Shell icon 

To be written

9. Part 8 - Next steps

9.1 Next steps

In this demonstration guide, you learned how easy it is to provision resources with IBM Power Systems Virtual Server (PowerVS). You also learned some of the basics for managing PowerVS resources. But there is still more to learn about PowerVS. Links to specific PowerVS topics were provided throughout this demonstration guide. If you haven't already, take the time to read the [PowerVS documentation](#) to learn the full capabilities of the offering.

Finally, remember to complete the IBM Power Systems Virtual Server - Level 3 learning plan.

IBM Sales and **IBM Technical sales** must complete a Stand and Deliver exercise to demonstrate to your manager your newly learned ability to demonstrate PowerVS. Be sure to refer to the evaluation rubric in the learning plan when preparing your Stand and Deliver demonstration.

Business Partners must pass the PowerVS quiz in learn.ibm.com. Remember, you will want to take the quiz while you have access to the TechZone environment. The BP quiz questions verify your use of the demonstration environment and not necessarily your knowledge of PowerVS.