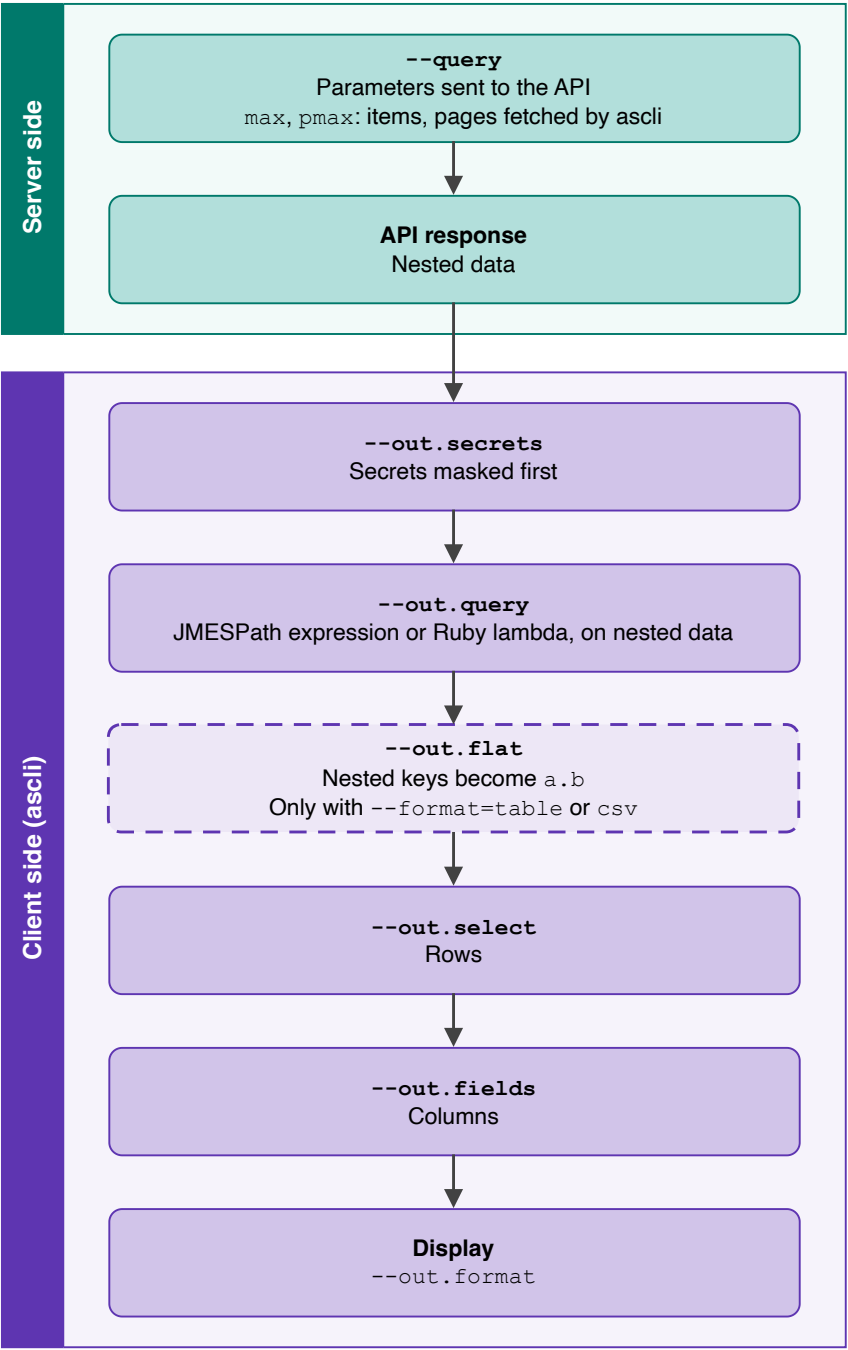
Server side
--query
Parameters sent to the API
max, pmax: items, pages fetched by ascli
API response
Nested data
Client side (ascli)
--out.secrets
Secrets masked first
--out.query
JMESPath expression or Ruby lambda, on nested data
--out.flat
Nested keys become a.b
Only with --format=table or csv
--out.select
Rows
--out.fields
Columns
Display
--out.format