



Introduction to Blobs and using the OpenCV Blobs Library

Mr. John Stastny
SPAWAR Systems Center, Pacific
Phone: 619-553-4564
Email: john.stastny@navy.mil

Mr. Bryan Bagnall
SPAWAR Systems Center, Pacific
Phone: 619-553-4061
Email: bryan.bagnall@navy.mil


Mr. Lucas Keenan
SPAWAR Systems Center, Pacific
Phone: 619-553-3686
Email: lucas.keenan@navy.mil

Overview of Talk

- ▼ Overview of Blob extraction
- ▼ Introduction to Blob Library
- ▼ Example: Using Blobs
- ▼ Conclusions

Overview of Blob Extraction

- ▼ Identify regions in an image that differ in properties like color or brightness
- ▼ Detect connected regions in binary images
 - ▼ Usually done after thresholding
- ▼ Many different and more complex algorithms
 - ▼ We're going to discuss the two-pass method

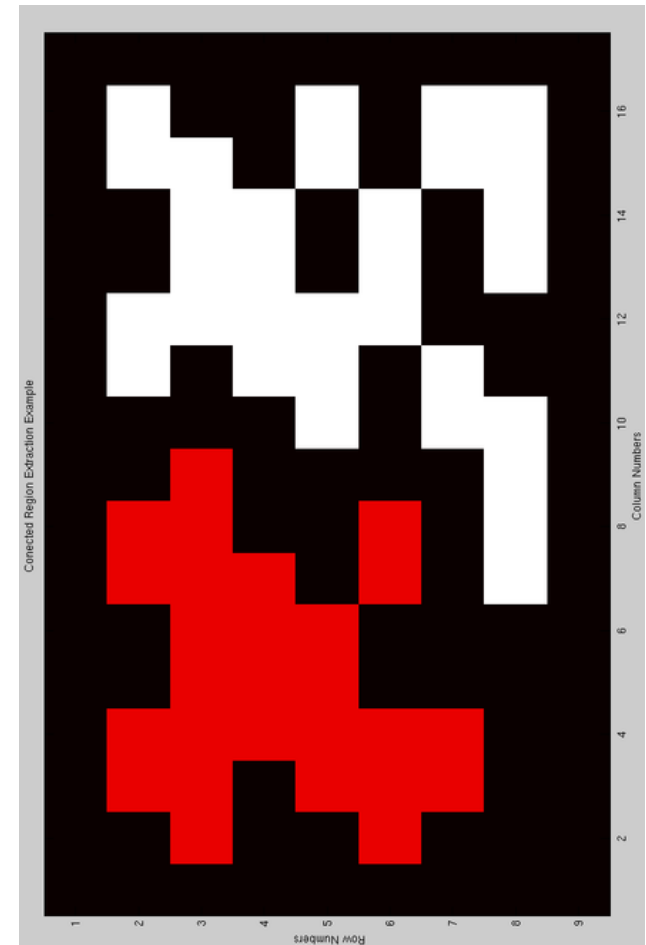



Blob Extraction – Two-pass algorithm

- ▼ Relatively easy to understand and implement
- ▼ First pass records equivalences and assigns temporary labels
- ▼ Second pass replaces temporary labels with the label of its equivalence class
- ▼ Connectivity checks are carried out by checking the labels of pixels that are North-East, North, North-West, and West of the current pixel
- ▼ Four conditions

Blob Extraction – Two-pass algorithm


- ▼ 1st condition – Does the pixel to the left (west) have the same value?
 - ▼ Yes → Same region, assign the same label to the current pixel
 - ▼ No → Check next condition

- ▼ 2nd condition – Do the pixels to the north and west of the current pixel have the same value but not the same label?
 - ▼ Yes → We know that the north and West pixels belong to the same region and must be merged, assign the current pixel the minimum of the north and west labels and record their equivalence relationship
 - ▼ No → Check next condition

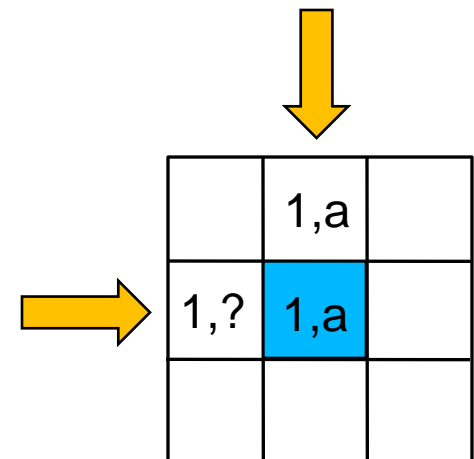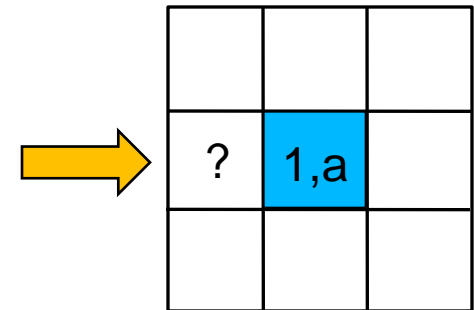


Blob Extraction – Two-pass algorithm

- ▼ 3rd condition – Does the pixel to the left (west) have a different value and the one to the north the same value?
 - ▼ Yes → Assign the label of the north pixel to the current pixel
 - ▼ No → Check next condition

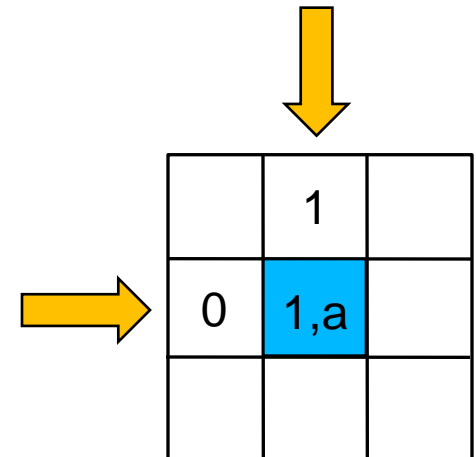


- ▼ 4th condition – Do the pixel's north and west neighbors have different pixel values?
 - ▼ Yes → Create a new label id and assign it to the current pixel

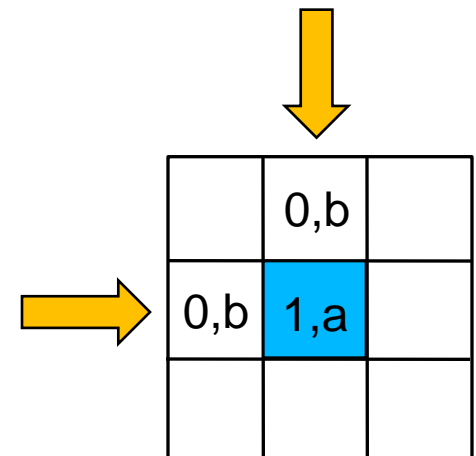

Blob Extraction – Two-pass algorithm


- ▼ After the first pass labels are generated for each of the pixels according to the four conditions and the equivalence tables are generated

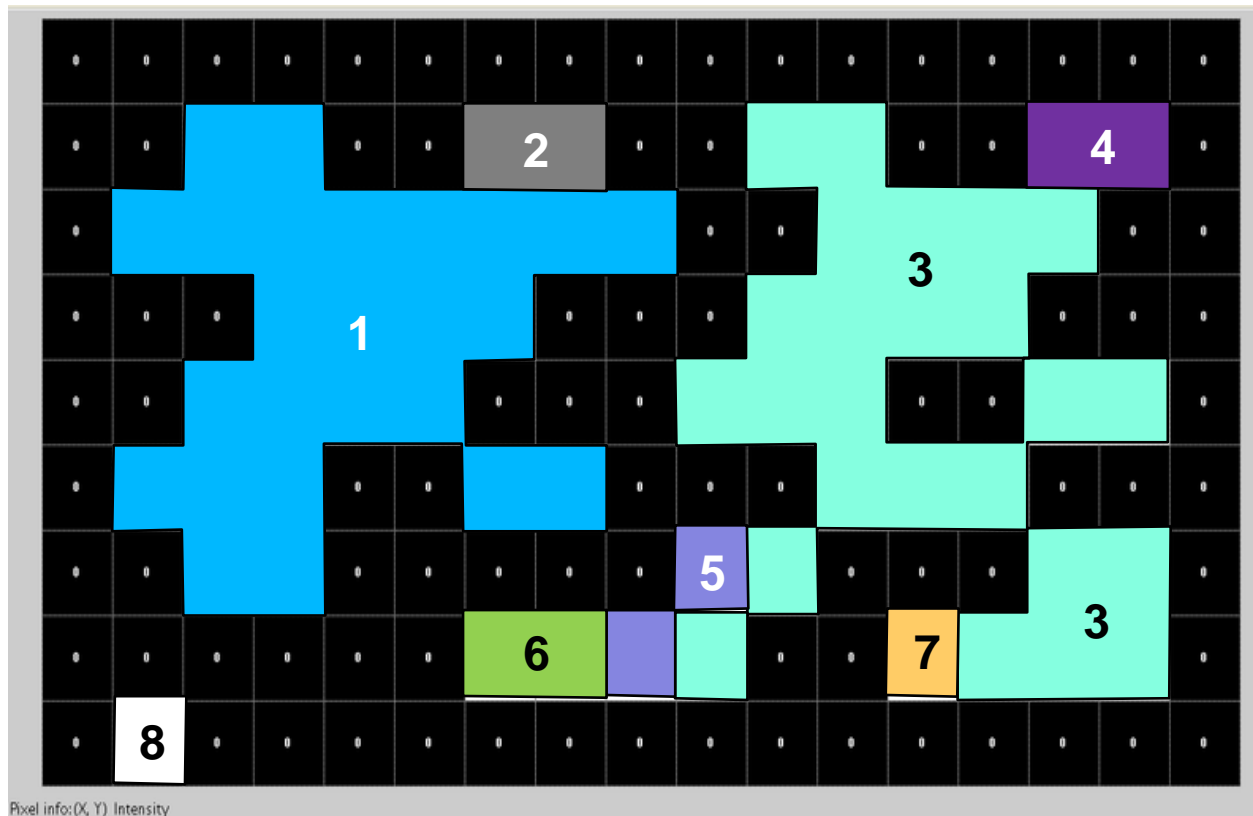

Set ID	Equivalent Labels
1	1,2
2	1,2
3	3,4,5,6,7
4	3,4,5,6,7
5	3,4,5,6,7
6	3,4,5,6,7
7	3,4,5,6,7

Blob Extraction – Two-pass algorithm

- ▼ On the second pass the labels are merged

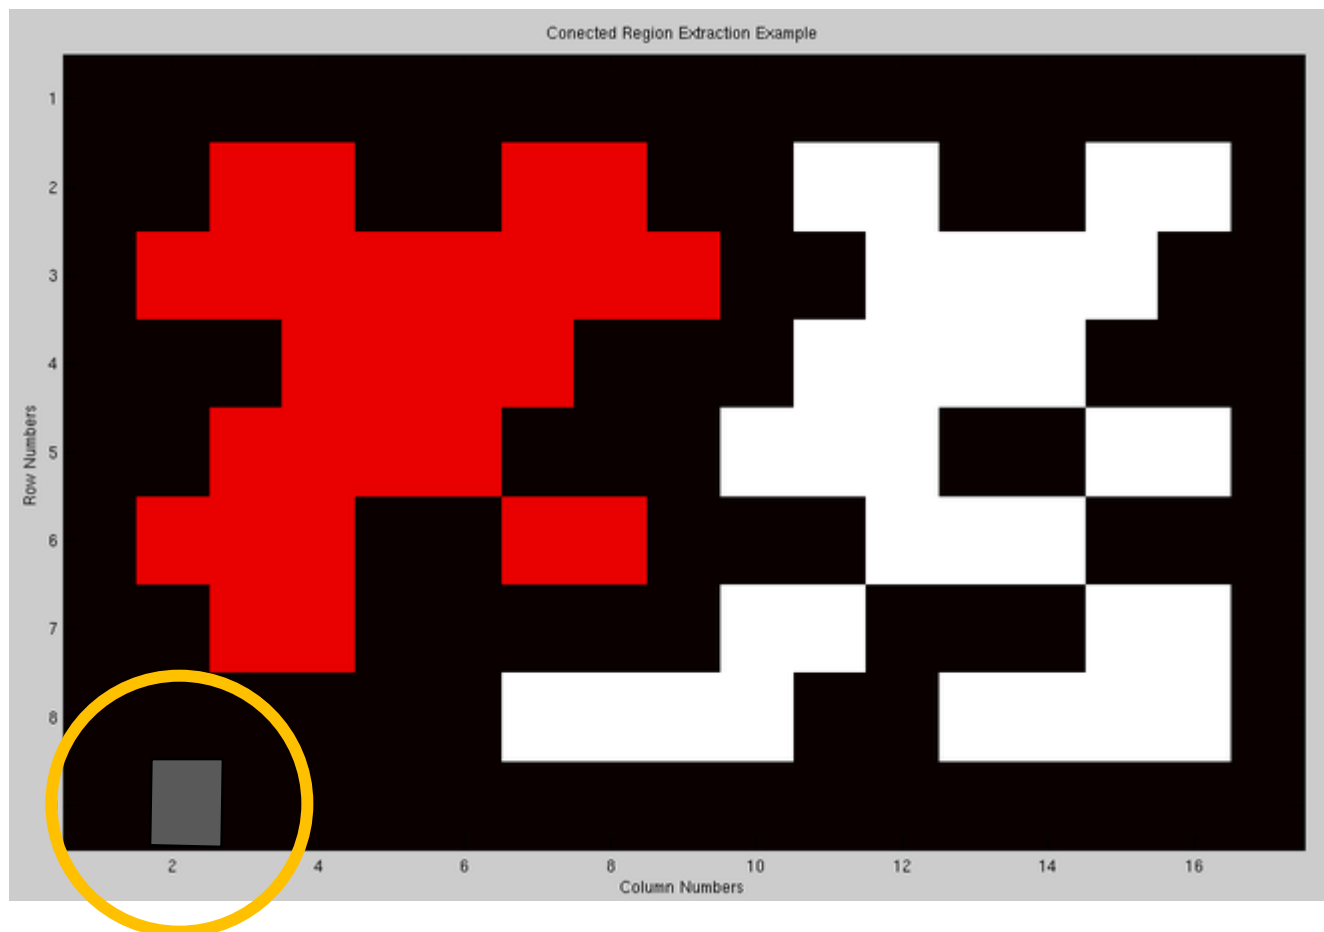

Blob Extraction – Two-pass algorithm


- ▼ How do we remove small specks and keep the blobs?
- ▼ ..\OpenCVThresholdAndExtractBlobs.cpp

```
blobs.Filter(blobs, B_INCLUDE, CBlobGetArea(), B_GREATER, 100);  
blobs.Filter(blobs, B_INCLUDE, CBlobGetMean(), B_GREATER, 1);
```

- ▼ This allows us to decide how “big” a significant blob is

Blob Extraction – Two-pass algorithm

- ▼ Now only large blobs remain

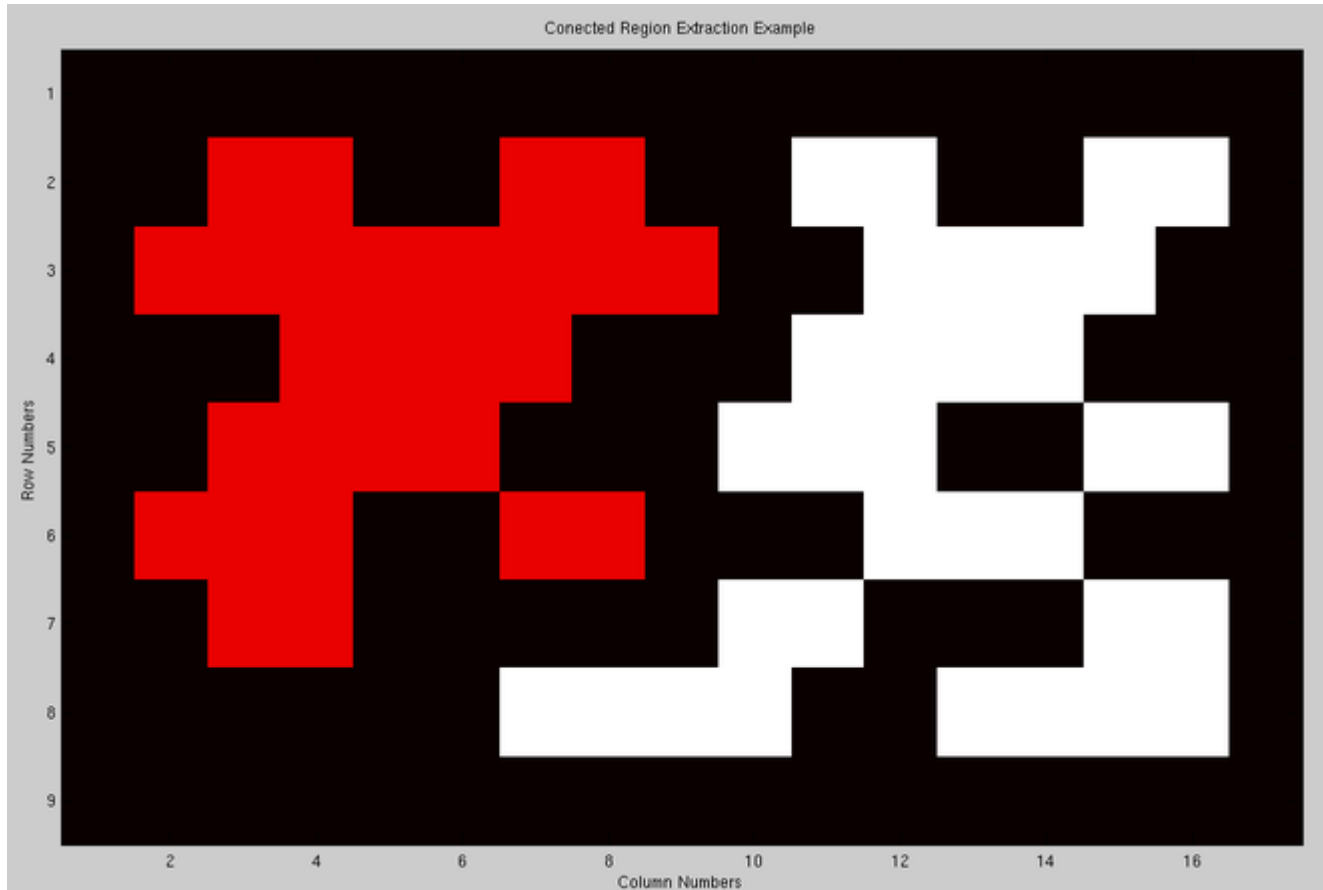

Blob Extraction – Two-pass algorithm

- ▼ 1st condition – Does the pixel to the left (west) have the same value?
 - ▼ Yes → Same region, assign the same label to the current pixel
 - ▼ No → Check next condition
- ▼ 2nd condition – Do the pixels to the north and west of the current pixel have the same value but not the same label?
 - ▼ Yes → We know that the north and West pixels belong to the same region and must be merged, assign the current pixel the minimum of the north and west labels and record their equivalence relationship
 - ▼ No → Check next condition
- ▼ 3rd condition – Does the pixel to the left (west) have a different value and the one to the north the same value?
 - ▼ Yes → Assign the label of the north pixel to the current pixel
 - ▼ No → Check next condition
- ▼ 4th condition – Do the pixel's north and west neighbors have different pixel values?
 - ▼ Yes → Create a new label id and assign it to the current pixel

Introduction to Blobs Library for OpenCV

- ▼ Blobs Library is a plugin for OpenCV.
 - ▼ <http://opencv.willowgarage.com/wiki/cvBlobsLib>
- ▼ Replicates functionality of Matlab's BWLabel and regionprops functions
- ▼ Takes binary image, and finds all of the blobs.
 - Blob is a “connected object”
- ▼ For each blob, finds, length, width, and orientation
- ▼ Can extract the sub-image corresponding to the blob area
- ▼ Can filter out blobs below or above a certain
 - 1) Area
 - 2) Mean value


Example: Using the blobs library with OpenCV

- ▼ Now we'll go through an example using OpenCV and the blobs library.
- The code is in the folder:
..\03_OpenCV_and_blobs\examples\Blobs_examples
 \OpenCVThresholdAndExtractBlobs


Example: Using the blobs library with OpenCV

- ▼ Modify the *.bat files so that the paths are correct
build_cmake_project_vs10.bat
cmake_arguments.bat
- ▼ Run build_cmake_project_vs10.bat and build the project
- ▼ Compile the project in Visual C++
- ▼ Run ..\Debug\runProject.bat

Blob Example Results

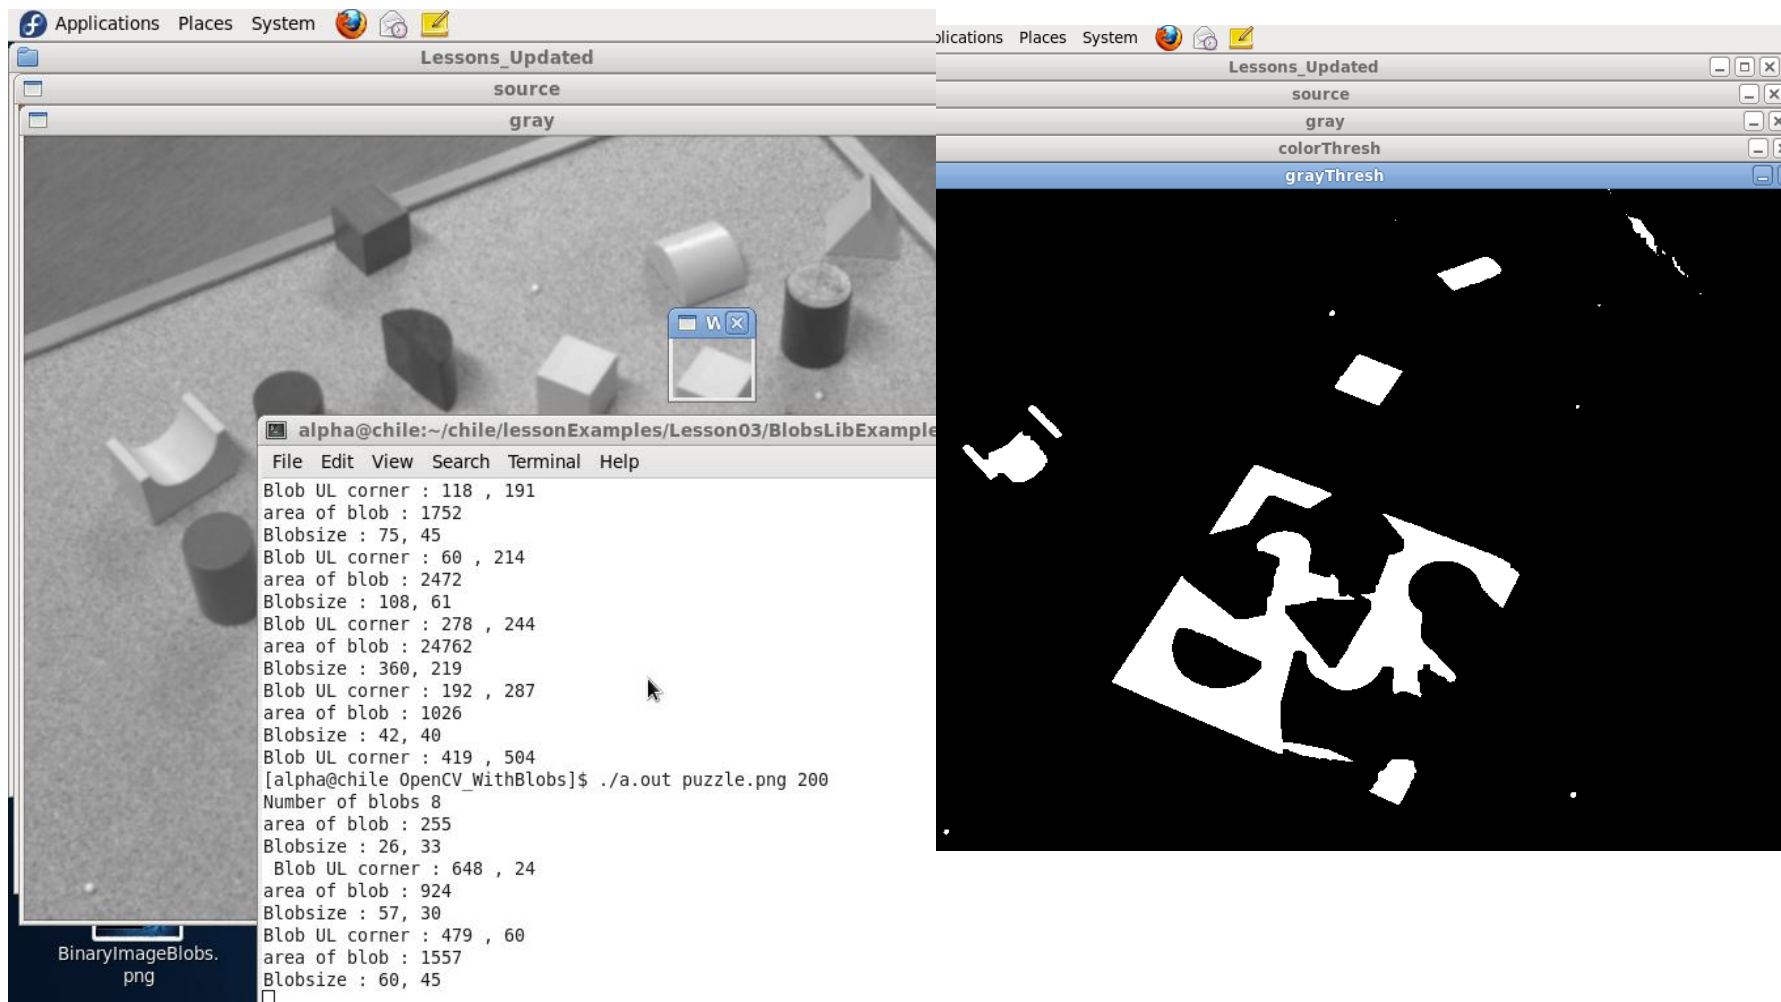

Another Sample Image

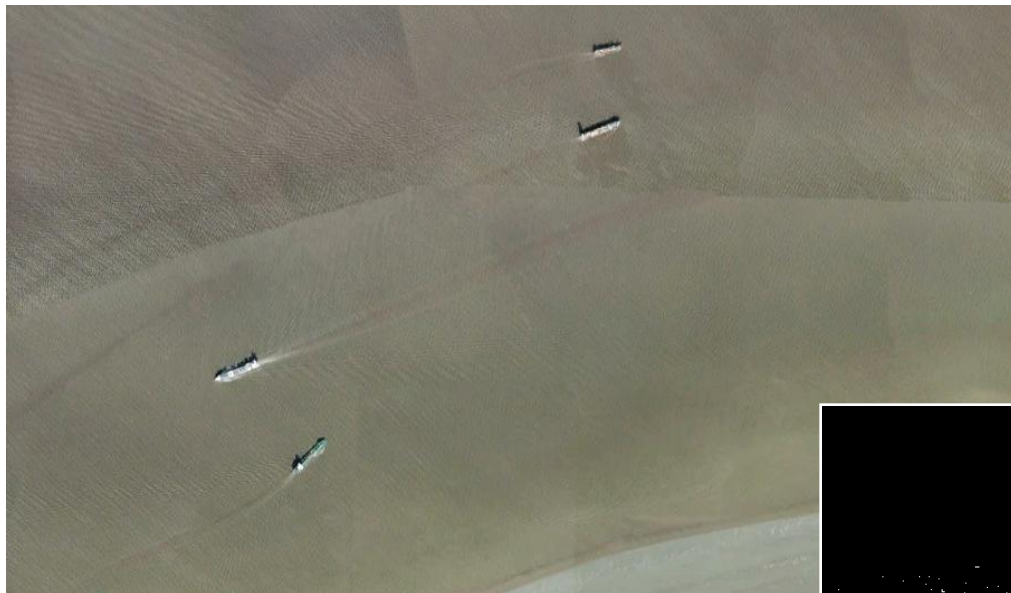

This simple algorithm can work with some “easy” images

