

# Department of Education

SCHOOLS DIVISION OFFICE OF NUEVA ECIJA

### LEARNING ACTIVITY SHEET SPECIAL PROGRAM IN ICT 10 ADVANCED PROGRAMMING

Fourth Quarter, Weeks 1 - 2

# **VB.Net - Advanced Form**

# Adding Menus and Sub Menus in an Application

Traditionally, the *Menu*, *MainMenu*, *ContextMenu*, and *MenuItem* classes were used for adding menus, sub-menus, and context menus in a Windows application.

Now, the MenuStrip, the ToolStripMenuItem, ToolStripDropDown, and ToolStripDropDownMenu controls replace and add functionality to the Menu-related controls of previous versions. However, the old control classes are retained for both backward compatibility and future use.

Let us create a typical windows main menu bar and sub-menus using the old version controls first since these controls are still much used in old applications.

Following is an example, which shows how we create a menu bar with menu items: File, Edit, View, and Project. The File menu has the sub-menus New, Open, and Save.

### Let's double click on the Form and put the following code in the opened window.


```
Public Class Form1
   Private Sub Form1 Load(sender As Object, e As EventArgs) Handles
MyBase.Load
      'defining the main menu bar
      Dim mnuBar As New MainMenu()
      'defining the menu items for the main menu bar
      Dim myMenuItemFile As New MenuItem("&File")
      Dim myMenuItemEdit As New MenuItem("&Edit")
      Dim myMenuItemView As New MenuItem("&View")
      Dim myMenuItemProject As New MenuItem("&Project")
      'adding the menu items to the main menu bar
mnuBar.MenuItems.Add (myMenuItemFile)
mnuBar.MenuItems.Add (myMenuItemEdit)
mnuBar.MenuItems.Add (myMenuItemView)
      mnuBar.MenuItems.Add (myMenuItemProject)
     ' defining some sub menus
      Dim myMenuItemNew As New MenuItem ("&New")
      Dim myMenuItemOpen As New MenuItem("&Open")
      Dim myMenuItemSave As New MenuItem("&Save")
      'add sub menus to the File menu
myMenuItemFile.MenuItems.Add (myMenuItemNew)
```

```
myMenuItemFile.MenuItems.Add(myMenuItemOpen)
myMenuItemFile.MenuItems.Add(myMenuItemSave)

    'add the main menu to the form
    Me.Menu = mnuBar

    ' Set the caption bar text of the form.
    Me.Text = "tutorialspoint.com"
    End Sub
End Class
```

When the above code is executed and run using the Start button available at the Microsoft Visual Studio toolbar, it will show the following window –



Windows Forms contain a rich set of classes for creating your custom menus with a modern appearance, look and feel. The **MenuStrip**, **ToolStripMenuItem**, **ContextMenuStrip** controls are used to create menu bars and context menus efficiently. Click the following links to check their details –

Sr.No.	Control & Description
1	MenuStrip It provides a menu system for a form.
2	ToolStripMenuItem It represents a selectable option displayed on a <b>MenuStrip</b> or <b>ContextMenuStrip</b> . The ToolStripMenuItem control replaces and adds functionality to the MenuItem control of previous versions.
3	ContextMenuStrip It represents a shortcut menu.

Adding the Cut, Copy and Paste Functionalities in a Form

The methods exposed by the **ClipBoard** class are used for adding the cut, copy and paste functionalities in an application. The ClipBoard class provides methods to place data on and retrieve data from the system Clipboard.

It has the following commonly used methods -

Sr.No.	Method Name & Description
1	Clear Removes all data from the Clipboard.
2	<b>ContainsData</b> Indicates whether there is data on the Clipboard that is in the specified format or can be converted to that format.
3	<b>ContainsImage</b> Indicates whether there is data on the Clipboard that is in the Bitmap format or can be converted to that format.


4	<b>ContainsText</b> Indicates whether there is data on the Clipboard in the Text or UnicodeText format, depending on the operating system.				
5	GetData Retrieves data from the Clipboard in the specified format.				
6	GetDataObject Retrieves the data that is currently on the system Clipboard.				
7	GetImage Retrieves an image from the Clipboard.				
8	<b>GetText</b> Retrieves text data from the Clipboard in the Text or UnicodeText format, depending on the operating system.				
9	<b>GetText(TextDataFormat)</b> Retrieves text data from the Clipboard in the format indicated by the specified TextDataFormat value.				
10	SetData Clears the Clipboard and then adds data in the specified format.				
11	SetText(String) Clears the Clipboard and then adds text data in the Text or UnicodeText format, depending on the operating system.				

Following is an example, which shows how we cut, copy and paste data using methods of the Clipboard class. Take the following steps –

- Add a rich text box control and three button controls on the form.
- Change the text property of the buttons to Cut, Copy and Paste, respectively.
- Double click on the buttons to add the following code in the code editor –

```
Public Class Form1
   Private Sub Form1 Load(sender As Object, e As EventArgs)
    Handles MyBase.Load
      ' Set the caption bar text of the form.
     Me.Text = "tutorialspoint.com"
   End Sub
   Private Sub Button1 Click(sender As Object, e As EventArgs)
      Handles Button1.Click
      Clipboard.SetDataObject(RichTextBox1.SelectedText)
      RichTextBox1.SelectedText = ""
   End Sub
   Private Sub Button2 Click(sender As Object, e As EventArgs)
      Handles Button2.Click
      Clipboard.SetDataObject(RichTextBox1.SelectedText)
   End Sub
  Private Sub Button3 Click(sender As Object, e As EventArgs)
    Handles Button3.Click
      Dim iData As DataObject
      iData = Clipboard.GetDataObject()
```

When the above code is executed and run using **Start** button available at the Microsoft Visual Studio tool bar, it will show the following window –




Enter some text and check how the buttons work.

# Anchoring and Docking Controls in a Form


**Anchoring** allows you to set an anchor position for a control to the edges of its container control, for example, the form. The **Anchor** property of the Control class allows you to set values of this property. The Anchor property gets or sets the edges of the container to which a control is bound and determines how a control is resized with its parent.

When you anchor a control to a form, the control maintains its distance from the edges of the form and its anchored position, when the form is resized.

You can set the Anchor property values of control from the Properties window –

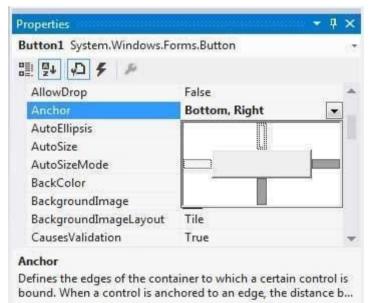

For example, let us add a Button control on a form and set its anchor property to Bottom, Right. Run this form to see the original position of the Button control with respect to the form.




Now, when you stretch the form, the distance between the Button and the bottom right corner of the form remains same.



**Docking** of control means docking it to one of the edges of its container. In docking, the control fills a certain area of the container.

The **Dock** property of the Control class does this. The Dock property gets or sets which control borders are docked to its parent control and determines how a control is resized with its parent. You can set the Dock property values of control from the Properties window –



For example, let us add a Button control on a form and set its Dock property to Bottom. Run this form to see the original position of the Button control with respect to the form.



Now, when you stretch the form, the Button resizes itself with the form.



### **Modal Forms**

**Modal Forms** are those forms that need to be closed or hidden before you can continue working with the rest of the application. All dialog boxes are modal forms. A MessageBox is also a modal form.

You can call a modal form in two ways -

- Calling the ShowDialog method
- Calling the Show method

Let us take up an example in which we will create a modal form, a dialog box. Take the following steps –

 Add a form, Form1 to your application, and add two labels and a Button control to Form1 • Change the text properties of the first label and the button to 'Welcome to Tutorials Point' and 'Enter your Name', respectively. Keep the text properties of the second label as blank.



- · Add a new Windows Form, Form2, and add two buttons, one label, and a text box to Form2.
- Change the text properties of the buttons to OK and Cancel, respectively. Change the text properties of the label to 'Enter your name:'.
- Set the FormBorderStyle property of Form2 to FixedDialog, for giving it a dialog box border.
- Set the control box property of Form2 to False.
- Set the ShowInTaskbar property of Form2 to False.
- Set the *DialogResult* property of the OK button to OK and the Cancel button to Cancel.




### Add the following code snippets in the Form2 Load method of Form2 -

```
Private Sub Form2_Load(sender As Object, e As EventArgs) _
    Handles MyBase.Load
    AcceptButton = Button1
    CancelButton = Button2 End Sub
```

### Add the following code snippets in the Button1 Click method of Form1 -

```
Private Sub Button1_Click(sender As Object, e As EventArgs) _
    Handles Button1.Click
    Dim frmSecond As Form2 = New Form2()

If frmSecond.ShowDialog() = DialogResult.OK Then
    Label2.Text = frmSecond.TextBox1.Text
End If
End Sub
```

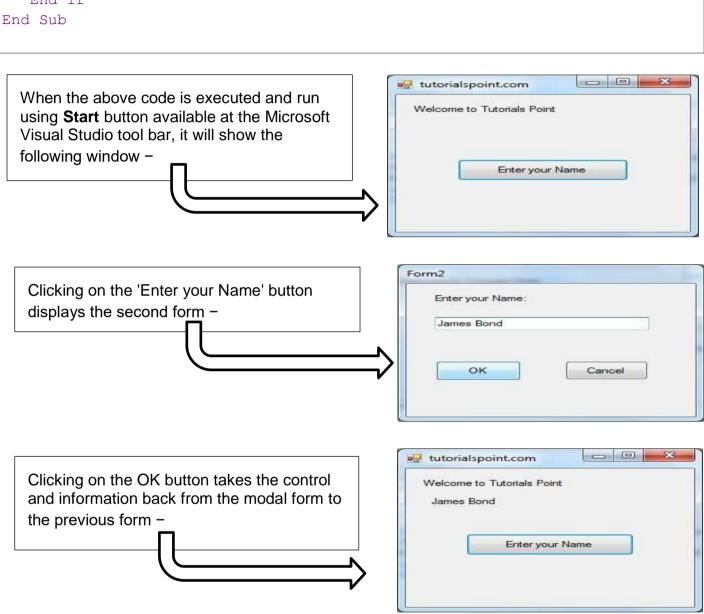

### LEARNING COMPETENCIES

- · Adding menus and sub-menus in an application
- · Adding the cut, copy and paste functionalities in a form
- · Anchoring and docking controls in a form
- Define Modal forms

**ACTIVITIES:** Write your answer in a one whole sheet of paper

**ACTIVITY 1** Define modal form

#### **ACTIVITY 2**

Identification; Read the statement carefully. Select your answer from the box below, and write your answer in a one whole sheet of paper.

Docking Anchoring	SetData	Modal Forms	Clear
-------------------	---------	-------------	-------

- 1. It allows you to set an anchor position for a control to the edges of its container control
- 2. Forms that need to be closed or hidden before you can continue working with the rest of the application.
- 3. Clears the Clipboard and then adds data in the specified format.
- 4. The control fills certain area of the container completely.
- 5. It removes all data from the Clipboard.

### **ACTIVITY 3**

**TRUE / FALSE:** Read and analyze each statement carefully, and then write your answer in a one whole sheet of paper.

- 1. Traditionally, the MenuStrip, the ToolStripMenuItem, ToolStripDropDown and ToolStripDropDownMenu classes were used for adding menus, sub-menus and context menus in a Windows application.
- 2. The *Menu*, *MainMenu*, *ContextMenu*, and *MenuItem* controls replace and add functionality to the Menu-related controls of previous versions.
- 3. MenuStrip It provides a menu system for a form.
- 4. **ClipBoard** class are used for adding the cut, copy and paste functionalities.
- 5. When the form is resized, you anchor a control to a form; the control maintains its distance from the edges of the form and its anchored position.
- 6. Docking of a control means docking it to one of the edges of its container.
- 7. All dialog boxes are modal forms.
- 8. A MessageBox is also a modal form.
- 9. There are five ways to call modal form.
- 10. You can change the text properties in the toolbox.

Prepared by: MELISSA H. AGUSTIN Noted by: LABERNE A. LADIGNON, JR

Division ICT Coordinator/ OIC EPS

**REFERENCE** <a href="https://www.tutorialspoint.com/vb.net/vb.net\_advancedform.htm">https://www.tutorialspoint.com/vb.net/vb.net\_advancedform.htm</a>