ASSIGNMENT 1

INTRODUCTION TO DDL AND DML

1. CREATE AND INSERT GIVEN DATA IN TABLE CUSTOMER with the following columns: cust_id, cust_fname, cust_lname, territory, cred_lmt, mngr_id, sex, marital_status and income. Insert the following data into it:

cust_id	cust_ fname	cust_ lname	territory	cred_ lmt	mngr_ id	marital_ status	sex	income
1	John	Doe	America	10000	200	Married	M	6000
2	Meg	Sen	Italy	8000	201	Single	F	5000
3	Alex	Roy	India	3000	200	Single	M	4000
4	Sara	Khan	America	12000	202	Married	F	7000
5	David	Lee	India	5500	201	Single	M	4500
6	Emma	Stone	Italy	9000	202	Married	F	6500
7	Rahul	Biswas	India	7000	203	Single	M	7500
8	Sania	Barik	London	11500	200	Single	F	8000
9	Glen	Mark	Sydney	9000	201	Married	M	5500
10	Selene	Joe	Mexico	9500	202	Married	F	6500

QUERY:

```
CREATE TABLE CUSTOMERR(cust_id INT, cust_fname VARCHAR(225), cust_lname
VARCHAR(225), territory VARCHAR(225), cred_lmt INT, mngr_id INT, martial_status
VARCHAR(225), sex CHAR(1), income INT) ;

INSERT INTO CUST_ONE
VALUES(1001, ‘John’,’Doe’,’America’, 1000,200, ’Married’, ‘M’ , 600);

INSERT INTO CUST_ONE
VALUES(1002, ‘Meg’,’Sen’,’Italy’, 8000,201, ’Single’, ‘F’ , 5000);


INSERT INTO CUST_ONE
VALUES(1002, ‘Alex’,’Roy’,’India’, 3000,200, ’Single’, ‘M’ , 4000);

INSERT INTO CUST_ONE
VALUES(1002, ‘Sara’,’Khan’,’America’, 12000, 202 , ’Married’, ‘F’ , 7000);

INSERT INTO CUST_ONE
VALUES(1002, ‘David’,’Lee’,’India’, 5500, 201, ’Single’, ‘M’ , 4500);

INSERT INTO CUST_ONE
VALUES(1002, ‘John’,’Doe’,’America’, 1000,200, ’Married’, ‘M’ , 6500);
```

OUTPUT:

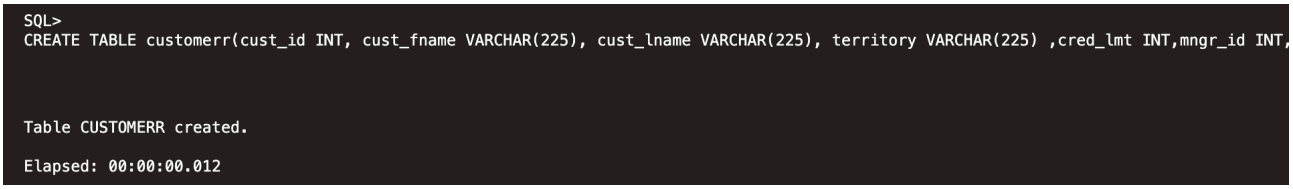

```
SQL> INSERT INTO CUSTOMERR VALUES(1001,'John','Doe','America',10000,200,'Married','M',600)


1 row inserted.

Elapsed: 00:00:00.014

SQL> INSERT INTO CUSTOMERR VALUES(1002,'Meg','Sen','Italy',8000,201,'Single','F',5000)


1 row inserted.

Elapsed: 00:00:00.002

SQL> INSERT INTO CUSTOMERR VALUES(1002,'Alex','Roy','India',3000,200,'Single','M',4000)


1 row inserted.

Elapsed: 00:00:00.002
```

```
SQL> INSERT INTO CUSTOMERR VALUES(1002,'Sara','Khan','America',12000,202,'Married','F',7000)


1 row inserted.

Elapsed: 00:00:00.002

SQL> INSERT INTO CUSTOMERR VALUES(1002,'David','Lee','India',5500,201,'Single','M',4500)


1 row inserted.

Elapsed: 00:00:00.001

SQL> INSERT INTO CUSTOMERR VALUES(1002,'Emma','Stone','Italy',9000,202,'Married','F',6500)


1 row inserted.

Elapsed: 00:00:00.001
```

	CUST_ID	CUST_FNAME	CUST_LNAME	TERRITORY	CRED_LMT	MNGR_ID	MARITAL_STATUS	SEX	INCOME
1	1002	Alex	Roy	India	3000	200	Single	M	4000
2	1002	Sara	Khan	America	12000	202	Married	F	7000
3	1002	David	Lee	India	5500	201	Single	M	4500
4	1002	Emma	Stone	Italy	9000	202	Married	F	6500
5	1001	John	Doe	America	10000	200	Married	M	600

2. ALTER TABLE AND ADD COLUMN STAY_FROM_YEAR.

QUERY:

```
ALTER TABLE CUSTOMER ADD Stay_from_year INT
```

OUTPUT:

```
SQL> ALTER TABLE CUSTOMERR ADD Stay_from_year INT


Table CUSTOMERR altered.

Elapsed: 00:00:00.028
```

3. SET VALUE OF STAY_FROM_YEAR AS 2001 FOR AMERICA

QUERY:

```
UPDATE CUSTOMER SET Stay_from_year 2001 where  TERRITORY='America';
```

OUTPUT:

```
SQL> UPDATE CUSTOMERR SET Stay_from_year=2001 where TERRITORY='America'


2 rows updated.

Elapsed: 00:00:00.008
```

4. DISPLAY CREDIT LIMIT ATTRIBUTE FOR AMERICA

QUERY:

```
SELECT cred_lmt FROM CUSTOMER WHERE TERRITORY='America';
```

OUTPUT:

	CRED_LMT
1	10000
2	12000

5. DELETE THE RECORD CORRESPONDING TO MEG SEN

QUERY:

```
DELETE FROM CUSTOMER WHERE CUST_FNAME='Meg' AND CUST_LNAME='Sen';
```

OUTPUT:

```
SQL> DELETE FROM CUSTOMERR WHERE CUST_FNAME='Meg' AND CUST_LNAME='Sen'


1 row deleted.

Elapsed: 00:00:00.028
```

6. SHOW ALL THE TERRITORY IN ITALY

QUERY:

```
SELECT * FROM CUSTOMER WHERE
TERRITORY = 'Italy';
```

OUTPUT:

	CUST_ID	CUST_FNAME	CUST_LNAME	TERRITORY	CRED_LMT	MNGR_ID	MARITAL_STATUS	SEX	INCOME
1	1002	Emma	Stone	Italy	9000	202	Married	F	

7. IF TERRITORY IS INDIA AND STATUS IS SINGLE SET VALUE OF CREDIT TO 7000.

QUERY:

```
UPDATE CUSTOMER SET cred_lmt=7000
WHERE TERRITORY = 'India' and
MARITAL_STATUS='Single';
```

OUTPUT:

```
SQL> UPDATE CUSTOMER SET cred_lmt=7000 WHERE TERRITORY = 'India' and MARITAL_STATUS='Single'


2 rows updated.

Elapsed: 00:00:00.005
```

8. RENAME CUST_FNAME TO FIRST_NAME

QUERY:

```
ALTER TABLE CUSTOMER RENAME
COLUMN CUST_FNAME TO FIRST_NAME;
```

OUTPUT:

```
2 rows updated.

Elapsed: 00:00:00.005


SQL> ALTER TABLE CUSTOMER RENAME COLUMN CUST_FNAME TO FIRST_NAME



Table CUSTOMER altered.

Elapsed: 00:00:00.013
```

9. RENAME CUST_LNAME TO LAST_NAME

QUERY:

```
ALTER TABLE CUSTOMER RENAME
COLUMN CUST_LNAME TO LAST_NAME;
```

OUTPUT:

```
Table CUSTOMER altered.

Elapsed: 00:00:00.013


SQL> ALTER TABLE CUSTOMER RENAME COLUMN CUST_LNAME TO LAST_NAME



Table CUSTOMER altered.

Elapsed: 00:00:00.011
```

10. DROP COLUMN INCOME FROM CUSTOMER

QUERY:

```
DESC CUSTOMER;
ALTER TABLE CUSTOMER
DROP COLUMN INCOME;
```

OUTPUT:

```
SQL> DESC CUSTOMER


Name           Null? Type
-------------- ----- -------------
CUST_ID              NUMBER(38)
FIRST_NAME           VARCHAR2(225)
LAST_NAME            VARCHAR2(225)
TERRITORY            VARCHAR2(225)
CRED_LMT             NUMBER(38)
MNGR_ID              NUMBER(38)
MARITAL_STATUS       VARCHAR2(225)
SEX                  CHAR(1)
INCOME               NUMBER(38)
STAY_FROM_YEAR       NUMBER(38)

SQL> ALTER TABLE CUSTOMER
     DROP COLUMN INCOME



Table CUSTOMER altered.

Elapsed: 00:00:00.029
```

11. RENAME TABLE CUSTOMER TO CUST_ONE

QUERY:

```
ALTER TABLE CUSTOMER
RENAME CUST_ONE;
```

OUTPUT:

```
SQL> ALTER TABLE CUSTOMER
     RENAME TO CUST_ONE



Table CUSTOMER altered.

Elapsed: 00:00:00.008
```

12. ALTER THE TABLE CUSTOMER CHANGE CUST_ID TO VARCHAR2(6).

QUERY:

```
TRUNCATE TABLE CUST_ONE;
DESC CUST_ONE;
ALTER TABLE CUST_ONE
MODIFY CUST_ID VARCHAR(6);
```

OUTPUT:

```
SQL> TRUNCATE TABLE CUST_ONE



Table CUST_ONE truncated.

Elapsed: 00:00:00.013


SQL> DESC CUST_ONE


Name           Null? Type
-------------- ----- -------------
CUST_ID               NUMBER(38)
FIRST_NAME            VARCHAR2(225)
LAST_NAME             VARCHAR2(225)
TERRITORY             VARCHAR2(225)
CRED_LMT              NUMBER(38)
MNGR_ID               NUMBER(38)
MARITAL_STATUS        VARCHAR2(225)
SEX                   CHAR(1)
STAY_FROM_YEAR        NUMBER(38)
TEMP_CUST_ID          VARCHAR2(6)


SQL> ALTER TABLE CUST_ONE
     MODIFY CUST_ID VARCHAR(6)



Table CUST_ONE altered.


Elapsed: 00:00:00.010
```

13. ADD NEW ATTRIBUTE MNGR_NAME TO CUSTOMER AND INSERT 2 RECORDS.

QUERY:

```
ALTER TABLE CUST_ONE ADD
MNGR_NAME VARCHAR2(200);
```

OUTPUT:

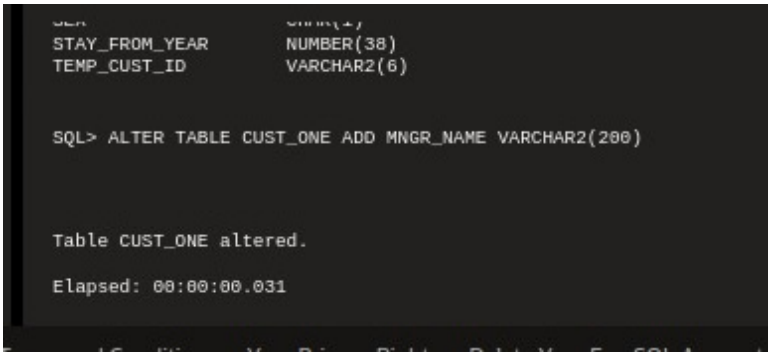


14. ADD ATTRIBUTE AGE TO CUSTOMER

QUERY:

```
ALTER TABLE CUST_ONE ADD AGE
NUMBER;
```

OUTPUT:

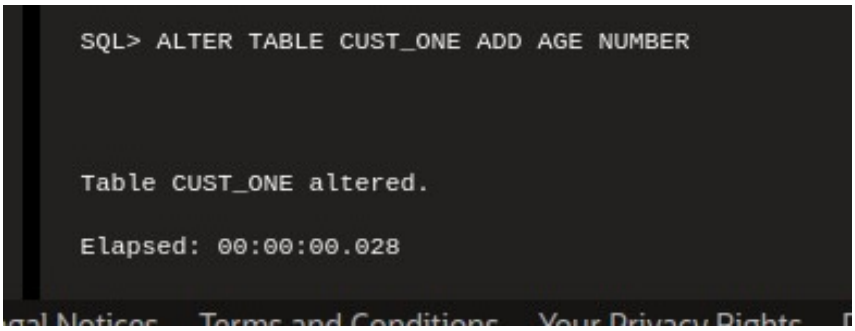

15. DROP TABLE CUSTOMER AND THEN BRING IT BACK.

QUERY:

```
DROP TABLE CUST_ONE;
FLASHBACK TABLE CUST_ONE TO
BEFORE DROP;
```

OUTPUT:

