


# Request-OTR Header

Shivan Kaul Sahib  
Anton Lazarev  
**Brave Browser**

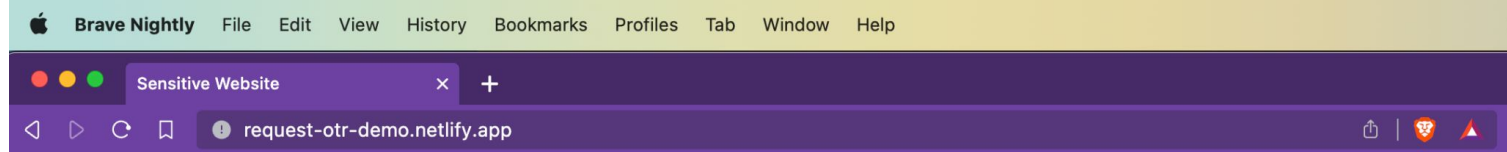

## This site may contain sensitive content.

Would you like to visit this site in Off-The-Record mode?

`https://request-otr-demo.netlify.app`


Brave wants to protect you when visiting sensitive sites. Sites you visit in Off-The-Record mode won't show up in your browsing history, and cookies will not be saved.


☐ Don't ask me again

You can change this later in Brave Settings in the Privacy and Security section

Proceed Normally

Proceed Off-The-Record

✕	Headers	Preview	Response	Initiator	Timing
Remote Address:		[2600:1f1c:471:9d01::c8]:443			
Referrer Policy:		strict-origin-when-cross-origin			
▼ Response Headers					
Accept-Ranges:		bytes			
Age:		106			
Cache-Control:		public, max-age=0, must-revalidate			
Content-Encoding:		br			
Content-Length:		13779			
Content-Type:		text/html; charset=UTF-8			
Date:		Sun, 23 Jul 2023 20:27:31 GMT			
Etag:		"9f4ffcce41ee6003110b1edfa167965e-ssl-df"			
Request-Otr:		1 			
Server:		Netlify			
Strict-Transport-Security:		max-age=31536000; includeSubDomains; preload			
Vary:		Accept-Encoding			
X-Nf-Request-Id:		01H626Z42G3CX1G6WR38Y3KVPB			
▼ Request Headers					

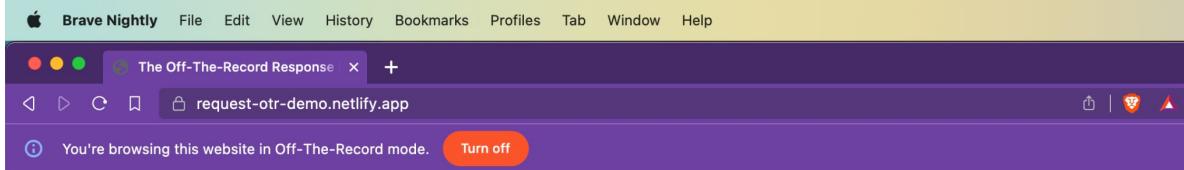

Workgroup: HTTP  
Internet-Draft: draft-sahib-httpbis-off-the-record-latest  
Published: 22 July 2023  
Intended Status: Standards Track  
Expires: 23 January 2024  
Author: S. K. Sahib  
Brave Software

## The Off-The-Record Response Header Field

### Abstract

This document specifies an HTTP response header field that enables a server to inform the client that the requested website should be treated as "off-the-record." The purpose is to indicate that the server considers the content sensitive in some way, and the client should not retain any record of accessing it.

### About This Document

*This note is to be removed before publishing as an RFC.*

The latest revision of this draft can be found at <https://brave-experiments.github.io/draft-sahib-httpbis-off-the-record/#go.draft-sahib-httpbis-off-the-record.html>. Status information for this document may be found at <https://datatracker.ietf.org/doc/draft-sahib-httpbis-off-the-record/>.

Discussion of this document takes place on the HTTP Working Group mailing list (<mailto:ietf-http-wg@w3.org>), which is archived at <https://lists.w3.org/Archives/Public/ietf-http-wg/>.

Source for this draft and an issue tracker can be found at <https://github.com/brave-experiments/draft-sahib-httpbis-off-the-record>.

### Status of This Memo

### Table of Contents

1. Introduction
  2. Conventions and Definitions
  3. Request-OTR Response  
    - 3.1. Definition
    - 3.2. Operation
  4. Off-The-Record Session
  5. Comparisons With Other Approaches  
    - 5.1. Private Browsing
    - 5.2. Manual Editing
    - 5.3. Clear-Site-Data
  6. Security Considerations  
    - 6.1. Navigation History
    - 6.2. Malicious Websites
    - 6.3. Consent
    - 6.4. Doesn't Protect Against
    - 6.5. Third Parties on the Same Site
    - 6.6. Only Applicable for Attacker
    - 6.7. Fingerprinting
    - 6.8. Self-Identification
  7. IANA Considerations
  8. References  
    - 8.1. Normative References
    - 8.2. Informative References
- Acknowledgments  
Author's Address

