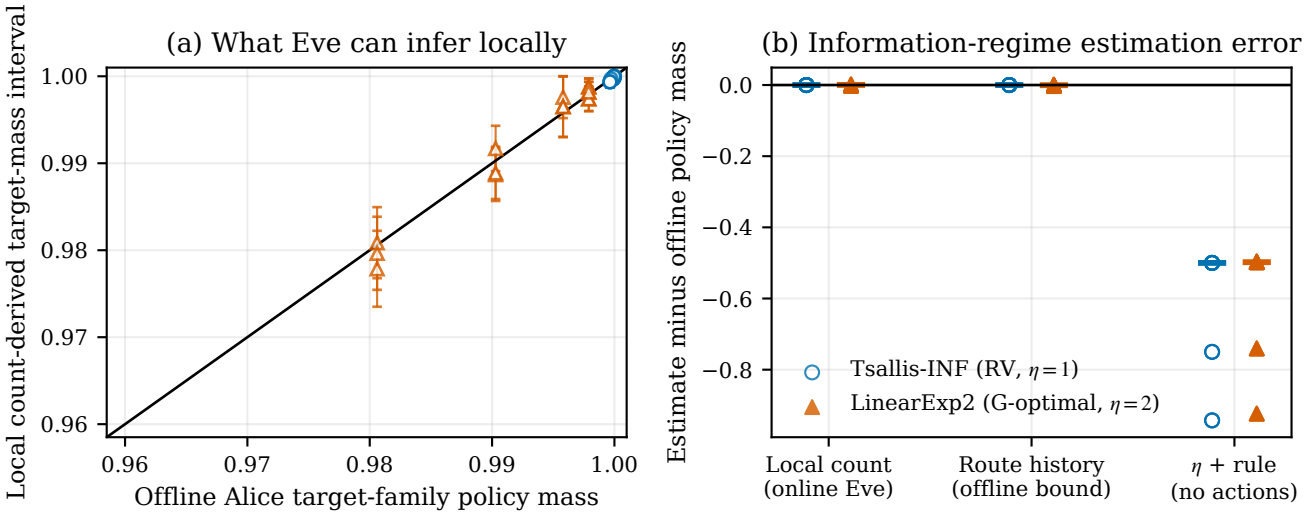The exploit trigger uses 5,000 count-valued local probe records—never Alice's weights